ORDER NO. KMS0310771S8

Service Manual

Digital Super Hybrid System

KX-TD1232BX

(for Asia, Middle Near East, Europe, Latin America and Russia)

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public.
It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product.
Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

Panasonic

© 2003 Panasonic Communications Co., Ltd. All rights reserved. Unauthorized copying and distribution is a violation of law.

1 SUP-12 (KMS0310771S8)

1.1. CHANGES

1.1.1. SUBJECT

Suffix	Reason for suffix change
I→J	Change of the software. (IC20, IC21: ROM Ver. P211R/P212R→P211V/P212V)
J→K	Change of the CO LINE BOARD. (PQUP10071ZD→PQUP10071ZE)

1.1.2. SUFFIX LOCATION



1.1.3. REPLACEMENT PARTS LIST

Reason for Change (Symbol:A) Following 1-8 reasons are indicated on the Notes in the bottom column.	
1. Improve performance	
2. Change of material or dimension	
3. To meet approved specification	
4. Standardization	
5. Addition	
6. Deletion	
7. Correction	
8. Other	

Interchangeability Code (Symbol:B) Following V-Z interchange abilities are indicated on the Notes in the bottom column.		
Parts	Set Production	
V Original New	Early (before change) Late (after change)	Original or new parts may be used in early or late production sets. Use original parts until exhausted, then stock new parts.
W Original New	Early (before change) Late (after change)	Original parts may be used in early production sets only. New parts may be used in early or late production sets. Use original parts where possible, then stock new parts.
X Original New	Early (before change) Late (after change)	New parts only may be used in early or late production sets. Stock new parts.
Y Original New	Early (before change) Late (after change)	Original parts may be used in early production sets only. New parts may be used in late production sets only. Stock both original and new parts.
Z Other		

Ref. No.	Part No.		Part Name & Description	Pcs	Remarks	Notes		Time of change (Suffix)
	Original (Old)	**New**						
CPU BOARD PARTS								
IC20, IC21	PSWI1D1232B9	**PSWI11232B11**	IC (ROM KIT)	2		1	X	J
CO LINE BOARD PARTS								
IC102A-IC102H	PQVIMC45503W	**PSVIMC14548V**	IC	8		8	Y	K
D104A-D104H	MA3047	**----------**	DIODE	0		6		K
D105A-D105H	MA3047	**----------**	DIODE	0		6		K
R108A-R108H	PQ4R10XJ821	**PQ4R10XF3000**	RESISITOR, 300Ω	8		8	Y	K
R110A-R110H	PQ4R10XF2323	**PQ4R10XF2703**	RESISITOR, 270kΩ	8		8	Y	K
R114A-R114H	PQ4R10XF4702	**----------**	RESISITOR, 47kΩ	0		6		K
R115A-R115H	PQ4R10XF1203	**PQ4R10XF6802**	RESISITOR, 68kΩ	8		8	Y	K
R116A-R116H	PQ4R10XF4702	**----------**	RESISITOR, 47kΩ	0		6		K
R165A-R165H	PQ4R10XJ471	**PQ4R10XF5600**	RESISITOR, 560Ω	8		8	Y	K
R180A-R180H	----------	**PQCUV1H104ZF**	CAPACITOR, 0.1µF	8		5		K
R190A-R190H	----------	**PQ4R10XF1203**	RESISITOR, 120kΩ	8		5		K

Ref. No.	Part No.		Part Name & Description	Pcs	Remarks	Notes		Time of change (Suffix)
	Original (Old)	**New**						
R191A-R191H	----------	**PQ4R10XJ104**	RESISITOR, 100kΩ	8		5		K
R192A-R192H	----------	**PQ4R10XJ124**	RESISITOR,120kΩ	8		5		K
R193A-R193H	----------	**PQ4R10XJ000**	RESISITOR, 0Ω	8		5		K
R194A-R194H	----------	**PQ4R10XJ563**	RESISITOR, 56kΩ	8		5		K
R197A-R197H	----------	**PQ4R10XJ000**	RESISITOR, 0Ω	8		5		K
R198A-R198H	----------	**PQ4R10XJ563**	RESISITOR, 56kΩ	8		5		K
J160A-J160H	----------	**PQ4R10XJ000**	RESISITOR, 0Ω	8		5		K
C106A-C106H	PQCUV1H563MD	**ECUV1C333KB**	CAPACITOR, 0.033µF	8		8	Y	K
C107A-C107H	PQCUV1H820JC	**----------**	CAPACITOR, 82pF	0		6		K
C108A-C108H	ECUV1H104MD	**----------**	CAPACITOR, 0.1µF	0		6		K
C109A-C109H	PQCUV1H223KB	**PQCUV1E223KB**	CAPACITOR, 0.022µF	8		8	Y	K
C110A-C110H	PQCUV1H223KB	**PQCUV1E223KB**	CAPACITOR, 0.022µF	8		8	Y	K
C120	PQCUV1H101JC	**----------**	CAPACITOR, 100pF	0		6		K
C151A-C151H	----------	**PQCUV1H101JC**	CAPACITOR, 100pF	8		5		K
C170	----------	**PQCUV1H223KB**	CAPACITOR, 0.022µF	1		5		K
C182A-C182H	----------	**PQCUV1C104KB**	CAPACITOR, 0.1µF	8		5		K
C183A-C183H	----------	**PQCUV1C104KB**	CAPACITOR, 0.1µF	8		5		K
C193A-C193H	----------	**PQCUV1H151JC**	CAPACITOR, 150pF	8		5		K

2 SUP-11 (KMS0306711S8)

ORDER NO. KMS0306711S8

Service Manual

Digital Super Hybrid System

KX-TD1232BX

(for Asia, Middle Near East, Europe, Latin America and Russia)

Please file and use this supplement manual together with the service manual for Model No. KX-TD1232BX Order No. KM49309622A3.

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public.
It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product.
Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

Note:Supplement-1~6 have already supplied with printed matter. So please refer to that.

Panasonic

© 2003 Panasonic Communications Co., Ltd. All rights reserved. Unauthorized copying and distribution is a violation of law.

KX-TD1232BX

1 CHANGES

1.1. SUBJECT

Suffix	Reason for suffix change
H→I	Change of the software. (IC20, IC21: ROM Ver. P211L/P212L→P211R/P212R)

1.2. SUFFIX LOCATION



1.3. REPLACEMENT PARTS LIST

Reason for Change (Symbol:A) Following 1-8 reasons are indicated on the Notes in the bottom column.	
1. Improve performance	Remark: *1. Change of company name.
2. Change of material or dimension	
3. To meet approved specification	
4. Standardization	
5. Addition	
6. Deletion	
7. Correction	
8. Other	

Interchangeability Code (Symbol:B) Following V-Z interchange abilities are indicated on the Notes in the bottom column.		
Parts	Set Production	
V Original New	Early (before change) Late (after change)	Original or new parts may be used in early or late production sets. Use original parts until exhausted, then stock new parts.
W Original New	Early (before change) Late (after change)	Original parts may be used in early production sets only. New parts may be used in early or late production sets. Use original parts where possible, then stock new parts.
X Original New	Early (before change) Late (after change)	New parts only may be used in early or late production sets. Stock new parts.
Y Original New	Early (before change) Late (after change)	Original parts may be used in early production sets only. New parts may be used in late production sets only. Stock both original and new parts.
Z Other		

Ref. No.	Part No.		Part Name & Description	Pcs	Remarks	Notes		Time of change (Suffix)
	Original (Old)	**New**						
CABINET AND ELECTRICAL PARTS								
33	PQGT10510Y	**PQGT10510X**	NAME PLATE	1	*1	8	X	
ACCESSORIES AND PACKING MATERIALS								
A8	PSQX2109Z	**PSQX2109Y**	USERS GUIDE	1	*1	8	X	
	PSQX2583Z	**PSQX2583Y**	ADD INSTALLATION MANUAL	1	*1	8	X	
	PSQX2586Z	**PSQX2586Y**	ADD USERS MANUAL	1	*1	8	X	
	PSQX2110Z	**PSQX2110Y**	USERS MANUAL	1	*1	8	X	
	PSQX2111Z	**PSQX2111Y**	FEATURE GUIDE	1	*1	8	X	
	PSQX2112Z	**PSQX2112Y**	PROGRAMING GUIDE	1	*1	8	X	
	PSQX2116Z	**PSQX2116Y**	PROGTAMING TABLE	1	*1	8	X	
P1	PQPK10438Z	**PQPK10438Y**	PACKING CASE	1	*1	8	X	
CPU BOARD PARTS								
IC20, IC21	PSWI1D1232B8	**PSWI1D1232B9**	IC (ROM KIT)	2		1	X	I
SW2	PQSS2A24Z	**K0D112A00140**	SWITCH	1		8	X	
POWER SUPPLY UNIT PARTS								
	----------	**PSLP1150Y**	POWER SUPPLY UNIT ASS'Y ⚠	1		5		

3 SUP-10 (KMS0110295S8)

ORDER NO. KMS0110295S8

Service Manual

DIGITAL SUPER HYBRID SYSTEM

Supplement

KX-TD1232BX

(for Asia, Middle Near East, Europe, Latin America and Russia)

Please file and use this supplement manual together with the service manual for Model No. KX-TD1232BX Order No. KM49309622A3.

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public.
It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product.
Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

Note:Supplement-1~6 have already supplied with printed matter. So please refer to that.

Panasonic

© 2001 Kyushu Matsushita Electric Co., Ltd. All rights reserved. Unauthorized copying and distribution is a violation of law.

KX-TD1232BX

1 CHANGES

1.1. Subject

Suffix	Reason for suffix change
G→H	Change of the software. (IC20/IC21:ROM Ver P211J/P212J→P211L/P212L) ~~Change CPU and EXT Card. (PQUP10441YB→PQUP10441YC and PQUP10442ZC→PQUP10442YB)~~ ~~There is no change in the replacement parts list.~~

1.2. Suffix location



1.3. REPLACEMENT PARTS LIST

Reason for Change (Symbol:A) Following 1-8 reasons are indicated on the Notes in the bottom column.	
1. Improve performance	Remark 1. Mark *1 has been changed at the same time.
2. Change of material or dimension	
3. To meet approved specification	
4. Standardization	
5. Addition	
6. Deletion	
7. Correction	
8. Other	

Interchangeability Code (Symbol:B) Following V-Z interchange abilities are indicated on the Notes in the bottom column.		
Parts	Set Production	
V Original / New	Early (before change) / Late (after change)	Original or new parts may be used in early or late production sets. Use original parts until exhausted, then stock new parts.
W Original / New	Early (before change) / Late (after change)	Original parts may be used in early production sets only. New parts may be used in early or late production sets. Use original parts where possible, then stock new parts.
X Original / New	Early (before change) / Late (after change)	New parts only may be used in early or late production sets. Stock new parts.
Y Original / New	Early (before change) / Late (after change)	Original parts may be used in early production sets only. New parts may be used in late production sets only. Stock both original and new parts.
Z Other		

Ref. No.	Part No.		Part Name & Description	Pcs	Remarks	Notes		Time of change (Suffix)
	Original (Old)	**New**						
ACCESSORIES AND PACKING MATERIALS								
	PSQW1715Z	**----------**	LEAFLET FOR KX-TD193DX	0	*1	6		H
	----------	**PSQX2586Z**	ADD USER MANUAL	1	*1	5		H
	----------	**PSQX2583Z**	ADD I/M	1	*1	5		H
MAIN BOARD PARTS								
IC20/IC21	PSWI1D1232B7	**PSWI1D1232B8**	IC (ROM KIT)	1		1	X	H
POWER SUPPLY UNIT								
93	PQHR477Z	**PQHR447Z**	SPACER-A	1		7		
R30	ERG1SJ100	**ERG1SJ100E**	RESISTOR, 10Ω	1		7		
R35	ERG1SJ100	**ERG1SJ100E**	RESISTOR, 10Ω	1		7		
R37	ERG1SJ100	**ERG1SJ100E**	RESISTOR, 10Ω	1		7		
R39	ERG1SJ100	**ERG1SJ100E**	RESISTOR, 10Ω	1		7		
C3	PSSCEMU2D471	**PSCCEMU2D471**	CAPACITOR, 470µF	1		7		
C5	PSCCELT1H010	**PSCCELT1H010**	CAPACITOR, 12µF→1µF	1		7		

KX-TD1232BX

2 CABINET AND ELECTRICAL PARTS LOCATION

2.1. Power Supply Section.....Change from Service Manual Supplement-6 page 13. (KX-TD1232BX:Order No.KMS9911500S3)

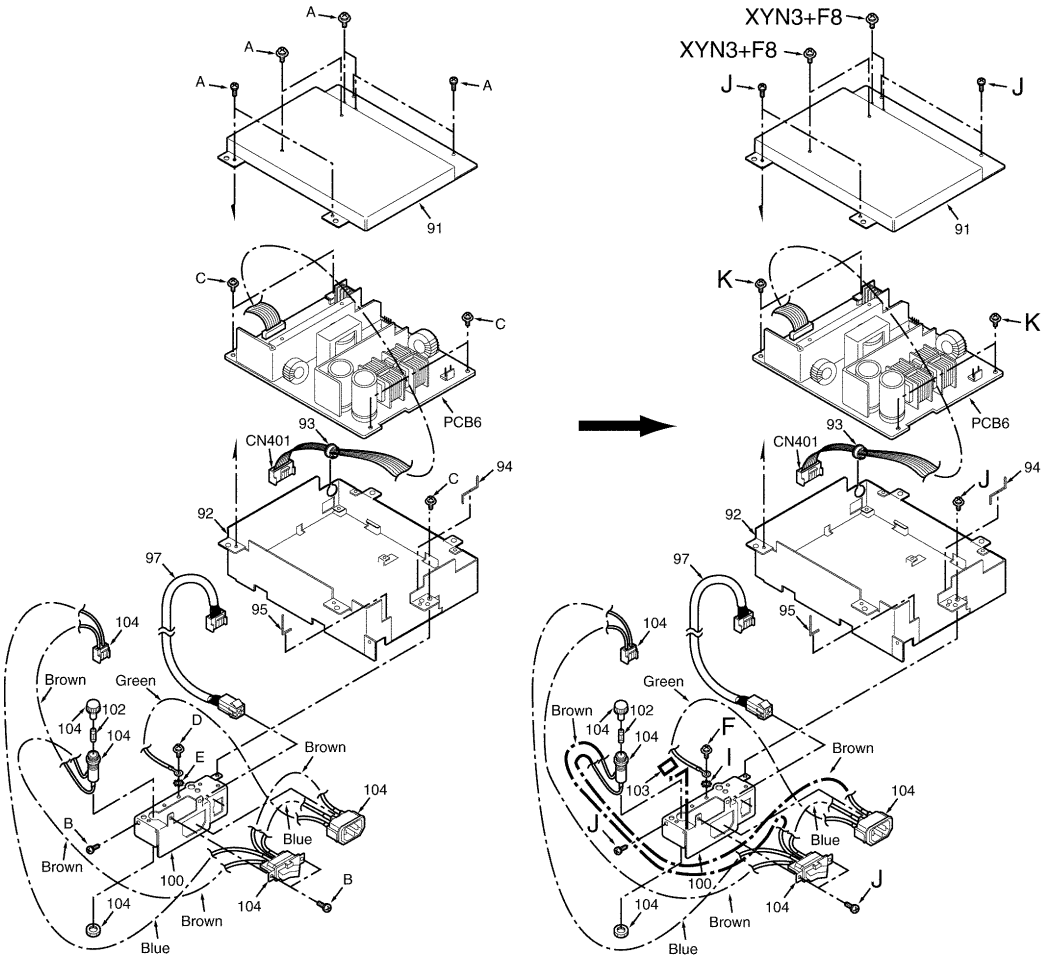

Addition: 103

[OLD] [CORRECTED]

4 SUP-9 (KMS0104167S8)

ORDER NO. KMS0104167S8

Service Manual

DIGITAL SUPER HYBRID SYSTEM

KX-TD1232BX

(for Asia, Middle Near East, Europe, Latin America and Russia)

Please file and use this supplement manual together with the service manual for Model KX-TD1232BX, Order No.KM49309622A3.

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public.
It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product.
Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

Note:Supplement-1~6 have already supplied with printed matter. So please refer to that.

Panasonic

© 2001 Kyushu Matsushita Electric Co., Ltd. All rights reserved. Unauthorized copying and distribution is a violation of law.

KX-TD1232BX

1 CHANGES

1.1. Subject

Suffix	Reason for suffix change
F→G	Change of the Software. (IC20/IC21:ROM Ver. P211I/P212I→P211J/P212J)
G→H	Change of the CPU and EXT Card. (PQUP10441YB→PQUP10441YC and PQUP10442ZC→PQUP10442YB) There is no change in the replacement parts list.

1.2. Suffix location



1.3. REPLACEMENT PARTS LIST

Reason for Change (Symbol:A) Following 1-8 reasons are indicated on the Notes in the bottom column.	
1. Improve performance	
2. Change of material or dimension	
3. To meet approved specification	
4. Standardization	
5. Addition	
6. Deletion	
7. Correction	
8. Other	

Interchangeability Code (Symbol:B) Following V-Z interchangeabilities are indicated on the Notes in the bottom column.		
Parts	Set Production	
V Original New	Early (before change) Late (after change)	Original or new parts may be used in early or late production sets. Use original parts until exhausted, then stock new parts.
W Original New	Early (before change) Late (after change)	Original parts may be used in early production sets only. New parts may be used in early or late production sets. Use original parts where possible, then stock new parts.
X Original New	Early (before change) Late (after change)	New parts only may be used in early or late production sets. Stock new parts.
Y Original New	Early (before change) Late (after change)	Original parts may be used in early production sets only. New parts may be used in late production sets only. Stock both original and new parts.
Z Other		

Ref. No.	Parts No.		Part Name & description	Pcs	Remarks	Notes		Time of change (Suffix)
	Original Part	**New part**						
CPU BOARD PARTS								
IC20/IC21	PSWI1D1232B6	**PSWI1D1232B7**	IC (ROM KIT)	1		1	X	G

5 SUP-8 (KMS0012017S8)

ORDER NO. KMS0012017S8

Service Manual

DIGITAL SUPER HYBRID SYSTEM

KX-TD1232BX

(for Asia, Middle Near East, Europe, Latin America and Russia)

Please file and use this supplement manual together with the service manual for Model KX-TD1232BX, Order No.KM49309622A3.

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public.
It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product.
Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

Note:Supplement-1~6 have already supplied with printed matter. So please refer to that.

Panasonic

© 2001 Kyushu Matsushita Electric Co., Ltd. All rights reserved. Unauthorized copying and distribution is a violation of law.

KX-TD1232BX

1 CHANGES

1.1. Subject

Suffix	Reason for suffix change
D→E	Change of the CPU board. (PQUP10441YB→PQUP10441YC)
E→F	Change of the software. (IC20/IC21:ROM Ver. P211B/P212B→P211I/P212I)

1.2. Suffix location



1.3. REPLACEMENT PARTS LIST

Reason for Change (Symbol:A) Following 1-8 reasons are indicated on the Notes in the bottom column.

1. Improve performance	Remark: 1. Part with mark *1 has not changed on the Supplement-8.
2. Change of material or dimension	
3. To meet approved specification	
4. Standardization	
5. Addition	
6. Deletion	
7. Correction	
8. Other	

Interchangeability code (Symbol:B) Following V-Z interchangeabilities are indicated on the Notes in the bottom column.

Parts	Set Production	Description
V	Original → Early (before change) New → Late (after change)	Original or new parts may be used in early or late production sets. Use original parts until exhausted, then stock new parts.
W	Original → Early (before change) New → Late (after change)	Original parts may be used in early production sets only. New parts may be used in early or late production sets. Use original parts where possible, then stock new parts.
X	Original → Early (before change) New → Late (after change)	New parts only may be used in early or late production sets. Stock new parts.
Y	Original → Early (before change) New → Late (after change)	Original parts may be used in early production sets only. New parts may be used in late production sets only. Stock both original and new parts.
Z	Other	

Ref. No.	Parts No.		Part Name & description	Pcs	Remarks	Notes		Time of change (Suffix)
	Original Part	**New part**						
ACCESSORIES AND PACKING MATERIALS								
	----------	**PSQW1715Z**	LEAFLET for KX-TD193DX	1		5		F
CPU BOARD PARTS (All parts are shown bellow.)								
PCB1	PSWP1D1232BX	**PSWP11232BX1**	CPU BOARD ASS'Y (RTL)	1		1	V	E
IC1	PQVI68301FCG	**PQVI68301FCG**	IC	1	*1			
IC2	PQVI620890F	**PQVI620890F**	IC	1	*1			
IC3	PQVIMT8980DE	**PQVIMT8980DE**	IC	1	*1			
IC6, IC7	PQVIMC45503P	**PSVIMC14548V**	IC	2		1	Y	E
IC8	PQVIMC45503P	**PSVIMC14548V**	IC	1		1	Y	E
IC9	PQVISV7860SG	**PQVISV7860SG**	IC	1	*1			
IC10, IC11	PQVINJM4558D	**----------**	IC	0		6		E
IC12, IC14	PQVINJM4558D	**PQVINJM4558D**	IC	2	*1			
IC13	PQVIPS520C	**PSVIPS600CMT**	IC	1		1	Y	E
IC15	PQVIHD75188P	**PQVIHD75188P**	IC	1	*1			
IC16	PQVIHD75189P	**PQVIHD75189P**	IC	1	*1			
IC17	PSVITC7H00A	**PSVITC7HT00A**	IC	1		7		
IC18	PQVISN7L00S	**PQVISN7L00S**	IC	1	*1			
IC19	PSWI2TD816AG	**PSWI2TD816AG**	IC (ROM)	1	*1			
IC20, IC21	PSWI1D1232B5	**PSWI1D1232B5**	IC (ROM KIT)	1		1	X	
IC22, IC23	PQVITC5183SD	**----------**	IC	0		6		E
IC24	PSVICX582MD	**PSVITC5401AE**	IC	1		1	Y	E
IC25	PSVICX582MD	**PSVITC5401AE**	IC	1		1	Y	E

KX-TD1232BX

IC26	PQVIMS6242BS	**PQVIMS6242BS**	IC	1	*1			
IC27	PQVINJM4558D	**PQVINJM4558D**	IC	1	*1			
IC29	PQVISN7L368M	**PQVISN7L368M**	IC	1	*1			
IC31	PQVISN7L640M	**PQVISN7L640M**	IC	1	*1			
IC32	PQVISN7L365S	**PQVISN7L365S**	IC	1	*1			
IC33, IC34	PQVISN7L368M	**PQVISN7L368M**	IC	2	*1			
IC35	PQVISN7L365S	**PQVISN7L365S**	IC	1	*1			
IC36	PQVIMB7HU04F	**PQVIMB7HU04F**	IC	1	*1			
IC37	PQVISN7H00S	**PQVISN7H00S**	IC	1	*1			
IC38	PQVISN7H74S	**PQVISN7H74S**	IC	1	*1			
IC39	PQVISN7L151M	**PQVISN7L151M**	IC	1	*1			
IC40	----------	**PQVISN7L32S**	IC	1		5	Y	E
Q5	PQVTDTA144EK	**PQVTDTA144EK**	TRANSISTOR (SI)	1	*1			
Q6	2SC2412K	**2SC2412K**	TRANSISTOR (SI)	1	*1			
Q7	2SC2412K	**2SC2412K**	TRANSISTOR (SI)	1	*1			
Q8	PQVTDTA143E	**PQVTDTA143E**	TRANSISTOR (SI)	1	*1			
Q9	PQVTDTC144E	**PQVTDTC144E**	TRANSISTOR (SI)	1	*1			
Q10	2SA933	**2SA933**	TRANSISTOR (SI) (or 2SA1317)	1	*1			
Q11	2SC2412K	**2SC2412K**	TRANSISTOR (SI)	1	*1			
Q12	2SC2878	**2SC2878**	TRANSISTOR (SI)	1	*1			
Q13	2SC2412K	**2SC2412K**	TRANSISTOR (SI)	1	*1			
Q14	2SC2878	**2SC2878**	TRANSISTOR (SI)	1	*1			
Q601	PQVTDTA144EK	**PQVTDTA144EK**	TRANSISTOR (SI)	1	*1			
Q602	PQVTDTC144E	**PQVTDTC144E**	TRANSISTOR (SI)	1	*1			
Q603	PQVTDTA144EK	**PQVTDTA144EK**	TRANSISTOR (SI)	1	*1			
Q604	PQVTDTC144E	**PQVTDTC144E**	TRANSISTOR (SI)	1	*1			
Q605	----------	**PQVTDTC144E**	TRANSISTOR (SI)	1		5		E
Q606	----------	**2SB1237R**	TRANSISTOR (SI)	1		5		E
Q607	----------	**PQVTDTC143E**	TRANSISTOR (SI)	1		5		E
D1	MA4091	**MA4091**	DIODE (SI)	1	*1			
D3	MA723	**MA723**	DIODE (SI)	1	*1			
D4	PQVDAK03	**PQVDAK03**	DIODE (SI)	1	*1			
D11, D12	RLS71	**RLS71**	DIODE (SI)	2	*1			
D13, D14	MA4030	**MA4030**	DIODE (SI)	2	*1			
D15	MA4056	**MA4056**	DIODE (SI)	1	*1			
D16, D17	RLS71	**RLS71**	DIODE (SI)	2	*1			
D20, D21	MA723	**MA723**	DIODE (SI)	2	*1			
R4	PQ4R10XJ471	**ERJ3GEYJ471**	RESISTOR, 470Ω	1		1	Y	E
R5	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	E
R6	PQ4R10XJ223	**ERJ3GEYJ223**	RESISTOR, 22kΩ	1		1	Y	E
R7	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R8	PQ4R10XJ683	**ERJ3GEYJ683**	RESISTOR, 68kΩ	1		1	Y	E
R10	PQ4R10XJ224	**ERJ3GEYJ224**	RESISTOR, 220kΩ	1		1	Y	E
R11	PQ4R10XJ681	**ERJ3GEYJ681**	RESISTOR, 680Ω	1		1	Y	E
R12	PQ4R10XJ393	**ERJ3GEYJ393**	RESISTOR, 39kΩ	1		1	Y	E
R13	PQ4R10XF1782	**ERJ3GEYJ183**	RESISTOR, 18kΩ	1		1	Y	E
R14	PQ4R10XJ104	**ERJ3GEYJ104**	RESISTOR, 100kΩ	1		1	Y	E
R15	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R16	PQ4R10XJ274	**ERJ3GEYJ274**	RESISTOR, 270kΩ	1		1	Y	E
R17	PQ4R10XJ183	**ERJ3GEYJ183**	RESISTOR, 18kΩ	1		1	Y	E
R18	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R19	PQ4R10XJ561	**ERJ3GEYJ561**	RESISTOR, 560Ω	1		1	Y	E
R20	PQ4R10XJ105	**ERJ3GEYJ105**	RESISTOR, 1MΩ	1		1	Y	E
R21	PQ4R10XJ563	**ERJ3GEYJ623**	RESISTOR, 62kΩ	1		1	Y	E
R22	PQ4R10XJ104	**ERJ3GEYJ913**	RESISTOR, 91kΩ	1		1	Y	E
R23	PQ4R10XJ104	**ERJ3GEYJ134**	RESISTOR, 130kΩ	1		1	Y	E
R24	PQ4R10XJ124	**ERJ3GEYJ154**	RESISTOR, 150kΩ	1		1	Y	E
R25	PQ4R10XJ823	----------	RESISTOR, 82kΩ	0		6		E
R26	PQ4R10XJ104	----------	RESISTOR, 100kΩ	0		6		E
R27	PQ4R10XJ104	----------	RESISTOR, 100kΩ	0		6		E
R28	PQ4R10XF1211	**ERJ3GEYF122**	RESISTOR, 1.2kΩ	1		1	Y	E
R29	PQ4R10XF1211	----------	RESISTOR, 1.21kΩ	0		6		E
R30	PQ4R10XJ224	**ERJ3GEYJ224**	RESISTOR, 220kΩ	1		1	Y	E
R31	PQ4R10XF1401	----------	RESISTOR, 1.4kΩ	0		6		E
R32	PQ4R10XJ823	**ERJ3GEYJ154**	RESISTOR, 150kΩ	1		1	Y	E
R33	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	E
R34	PQ4R10XJ333	**ERJ3GEYJ333**	RESISTOR, 33kΩ	1		1	Y	E
R35	PQ4R10XJ104	**ERJ3GEYJ104**	RESISTOR, 100kΩ	1		1	Y	E

KX-TD1232BX

R36	PQ4R10XJ124	**ERJ3GEYJ124**	RESISTOR, 120kΩ	1		1	Y	E
R37	PQ4R10XJ104	**ERJ3GEYJ563**	RESISTOR, 56kΩ	1		1	Y	E
R38	PQ4R10XJ104	**ERJ3GEYJ104**	RESISTOR, 100kΩ	1		1	Y	E
R39	PQ4R10XJ124	**ERJ3GEYJ124**	RESISTOR, 120kΩ	1		1	Y	E
R40	PQ4R10XJ104	**ERJ3GEYJ104**	RESISTOR, 100kΩ	1		1	Y	E
R48	PQ4R10XJ333	**ERJ3GEYJ333**	RESISTOR, 33kΩ	1		1	Y	E
R50	PQ4R10XJ224	**ERJ3GEYJ224**	RESISTOR, 220kΩ	1		1	Y	E
R51	PQ4R10XJ333	**ERJ3GEYJ333**	RESISTOR, 33kΩ	1		1	Y	E
R52	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	E
R53	PQ4R10XJ104	**ERJ3GEYJ104**	RESISTOR, 100kΩ	1		1	Y	E
R57	PQ4R10XJ102	**ERJ3GEYJ102**	RESISTOR, 1kΩ	1		1	Y	E
R59	PQ4R10XJ104	**ERJ3GEYJ563**	RESISTOR, 56kΩ	1		1	Y	E
R61	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R62	PQ4R10XJ223	**ERJ3GEYJ223**	RESISTOR, 22kΩ	1		1	Y	E
R65	PQ4R10XJ561	**ERJ3GEYJ561**	RESISTOR, 560Ω	1		1	Y	E
R66	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R67	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R68	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R69	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R70	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R71	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R72	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R73	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R74	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R75	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R76	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R77	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R78	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R79	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R83	PQRD1VJ151	**PQRD1VJ151**	RESISTOR, 150Ω	1	*1			
R84	PQ4R10XJ152	**ERJ3GEYJ152**	RESISTOR, 1.5kΩ	1		1	Y	E
R85	PQ4R10XJ681	**ERJ3GEYJ681**	RESISTOR, 680Ω	1		1	Y	E
R87	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R91	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R92	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R93	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R94	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R96	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R97	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R110	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	E
R111	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	E
R112	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	E
R113	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R114	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R115	PQ4R10XJ222	**ERJ3GEYJ222**	RESISTOR, 2.2kΩ	1		1	Y	E
R116	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	E
R117	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R118	PQ4R10XJ333	**ERJ3GEYJ333**	RESISTOR, 33kΩ	1		1	Y	E
R119	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R120	PQ4R10XJ334	**ERJ3GEYJ334**	RESISTOR, 330kΩ	1		1	Y	E
R121	PQ4R10XJ222	**ERJ3GEYJ222**	RESISTOR, 2.2kΩ	1		1	Y	E
R122	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	E
R123	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R124	PQ4R10XJ333	**ERJ3GEYJ333**	RESISTOR, 33kΩ	1		1	Y	E
R125	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R126	PQ4R10XJ334	**ERJ3GEYJ334**	RESISTOR, 330kΩ	1		1	Y	E
R127	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	E
R128	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	E
R129	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	E
R130	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	E
R131	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	E
R132	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	E
R133	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	E
R134	PQ4R10XJ390	**ERJ3GEYJ390**	RESISTOR, 39Ω	1		1	Y	E
R135	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	E
R136	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	E
R137	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	E
R138	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	E

KX-TD1232BX

R139	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	E
R140	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	E
R141	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	E
R142	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	E
R143	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	E
R144	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	E
R145	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	E
R146	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	E
R147	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	E
R148	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	E
R149	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	E
R150	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	E
R151	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	E
R152	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	E
R153	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	E
R154	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	E
R155	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	E
R156	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	E
R157	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	E
R158	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	E
R159	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	E
R160	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	E
R161	PQ4R10XJ390	**ERJ3GEYJ390**	RESISTOR, 39Ω	1		1	Y	E
R162	PQ4R10XJ330	**ERJ3GEYJ330**	RESISTOR, 33Ω	1		1	Y	E
R163	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R164	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R165	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R166	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R167	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R168	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R169	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R170	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R171	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R172	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R173	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R174	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R175	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R176	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R177	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R178	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R179	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R180	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R181	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R182	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R183	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R184	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R185	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R186	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R187	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R188	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R189	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R190	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R191	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R192	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R193	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R194	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R195	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R196	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R197	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R198	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R199	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R200	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R201	PQ4R10XJ102	**ERJ3GEYJ102**	RESISTOR, 1kΩ	1		1	Y	E
R202	PQ4R10XJ102	**ERJ3GEYJ102**	RESISTOR, 1kΩ	1		1	Y	E
R203	PQ4R10XJ102	**ERJ3GEYJ102**	RESISTOR, 1kΩ	1		1	Y	E
R204	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R205	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R206	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E

KX-TD1232BX

R207	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R208	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R209	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R210	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R211	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R212	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R213	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R214	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R215	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R216	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R217	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R218	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R219	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R220	PQ4R10XJ223	**ERJ3GEYJ223**	RESISTOR, 22kΩ	1		1	Y	E
R221	PQ4R10XJ222	**ERJ3GEYJ222**	RESISTOR, 2.2kΩ	1		1	Y	E
R222	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R223	PQ4R10XJ223	**ERJ3GEYJ223**	RESISTOR, 22kΩ	1		1	Y	E
R224	PQ4R10XJ105	**ERJ3GEYJ105**	RESISTOR, 1MΩ	1		1	Y	E
R225, R226	PQ4R10XJ330	**ERJ3GEYJ330**	RESISTOR, 33Ω	2		1	Y	E
R227	PQ4R10XJ223	**ERJ3GEYJ223**	RESISTOR, 22kΩ	1		1	Y	E
R228	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	E
R229	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	E
R601, R602	PQ4R10XJ104	**ERJ3GEYJ104**	RESISTOR, 100kΩ	2		1	Y	E
R603	PQ4R10XJ331	**ERJ3GEYJ331**	RESISTOR, 300Ω	1		1	Y	E
R604	PQ4R10XJ151	**ERJ3GEYJ151**	RESISTOR, 150Ω	1		1	Y	E
R605	PQ4R10XJ824	**ERJ3GEYJ824**	RESISTOR, 820kΩ	1		1	Y	E
R606	PQ4R10XJ223	**ERJ3GEYJ223**	RESISTOR, 22kΩ	1		1	Y	E
R608	PQ4R10XJ124	**ERJ3GEYJ124**	RESISTOR, 120kΩ	1		1	Y	E
R609	PQ4R10XJ223	**ERJ3GEYJ223**	RESISTOR, 22kΩ	1		1	Y	E
R610, R611	PQ4R10XJ223	**ERJ3GEYJ223**	RESISTOR, 22kΩ	2		1	Y	E
R704	----------	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		5		E
R705	----------	**PQRD1VJ220**	RESISTOR, 22Ω	1		5		E
R706	----------	**ERJ3GEY0R00**	RESISTOR, 0Ω	1		5		E
R707	----------	**ERJ3GEYJ561**	RESISTOR, 560Ω	1		5		E
R709	----------	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		5		E
R715	----------	**ERJ3GEY0R00**	RESISTOR, 0Ω	1		5		E
J1	PQ4R10XJ000	**ERJ3GEY0R00**	RESISTOR, 0Ω	1		1	Y	E
J2	----------	**ERJ3GEY0R00**	RESISTOR, 0Ω	1		5		E
J3	PQ4R10XJ000	**ERJ3GEY0R00**	RESISTOR, 0Ω	1		1	Y	E
J6	PQ4R10XJ000	**----------**	RESISTOR, 0Ω	0		6		E
J16	PQ4R10XJ223	**----------**	RESISTOR, 22kΩ	0		6		E
C1	EECFE5R5474	**EECFE5R5474**	CAPACITOR, 0.47µF	1	*1			
C2	ECEA1EU4R7	**ECEA1EU4R7**	CAPACITOR, 4.7µF	1	*1			
C3	ECEA1HN3R3S	**ECEA1HN3R3S**	CAPACITOR, 3.3µF	1	*1			
C8	ECQV1H104JZ	**ECQV1H104JZ**	CAPACITOR, 0.1µF	1	*1			
C9	ECQV1H104JZ	**ECQV1H104JZ**	CAPACITOR, 0.1µF	1	*1			
C11	PQCUV1H104ZF	**PQCUV1H105JC**	CAPACITOR, 1µF	1		1	Y	P
C12	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	P
C13	PQCUV1H682KB	**----------**	CAPACITOR, 0.0068µF	0		6		P
C14	PQCUV1H680JC	**ECUV1H680JCV**	CAPACITOR, 68pF	1		1	Y	E
C16	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	E
C17	PQCUV1H104ZF	**----------**	CAPACITOR, 0.1µF	0		6		E
C19	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	E
C20	PQCUV1H332KB	**ECUV1H332KBV**	CAPACITOR, 0.0033µF	1		1	Y	E
C21	PQCUV1H104ZF	**----------**	CAPACITOR, 0.1µF	0		6		E
C22	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	E
C23	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	E
C24	PQCUV1H332KB	**ECUV1H332KBV**	CAPACITOR, 0.0033µF	1		1	Y	E
C25	PQCUV1H104ZF	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	E
C26	PQCUV1H104ZF	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	E
C27	PQCUV1H102J	**ECUV1H102KBV**	CAPACITOR, 0.001µF	1		1	Y	E
C28	PQCUV1H104ZF	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	E
C29	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	E
C30	PQCUV1H104ZF	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	E
C31	PQCUV1H102J	**ECUV1H102KBV**	CAPACITOR, 0.001µF	1		1	Y	E
C33	PQCUV1H223KB	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		5	Y	P
C34	PQCUV1H223KB	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		5	Y	P
C35	PQCUV1H223KB	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	E

KX-TD1232BX

C36	PQCUV1H223KB	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	E
C37	PQCUV1H223KB	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	E
C38	PQCUV1H223KB	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	E
C39	PQCUV1H200JC	**ECUV1H200JCV**	CAPACITOR, 20pF	1		1	Y	E
C40	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	E
C41	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	E
C42	PQCUV1H223KB	**----------**	CAPACITOR, 0.022µF	0		6		P
C43	PQCUV1H223KB	**----------**	CAPACITOR, 0.022µF	0		6		P
C44	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	E
C45	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	E
C46	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	E
C47	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	E
C50	ECEA1AU331	**ECEA1AU331**	CAPACITOR, 330	1	*1			
C53	PQCUV1H180JC	**ECUV1H180JCV**	CAPACITOR, 18pF	1		1	Y	E
C54	PQCUV1H180JC	**ECUV1H180JCV**	CAPACITOR, 18pF	1		1	Y	E
C55	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	E
C56	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	E
C59	ECEA1HU010	**ECEA1HU010**	CAPACITOR, 1µF	1	*1			
C60	ECEA1HU010	**ECEA1HU010**	CAPACITOR, 1µF	1	*1			
C61	ECEA1HU010	**ECEA1HU010**	CAPACITOR, 1µF	1	*1			
C62	ECEA1HU010	**ECEA1HU010**	CAPACITOR, 1µF	1	*1			
C63	ECEA1HU010	**ECEA1HU010**	CAPACITOR, 1µF	1	*1			
C64	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	E
C66	ECEA1AU101	**ECEA1AU101**	CAPACITOR, 100µF	1	*1			
C67	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	E
C68	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	E
C70	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	E
C71	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	E
C72	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	E
C80	PQCUV1H200JC	**ECUV1H200JCV**	CAPACITOR, 20pF	1		1	Y	E
C81	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	E
C82	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	E
C83	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	E
C84	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	E
C85	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	E
C86	PQCUV1H104ZF	**ECUV1C104KBV**	CAPACITOR, 1µF	1		1	Y	E
C87	ECEA1VU330	**ECEA1VU330**	CAPACITOR, 33µF	1	*1			
C88	ECEA1HN2R2S	**ECEA1HN2R2S**	CAPACITOR, 2.2µF	1	*1			
C89	PQCUV1H104ZF	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	E
C90	ECEA1VU330	**ECEA1VU330**	CAPACITOR, 33µF	1	*1			
C91	ECEA1HN2R2S	**ECEA1HN2R2S**	CAPACITOR, 2.2µF	1	*1			
C92	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	E
C93	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	E
C94	PQCUV1H470JC	**ECUV1H470JCV**	CAPACITOR, 47pF	1		1	Y	E
C95	PQCUV1H470JC	**ECUV1H470JCV**	CAPACITOR, 47pF	1		1	Y	E
C96	PQCUV1H470JC	**ECUV1H470JCV**	CAPACITOR, 47pF	1		1	Y	E
C97	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	E
C98	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	E
C99	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	E
C100, C101	PQCUV1H220JC	**ECUV1H220JCV**	CAPACITOR, 22pF	2		1	Y	E
C102	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	E
C601	ECEA1EU4R7	**ECEA1EU4R7**	CAPACITOR, 4.7µF	1	*1			
C602	ECEA1EU4R7	**ECEA1EU4R7**	CAPACITOR, 4.7µF	1	*1			
C603	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	E
C604	PQCUV1H104ZF	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	E
C705	----------	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		5		E
T1	ETA14Y180AY	**ETA14Y180AY**	TRANSFORMER	1	*1			
T2~T5	PQLT2D6A	**PQLT2D6A**	TRANSFORMER	4	*1			
L21~T23	PQVFTU50MT	**PQVFTU50MT**	CERAMIC FILTER	3	*1			
L24~L27	PQVFCM04RC01	**PQVFCM04RC01**	CERAMIC FILTER	4	*1			
L30	PQLE106	**PQLE106**	COIL	1	*1			
JAC1, JAC2	PQJJ1G1Z	**PQJJ1G1Z**	JACK, PAGING	2	*1			
JAC3, JAC4	PQJJ1D3Z	**PQJJ1D3Z**	JACK, EP, EXT. HOLD	2	*1			
CN1	PQJS64R15Z	**PQJS64R15Z**	CONNECTOR, 64P	1	*1			
CN4	PQJP2D70Z	**PQJP2D70Z**	CONNECTOR, 2P	1	*1			
CN5~CN8	PSJS20A25Z	**PSJS20A25Z**	CONNECTOR, 20P	4	*1			
CN9	PQJP20A08Z	**PQJP20A08Z**	CONNECTOR, 20P	1	*1			
CN12	PQJP6D70Z	**PQJP6D70Z**	CONNECTOR, 6P	1	*1			

KX-TD1232BX

CN13	PQJS6H30Z	**PQJS6H30Z**	CONNECTOR, 6P	1	*1			
CN14	PQJS4H30Z	**PQJS4H30Z**	CONNECTOR, 4P	1	*1			
BAT	CR23541GUF	**CR23541GUF**	LITHIUM BATTERY	1	*1			
SW1	EVQ21409K	**EVQ21409K**	SWITCH	1	*1			
SW2	PQSS2A24Z	**PQSS2A24Z**	SWITCH	1	*1			
SW3	ESD11V120	**ESD11V120**	SWITCH	1	*1			
X1	PQVCJ12000N8	**PQVCJ12000N8**	CRYSTAL OSCILLATOR	1	*1			
X2	PQVCL3276N6Z	**PQVCL3276N6Z**	CRYSTAL OSCILLATOR	1	*1			
X3	PQVCJ8192N8Z	**PQVCJ8192N8Z**	CRYSTAL OSCILLATOR	1	*1			
Z1, Z2, Z4~Z6	PQRSLD8X103J	**PQRSLD8X103J**	RESISTOR ARRAY	5	*1			

KX-TD1232BX

2 PRINTED CIRCUIT BOARD (CPU BOARD)

2.1. Change from Supplement-3 page 5.

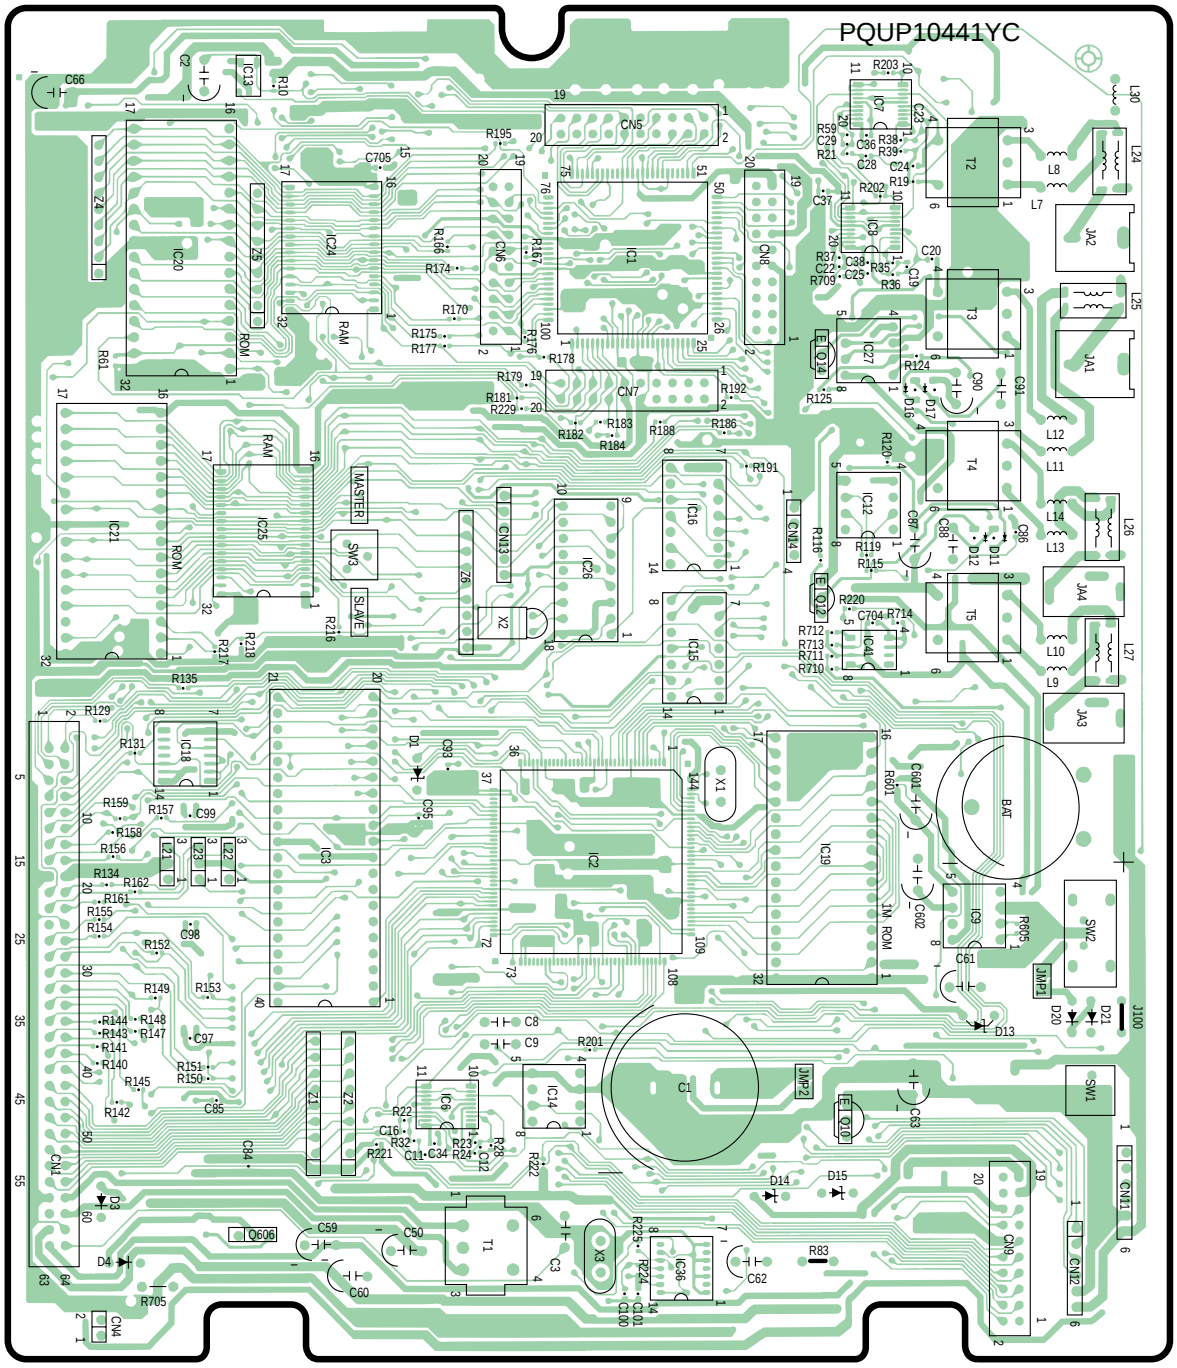

KX-TD1232BX

2.2. Change from Supplement-3 page 6.

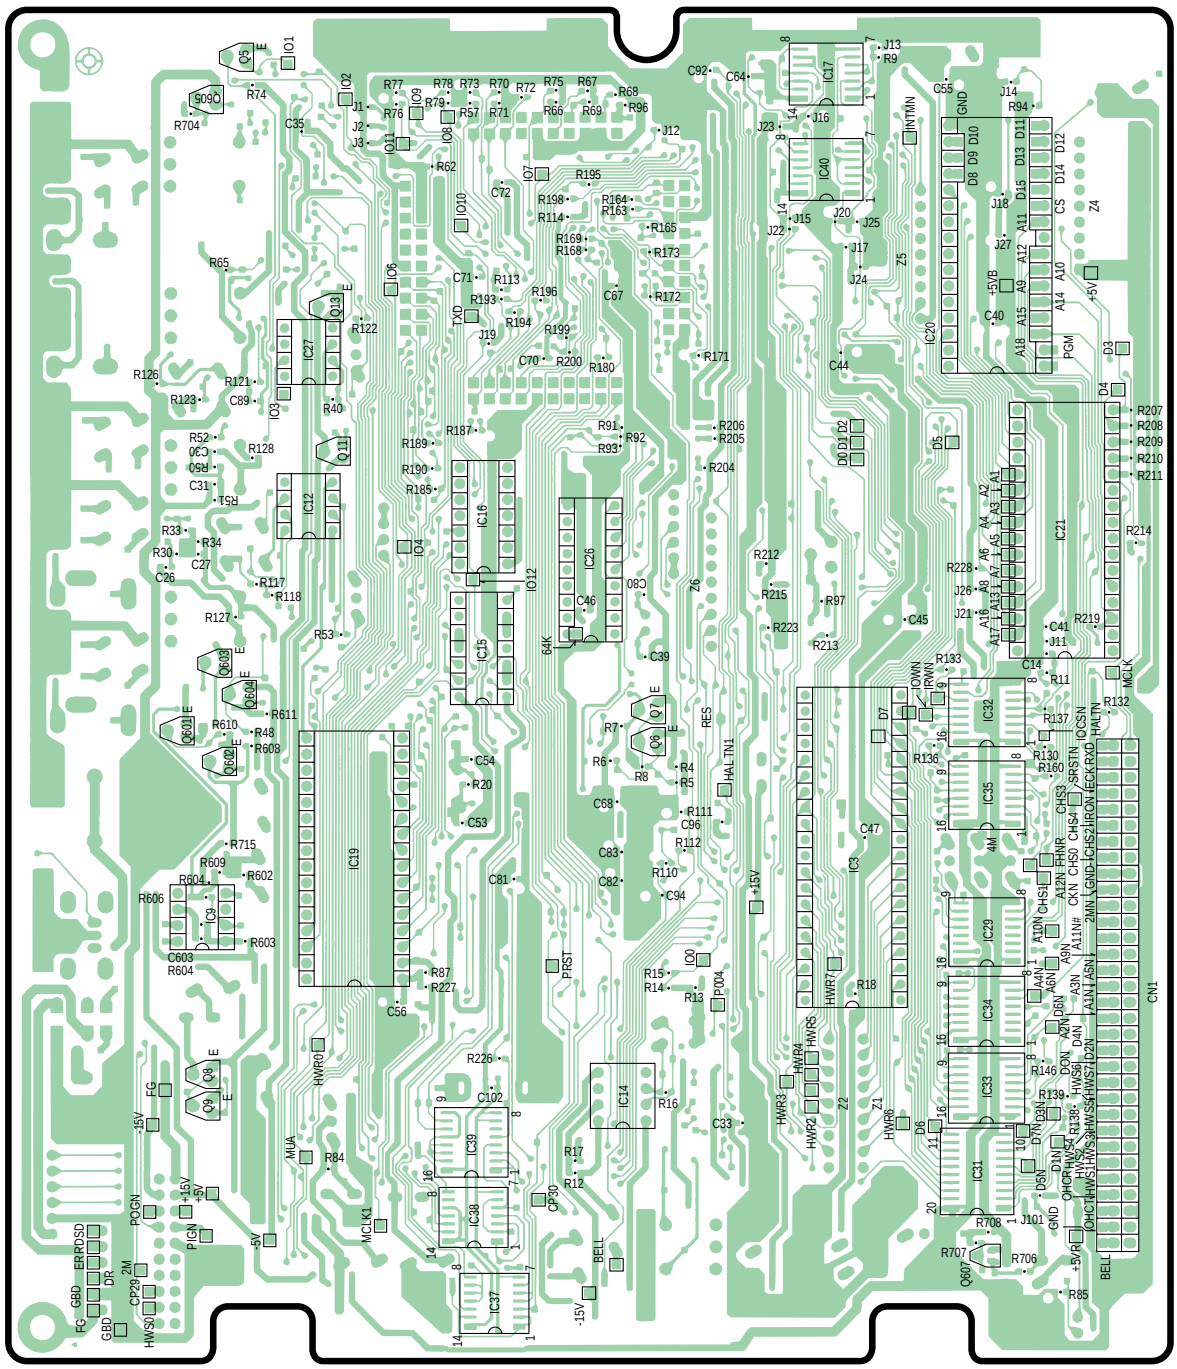

KX-TD1232BX

3 SCHEMATIC DIAGRAM (CPU CIRCUIT)

3.1. Change from Supplement-3 page 7.

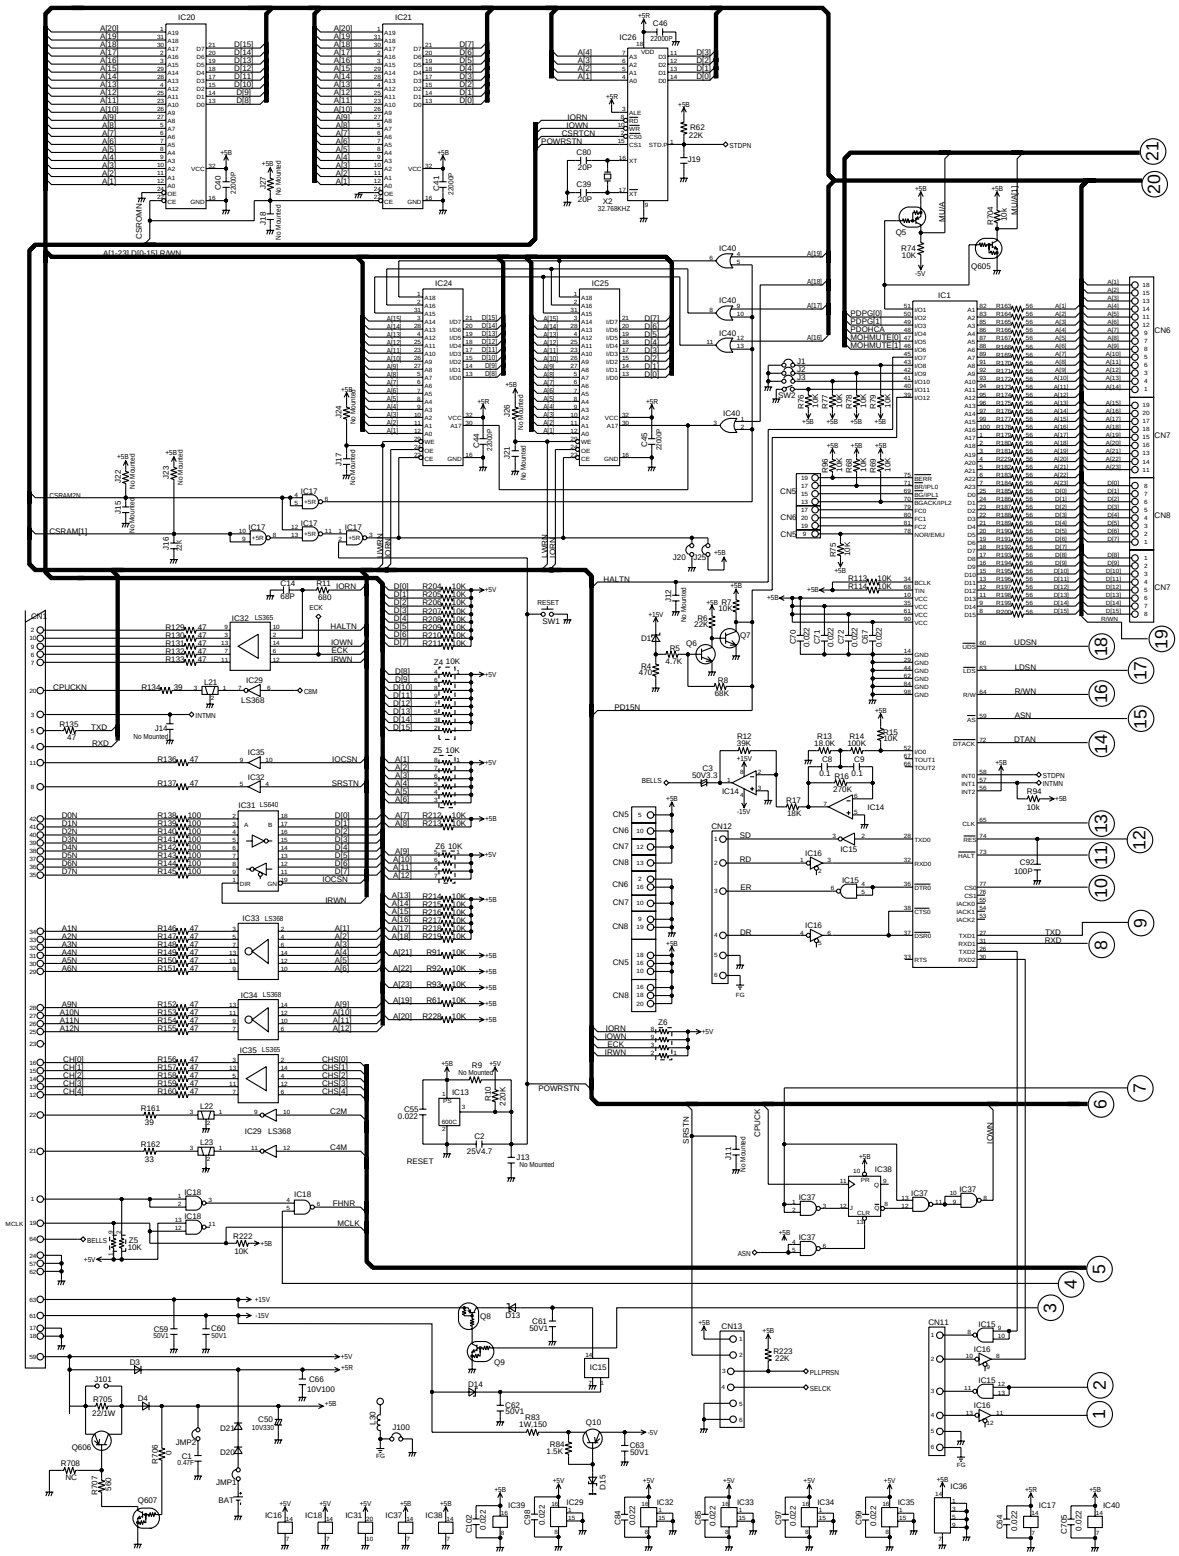

KX-TD1232BX

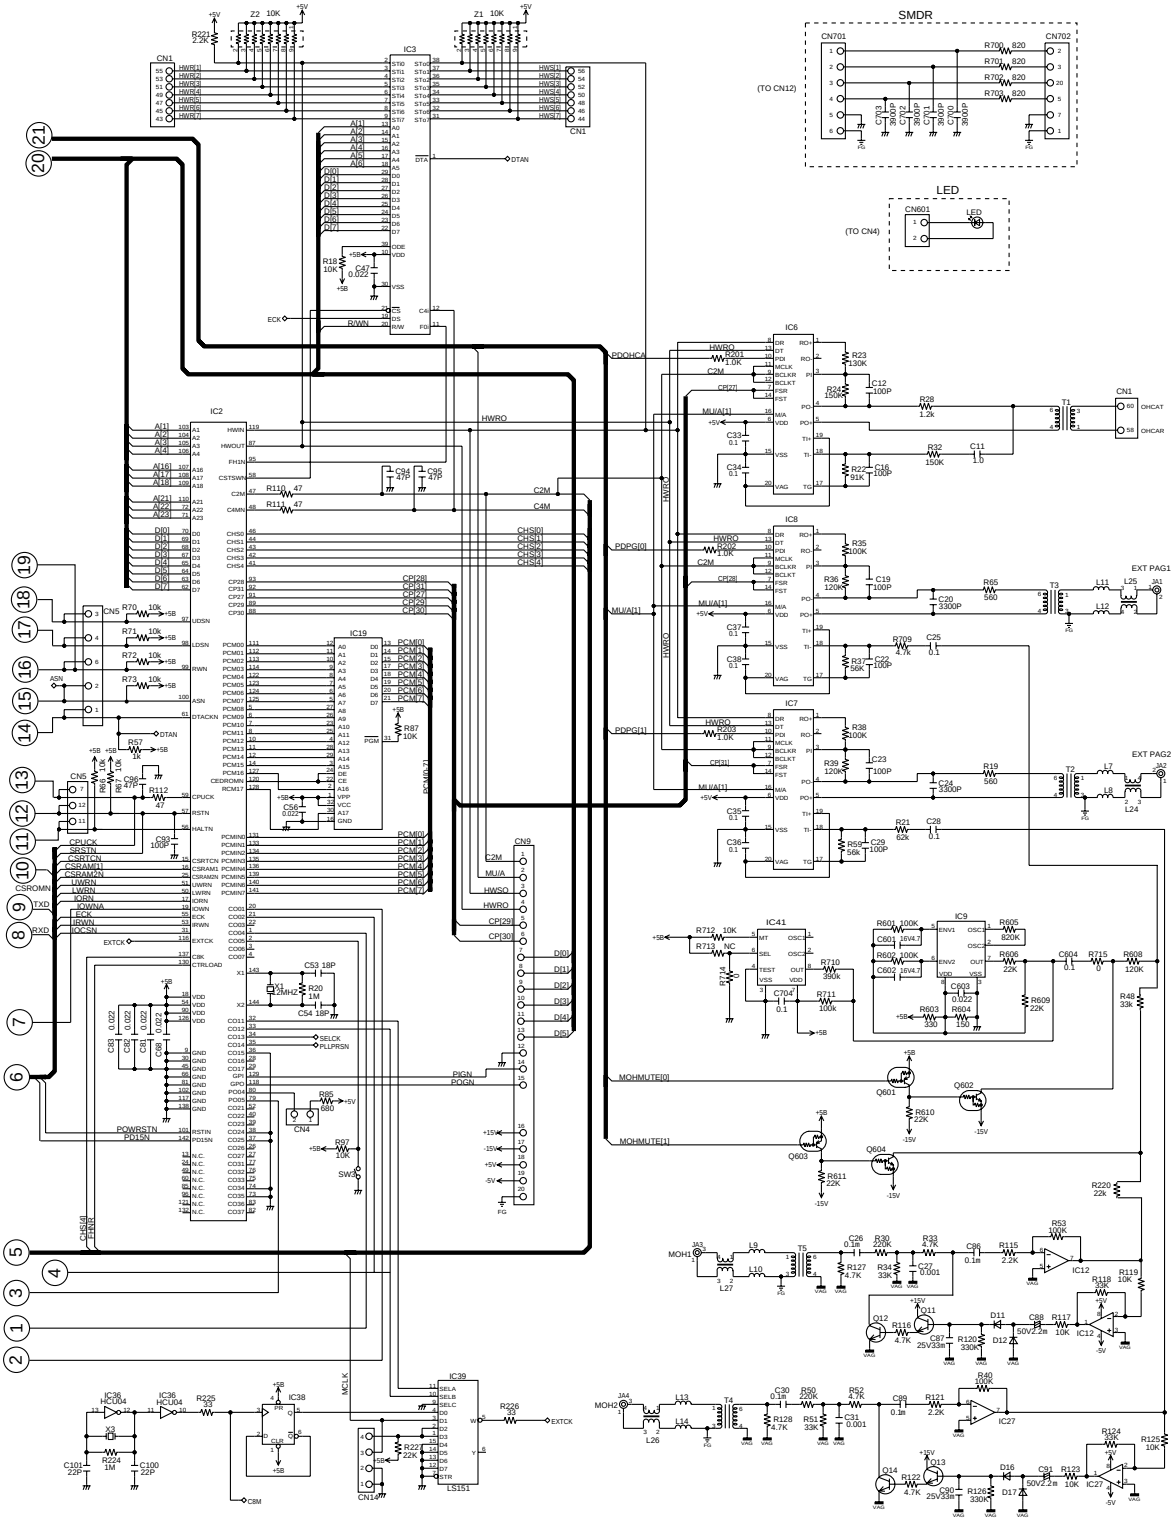

N.T
KXTD1232BX

PAGE 11-12

6 SUP-7 (KMS0008867S3)

ORDER NO. KMS0008867S3

Service Manual

DIGITAL SUPER HYBRID SYSTEM

KX-TD1232BX

(for Asia, Middle Near East and Other areas)

Please file and use this supplement manual together with the service manual for Model KX-TD1232BX Order No. KM49309622A3.

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public.
It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product.
Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

Note:Supplement-1~6 have already supplied with printed matter. So please refer to that.

Panasonic

© 2000 Kyushu Matsushita Electric Co., Ltd. All rights reserved. Unauthorized copying and distribution is a violation of law.

KX-TD1232BX

1 CHANGES

1.1. Subject

Suffix	Reason for suffix change
B→C	Change of the software. (IC20/21:ROM Ver. P231S/P232S→P231U/P232U)
C→D	Change of the software. (IC20/21:ROM Ver. P231U/P232U→P211B/P212B)

1.2. Suffix location



1.3. REPLACEMENT PARTS LIST

Reason for Change (Symbol:A) Following 1-8 reasons are indicated on the Notes in the bottom column.	
1. Improve performance 2. Change of material or dimension 3. To meet approved specification 4. Standardization 5. Addition 6. Deletion 7. Correction 8. Other	**Note** 1. Mark *1 has been corrected at the Ref. No. 2. Mark *2 has been changed at the same time.

Interchangeability code (Symbol:B) Following V-Z interchangeabilities are indicated on the Notes in the bottom column.		
Parts	Set Production	Description
V	Original → Early (before change) New → Late (after change)	Original or new parts may be used in early or late production sets. Use original parts until exhausted, then stock new parts.
W	Original → Early (before change) New → Late (after change)	Original parts may be used in early production sets only. New parts may be used in early or late production sets. Use original parts where possible, then stock new parts.
X	Original → Early (before change) New → Late (after change)	New parts only may be used in early or late production sets. Stock new parts.
Y	Original → Early (before change) New → Late (after change)	Original parts may be used in early production sets only. New parts may be used in late production sets only. Stock both original and new parts.
Z	Other	

Ref. No.	Part No.		Part Name & Description	Pcs	Remarks	Notes		Time of change (Suffix)
	Original Part	**New Part**						
ACCESSORIES AND PACKING MATERIALS								
A7	PQQX10191W	----------	USERS GUIDE (for SLT)	0		6		D
A8	PQQX10190V	**PSQX2109Z**	USERS GUIDE	1		8	X	D
A12	PQQX10189V	----------	INSTALLATION MANUAL	0	*2	6		D
A13	PQQX10496W	**PSQX2116Z**	PROGRAMING TABLE	1		8	X	D
	PSQX1329Y	----------	ADDITIONAL USERS MANUAL	0		6		D
	PSQX1330Y	----------	ADDITIONAL INSTALLATION MANUAL	0		6		D
	PSQX1331Y	----------	LEAFLET	0		6		D
	PSQX1332Y	----------	LEAFLET	0		6		D
	PSQW1375Z	----------	LEAFLET	0		6		D
	PSQW1376Z	----------	LEAFLET	0		6		D
	----------	**PSQX2110Z**	USERS MANUAL	1	*2	5		D
	----------	**PSQX2111Z**	FEATURE GUIDE	1	*2	5		D
	----------	**PSQX2112Z**	PROGRAMING GUIDE	1	*2	5		D
	PSQX1379Z	**PSQW1379Z**	LEAFLET	1		7		
	PSQW1379Z	----------	LEAFLET	0		6		D

KX-TD1232BX

Ref. No.	Part No.		Part Name & Description	Pcs	Remarks	Notes		Time of change (Suffix)
	Original Part	**New Part**						
CPU BOARD PARTS								
IC20/IC21	PSWI1D1232C4	**PSWI11232M16**	IC (ROM KIT)	1		1	X	C
	PSWI11232M16	**PSWI1D1232B5**	IC (ROM KIT)	1		1	X	D
EXTENSION CARD PARTS								
R206A-R206H	ERDS2TJ680	**PQ4R18XJ680**	RESISTOR, 68Ω	8		1	X	
R209A-R209H	ERDS2TJ680	**PQ4R18XJ680**	RESISTOR, 68Ω	8		1	X	
R255,R258	PQ4R10XJ393	**PQ4R10XJ823**	RESISTOR, 82kΩ	2		1	X	
R202A-H→RY202A-H	PQSL119Z	**PQSL44Z**	RELAY	8	* 1	7		
POWER SUPLLY UNIT PARTS								
ZD1	PQVDMTZ6R2B	**PQVDMZJ6R2B**	DIODE	1		8	X	
ZD2	PQVDMTZ36B	**PQVDMZJ36B**	DIODE	1		8	X	
ZD3	PSVDMTZ5R1B	**PQVDMZJ5R1B**	DIODE	1		8	X	
C8	PSCKR215C683K	**PSCKR215C683**	CAPACITOR, 0.068µF	1		7		
VR1, VR2	EVNDJAA03B52	**EVNDXAA03B52**	SEMI-FIXED RESISTOR 500Ω(B)	2		8	X	
L11	PSLELSA07230Q	**PSLESA07230Q**	COIL	1		7		
L12, L13	PSLEHCA112019	**PSLECA112019**	COIL	2		7		
PC1, PC2	PQVIKPC817	**PSVIKPC817**	PHOTO COUPLER ⚠	2		7		
R38	ERDS1TJ100	**ERG1SJ201**	RESISTOR, 200Ω	1		1	X	
C5	PSCK105Z20Z	**PSCCELT1H010**	CAPACITOR,12µF	1		1	X	

1.4. POWER SUPPLY CIRCUIT

1.4.1. Change from supplement-6 page 12. (Order No.KMS9911500S3)

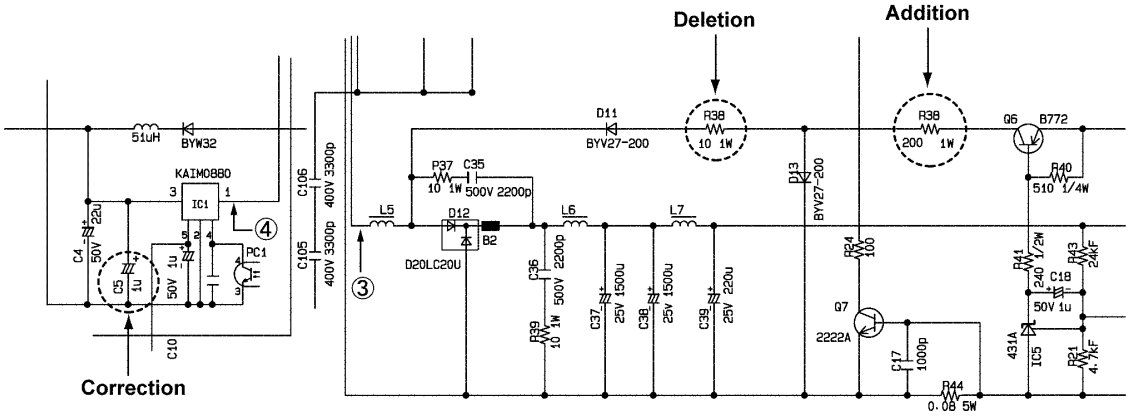

N.T.(Q)
KXTD1232BX
Printed in Japan

K.H.
KXTD1232BX

ORDER NO. KMS0502007S3

Service Manual

Digital Super Hybrid System

Supplement

KX-TD1232BX

(for Asia, Middle Near East, Europe, Latin America and Russia)

Please file and use this supplement manual together with the service manual for Model No. KX-TD1232BX Order No. KM49309622A3.

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public.
It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product.
Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

Note:Supplement-1 has already been supplied as printed matter. So please refer to that.

Panasonic

© 2005 Panasonic Communications Co., Ltd. All rights reserved. Unauthorized copying and distribution is a violation of law.

1 CHANGES

1.1. SUBJECT

Suffix	Reason for suffix change
J to K	Change of the extension board (PQUP10442YA to PQUP10442YB) Change of the CO line board (PQUP10071ZD to PQUP10071ZE)
K to L	Software change (IC20/IC21: ROM Ver. P211V/P212V to P211W/P212W)
L to M	Addition of lead wire between C112- and D154 cathode due to cross talk level improvement, There is no change in the "REPLACEMENT PARTS LIST".
M to N	Noise improvement

1.2. SUFFIX LOCATION



1.3. REPLACEMENT PARTS LIST

Reason for Change (Symbol:A) Following 1-8 reasons are indicated on the Notes in the bottom column.	
1. Improve performance	
2. Change of material or dimension	
3. To meet approved specification	
4. Standardization	
5. Addition	
6. Deletion	
7. Correction	
8. Other	

Interchangeability Code (Symbol:B) Following V-Z interchange abilities are indicated on the Notes in the bottom column.		
Parts	Set Production	
V Original New	Early (before change) Late (after change)	Original or new parts may be used in early or late production sets. Use original parts until exhausted, then stock new parts.
W Original New	Early (before change) Late (after change)	Original parts may be used in early production sets only. New parts may be used in early or late production sets. Use original parts where possible, then stock new parts.
X Original New	Early (before change) Late (after change)	New parts only may be used in early or late production sets. Stock new parts.
Y Original New	Early (before change) Late (after change)	Original parts may be used in early production sets only. New parts may be used in late production sets only. Stock both original and new parts.
Z Other		

Ref. No.	Part No.		Part Name & Description	Pcs	Remarks	Notes		Time of change (Suffix)
	Original (Old)	**New**						
CPU BOARD PARTS								
IC20/IC21	PSWI11232B11	**PSWI11232B12**	IC (ROM PACK)	2		1	X	L
CN5 to CN8	PSJS20A25Z	**----------**	CONNECTOR, 20P	0		6		
EXTENSION BOARD PARTS								
PCB2	PQWP2TD1232C	**PSWP2D1232BX**	EXTENSION BOARD ASS'Y (RTL)	1		8	V	K
CO LINE BOARD PARTS								
PCB3	PQWP3TD1232X	**PSWP3D1232BX**	CO LINE BOARD ASS'Y (RTL)	1		8	V	K

1.4. NEW EXTENSION BOARD PARTS

Ref. No.	Part No.	Part Name & Description	Remarks
PCB2	PSWP2D1232BX	EXTENSION BOARD ASS´Y (RTL)	
		(ICs)	
IC201A	PQVIMC14548V	IC	
IC201B	PQVIMC14548V	IC	
IC201C	PQVIMC14548V	IC	
IC201D	PQVIMC14548V	IC	
IC201E	PQVIMC14548V	IC	
IC201F	PQVIMC14548V	IC	
IC201G	PQVIMC14548V	IC	
IC201H	PQVIMC14548V	IC	
IC203A	PQVINJM319V	IC	
IC203B	PQVINJM319V	IC	
IC203C	PQVINJM319V	IC	
IC203D	PQVINJM319V	IC	
IC203E	PQVINJM319V	IC	
IC203F	PQVINJM319V	IC	
IC203G	PQVINJM319V	IC	
IC203H	PQVINJM319V	IC	
IC211	PQVI603830F	IC	
IC213	PQVIMT8952BE	IC	
IC215	PQVICM8870FI	IC	
IC216	PQVICM8870FI	IC	
IC217	PQVITC4051F	IC	
IC218	PQVITC4051F	IC	
IC209	PQVISN7L14S	IC	
IC220	PQVISN7L14S	IC	
IC221	PQVISN7L14S	IC	
IC222	PQVISN7L365S	IC	
IC223	PQVISN7L86S	IC	
IC224	PQVISN7L640M	IC	
		(TRANSISTORS)	
Q200A	2SB1218A	TRANSISTOR(SI)	
Q200B	2SB1218A	TRANSISTOR(SI)	
Q200C	2SB1218A	TRANSISTOR(SI)	
Q200D	2SB1218A	TRANSISTOR(SI)	
Q200E	2SD1819A	TRANSISTOR(SI)	
Q200F	2SD1819A	TRANSISTOR(SI)	
Q200G	2SD1819A	TRANSISTOR(SI)	
Q200H	2SD1819A	TRANSISTOR(SI)	
Q201A	2SB1218A	TRANSISTOR(SI)	
Q201B	2SB1218A	TRANSISTOR(SI)	
Q201C	2SB1218A	TRANSISTOR(SI)	
Q201E	2SB1218A	TRANSISTOR(SI)	
Q201D	2SB1218A	TRANSISTOR(SI)	
Q201F	2SB1218A	TRANSISTOR(SI)	
Q201G	2SB1218A	TRANSISTOR(SI)	
Q201H	2SB1218A	TRANSISTOR(SI)	
Q203A	2SB1322	TRANSISTOR(SI)	
Q203B	2SB1322	TRANSISTOR(SI)	
Q203C	2SB1322	TRANSISTOR(SI)	
Q203D	2SB1322	TRANSISTOR(SI)	
Q203E	2SB1322	TRANSISTOR(SI)	
Q203F	2SB1322	TRANSISTOR(SI)	
Q203G	2SB1322	TRANSISTOR(SI)	
Q203H	2SB1322	TRANSISTOR(SI)	
Q204A	2SD1994A	TRANSISTOR(SI)	
Q204B	2SD1994A	TRANSISTOR(SI)	
Q204C	2SD1994A	TRANSISTOR(SI)	
Q204D	2SD1994A	TRANSISTOR(SI)	
Q204E	2SD1994A	TRANSISTOR(SI)	
Q204F	2SD1994A	TRANSISTOR(SI)	
Q204G	2SD1994A	TRANSISTOR(SI)	
Q204H	2SD1994A	TRANSISTOR(SI)	
Q205A	2SD1819A	TRANSISTOR(SI)	
Q205B	2SD1819A	TRANSISTOR(SI)	
Q205C	2SD1819A	TRANSISTOR(SI)	
Q205D	2SD1819A	TRANSISTOR(SI)	
Q205E	2SD1819A	TRANSISTOR(SI)	
Q205F	2SD1819A	TRANSISTOR(SI)	
Q205G	2SD1819A	TRANSISTOR(SI)	
Q205H	2SD1819A	TRANSISTOR(SI)	
Q206A	2SD1819A	TRANSISTOR(SI)	
Q206B	2SD1819A	TRANSISTOR(SI)	
Q206C	2SD1819A	TRANSISTOR(SI)	
Q206D	2SD1819A	TRANSISTOR(SI)	
Q206E	2SD1819A	TRANSISTOR(SI)	
Q206F	2SD1819A	TRANSISTOR(SI)	
Q206G	2SD1819A	TRANSISTOR(SI)	
Q206H	2SD1819A	TRANSISTOR(SI)	
Q207A	PQVTDTC143E	TRANSISTOR(SI)	
Q207B	PQVTDTC143E	TRANSISTOR(SI)	
Q207C	PQVTDTC143E	TRANSISTOR(SI)	
Q207D	PQVTDTC143E	TRANSISTOR(SI)	
Q207E	PQVTDTC143E	TRANSISTOR(SI)	
Q207F	PQVTDTC143E	TRANSISTOR(SI)	
Q207G	PQVTDTC143E	TRANSISTOR(SI)	
Q207H	PQVTDTC143E	TRANSISTOR(SI)	
Q208A	2SB1218A	TRANSISTOR(SI)	
Q208B	2SB1218A	TRANSISTOR(SI)	
Q208C	2SB1218A	TRANSISTOR(SI)	
Q208D	2SB1218A	TRANSISTOR(SI)	
Q208E	2SB1218A	TRANSISTOR(SI)	
Q208F	2SB1218A	TRANSISTOR(SI)	
Q208G	2SB1218A	TRANSISTOR(SI)	
Q208H	2SB1218A	TRANSISTOR(SI)	
Q210	2SD2137	TRANSISTOR(SI)	
Q211	UN5113	TRANSISTOR(SI)	
Q213	2SD1819A	TRANSISTOR(SI)	
Q214	UN5213	TRANSISTOR(SI)	
Q215	2SB1417P	TRANSISTOR(SI)	
Q220A	UN5213	TRANSISTOR(SI)	
Q221	PQVTDTC143E	TRANSISTOR(SI)	
Q251	2SB1322	TRANSISTOR(SI)	
Q252	UN5113	TRANSISTOR(SI)	
		(DIODES)	
D203A	RLS71	DIODE(SI)	
D204A	RLS71	DIODE(SI)	
D204B	RLS71	DIODE(SI)	
D204C	RLS71	DIODE(SI)	
D204D	RLS71	DIODE(SI)	
D204E	RLS71	DIODE(SI)	
D204F	RLS71	DIODE(SI)	
D204G	RLS71	DIODE(SI)	
D204H	RLS71	DIODE(SI)	
D205A	RLS71	DIODE(SI)	
D205B	RLS71	DIODE(SI)	
D205C	RLS71	DIODE(SI)	
D205D	RLS71	DIODE(SI)	
D205E	RLS71	DIODE(SI)	
D205F	RLS71	DIODE(SI)	
D205G	RLS71	DIODE(SI)	
D205H	RLS71	DIODE(SI)	
D206A	RLS71	DIODE(SI)	
D206B	RLS71	DIODE(SI)	
D206C	RLS71	DIODE(SI)	
D206D	RLS71	DIODE(SI)	
D206E	RLS71	DIODE(SI)	
D206F	RLS71	DIODE(SI)	
D206G	RLS71	DIODE(SI)	
D206H	RLS71	DIODE(SI)	
D207A	RLS71	DIODE(SI)	
D207B	RLS71	DIODE(SI)	
D207C	RLS71	DIODE(SI)	
D207D	RLS71	DIODE(SI)	
D207E	RLS71	DIODE(SI)	
D207F	RLS71	DIODE(SI)	
D207G	RLS71	DIODE(SI)	
D207H	RLS71	DIODE(SI)	
D210A	RLS71	DIODE(SI)	
D210B	RLS71	DIODE(SI)	
D210C	RLS71	DIODE(SI)	
D210D	RLS71	DIODE(SI)	

Ref. No.	Part No.	Part Name & Description	Remarks
D210E	RLS71	DIODE(SI)	
D210F	RLS71	DIODE(SI)	
D210G	RLS71	DIODE(SI)	
D210H	RLS71	DIODE(SI)	
D211A	MA4039	DIODE(SI)	
D211B	MA4039	DIODE(SI)	
D211C	MA4039	DIODE(SI)	
D211D	MA4039	DIODE(SI)	
D211E	MA4039	DIODE(SI)	
D211F	MA4039	DIODE(SI)	
D211G	MA4039	DIODE(SI)	
D211H	MA4039	DIODE(SI)	
D212A	MA151WK	DIODE(SI)	
D212B	MA151WK	DIODE(SI)	
D212C	MA151WK	DIODE(SI)	
D212D	MA151WK	DIODE(SI)	
D212E	MA151WK	DIODE(SI)	
D212F	MA151WK	DIODE(SI)	
D212G	MA151WK	DIODE(SI)	
D212H	MA151WK	DIODE(SI)	
D213A	1SS181	DIODE(SI)	
D213B	1SS181	DIODE(SI)	
D213C	1SS181	DIODE(SI)	
D213D	1SS181	DIODE(SI)	
D213E	1SS181	DIODE(SI)	
D213F	1SS181	DIODE(SI)	
D213G	1SS181	DIODE(SI)	
D213H	1SS181	DIODE(SI)	
D214A	RLS71	DIODE(SI)	
D214B	RLS71	DIODE(SI)	
D214C	RLS71	DIODE(SI)	
D214D	RLS71	DIODE(SI)	
D214E	RLS71	DIODE(SI)	
D214F	RLS71	DIODE(SI)	
D214G	RLS71	DIODE(SI)	
D214H	RLS71	DIODE(SI)	
D220	RLS71	DIODE(SI)	
D221	RLS71	DIODE(SI)	
D223	RLS71	DIODE(SI)	
D225	RLS71	DIODE(SI)	
D251	MA4056	DIODE(SI)	
D252	RLS71	DIODE(SI)	
		(COILS)	
L200A	PQLQZM100K	CHOKE COIL	
L200B	PQLQZM100K	CHOKE COIL	
L200C	PQLQZM100K	CHOKE COIL	
L200D	PQLQZM100K	CHOKE COIL	
L200E	PQLQZM100K	CHOKE COIL	
L200F	PQLQZM100K	CHOKE COIL	
L200G	PQLQZM100K	CHOKE COIL	
L200H	PQLQZM100K	CHOKE COIL	
L201A	PQLQZM100K	CHOKE COIL	
L201B	PQLQZM100K	CHOKE COIL	
L201C	PQLQZM100K	CHOKE COIL	
L201D	PQLQZM100K	CHOKE COIL	
L201E	PQLQZM100K	CHOKE COIL	
L201F	PQLQZM100K	CHOKE COIL	
L201G	PQLQZM100K	CHOKE COIL	
L201H	PQLQZM100K	CHOKE COIL	
L202A	PQLE106	CHOKE COIL	
L202B	PQLE106	CHOKE COIL	
L202C	PQLE106	CHOKE COIL	
L202D	PQLE106	CHOKE COIL	
		(CONNECTORS)	
CN200	PQJS50A04Y	CONNECTOR, 50P	
CN201	PQJS50A15Z	CONNECTOR, 50P	
		(CRYSTAL OSCILLATOR)	
X201	PQVBFC3584A1	CRYSTAL OSCILLATOR	
		(FUSES)	
F200	PQBA1N20NMAL	FUSE	
F201	PQBA1N20NMAL	FUSE	
		(RELAYS)	
RY200A	PQSL44Z	RELAY	
RY200B	PQSL44Z	RELAY	
RY201A	PQSL44Z	RELAY	
RY202A	PQSL44Z	RELAY	
RY202B	PQSL44Z	RELAY	
RY202C	PQSL44Z	RELAY	
RY202D	PQSL44Z	RELAY	
RY202E	PQSL44Z	RELAY	
RY202F	PQSL44Z	RELAY	
RY202G	PQSL44Z	RELAY	
RY202H	PQSL44Z	RELAY	
		(TRANSFORMERS)	
T201A	ETE13K38AY	TRANSFORMER	
T201B	ETE13K38AY	TRANSFORMER	
T201C	ETE13K38AY	TRANSFORMER	
T201D	ETE13K38AY	TRANSFORMER	
T201E	ETE13K38AY	TRANSFORMER	
T201F	ETE13K38AY	TRANSFORMER	
T201G	ETE13K38AY	TRANSFORMER	
T201H	ETE13K38AY	TRANSFORMER	
		(VARISTORS)	
ZR202A	PQVDNV039D03	VARISTOR	
ZR202B	PQVDNV039D03	VARISTOR	
ZR202C	PQVDNV039D03	VARISTOR	
ZR202D	PQVDNV039D03	VARISTOR	
ZR202E	PQVDNV039D03	VARISTOR	
ZR202F	PQVDNV039D03	VARISTOR	
ZR202G	PQVDNV039D03	VARISTOR	
ZR202H	PQVDNV039D03	VARISTOR	
ZR203A	PQVDNV039D03	VARISTOR	
ZR203B	PQVDNV039D03	VARISTOR	
ZR203C	PQVDNV039D03	VARISTOR	
ZR203D	PQVDNV039D03	VARISTOR	
ZR203E	PQVDNV039D03	VARISTOR	
ZR203F	PQVDNV039D03	VARISTOR	
ZR203G	PQVDNV039D03	VARISTOR	
ZR203H	PQVDNV039D03	VARISTOR	
ZR204A	PQVDNV039D03	VARISTOR	
ZR204B	PQVDNV039D03	VARISTOR	
ZR204C	PQVDNV039D03	VARISTOR	
ZR204D	PQVDNV039D03	VARISTOR	
ZR204E	PQVDNV039D03	VARISTOR	
ZR204F	PQVDNV039D03	VARISTOR	
ZR204G	PQVDNV039D03	VARISTOR	
ZR204H	PQVDNV039D03	VARISTOR	
ZR205A	PQVDNV039D03	VARISTOR	
ZR205B	PQVDNV039D03	VARISTOR	
ZR205C	PQVDNV039D03	VARISTOR	
ZR205D	PQVDNV039D03	VARISTOR	
ZR205E	PQVDNV039D03	VARISTOR	
ZR205F	PQVDNV039D03	VARISTOR	
ZR205G	PQVDNV039D03	VARISTOR	
ZR205H	PQVDNV039D03	VARISTOR	
		(CAPACITORS)	
C200A	ECEA1HU2R2	2.2	
C200B	ECEA1HU2R2	2.2	
C200C	ECEA1HU2R2	2.2	
C200D	ECEA1HU2R2	2.2	
C200E	ECEA1HU2R2	2.2	
C200F	ECEA1HU2R2	2.2	
C200G	ECEA1HU2R2	2.2	
C200H	ECEA1HU2R2	2.2	
C202A	ECEA1HU2R2	2.2	
C202B	ECEA1HU2R2	2.2	
C202C	ECEA1HU2R2	2.2	
C202D	ECEA1HU2R2	2.2	
C202E	ECEA1HU2R2	2.2	
C202F	ECEA1HU2R2	2.2	
C202G	ECEA1HU2R2	2.2	
C202H	ECEA1HU2R2	2.2	
C204A	ECEA1HU100	10	
C204B	ECEA1HU100	10	
C204C	ECEA1HU100	10	
C204D	ECEA1HU100	10	

Ref. No.	Part No.	Part Name & Description	Remarks
C204E	ECEA1HU100	10	
C204F	ECEA1HU100	10	
C204G	ECEA1HU100	10	
C204H	ECEA1HU100	10	
C205A	ECEA1EN100S	10	
C205B	ECEA1EN100S	10	
C205C	ECEA1EN100S	10	
C205D	ECEA1EN100S	10	
C205E	ECEA1EN100S	10	
C205F	ECEA1EN100S	10	
C205G	ECEA1EN100S	10	
C205H	ECEA1EN100S	10	
C206A	ECEA1EN100S	10	
C206B	ECEA1EN100S	10	
C206C	ECEA1EN100S	10	
C206D	ECEA1EN100S	10	
C206E	ECEA1EN100S	10	
C206F	ECEA1EN100S	10	
C206G	ECEA1EN100S	10	
C206H	ECEA1EN100S	10	
C207A	ECEA1HU4R7	4.7	
C207B	ECEA1HU4R7	4.7	
C207C	ECEA1HU4R7	4.7	
C207D	ECEA1HU4R7	4.7	
C207E	ECEA1HU4R7	4.7	
C207F	ECEA1HU4R7	4.7	
C207G	ECEA1HU4R7	4.7	
C207H	ECEA1HU4R7	4.7	
C209A	PQCUV1H223KB	0.022	
C209B	PQCUV1H223KB	0.022	
C209C	PQCUV1H223KB	0.022	
C209D	PQCUV1H223KB	0.022	
C209E	PQCUV1H223KB	0.022	
C209F	PQCUV1H223KB	0.022	
C209G	PQCUV1H223KB	0.022	
C209H	PQCUV1H223KB	0.022	
C210A	PQCUV1H104ZF	0.1	
C210B	PQCUV1H104ZF	0.1	
C210C	PQCUV1H104ZF	0.1	
C210D	PQCUV1H104ZF	0.1	
C210E	PQCUV1H104ZF	0.1	
C210F	PQCUV1H104ZF	0.1	
C210G	PQCUV1H104ZF	0.1	
C210H	PQCUV1H104ZF	0.1	
C211A	ECEA1HN4R7S	4.7	
C211B	ECEA1HN4R7S	4.7	
C211C	ECEA1HN4R7S	4.7	
C211D	ECEA1HN4R7S	4.7	
C211E	ECEA1HN4R7S	4.7	
C211F	ECEA1HN4R7S	4.7	
C211G	ECEA1HN4R7S	4.7	
C211H	ECEA1HN4R7S	4.7	
C212A	PQCUV1H103KB	0.01	
C212B	PQCUV1H103KB	0.01	
C212C	PQCUV1H103KB	0.01	
C212D	PQCUV1H103KB	0.01	
C212E	PQCUV1H103KB	0.01	
C212F	PQCUV1H103KB	0.01	
C212G	PQCUV1H103KB	0.01	
C212H	PQCUV1H103KB	0.01	
C213A	PQCUV1H103KB	0.01	
C213B	PQCUV1H103KB	0.01	
C213C	PQCUV1H103KB	0.01	
C213D	PQCUV1H103KB	0.01	
C213E	PQCUV1H103KB	0.01	
C213F	PQCUV1H103KB	0.01	
C213G	PQCUV1H103KB	0.01	
C213H	PQCUV1H103KB	0.01	
C215A	PQCUV1H121JC	120P	
C215B	PQCUV1H121JC	120P	
C215C	PQCUV1H121JC	120P	
C215D	PQCUV1H121JC	120P	
C215E	PQCUV1H121JC	120P	

Ref. No.	Part No.	Part Name & Description	Remarks
C215F	PQCUV1H121JC	120P	
C215G	PQCUV1H121JC	120P	
C215H	PQCUV1H121JC	120P	
C216A	ECEA1HU2R2	2.2	
C216B	ECEA1HU2R2	2.2	
C216C	ECEA1HU2R2	2.2	
C216D	ECEA1HU2R2	2.2	
C216E	ECEA1HU2R2	2.2	
C216F	ECEA1HU2R2	2.2	
C216G	ECEA1HU2R2	2.2	
C216H	ECEA1HU2R2	2.2	
C217A	PQCUV1H680JC	68P	
C217B	PQCUV1H680JC	68P	
C217C	PQCUV1H680JC	68P	
C217D	PQCUV1H680JC	68P	
C217E	PQCUV1H680JC	68P	
C217F	PQCUV1H680JC	68P	
C217G	PQCUV1H680JC	68P	
C217H	PQCUV1H680JC	68P	
C218A	PQCUV1H680JC	68P	
C218B	PQCUV1H680JC	68P	
C218C	PQCUV1H680JC	68P	
C218D	PQCUV1H680JC	68P	
C218E	PQCUV1H680JC	68P	
C218F	PQCUV1H680JC	68P	
C218G	PQCUV1H680JC	68P	
C218H	PQCUV1H680JC	68P	
C219A	ECUV1H104MD	0.1	
C219B	ECUV1H104MD	0.1	
C219C	ECUV1H104MD	0.1	
C219D	ECUV1H104MD	0.1	
C219E	ECUV1H104MD	0.1	
C219F	ECUV1H104MD	0.1	
C219G	ECUV1H104MD	0.1	
C219H	ECUV1H104MD	0.1	
C220	ECEA1EU101	100	
C220A	ECUV1H393KB	0.039	
C220B	ECUV1H393KB	0.039	
C220C	ECUV1H393KB	0.039	
C220D	ECUV1H393KB	0.039	
C220E	ECUV1H393KB	0.039	
C220F	ECUV1H393KB	0.039	
C220G	ECUV1H393KB	0.039	
C220H	ECUV1H393KB	0.039	
C221	ECEA1EU101	100	
C222A	ECEA1HU100	10	
C222B	ECEA1HU100	10	
C222C	ECEA1HU100	10	
C222D	ECEA1HU100	10	
C222E	ECEA1HU100	10	
C222F	ECEA1HU100	10	
C222G	ECEA1HU100	10	
C222H	ECEA1HU100	10	
C251	PQCUV1H223KB	0.022	
C252	PQCUV1H223KB	0.022	
C253	PQCUV1H223KB	0.022	
C254	PQCUV1H223KB	0.022	
C255	ECEA1VU330	33	
C256	PQCUV1H221JC	220P	
C257	PQCUV1H104ZF	0.1	
C258	PQCUV1H104ZF	0.1	
C259	PQCUV1H104ZF	0.1	
C260	ECEA1ESS471U	470	
C262	ECEA1VU330	33	
C263	ECEA1VU330	33	
C264	ECEA1VU330	33	
C265	PQCUV1H104ZF	0.1	
C270	ECEA1AU101	100	
C272	PQCUV1H104ZF	0.1	
C273	PQCUV1H104ZF	0.1	
C280	PQCUV1H104ZF	0.1	
C281	PQCUV1H104ZF	0.1	
C282	PQCUV1H104ZF	0.1	

Ref. No.	Part No.	Part Name & Description	Remarks
C283	PQCUV1H104ZF	0.1	
C284	PQCUV1H104ZF	0.1	
C285	PQCUV1H104ZF	0.1	
C287	PQCUV1H104ZF	0.1	
C288	PQCUV1H104ZF	0.1	
C289	PQCUV1H104ZF	0.1	
C290	PQCUV1H104ZF	0.1	
C292	ECEA1EU101	100	
C295	PQCUV1H104ZF	0.1	
C296	PQCUV1H104ZF	0.1	
C299A	PQCUV1H221JC	220P	
C299B	PQCUV1H221JC	220P	
C299C	PQCUV1H221JC	220P	
C299D	PQCUV1H221JC	220P	
C299F	PQCUV1H221JC	220P	
C299G	PQCUV1H221JC	220P	
C299H	PQCUV1H221JC	220P	
C900A	PQCUV1H560JC	56P	
C900B	PQCUV1H560JC	56P	
C900C	PQCUV1H560JC	56P	
C900D	PQCUV1H560JC	56P	
C900E	PQCUV1H560JC	56P	
C900F	PQCUV1H560JC	56P	
C900G	PQCUV1H560JC	56P	
C900H	PQCUV1H560JC	56P	
C901A	PQCUV1H560JC	56P	
C901B	PQCUV1H560JC	56P	
C901C	PQCUV1H560JC	56P	
C901D	PQCUV1H560JC	56P	
C901E	PQCUV1H560JC	56P	
C901F	PQCUV1H560JC	56P	
C901G	PQCUV1H560JC	56P	
C901H	PQCUV1H560JC	56P	
		(RESISTORS)	
C208A	PQ4R10XJ000	0	
C208B	PQ4R10XJ000	0	
C208C	PQ4R10XJ000	0	
C208D	PQ4R10XJ000	0	
C208E	PQ4R10XJ000	0	
C208F	PQ4R10XJ000	0	
C208G	PQ4R10XJ000	0	
C208H	PQ4R10XJ000	0	
J201	PQ4R10XJ000	0	
J202	PQ4R10XJ000	0	
J203	PQ4R10XJ000	0	
J204	PQ4R10XJ000	0	
J250A	PQ4R10XJ000	0	
J250B	PQ4R10XJ000	0	
J250C	PQ4R10XJ000	0	
J250D	PQ4R10XJ000	0	
J250E	PQ4R10XJ000	0	
J250F	PQ4R10XJ000	0	
J250G	PQ4R10XJ000	0	
J250H	PQ4R10XJ000	0	
J252A	PQ4R10XJ000	0	
J252B	PQ4R10XJ000	0	
J252C	PQ4R10XJ000	0	
J252D	PQ4R10XJ000	0	
J252E	PQ4R10XJ000	0	
J252F	PQ4R10XJ000	0	
J252G	PQ4R10XJ000	0	
J252H	PQ4R10XJ000	0	
J254A	PQ4R10XJ000	0	
J254B	PQ4R10XJ000	0	
J254C	PQ4R10XJ000	0	
J254D	PQ4R10XJ000	0	
J254E	PQ4R10XJ000	0	
J254F	PQ4R10XJ000	0	
J254G	PQ4R10XJ000	0	
J254H	PQ4R10XJ000	0	
J256A	PQ4R10XJ000	0	
J256B	PQ4R10XJ000	0	
J256C	PQ4R10XJ000	0	

Ref. No.	Part No.	Part Name & Description	Remarks
J256D	PQ4R10XJ000	0	
J256F	PQ4R10XJ000	0	
J256G	PQ4R10XJ000	0	
J256H	PQ4R10XJ000	0	
J302A	ERDS2TJ0T	0	
J302D	ERDS2TJ0T	0	
J302F	ERDS2TJ0T	0	
J302G	ERDS2TJ0T	0	
J302H	ERDS2TJ0T	0	
R200A	PQ4R10XJ390	39	
R200B	PQ4R10XJ390	39	
R200C	PQ4R10XJ390	39	
R200D	PQ4R10XJ390	39	
R200E	PQ4R10XJ390	39	
R200F	PQ4R10XJ390	39	
R200G	PQ4R10XJ390	39	
R200H	PQ4R10XJ390	39	
R201A	PQ4R10XJ222	2.2K	
R201B	PQ4R10XJ222	2.2K	
R201C	PQ4R10XJ222	2.2K	
R201D	PQ4R10XJ222	2.2K	
R201E	PQ4R10XJ222	2.2K	
R201F	PQ4R10XJ222	2.2K	
R201G	PQ4R10XJ222	2.2K	
R201H	PQ4R10XJ222	2.2K	
R202A	PQ4R10XJ222	2.2K	
R202B	PQ4R10XJ222	2.2K	
R202C	PQ4R10XJ222	2.2K	
R202D	PQ4R10XJ222	2.2K	
R202E	PQ4R10XJ222	2.2K	
R202F	PQ4R10XJ222	2.2K	
R202G	PQ4R10XJ222	2.2K	
R202H	PQ4R10XJ222	2.2K	
R203	PQ4R10XJ101	100	
R204	PQ4R10XJ105	1M	
R205A	ERDS2TJ220	22	
R205B	ERDS2TJ220	22	
R205C	ERDS2TJ220	22	
R205D	ERDS2TJ220	22	
R205E	ERDS2TJ220	22	
R205F	ERDS2TJ220	22	
R205G	ERDS2TJ220	22	
R205H	ERDS2TJ220	22	
R206A	PQ4R18XJ680	68	
R206B	PQ4R18XJ680	68	
R206C	PQ4R18XJ680	68	
R206D	PQ4R18XJ680	68	
R206E	PQ4R18XJ680	68	
R206F	PQ4R18XJ680	68	
R206G	PQ4R18XJ680	68	
R206H	PQ4R18XJ680	68	
R207A	PQ4R10XJ682	6.8K	
R207B	PQ4R10XJ682	6.8K	
R207C	PQ4R10XJ682	6.8K	
R207D	PQ4R10XJ682	6.8K	
R207E	PQ4R10XJ682	6.8K	
R207F	PQ4R10XJ682	6.8K	
R207G	PQ4R10XJ682	6.8K	
R207H	PQ4R10XJ682	6.8K	
R208A	ERDS2TJ220	22	
R208B	ERDS2TJ220	22	
R208C	ERDS2TJ220	22	
R208D	ERDS2TJ220	22	
R208E	ERDS2TJ220	22	
R208F	ERDS2TJ220	22	
R208G	ERDS2TJ220	22	
R208H	ERDS2TJ220	22	
R209A	PQ4R18XJ680	68	
R209B	PQ4R18XJ680	68	
R209C	PQ4R18XJ680	68	
R209D	PQ4R18XJ680	68	
R209E	PQ4R18XJ680	68	
R209F	PQ4R18XJ680	68	

Ref. No.	Part No.	Part Name & Description	Remarks
R209G	PQ4R18XJ680	68	
R209H	PQ4R18XJ680	68	
R210A	PQ4R10XJ682	6.8K	
R210B	PQ4R10XJ682	6.8K	
R210C	PQ4R10XJ682	6.8K	
R210D	PQ4R10XJ682	6.8K	
R210E	PQ4R10XJ682	6.8K	
R210F	PQ4R10XJ682	6.8K	
R210G	PQ4R10XJ682	6.8K	
R210H	PQ4R10XJ682	6.8K	
R211A	PQ4RXF3000	300	
R211B	PQ4RXF3000	300	
R211C	PQ4RXF3000	300	
R211D	PQ4RXF3000	300	
R211E	PQ4RXF3000	300	
R211F	PQ4RXF3000	300	
R211G	PQ4RXF3000	300	
R211H	PQ4RXF3000	300	
R212A	PQ4RXF2401	2.4K	
R212B	PQ4RXF2401	2.4K	
R212C	PQ4RXF2401	2.4K	
R212D	PQ4RXF2401	2.4K	
R212E	PQ4RXF2401	2.4K	
R212F	PQ4RXF2401	2.4K	
R212G	PQ4RXF2401	2.4K	
R212H	PQ4RXF2401	2.4K	
R213A	PQ4RXF3001	3K	
R213B	PQ4RXF3001	3K	
R213C	PQ4RXF3001	3K	
R213D	PQ4RXF3001	3K	
R213E	PQ4RXF3001	3K	
R213F	PQ4RXF3001	3K	
R213G	PQ4RXF3001	3K	
R213H	PQ4RXF3001	3K	
R214A	PQ4RXF8202	82K	
R214B	PQ4RXF8202	82K	
R214C	PQ4RXF8202	82K	
R214D	PQ4RXF8202	82K	
R214E	PQ4RXF8202	82K	
R214F	PQ4RXF8202	82K	
R214G	PQ4RXF8202	82K	
R214H	PQ4RXF8202	82K	
R215A	PQ4RXF1103	110K	
R215B	PQ4RXF1103	110K	
R215C	PQ4RXF1103	110K	
R215D	PQ4RXF1103	110K	
R215E	PQ4RXF1103	110K	
R215F	PQ4RXF1103	110K	
R215G	PQ4RXF1103	110K	
R215H	PQ4RXF1103	110K	
R216A	PQ4RXF1003	100K	
R216B	PQ4RXF1003	100K	
R216C	PQ4RXF1003	100K	
R216D	PQ4RXF1003	100K	
R216E	PQ4RXF1003	100K	
R216F	PQ4RXF1003	100K	
R216G	PQ4RXF1003	100K	
R216H	PQ4RXF1003	100K	
R217A	PQ4RXF1003	100K	
R217B	PQ4RXF1003	100K	
R217C	PQ4RXF1003	100K	
R217D	PQ4RXF1003	100K	
R217E	PQ4RXF1003	100K	
R217F	PQ4RXF1003	100K	
R217G	PQ4RXF1003	100K	
R217H	PQ4RXF1003	100K	
R219A	PQ4RXF1103	110K	
R219B	PQ4RXF1103	110K	
R219C	PQ4RXF1103	110K	
R219D	PQ4RXF1103	110K	
R219E	PQ4RXF1103	110K	
R219F	PQ4RXF1103	110K	
R219G	PQ4RXF1103	110K	

Ref. No.	Part No.	Part Name & Description	Remarks
R219H	PQ4RXF1103	110K	
R220A	PQ4RXF1103	110K	
R220B	PQ4RXF1103	110K	
R220C	PQ4RXF1103	110K	
R220D	PQ4RXF1103	110K	
R220E	PQ4RXF1103	110K	
R220F	PQ4RXF1103	110K	
R220G	PQ4RXF1103	110K	
R220H	PQ4RXF1103	110K	
R221A	PQ4RXF9102	91K	
R221B	PQ4RXF9102	91K	
R221C	PQ4RXF9102	91K	
R221D	PQ4RXF9102	91K	
R221E	PQ4RXF9102	91K	
R221F	PQ4RXF9102	91K	
R221G	PQ4RXF9102	91K	
R221H	PQ4RXF9102	91K	
R222A	PQ4RXF3000	300	
R222B	PQ4RXF3000	300	
R222C	PQ4RXF3000	300	
R222D	PQ4RXF3000	300	
R222E	PQ4RXF3000	300	
R222F	PQ4RXF3000	300	
R222G	PQ4RXF3000	300	
R222H	PQ4RXF3000	300	
R224A	PQ4R10XJ153	15K	
R224B	PQ4R10XJ153	15K	
R224C	PQ4R10XJ153	15K	
R224D	PQ4R10XJ153	15K	
R224E	PQ4R10XJ153	15K	
R224F	PQ4R10XJ153	15K	
R224G	PQ4R10XJ153	15K	
R224H	PQ4R10XJ153	15K	
R225A	PQ4R10XJ333	33K	
R225B	PQ4R10XJ333	33K	
R225C	PQ4R10XJ333	33K	
R225D	PQ4R10XJ333	33K	
R225E	PQ4R10XJ333	33K	
R225F	PQ4R10XJ333	33K	
R225G	PQ4R10XJ333	33K	
R225H	PQ4R10XJ333	33K	
R226A	PQ4R10XJ103	10K	
R226B	PQ4R10XJ103	10K	
R226C	PQ4R10XJ103	10K	
R226D	PQ4R10XJ103	10K	
R226E	PQ4R10XJ103	10K	
R226F	PQ4R10XJ103	10K	
R226G	PQ4R10XJ103	10K	
R226H	PQ4R10XJ103	10K	
R227A	PQ4R10XJ473	47K	
R227B	PQ4R10XJ473	47K	
R227C	PQ4R10XJ473	47K	
R227D	PQ4R10XJ473	47K	
R227E	PQ4R10XJ473	47K	
R227F	PQ4R10XJ473	47K	
R227G	PQ4R10XJ473	47K	
R227H	PQ4R10XJ473	47K	
R228A	PQ4R10XJ123	12K	
R228B	PQ4R10XJ123	12K	
R228C	PQ4R10XJ123	12K	
R228D	PQ4R10XJ123	12K	
R228E	PQ4R10XJ123	12K	
R228F	PQ4R10XJ123	12K	
R228G	PQ4R10XJ123	12K	
R228H	PQ4R10XJ123	12K	
R229A	PQ4R10XJ333	33K	
R229B	PQ4R10XJ333	33K	
R229C	PQ4R10XJ333	33K	
R229D	PQ4R10XJ333	33K	
R229E	PQ4R10XJ333	33K	
R229F	PQ4R10XJ333	33K	
R229G	PQ4R10XJ333	33K	
R229H	PQ4R10XJ333	33K	

Ref. No.	Part No.	Part Name & Description	Remarks
R230A	PQ4R10XJ103	10K	
R230B	PQ4R10XJ103	10K	
R230C	PQ4R10XJ103	10K	
R230D	PQ4R10XJ103	10K	
R230E	PQ4R10XJ103	10K	
R230F	PQ4R10XJ103	10K	
R230G	PQ4R10XJ103	10K	
R230H	PQ4R10XJ103	10K	
R232A	PQRD2TJ102	1K	
R232B	PQRD2TJ102	1K	
R232C	PQRD2TJ102	1K	
R232D	PQRD2TJ102	1K	
R232E	PQRD2TJ102	1K	
R232F	PQRD2TJ102	1K	
R232G	PQRD2TJ102	1K	
R232H	PQRD2TJ102	1K	
R233A	PQ4R10XJ5R6	5.6	
R233B	PQ4R10XJ5R6	5.6	
R233C	PQ4R10XJ5R6	5.6	
R233D	PQ4R10XJ5R6	5.6	
R233E	PQ4R10XJ5R6	5.6	
R233F	PQ4R10XJ5R6	5.6	
R233G	PQ4R10XJ5R6	5.6	
R233H	PQ4R10XJ5R6	5.6	
R234A	PQ4R10XJ222	2.2K	
R234B	PQ4R10XJ222	2.2K	
R234C	PQ4R10XJ222	2.2K	
R234D	PQ4R10XJ222	2.2K	
R234E	PQ4R10XJ222	2.2K	
R234F	PQ4R10XJ222	2.2K	
R234G	PQ4R10XJ222	2.2K	
R234H	PQ4R10XJ222	2.2K	
R235A	PQ4R10XJ561	560	
R235B	PQ4R10XJ561	560	
R235C	PQ4R10XJ561	560	
R235D	PQ4R10XJ561	560	
R235E	PQ4R10XJ561	560	
R235F	PQ4R10XJ561	560	
R235G	PQ4R10XJ561	560	
R235H	PQ4R10XJ561	560	
R236A	PQ4R10XJ222	2.2K	
R236B	PQ4R10XJ222	2.2K	
R236C	PQ4R10XJ222	2.2K	
R236D	PQ4R10XJ222	2.2K	
R236E	PQ4R10XJ222	2.2K	
R236F	PQ4R10XJ222	2.2K	
R236G	PQ4R10XJ222	2.2K	
R236H	PQ4R10XJ222	2.2K	
R237A	PQ4R10XJ561	560	
R237B	PQ4R10XJ561	560	
R237C	PQ4R10XJ561	560	
R237D	PQ4R10XJ561	560	
R237E	PQ4R10XJ561	560	
R237F	PQ4R10XJ561	560	
R237G	PQ4R10XJ561	560	
R237H	PQ4R10XJ561	560	
R238A	PQ4R10XJ390	39	
R238B	PQ4R10XJ390	39	
R238C	PQ4R10XJ390	39	
R238D	PQ4R10XJ390	39	
R238E	PQ4R10XJ390	39	
R238F	PQ4R10XJ390	39	
R238G	PQ4R10XJ390	39	
R238H	PQ4R10XJ390	39	
R239A	PQ4R10XJ222	2.2K	
R239B	PQ4R10XJ222	2.2K	
R239C	PQ4R10XJ222	2.2K	
R239D	PQ4R10XJ222	2.2K	
R239E	PQ4R10XJ222	2.2K	
R239F	PQ4R10XJ222	2.2K	
R239G	PQ4R10XJ222	2.2K	
R239H	PQ4R10XJ222	2.2K	
R240A	PQ4R10XJ222	2.2K	

Ref. No.	Part No.	Part Name & Description	Remarks
R240B	PQ4R10XJ222	2.2K	
R240C	PQ4R10XJ222	2.2K	
R240D	PQ4R10XJ222	2.2K	
R240E	PQ4R10XJ222	2.2K	
R240F	PQ4R10XJ222	2.2K	
R240G	PQ4R10XJ222	2.2K	
R240H	PQ4R10XJ222	2.2K	
R241	PQ4R10XJ473	47K	
R243	PQ4R10XJ223	22K	
R244	PQ4R10XJ472	4.7K	
R245	PQ4R10XJ153	15K	
R246	PQ4R10XJ152	1.5K	
R247	PQ4R10XJ223	22K	
R248A	PQ4R10XJ561	560	
R248B	PQ4R10XJ561	560	
R248C	PQ4R10XJ561	560	
R248D	PQ4R10XJ561	560	
R248E	PQ4R10XJ561	560	
R248F	PQ4R10XJ561	560	
R248G	PQ4R10XJ561	560	
R248H	PQ4R10XJ561	560	
R251	PQ4R10XJ103	10K	
R252	PQ4R10XJ103	10K	
R253	PQ4R10XJ103	10K	
R254	PQ4R10XJ103	10K	
R255	PQ4R10XJ823	82K	
R256	PQ4R10XJ104	100K	
R257	PQ4R10XJ334	330K	
R258	PQ4R10XJ823	82K	
R259	PQ4R10XJ104	100K	
R260	PQ4R10XJ334	330K	
R261	PQRD1TJ820	82	
R262	PQ4R10XJ152	1.5K	
R263	PQ4R10XJ152	1.5K	
R264	PQ4R10XJ152	1.5K	
R265	PQ4R10XJ103	10K	
R266	PQ4R10XJ103	10K	
R267	PQ4R10XJ101	100	
R268	PQ4R10XJ101	100	
R269	PQ4R10XJ101	100	
R270	ERDS2TJ220	22	
R270A	PQ4R10XJ103	10K	
R270B	PQ4R10XJ103	10K	
R270C	PQ4R10XJ103	10K	
R270D	PQ4R10XJ103	10K	
R270E	PQ4R10XJ103	10K	
R270F	PQ4R10XJ103	10K	
R270G	PQ4R10XJ103	10K	
R270H	PQ4R10XJ103	10K	
R271	PQ4R10XJ682	6.8K	
R272	PQ4R10XJ101	100	
R275A	PQ4R10XJ563	56K	
R275B	PQ4R10XJ563	56K	
R275C	PQ4R10XJ563	56K	
R275D	PQ4R10XJ563	56K	
R275E	PQ4R10XJ563	56K	
R275F	PQ4R10XJ563	56K	
R275G	PQ4R10XJ563	56K	
R275H	PQ4R10XJ563	56K	
R276A	PQ4R10XJ560	56	
R276B	PQ4R10XJ560	56	
R276C	PQ4R10XJ560	56	
R276D	PQ4R10XJ560	56	
R276E	PQ4R10XJ560	56	
R276F	PQ4R10XJ560	56	
R276G	PQ4R10XJ560	56	
R276H	PQ4R10XJ560	56	
R277A	PQ4R10XJ560	56	
R277B	PQ4R10XJ560	56	
R277C	PQ4R10XJ560	56	
R277D	PQ4R10XJ560	56	
R277E	PQ4R10XJ560	56	
R277F	PQ4R10XJ560	56	

Ref. No.	Part No.	Part Name & Description	Remarks
R277G	PQ4R10XJ560	56	
R277H	PQ4R10XJ560	56	
R278A	PQ4R10XJ560	56	
R278B	PQ4R10XJ560	56	
R278C	PQ4R10XJ560	56	
R278D	PQ4R10XJ560	56	
R278E	PQ4R10XJ560	56	
R278F	PQ4R10XJ560	56	
R278G	PQ4R10XJ560	56	
R278H	PQ4R10XJ560	56	
R279A	PQ4R10XJ560	56	
R279B	PQ4R10XJ560	56	
R279C	PQ4R10XJ560	56	
R279D	PQ4R10XJ560	56	
R279E	PQ4R10XJ560	56	
R279F	PQ4R10XJ560	56	
R279G	PQ4R10XJ560	56	
R279H	PQ4R10XJ560	56	
R280	PQ4R10XJ223	22K	
R285	PQ4R10XJ122	1.2K	
R286	PQ4R10XJ152	1.5K	
R289A	PQ4R10XJ5R6	5.6	
R289B	PQ4R10XJ5R6	5.6	
R289C	PQ4R10XJ5R6	5.6	
R289D	PQ4R10XJ5R6	5.6	
R289E	PQ4R10XJ5R6	5.6	
R289F	PQ4R10XJ5R6	5.6	
R289G	PQ4R10XJ5R6	5.6	
R289H	PQ4R10XJ5R6	5.6	
R290A	PQ4R10XJ472	4.7K	
R290B	PQ4R10XJ472	4.7K	
R290C	PQ4R10XJ472	4.7K	
R290D	PQ4R10XJ472	4.7K	
R290E	PQ4R10XJ472	4.7K	
R290F	PQ4R10XJ472	4.7K	
R290G	PQ4R10XJ472	4.7K	
R290H	PQ4R10XJ472	4.7K	
R291A	PQ4R10XJ472	4.7K	
R291B	PQ4R10XJ472	4.7K	
R291C	PQ4R10XJ472	4.7K	
R291D	PQ4R10XJ472	4.7K	
R291E	PQ4R10XJ472	4.7K	
R291F	PQ4R10XJ472	4.7K	
R291G	PQ4R10XJ472	4.7K	
R291H	PQ4R10XJ472	4.7K	
R292A	PQ4R10XJ472	4.7K	
R292B	PQ4R10XJ472	4.7K	
R292C	PQ4R10XJ472	4.7K	
R292D	PQ4R10XJ472	4.7K	
R292E	PQ4R10XJ472	4.7K	
R292F	PQ4R10XJ472	4.7K	
R292G	PQ4R10XJ472	4.7K	
R292H	PQ4R10XJ472	4.7K	
R293	PQ4R10XF6801	6.8K	
R294	PQ4R10XF1201	1.2K	
R295A	PQ4R10XJ101	100	
R295B	PQ4R10XJ101	100	
R295C	PQ4R10XJ101	100	
R295D	PQ4R10XJ101	100	
R295E	PQ4R10XJ101	100	
R295F	PQ4R10XJ101	100	
R295G	PQ4R10XJ101	100	
R295H	PQ4R10XJ101	100	
R299A	PQ4R10XJ101	100	
R299B	PQ4R10XJ101	100	
R299C	PQ4R10XJ101	100	
R299D	PQ4R10XJ101	100	
R299E	PQ4R10XJ101	100	
R299F	PQ4R10XJ101	100	
R299G	PQ4R10XJ101	100	
R299H	PQ4R10XJ101	100	
R300	PQ4R10XJ331	330	
R301	PQ4R10XJ331	330	
R302	PQ4R10XJ331	330	
R303	PQ4R10XJ331	330	
R304	PQ4R10XJ331	330	
R305	PQ4R10XJ331	330	
R306	PQ4R10XJ331	330	
R307	PQ4R10XJ331	330	
R308	PQ4R10XJ331	330	
R309	PQ4R10XJ331	330	
R310	PQ4R10XJ331	330	
R311	PQ4R10XJ331	330	
R312	PQ4R10XJ331	330	
R313	PQ4R10XJ331	330	
R314	PQ4R10XJ331	330	
R315	PQ4R10XJ331	330	
R316	PQ4R10XJ331	330	
R317	PQ4R10XJ331	330	
R318	PQ4R10XJ331	330	
R319	PQ4R10XJ331	330	
R320	PQ4R10XJ331	330	
R321	PQ4R10XJ331	330	
R322	PQ4R10XJ331	330	
R323	PQ4R10XJ331	330	
R324	PQ4R10XJ331	330	
R801	PQ4R10XJ330	33	
R802	PQ4R10XJ330	33	
R803	PQ4R10XJ330	33	
R804	PQ4R10XJ330	33	
R805	PQ4R10XJ330	33	
R900A	PQ4R10XF9102	91K	
R900B	PQ4R10XF9102	91K	
R900C	PQ4R10XF9102	91K	
R900D	PQ4R10XF9102	91K	
R900E	PQ4R10XF9102	91K	
R900F	PQ4R10XF9102	91K	
R900G	PQ4R10XF9102	91K	
R900H	PQ4R10XF9102	91K	
R903A	PQ4R10XJ5R6	5.6	
R903B	PQ4R10XJ5R6	5.6	
R903C	PQ4R10XJ5R6	5.6	
R903D	PQ4R10XJ5R6	5.6	
R903E	PQ4R10XJ5R6	5.6	
R903F	PQ4R10XJ5R6	5.6	
R903G	PQ4R10XJ5R6	5.6	
R903H	PQ4R10XJ5R6	5.6	
R904A	PQ4R10XJ101	100	
R904B	PQ4R10XJ101	100	
R904C	PQ4R10XJ101	100	
R904D	PQ4R10XJ101	100	
R904E	PQ4R10XJ101	100	
R904F	PQ4R10XJ101	100	
R904G	PQ4R10XJ101	100	
R904H	PQ4R10XJ101	100	

1.5. NEW CO LINE BOARD PARTS

Ref. No.	Part No.	Part Name & Description	Remarks
PCB3	PSWP3D1232BX	CO LINE BOARD ASS´Y (RTL)	
		(ICs)	
IC101A	PQVINJM4558M	IC	
IC101B	PQVINJM4558M	IC	
IC101C	PQVINJM4558M	IC	
IC101D	PQVINJM4558M	IC	
IC101E	PQVINJM4558M	IC	
IC101F	PQVINJM4558M	IC	
IC101G	PQVINJM4558M	IC	
IC101H	PQVINJM4558M	IC	
IC102A	PQVIMC14548V	IC	
IC102B	PQVIMC14548V	IC	
IC102C	PQVIMC14548V	IC	
IC102D	PQVIMC14548V	IC	
IC102E	PQVIMC14548V	IC	
IC102F	PQVIMC14548V	IC	

Ref. No.	Part No.	Part Name & Description	Remarks
IC102G	PQVIMC14548V	IC	
IC102H	PQVIMC14548V	IC	
IC111	PQVI63HB110	IC	
IC112	PQVISN7L138M	IC	
IC114	PQVISN7L138M	IC	
IC116	PQVISN7L640M	IC	
IC117	PQVISN7L08S	IC	
IC120	PQVISN7L04S	IC	
IC121	PQVISN7L14S	IC	
IC122	PQVISN7L273M	IC	
IC123	PQVISN7L14S	IC	
		(TRANSISTORS)	
Q101A	2SD1897	TRANSISTOR(SI)	
Q101B	2SD1897	TRANSISTOR(SI)	
Q101C	2SD1897	TRANSISTOR(SI)	
Q101D	2SD1897	TRANSISTOR(SI)	
Q101E	2SD1897	TRANSISTOR(SI)	
Q101F	2SD1897	TRANSISTOR(SI)	
Q101G	2SD1897	TRANSISTOR(SI)	
Q101H	2SD1897	TRANSISTOR(SI)	
Q102A	PQVTDTC143EK	TRANSISTOR(SI)	
Q102B	PQVTDTC143EK	TRANSISTOR(SI)	
Q102C	PQVTDTC143EK	TRANSISTOR(SI)	
Q102D	PQVTDTC143EK	TRANSISTOR(SI)	
Q102E	PQVTDTC143EK	TRANSISTOR(SI)	
Q102F	PQVTDTC143EK	TRANSISTOR(SI)	
Q102G	PQVTDTC143EK	TRANSISTOR(SI)	
Q102H	PQVTDTC143EK	TRANSISTOR(SI)	
Q111	2SB1322	TRANSISTOR(SI)	
Q112	UN5113	TRANSISTOR(SI)	
Q120A	2SA1627	TRANSISTOR(SI)	
Q120B	2SA1627	TRANSISTOR(SI)	
Q120C	2SA1627	TRANSISTOR(SI)	
Q120D	2SA1627	TRANSISTOR(SI)	
Q120E	2SA1627	TRANSISTOR(SI)	
Q120F	2SA1627	TRANSISTOR(SI)	
Q120G	2SA1627	TRANSISTOR(SI)	
Q120H	2SA1627	TRANSISTOR(SI)	
		(DIODES)	
D101A	PQVDS1YB40F1	DIODE(SI)	
D101B	PQVDS1YB40F1	DIODE(SI)	
D101C	PQVDS1YB40F1	DIODE(SI)	
D101D	PQVDS1YB40F1	DIODE(SI)	
D101E	PQVDS1YB40F1	DIODE(SI)	
D101F	PQVDS1YB40F1	DIODE(SI)	
D101G	PQVDS1YB40F1	DIODE(SI)	
D101H	PQVDS1YB40F1	DIODE(SI)	
D102A	PQVDHZS2B1	DIODE(SI)	
D102B	PQVDHZS2B1	DIODE(SI)	
D102C	PQVDHZS2B1	DIODE(SI)	
D102D	PQVDHZS2B1	DIODE(SI)	
D102E	PQVDHZS2B1	DIODE(SI)	
D102F	PQVDHZS2B1	DIODE(SI)	
D102G	PQVDHZS2B1	DIODE(SI)	
D102H	PQVDHZS2B1	DIODE(SI)	
D103A	PQVDHZS2B1	DIODE(SI)	
D103B	PQVDHZS2B1	DIODE(SI)	
D103C	PQVDHZS2B1	DIODE(SI)	
D103D	PQVDHZS2B1	DIODE(SI)	
D103E	PQVDHZS2B1	DIODE(SI)	
D103F	PQVDHZS2B1	DIODE(SI)	
D103G	PQVDHZS2B1	DIODE(SI)	
D103H	PQVDHZS2B1	DIODE(SI)	
D108A	RLS71	DIODE(SI)	
D108B	RLS71	DIODE(SI)	
D108C	RLS71	DIODE(SI)	
D108D	RLS71	DIODE(SI)	
D108E	RLS71	DIODE(SI)	
D108F	RLS71	DIODE(SI)	
D108G	RLS71	DIODE(SI)	
D108H	RLS71	DIODE(SI)	
D154	MA4056	DIODE(SI)	
D155	MA723	DIODE(SI)	

Ref. No.	Part No.	Part Name & Description	Remarks
		(CONNECTOR)	
CN101	PQJS50R15Z	CONNECTOR, 50P	
CN104	PQJS22A15Z	CONNECTOR, 22P	
CN105	PQJS08A15Z	CONNECTOR, 8P	
CN106	PQJS22A15Z	CONNECTOR, 22P	
CN107	PQJS08A15Z	CONNECTOR, 8P	
		(JACKS)	
CN108	PQJJ1TB25Y	JACK, TEL	
CN109	PQJJ1TB25Y	JACK, TEL	
CN110	PQJJ1TB25Y	JACK, TEL	
CN111	PQJJ1TB25Y	JACK, TEL	
		(PHOTO ELECTRIC TRANSDUCERS)	
PC101A	ON3181R	PHOTO COUPLER	
PC101B	ON3181R	PHOTO COUPLER	
PC101C	ON3181R	PHOTO COUPLER	
PC101D	ON3181R	PHOTO COUPLER	
PC101E	ON3181R	PHOTO COUPLER	
PC101F	ON3181R	PHOTO COUPLER	
PC101G	ON3181R	PHOTO COUPLER	
PC101H	ON3181R	PHOTO COUPLER	
PC102A	PQVITLP627	PHOTO COUPLER	
PC102B	PQVITLP627	PHOTO COUPLER	
PC102C	PQVITLP627	PHOTO COUPLER	
PC102D	PQVITLP627	PHOTO COUPLER	
PC102E	PQVITLP627	PHOTO COUPLER	
PC102F	PQVITLP627	PHOTO COUPLER	
PC102G	PQVITLP627	PHOTO COUPLER	
PC102H	PQVITLP627	PHOTO COUPLER	
		(RELAYS)	
RY101A	PQSL41Z	RELAY	
RY101B	PQSL41Z	RELAY	
RY101C	PQSL41Z	RELAY	
RY101D	PQSL41Z	RELAY	
RY101E	PQSL41Z	RELAY	
RY101F	PQSL41Z	RELAY	
RY101G	PQSL41Z	RELAY	
RY101H	PQSL41Z	RELAY	
		(TRANSFORMERS)	
T101A	ETA14Y85AY	TRANSFORMER	
T101B	ETA14Y85AY	TRANSFORMER	
T101C	ETA14Y85AY	TRANSFORMER	
T101D	ETA14Y85AY	TRANSFORMER	
T101E	ETA14Y85AY	TRANSFORMER	
T101F	ETA14Y85AY	TRANSFORMER	
T101G	ETA14Y85AY	TRANSFORMER	
T101H	ETA14Y85AY	TRANSFORMER	
		(VARISTORS)	
SA101A	PSVDB1A351	VARISTOR (SURGE ABSORBER)	
SA101B	PSVDB1A351	VARISTOR (SURGE ABSORBER)	
SA101C	PSVDB1A351	VARISTOR (SURGE ABSORBER)	
SA101D	PSVDB1A351	VARISTOR (SURGE ABSORBER)	
SA101E	PSVDB1A351	VARISTOR (SURGE ABSORBER)	
SA101F	PSVDB1A351	VARISTOR (SURGE ABSORBER)	
SA101G	PSVDB1A351	VARISTOR (SURGE ABSORBER)	
SA101H	PSVDB1A351	VARISTOR (SURGE ABSORBER)	
SA102A	PSVDB1A351	VARISTOR (SURGE ABSORBER)	
SA102B	PSVDB1A351	VARISTOR (SURGE ABSORBER)	
SA102C	PSVDB1A351	VARISTOR (SURGE ABSORBER)	
SA102D	PSVDB1A351	VARISTOR (SURGE ABSORBER)	
SA102E	PSVDB1A351	VARISTOR (SURGE ABSORBER)	
SA102F	PSVDB1A351	VARISTOR (SURGE ABSORBER)	
SA102G	PSVDB1A351	VARISTOR (SURGE ABSORBER)	
SA102H	PSVDB1A351	VARISTOR (SURGE ABSORBER)	
SA103A	PSVDB1A351	VARISTOR (SURGE ABSORBER)	
SA103B	PSVDB1A351	VARISTOR (SURGE ABSORBER)	
SA103C	PSVDB1A351	VARISTOR (SURGE ABSORBER)	
SA103D	PSVDB1A351	VARISTOR (SURGE ABSORBER)	
SA103E	PSVDB1A351	VARISTOR (SURGE ABSORBER)	
SA103F	PSVDB1A351	VARISTOR (SURGE ABSORBER)	
SA103G	PSVDB1A351	VARISTOR (SURGE ABSORBER)	
SA103H	PSVDB1A351	VARISTOR (SURGE ABSORBER)	
SA104	ERZC10DK681	VARISTOR (SURGE ABSORBER)	
ZR101A	ERZC07DK820	VARISTOR	

Ref. No.	Part No.	Part Name & Description	Remarks
ZR101B	ERZC07DK820	VARISTOR	
ZR101C	ERZC07DK820	VARISTOR	
ZR101D	ERZC07DK820	VARISTOR	
ZR101E	ERZC07DK820	VARISTOR	
ZR101F	ERZC07DK820	VARISTOR	
ZR101G	ERZC07DK820	VARISTOR	
ZR101H	ERZC07DK820	VARISTOR	
		(CAPACITORS)	
R180A	PQCUV1H104ZF	0.1	
R180B	PQCUV1H104ZF	0.1	
R180C	PQCUV1H104ZF	0.1	
R180D	PQCUV1H104ZF	0.1	
R180E	PQCUV1H104ZF	0.1	
R180F	PQCUV1H104ZF	0.1	
R180G	PQCUV1H104ZF	0.1	
R180H	PQCUV1H104ZF	0.1	
C101A	ECKDKC222KB	0.0022	
C101B	ECKDKC222KB	0.0022	
C101C	ECKDKC222KB	0.0022	
C101D	ECKDKC222KB	0.0022	
C101E	ECKDKC222KB	0.0022	
C101F	ECKDKC222KB	0.0022	
C101G	ECKDKC222KB	0.0022	
C101H	ECKDKC222KB	0.0022	
C102A	ECQE2E224JZ	0.22	
C102B	ECQE2E224JZ	0.22	
C102C	ECQE2E224JZ	0.22	
C102D	ECQE2E224JZ	0.22	
C102E	ECQE2E224JZ	0.22	
C102F	ECQE2E224JZ	0.22	
C102G	ECQE2E224JZ	0.22	
C102H	ECQE2E224JZ	0.22	
C103A	ECEA1HU100	10	
C103B	ECEA1HU100	10	
C103C	ECEA1HU100	10	
C103D	ECEA1HU100	10	
C103E	ECEA1HU100	10	
C103F	ECEA1HU100	10	
C103G	ECEA1HU100	10	
C103H	ECEA1HU100	10	
C104A	ECEA1HU220	22	
C104B	ECEA1HU220	22	
C104C	ECEA1HU220	22	
C104D	ECEA1HU220	22	
C104E	ECEA1HU220	22	
C104F	ECEA1HU220	22	
C104G	ECEA1HU220	22	
C104H	ECEA1HU220	22	
C105A	PQCUV1H102J	0.001	
C105B	PQCUV1H102J	0.001	
C105C	PQCUV1H102J	0.001	
C105D	PQCUV1H102J	0.001	
C105E	PQCUV1H102J	0.001	
C105F	PQCUV1H102J	0.001	
C105G	PQCUV1H102J	0.001	
C105H	PQCUV1H102J	0.001	
C106A	ECUV1C563KBV	0.056	N
C106B	ECUV1C563KBV	0.056	N
C106C	ECUV1C563KBV	0.056	N
C106D	ECUV1C563KBV	0.056	N
C106E	ECUV1C563KBV	0.056	N
C106F	ECUV1C563KBV	0.056	N
C106G	ECUV1C563KBV	0.056	N
C106H	ECUV1C563KBV	0.056	N
C109A	PQCUV1E223KB	0.022	
C109B	PQCUV1E223KB	0.022	
C109C	PQCUV1E223KB	0.022	
C109D	PQCUV1E223KB	0.022	
C109E	PQCUV1E223KB	0.022	
C109F	PQCUV1E223KB	0.022	
C109G	PQCUV1E223KB	0.022	
C109H	PQCUV1E223KB	0.022	
C110A	PQCUV1E223KB	0.022	

Ref. No.	Part No.	Part Name & Description	Remarks
C110B	PQCUV1E223KB	0.022	
C110C	PQCUV1E223KB	0.022	
C110D	PQCUV1E223KB	0.022	
C110E	PQCUV1E223KB	0.022	
C110F	PQCUV1E223KB	0.022	
C110G	PQCUV1E223KB	0.022	
C110H	PQCUV1E223KB	0.022	
C111A	ECEA1HUR47	0.47	
C111B	ECEA1HUR47	0.47	
C111C	ECEA1HUR47	0.47	
C111D	ECEA1HUR47	0.47	
C111E	ECEA1HUR47	0.47	
C111F	ECEA1HUR47	0.47	
C111G	ECEA1HUR47	0.47	
C111H	ECEA1HUR47	0.47	
C151	ECEA1HU330	33	
C151A	PQCUV1H101JC	100	
C151B	PQCUV1H101JC	100	
C151C	PQCUV1H101JC	100	
C151D	PQCUV1H101JC	100	
C151E	PQCUV1H101JC	100	
C151F	PQCUV1H101JC	100	
C151G	PQCUV1H101JC	100	
C151H	PQCUV1H101JC	100	
C152	ECEA1HU330	33	
C153	ECEA1HU330	33	
C154	ECEA1HKS010	1	
C155	ECEA1ESS331	330	
C156	ECEA1AU222	2200	
C170	PQCUV1H223KB	0.022	
C182A	PQCUV1C104KB	0.1	
C182B	PQCUV1C104KB	0.1	
C182C	PQCUV1C104KB	0.1	
C182D	PQCUV1C104KB	0.1	
C182E	PQCUV1C104KB	0.1	
C182F	PQCUV1C104KB	0.1	
C182G	PQCUV1C104KB	0.1	
C182H	PQCUV1C104KB	0.1	
C183A	PQCUV1C104KB	0.1	
C183B	PQCUV1C104KB	0.1	
C183C	PQCUV1C104KB	0.1	
C183D	PQCUV1C104KB	0.1	
C183E	PQCUV1C104KB	0.1	
C183F	PQCUV1C104KB	0.1	
C183G	PQCUV1C104KB	0.1	
C183H	PQCUV1C104KB	0.1	
C193A	PQCUV1H151JC	150	
C193B	PQCUV1H151JC	150	
C193C	PQCUV1H151JC	150	
C193D	PQCUV1H151JC	150	
C193E	PQCUV1H151JC	150	
C193F	PQCUV1H151JC	150	
C193G	PQCUV1H151JC	150	
C193H	PQCUV1H151JC	150	
		(RESISTORS)	
J100A	ERDS2TJ0T	0	
J151	PQ4R10XJ000	0	
J152	PQ4R10XJ000	0	
J153	PQ4R10XJ000	0	
J154	PQ4R10XJ000	0	
J155A	PQ4R10XJ000	0	
J155B	PQ4R10XJ000	0	
J155C	PQ4R10XJ000	0	
J155D	PQ4R10XJ000	0	
J155E	PQ4R10XJ000	0	
J155F	PQ4R10XJ000	0	
J155G	PQ4R10XJ000	0	
J155H	PQ4R10XJ000	0	
J156A	PQ4R10XJ000	0	
J156B	PQ4R10XJ000	0	
J156C	PQ4R10XJ000	0	
J156D	PQ4R10XJ000	0	
J156E	PQ4R10XJ000	0	

Ref. No.	Part No.	Part Name & Description	Remarks
J156F	PQ4R10XJ000	0	
J156G	PQ4R10XJ000	0	
J156H	PQ4R10XJ000	0	
J160A	PQ4R10XJ000	0	
J160B	PQ4R10XJ000	0	
J160C	PQ4R10XJ000	0	
J160D	PQ4R10XJ000	0	
J160E	PQ4R10XJ000	0	
J160F	PQ4R10XJ000	0	
J160G	PQ4R10XJ000	0	
J160H	PQ4R10XJ000	0	
R101A	ERQN1VJ223	22K	
R101B	ERQN1VJ223	22K	
R101C	ERQN1VJ223	22K	
R101D	ERQN1VJ223	22K	
R101E	ERQN1VJ223	22K	
R101F	ERQN1VJ223	22K	
R101G	ERQN1VJ223	22K	
R101H	ERQN1VJ223	22K	
R102A	PQ4R10XJ822	8.2K	
R102B	PQ4R10XJ822	8.2K	
R102C	PQ4R10XJ822	8.2K	
R102D	PQ4R10XJ822	8.2K	
R102E	PQ4R10XJ822	8.2K	
R102F	PQ4R10XJ822	8.2K	
R102G	PQ4R10XJ822	8.2K	
R102H	PQ4R10XJ822	8.2K	
R103A	ERDS2TJ390	39	
R103B	ERDS2TJ390	39	
R103C	ERDS2TJ390	39	
R103D	ERDS2TJ390	39	
R103E	ERDS2TJ390	39	
R103F	ERDS2TJ390	39	
R103G	ERDS2TJ390	39	
R103H	ERDS2TJ390	39	
R104A	PQ4R10XJ103	10K	
R104B	PQ4R10XJ103	10K	
R104C	PQ4R10XJ103	10K	
R104D	PQ4R10XJ103	10K	
R104E	PQ4R10XJ103	10K	
R104F	PQ4R10XJ103	10K	
R104G	PQ4R10XJ103	10K	
R104H	PQ4R10XJ103	10K	
R105A	PQ4R10XJ471	470	
R105B	PQ4R10XJ471	470	
R105C	PQ4R10XJ471	470	
R105D	PQ4R10XJ471	470	
R105E	PQ4R10XJ471	470	
R105F	PQ4R10XJ471	470	
R105G	PQ4R10XJ471	470	
R105H	PQ4R10XJ471	470	
R107A	PQ4R10XF1211	1.21K	
R107B	PQ4R10XF1211	1.21K	
R107C	PQ4R10XF1211	1.21K	
R107D	PQ4R10XF1211	1.21K	
R107E	PQ4R10XF1211	1.21K	
R107F	PQ4R10XF1211	1.21K	
R107G	PQ4R10XF1211	1.21K	
R107H	PQ4R10XF1211	1.21K	
R108A	PQ4R10XJ821	820	N
R108B	PQ4R10XJ821	820	N
R108C	PQ4R10XJ821	820	N
R108D	PQ4R10XJ821	820	N
R108E	PQ4R10XJ821	820	N
R108F	PQ4R10XJ821	820	N
R108G	PQ4R10XJ821	820	N
R108H	PQ4R10XJ821	820	N
R110A	PQ4R10XF2703	270K	
R110B	PQ4R10XF2703	270K	
R110C	PQ4R10XF2703	270K	
R110D	PQ4R10XF2703	270K	
R110E	PQ4R10XF2703	270K	
R110F	PQ4R10XF2703	270K	

Ref. No.	Part No.	Part Name & Description	Remarks
R110G	PQ4R10XF2703	270K	
R110H	PQ4R10XF2703	270K	
R111A	PQ4R10XF1003	100K	
R111B	PQ4R10XF1003	100K	
R111C	PQ4R10XF1003	100K	
R111D	PQ4R10XF1003	100K	
R111E	PQ4R10XF1003	100K	
R111F	PQ4R10XF1003	100K	
R111G	PQ4R10XF1003	100K	
R111H	PQ4R10XF1003	100K	
R112A	PQ4R10XF1003	100K	
R112B	PQ4R10XF1003	100K	
R112C	PQ4R10XF1003	100K	
R112D	PQ4R10XF1003	100K	
R112E	PQ4R10XF1003	100K	
R112F	PQ4R10XF1003	100K	
R112G	PQ4R10XF1003	100K	
R112H	PQ4R10XF1003	100K	
R113A	PQ4R10XF1003	100K	
R113B	PQ4R10XF1003	100K	
R113C	PQ4R10XF1003	100K	
R113D	PQ4R10XF1003	100K	
R113E	PQ4R10XF1003	100K	
R113F	PQ4R10XF1003	100K	
R113G	PQ4R10XF1003	100K	
R113H	PQ4R10XF1003	100K	
R115A	PQ4R10XF6802	68K	
R115B	PQ4R10XF6802	68K	
R115C	PQ4R10XF6802	68K	
R115D	PQ4R10XF6802	68K	
R115E	PQ4R10XF6802	68K	
R115F	PQ4R10XF6802	68K	
R115G	PQ4R10XF6802	68K	
R115H	PQ4R10XF6802	68K	
R118A	ERDS2TJ392	3.9K	
R118B	ERDS2TJ392	3.9K	
R118C	ERDS2TJ392	3.9K	
R118D	ERDS2TJ392	3.9K	
R118E	ERDS2TJ392	3.9K	
R118F	ERDS2TJ392	3.9K	
R118G	ERDS2TJ392	3.9K	
R118H	ERDS2TJ392	3.9K	
R119A	PQ4R10XF1211	1.21K	
R119B	PQ4R10XF1211	1.21K	
R119C	PQ4R10XF1211	1.21K	
R119D	PQ4R10XF1211	1.21K	
R119E	PQ4R10XF1211	1.21K	
R119F	PQ4R10XF1211	1.21K	
R119G	PQ4R10XF1211	1.21K	
R119H	PQ4R10XF1211	1.21K	
R122A	PQ4R10XJ222	2.2K	
R122B	PQ4R10XJ222	2.2K	
R122C	PQ4R10XJ222	2.2K	
R122D	PQ4R10XJ222	2.2K	
R122E	PQ4R10XJ222	2.2K	
R122F	PQ4R10XJ222	2.2K	
R122G	PQ4R10XJ222	2.2K	
R122H	PQ4R10XJ222	2.2K	
R125	PQ4R10XJ101	100	
R126	PQ4R10XJ101	100	
R127	PQ4R10XJ101	100	
R128	PQ4R10XJ101	100	
R129	PQ4R10XJ101	100	
R130	PQ4R10XJ101	100	
R131	PQ4R10XJ101	100	
R132	PQ4R10XJ101	100	
R153	PQ4R10XJ152	1.5K	
R154	PQRD1VJ221	220	
R155	PQ4R10XJ103	10K	
R156	PQ4R10XJ103	10K	
R157	PQ4R10XJ103	10K	
R158	PQ4R10XJ103	10K	
R159	PQ4R10XJ103	10K	

Ref. No.	Part No.	Part Name & Description	Remarks
R160	PQ4R10XJ103	10K	
R161	PQ4R10XJ101	100	
R161A	ERDS2TJ560	56	
R161B	ERDS2TJ560	56	
R161C	ERDS2TJ560	56	
R161D	ERDS2TJ560	56	
R161E	ERDS2TJ560	56	
R161F	ERDS2TJ560	56	
R161G	ERDS2TJ560	56	
R161H	ERDS2TJ560	56	
R162A	PQ4R10XJ104	100K	
R162B	PQ4R10XJ104	100K	
R162C	PQ4R10XJ104	100K	
R162D	PQ4R10XJ104	100K	
R162E	PQ4R10XJ104	100K	
R162F	PQ4R10XJ104	100K	
R162G	PQ4R10XJ104	100K	
R162H	PQ4R10XJ104	100K	
R163A	PQRQ25VJ5R6	5.6	
R163B	PQRQ25VJ5R6	5.6	
R163C	PQRQ25VJ5R6	5.6	
R163D	PQRQ25VJ5R6	5.6	
R163E	PQRQ25VJ5R6	5.6	
R163F	PQRQ25VJ5R6	5.6	
R163G	PQRQ25VJ5R6	5.6	
R163H	PQRQ25VJ5R6	5.6	
R164A	ERDS2TJ272	2.7K	
R164B	ERDS2TJ272	2.7K	
R164C	ERDS2TJ272	2.7K	
R164D	ERDS2TJ272	2.7K	
R164E	ERDS2TJ272	2.7K	
R164F	ERDS2TJ272	2.7K	
R164G	ERDS2TJ272	2.7K	
R164H	ERDS2TJ272	2.7K	
R165A	PQ4R10XJ471	470	N
R165B	PQ4R10XJ471	470	N
R165C	PQ4R10XJ471	470	N
R165D	PQ4R10XJ471	470	N
R165E	PQ4R10XJ471	470	N
R165F	PQ4R10XJ471	470	N
R165G	PQ4R10XJ471	470	N
R165H	PQ4R10XJ471	470	N
R171	PQ4R10XJ331	330	
R172	PQ4R10XJ331	330	
R173	PQ4R10XJ331	330	
R174	PQ4R10XJ331	330	
R175	PQ4R10XJ331	330	
R176	PQ4R10XJ331	330	
R177	PQ4R10XJ331	330	
R178	PQ4R10XJ331	330	
R179	PQ4R10XJ331	330	
R180	PQ4R10XJ331	330	
R181	PQ4R10XJ331	330	
R182	PQ4R10XJ331	330	
R190A	PQ4R10XF1203	120K	
R190B	PQ4R10XF1203	120K	
R190C	PQ4R10XF1203	120K	
R190D	PQ4R10XF1203	120K	
R190E	PQ4R10XF1203	120K	
R190F	PQ4R10XF1203	120K	
R190G	PQ4R10XF1203	120K	
R190H	PQ4R10XF1203	120K	
R191	PQ4R10XJ331	330	
R191A	PQ4R10XJ104	100K	
R191B	PQ4R10XJ104	100K	
R191C	PQ4R10XJ104	100K	
R191D	PQ4R10XJ104	100K	
R191E	PQ4R10XJ104	100K	
R191F	PQ4R10XJ104	100K	
R191G	PQ4R10XJ104	100K	
R191H	PQ4R10XJ104	100K	
R192	PQ4R10XJ331	330	
R192A	PQ4R10XJ124	120K	
R192B	PQ4R10XJ124	120K	
R192C	PQ4R10XJ124	120K	
R192D	PQ4R10XJ124	120K	
R192E	PQ4R10XJ124	120K	
R192F	PQ4R10XJ124	120K	
R192G	PQ4R10XJ124	120K	
R192H	PQ4R10XJ124	120K	
R193	PQ4R10XJ331	330	
R193A	PQ4R10XJ000	0	
R193B	PQ4R10XJ000	0	
R193C	PQ4R10XJ000	0	
R193D	PQ4R10XJ000	0	
R193E	PQ4R10XJ000	0	
R193F	PQ4R10XJ000	0	
R193G	PQ4R10XJ000	0	
R193H	PQ4R10XJ000	0	
R194	PQ4R10XJ331	330	
R194A	PQ4R10XJ563	56K	
R194B	PQ4R10XJ563	56K	
R194C	PQ4R10XJ563	56K	
R194D	PQ4R10XJ563	56K	
R194E	PQ4R10XJ563	56K	
R194F	PQ4R10XJ563	56K	
R194G	PQ4R10XJ563	56K	
R194H	PQ4R10XJ563	56K	
R195	PQ4R10XJ331	330	
R196	PQ4R10XJ331	330	
R197	PQ4R10XJ331	330	
R197A	PQ4R10XJ000	0	
R197B	PQ4R10XJ000	0	
R197C	PQ4R10XJ000	0	
R197D	PQ4R10XJ000	0	
R197E	PQ4R10XJ000	0	
R197F	PQ4R10XJ000	0	
R197G	PQ4R10XJ000	0	
R197H	PQ4R10XJ000	0	
R198	PQ4R10XJ331	330	
R198A	PQ4R10XJ563	56K	
R198B	PQ4R10XJ563	56K	
R198C	PQ4R10XJ563	56K	
R198D	PQ4R10XJ563	56K	
R198E	PQ4R10XJ563	56K	
R198F	PQ4R10XJ563	56K	
R198G	PQ4R10XJ563	56K	
R198H	PQ4R10XJ563	56K	

2 PRINTED CIRCUIT BOARD (EXTENSION BOARD)

2.1. COMPONENT VIEW

Change from the Original Service Manual pages 83, 84.

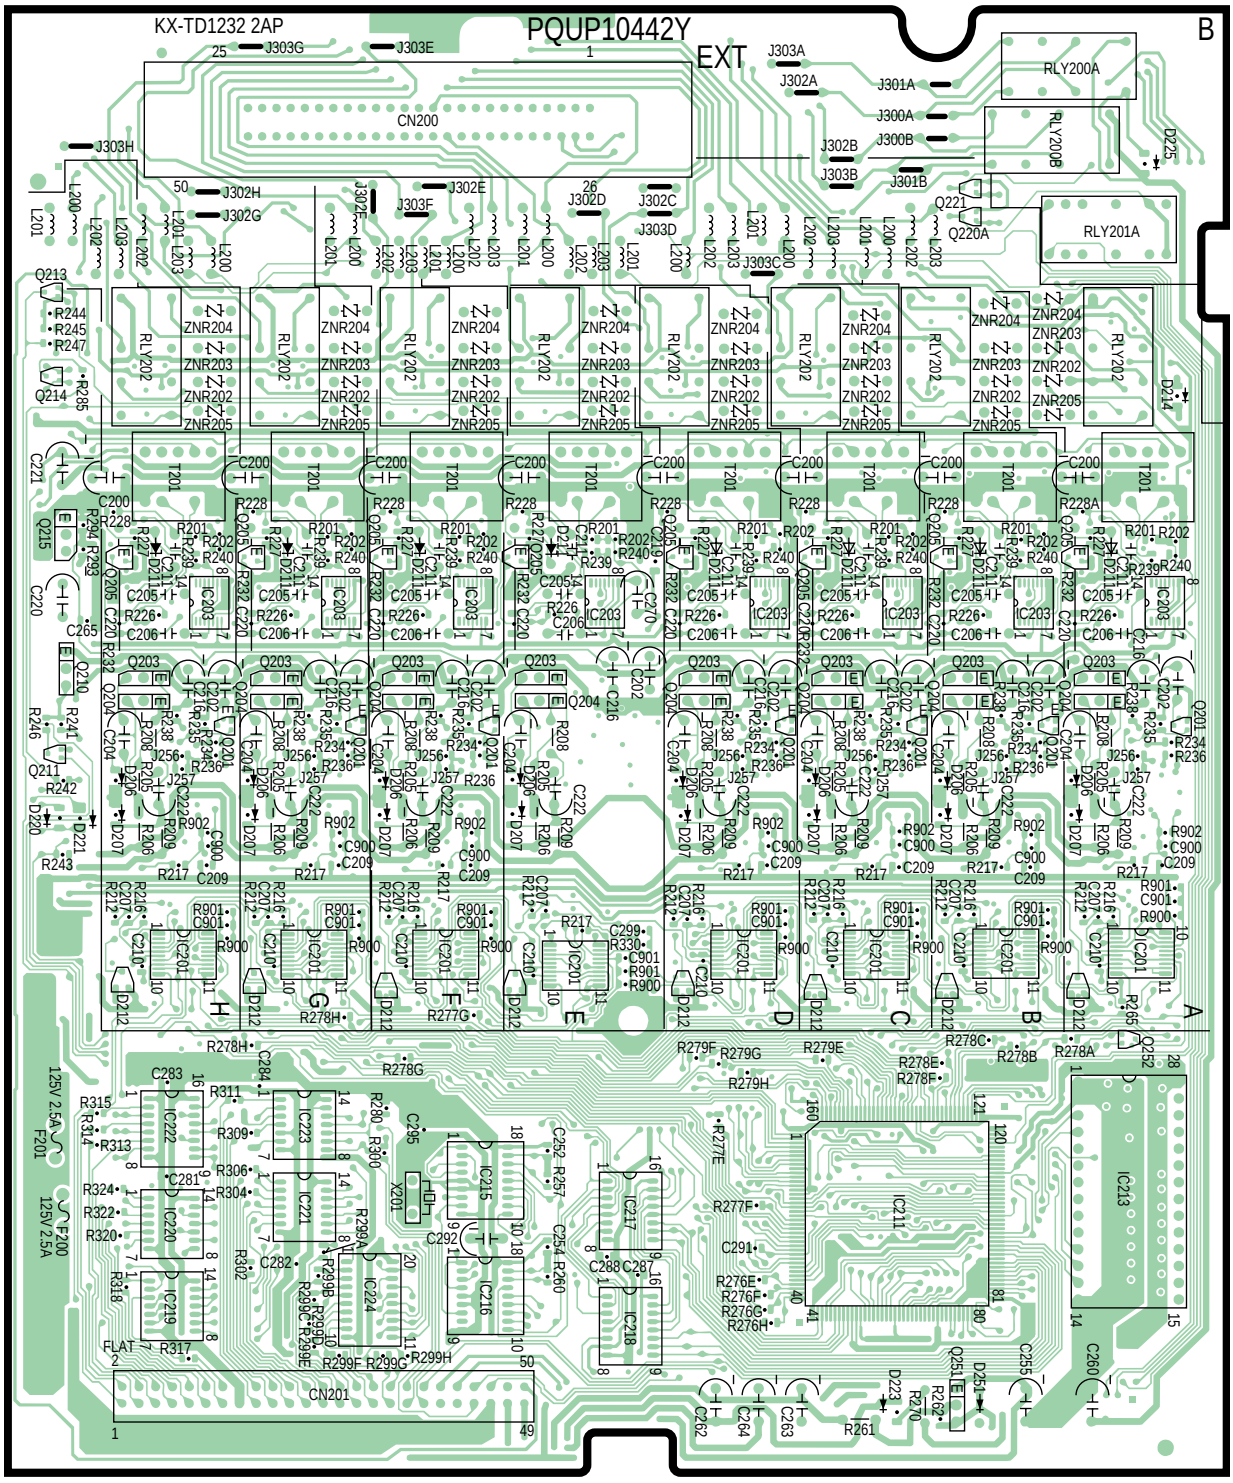

2.2. BOTTOM VIEW

Change from the Original Service Manual pages 85, 86.

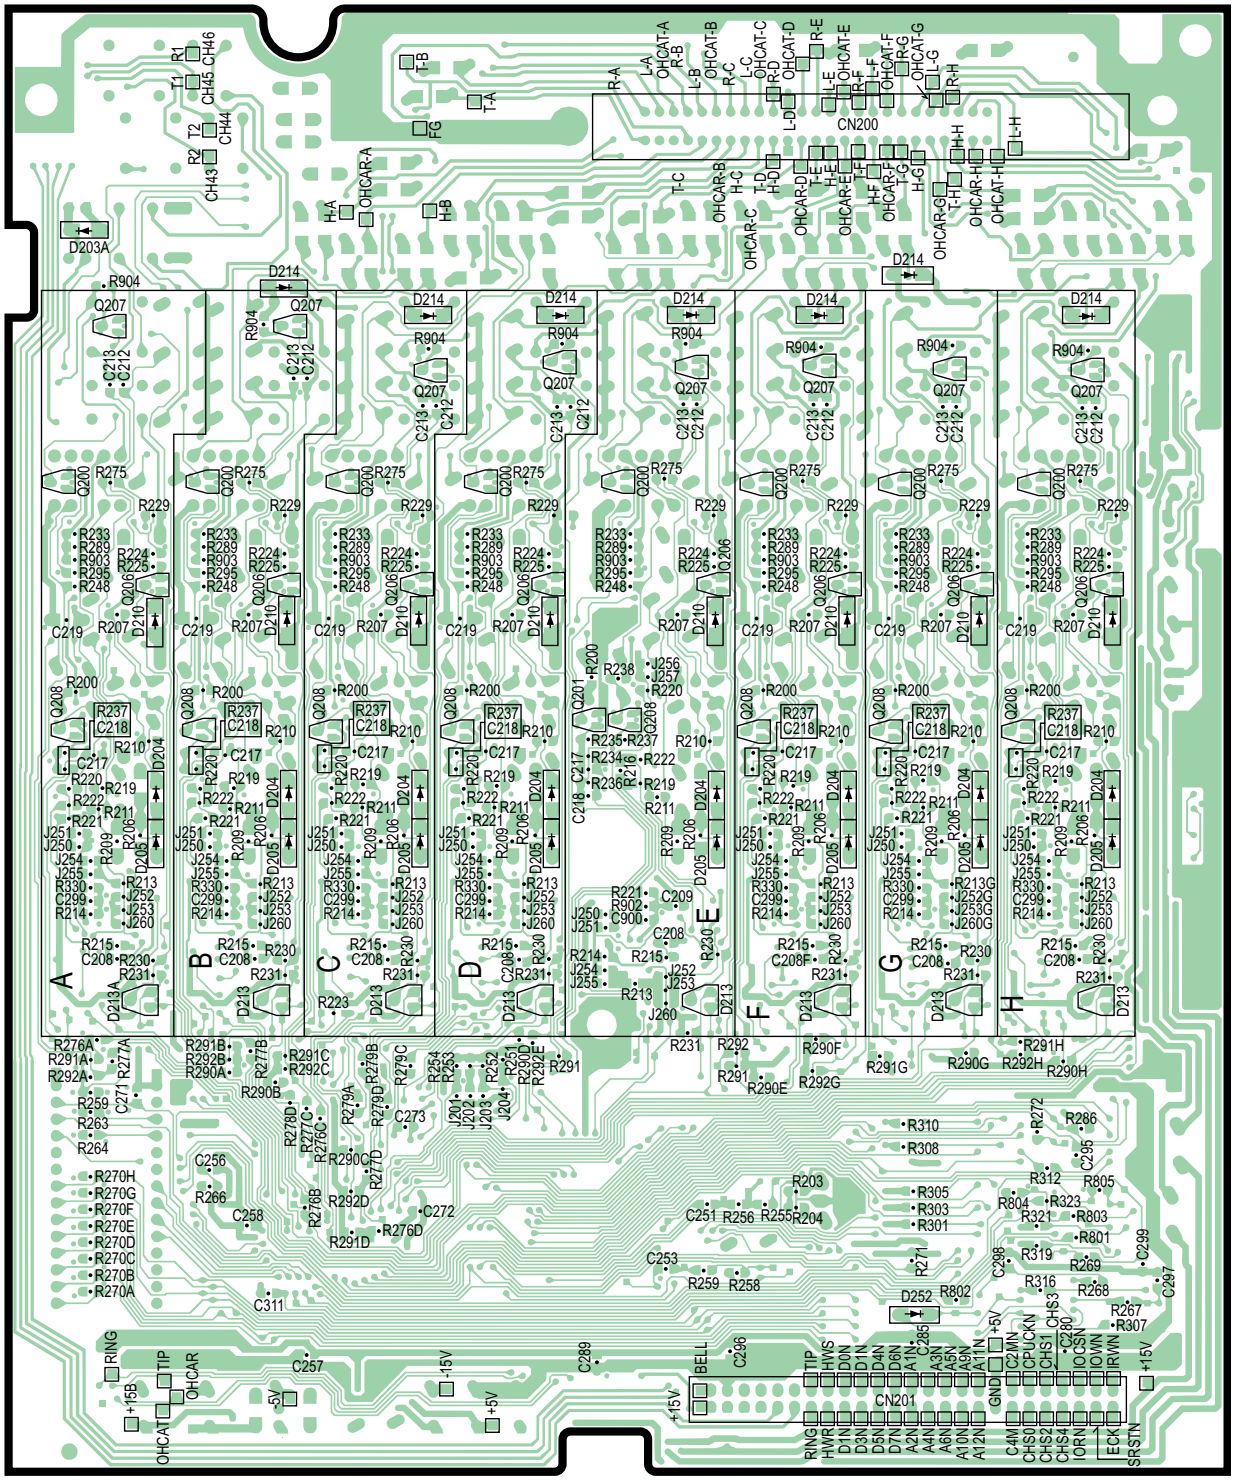

KX-TD1232BX EXTENSION BOARD BOTTOM VIEW

3 PRINTED CIRCIT BOARD (CO LINE BOARD)

3.1. COMPONENT VIEW

Change from the Original Service Manual pags 93, 94.

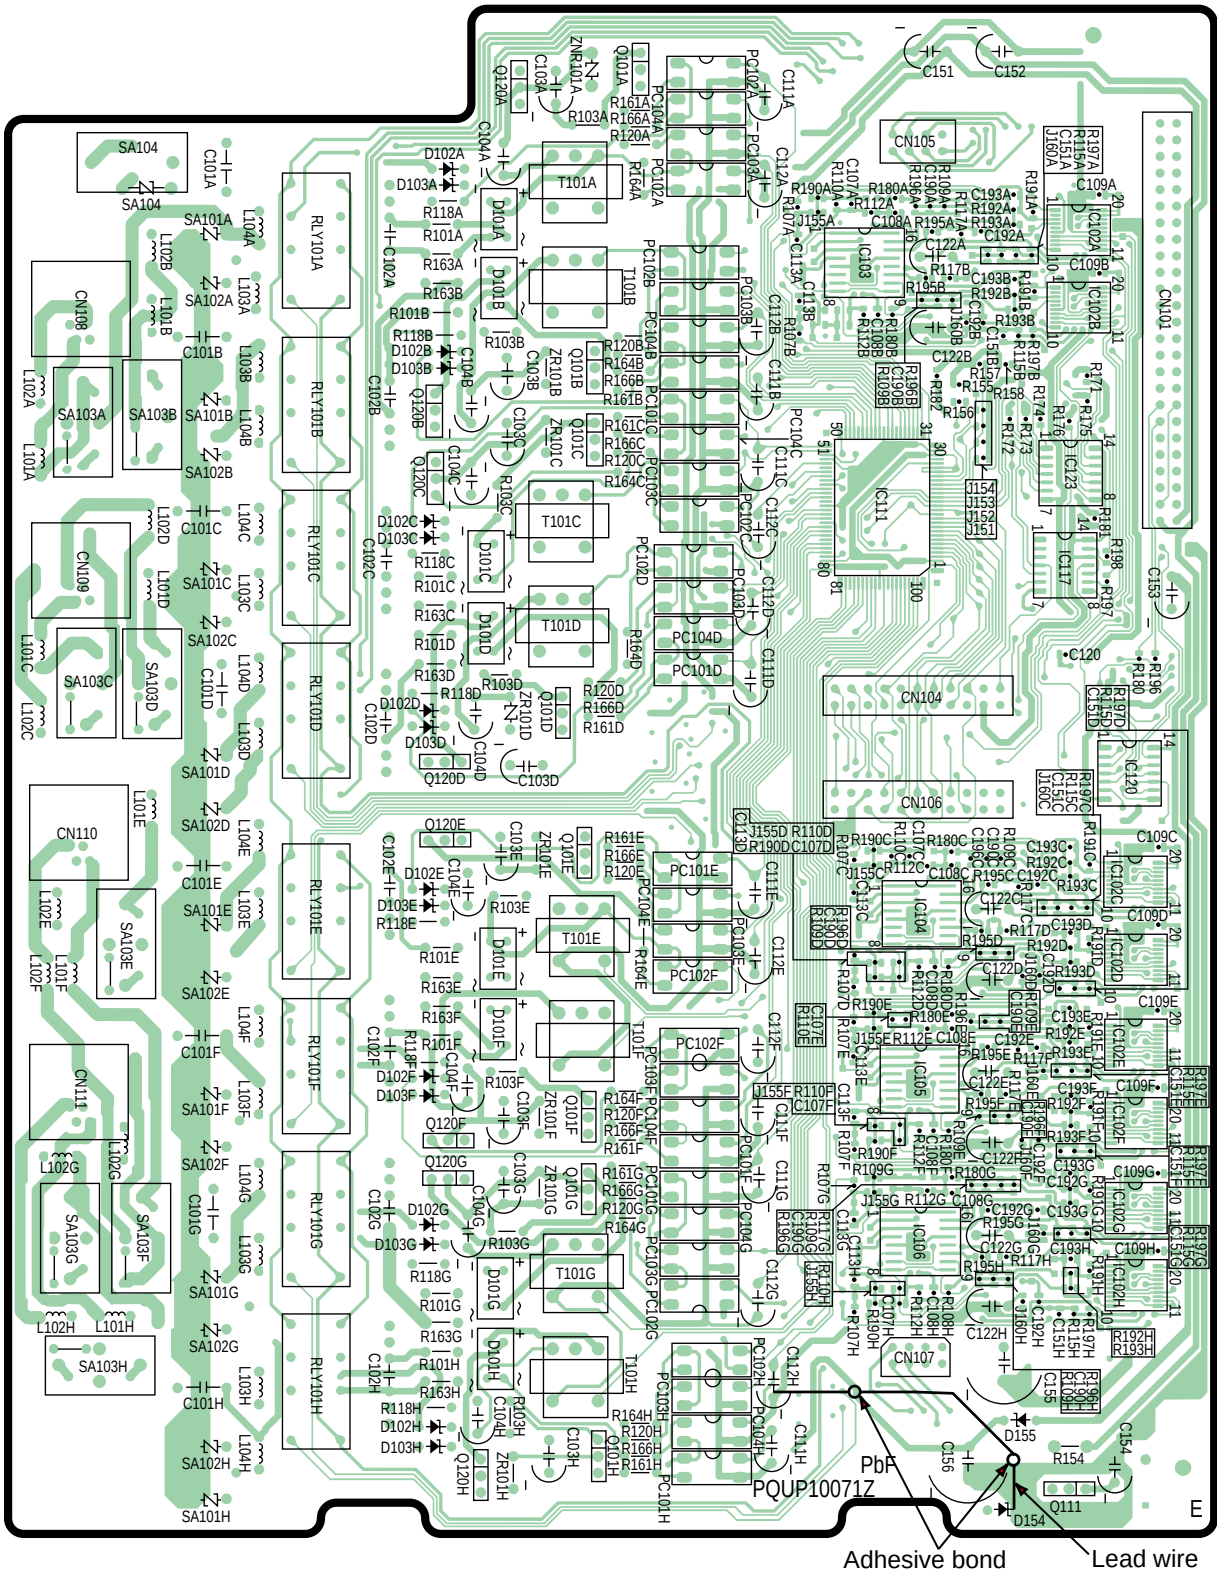

KX-TD1232BX CO LINE BOARD COMPONENT VIEW

3.2. BOTTOM VIEW

Change from the Original Service Manual pags 95, 96.

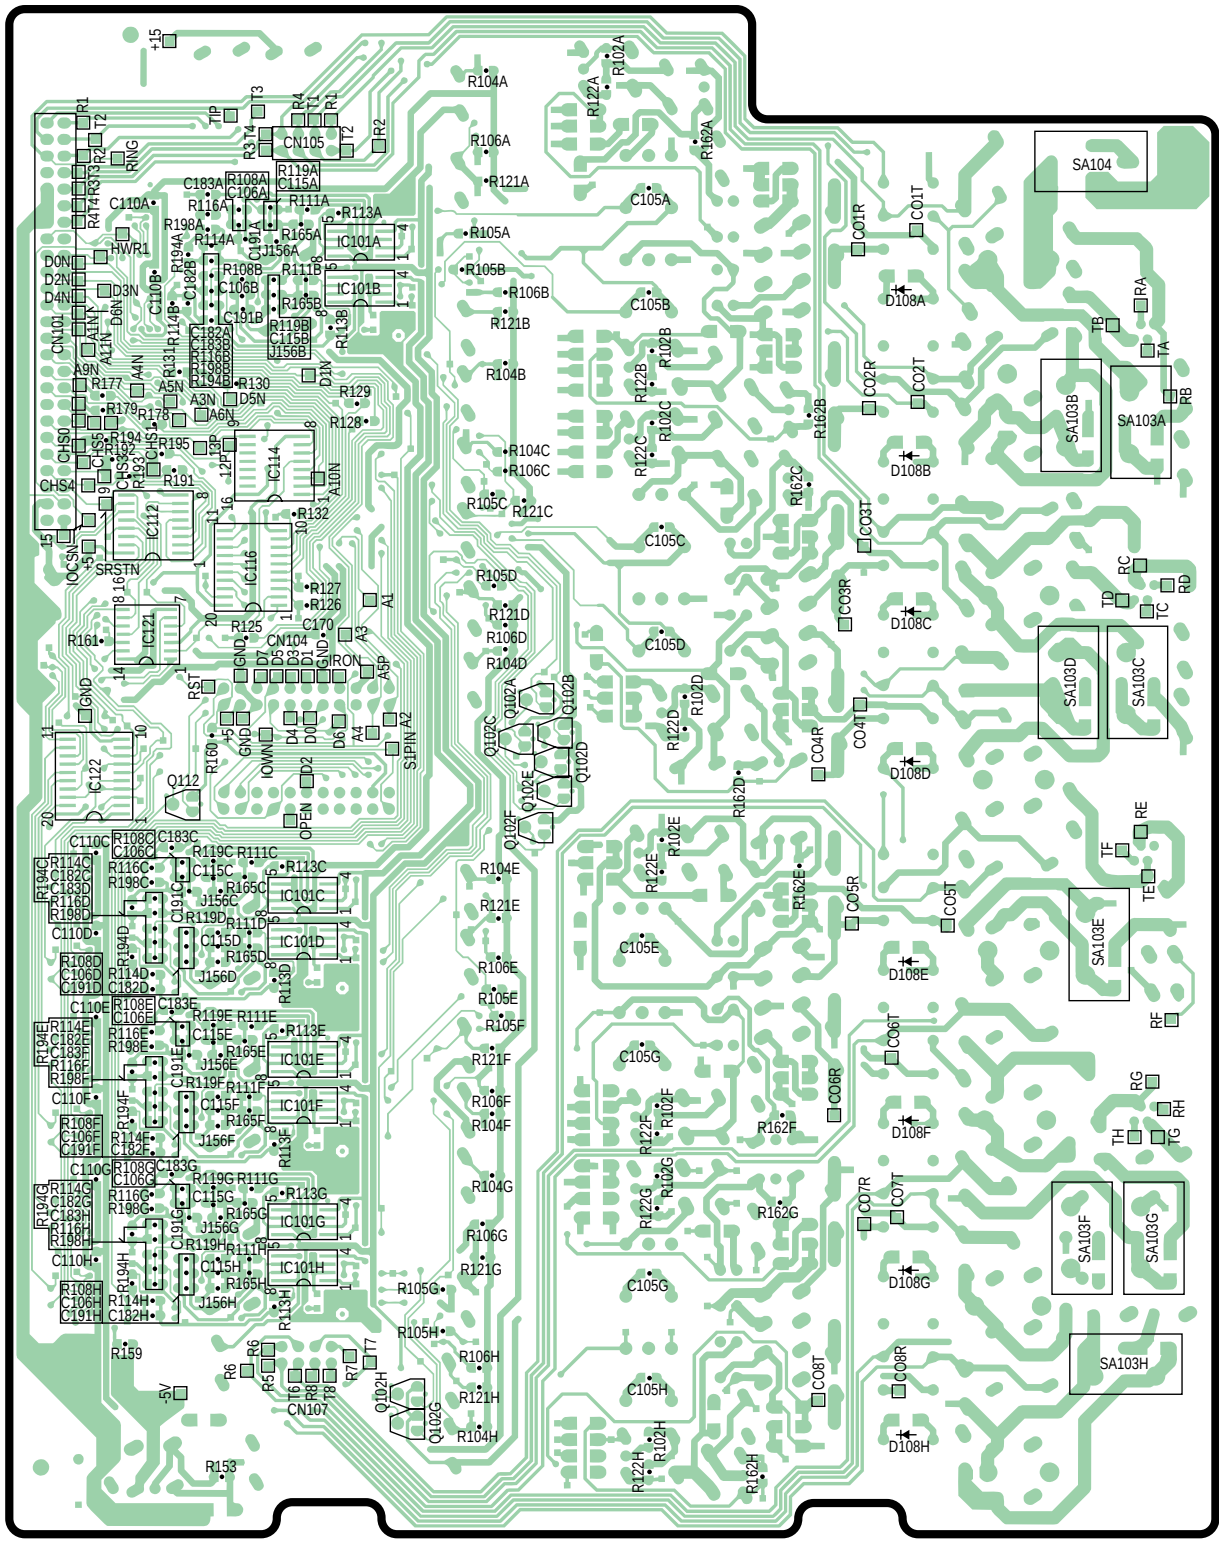

KX-TD1232BX CO LINE BOARD BOTTOM VIEW

4 SCHEMATIC DIAGRAM

4.1. EXT.1/2 CIRCUIT

Change from the Original Service Manual pages 80~82.

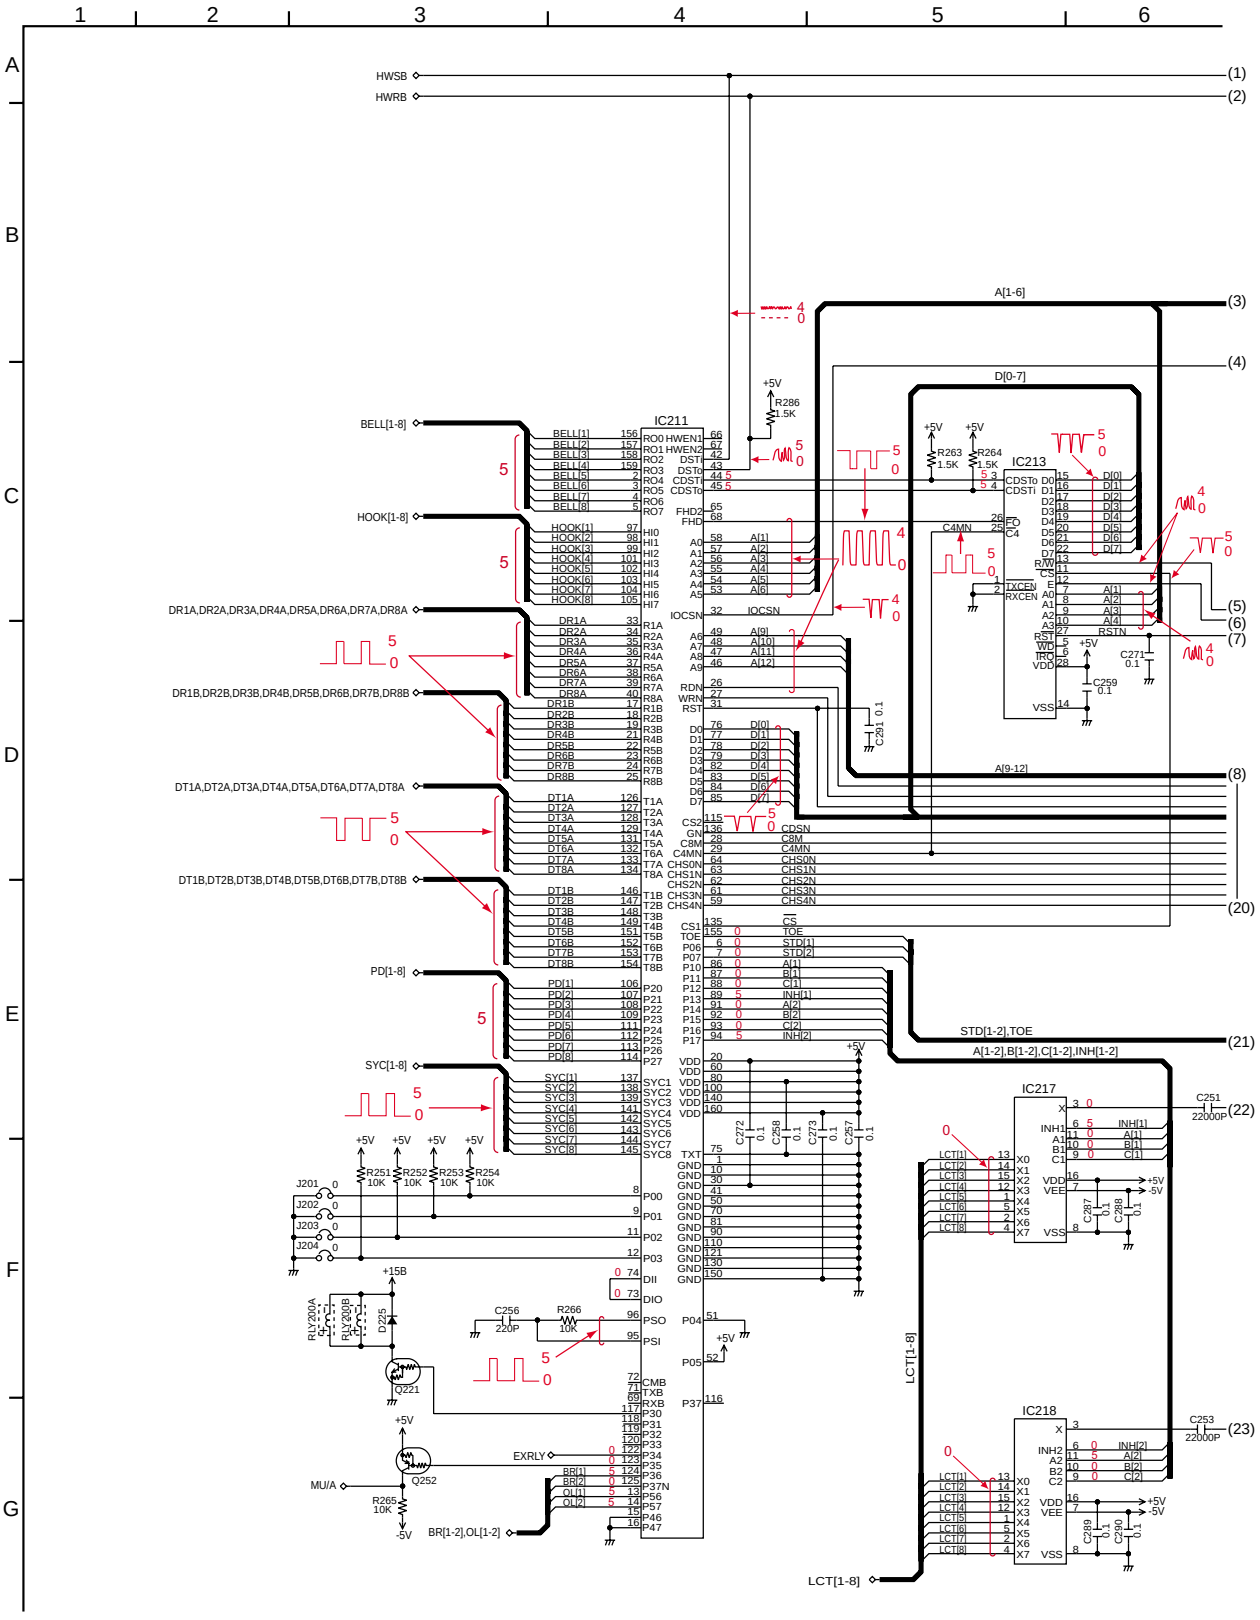

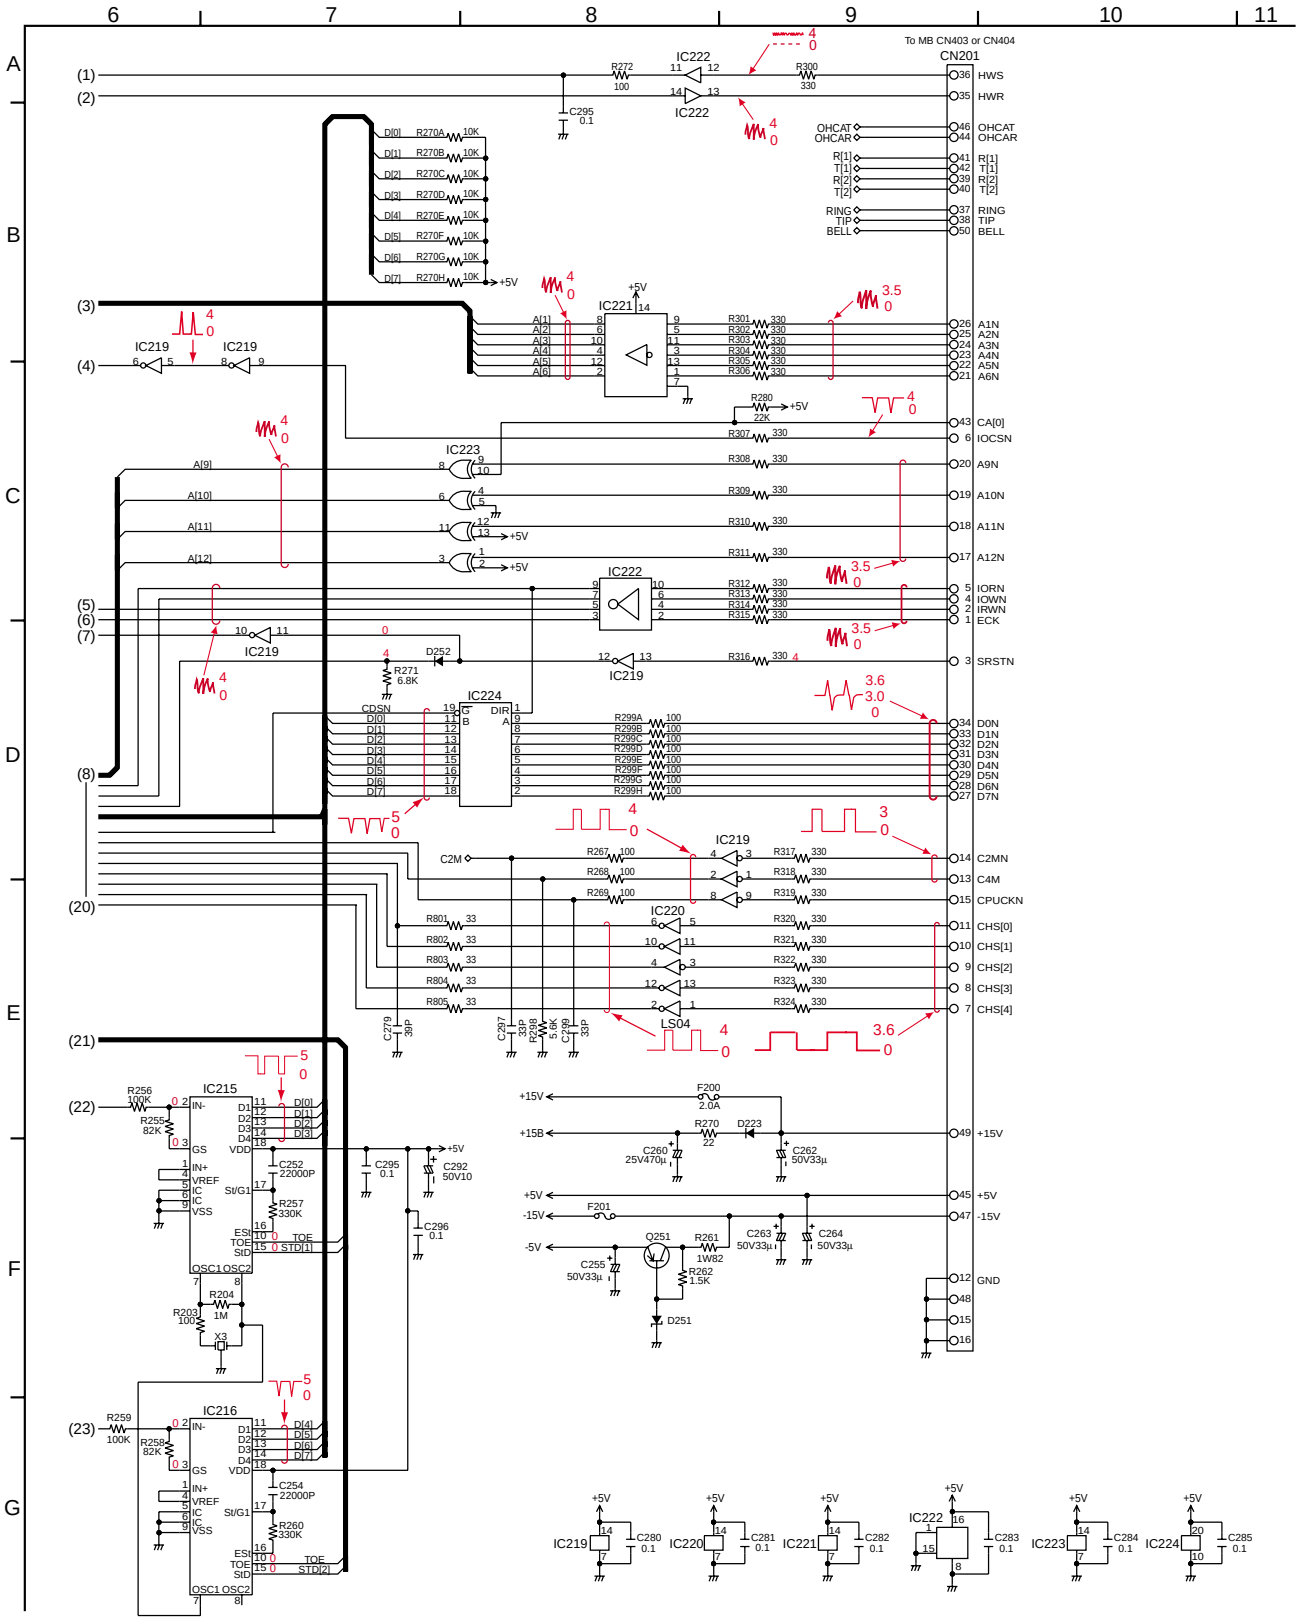
6
7
8
9
10
11
A
B
C
D
E
F
G
To MB CN403 or CN404
CN201
HWS
HWR
OHCAT
OHCAR
R[1]
T[1]
R[2]
T[2]
RING
TIP
BELL
A1N
A2N
A3N
A4N
A5N
A6N
CA[0]
IOCSN
A9N
A10N
A11N
A12N
IORN
IOWN
IRWN
ECK
SRSTN
D0N
D1N
D2N
D3N
D4N
D5N
D6N
D7N
C2MN
C4M
CPUCKN
CHS[0]
CHS[1]
CHS[2]
CHS[3]
CHS[4]
+15V
-15V
GND
IC215
IC216
IC219
IC220
IC221
IC222
IC223
IC224
LS04
Q251
D251
D252
F200
F201

4.2. EXT.2/2 CIRCUIT

Change from the Original Service Manual pages 87~89.

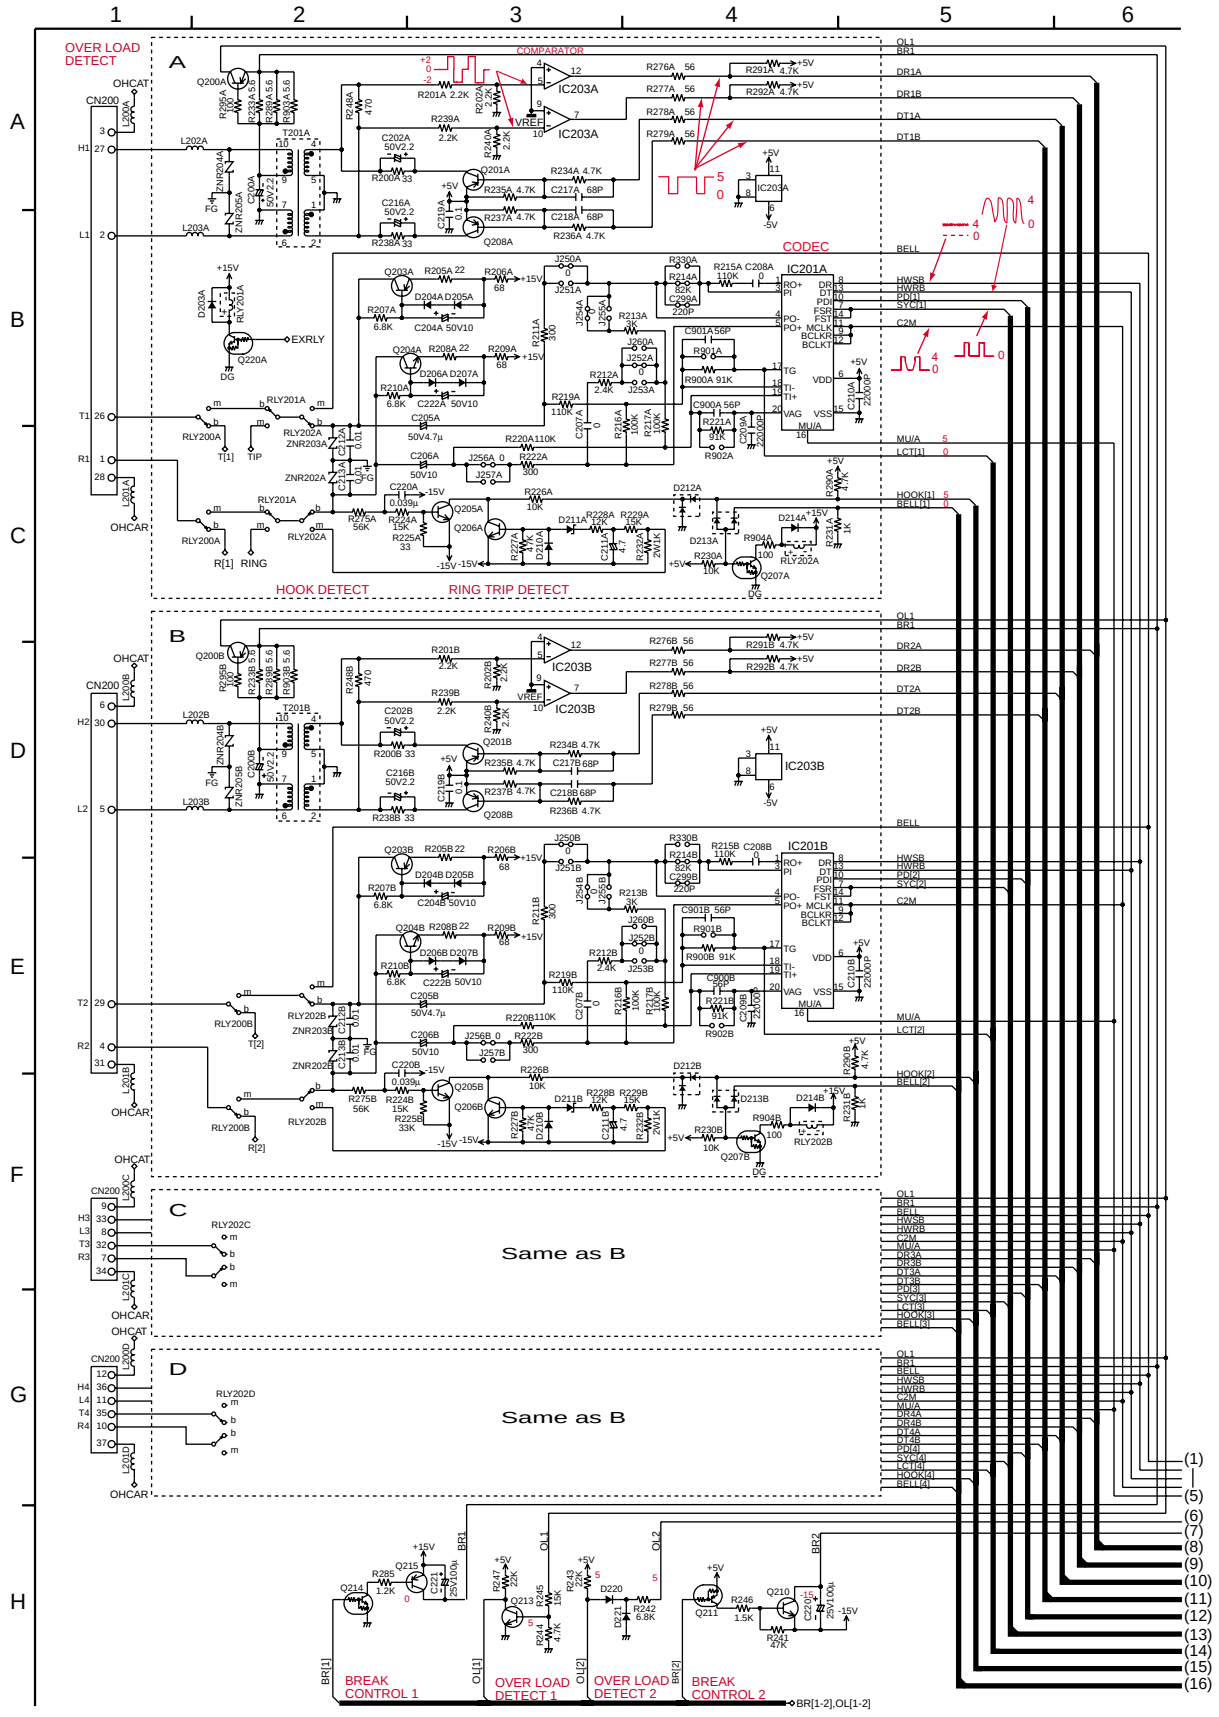

KX-TD1232BX SCHEMATIC DIAGRAM (EXTENSION) No.2

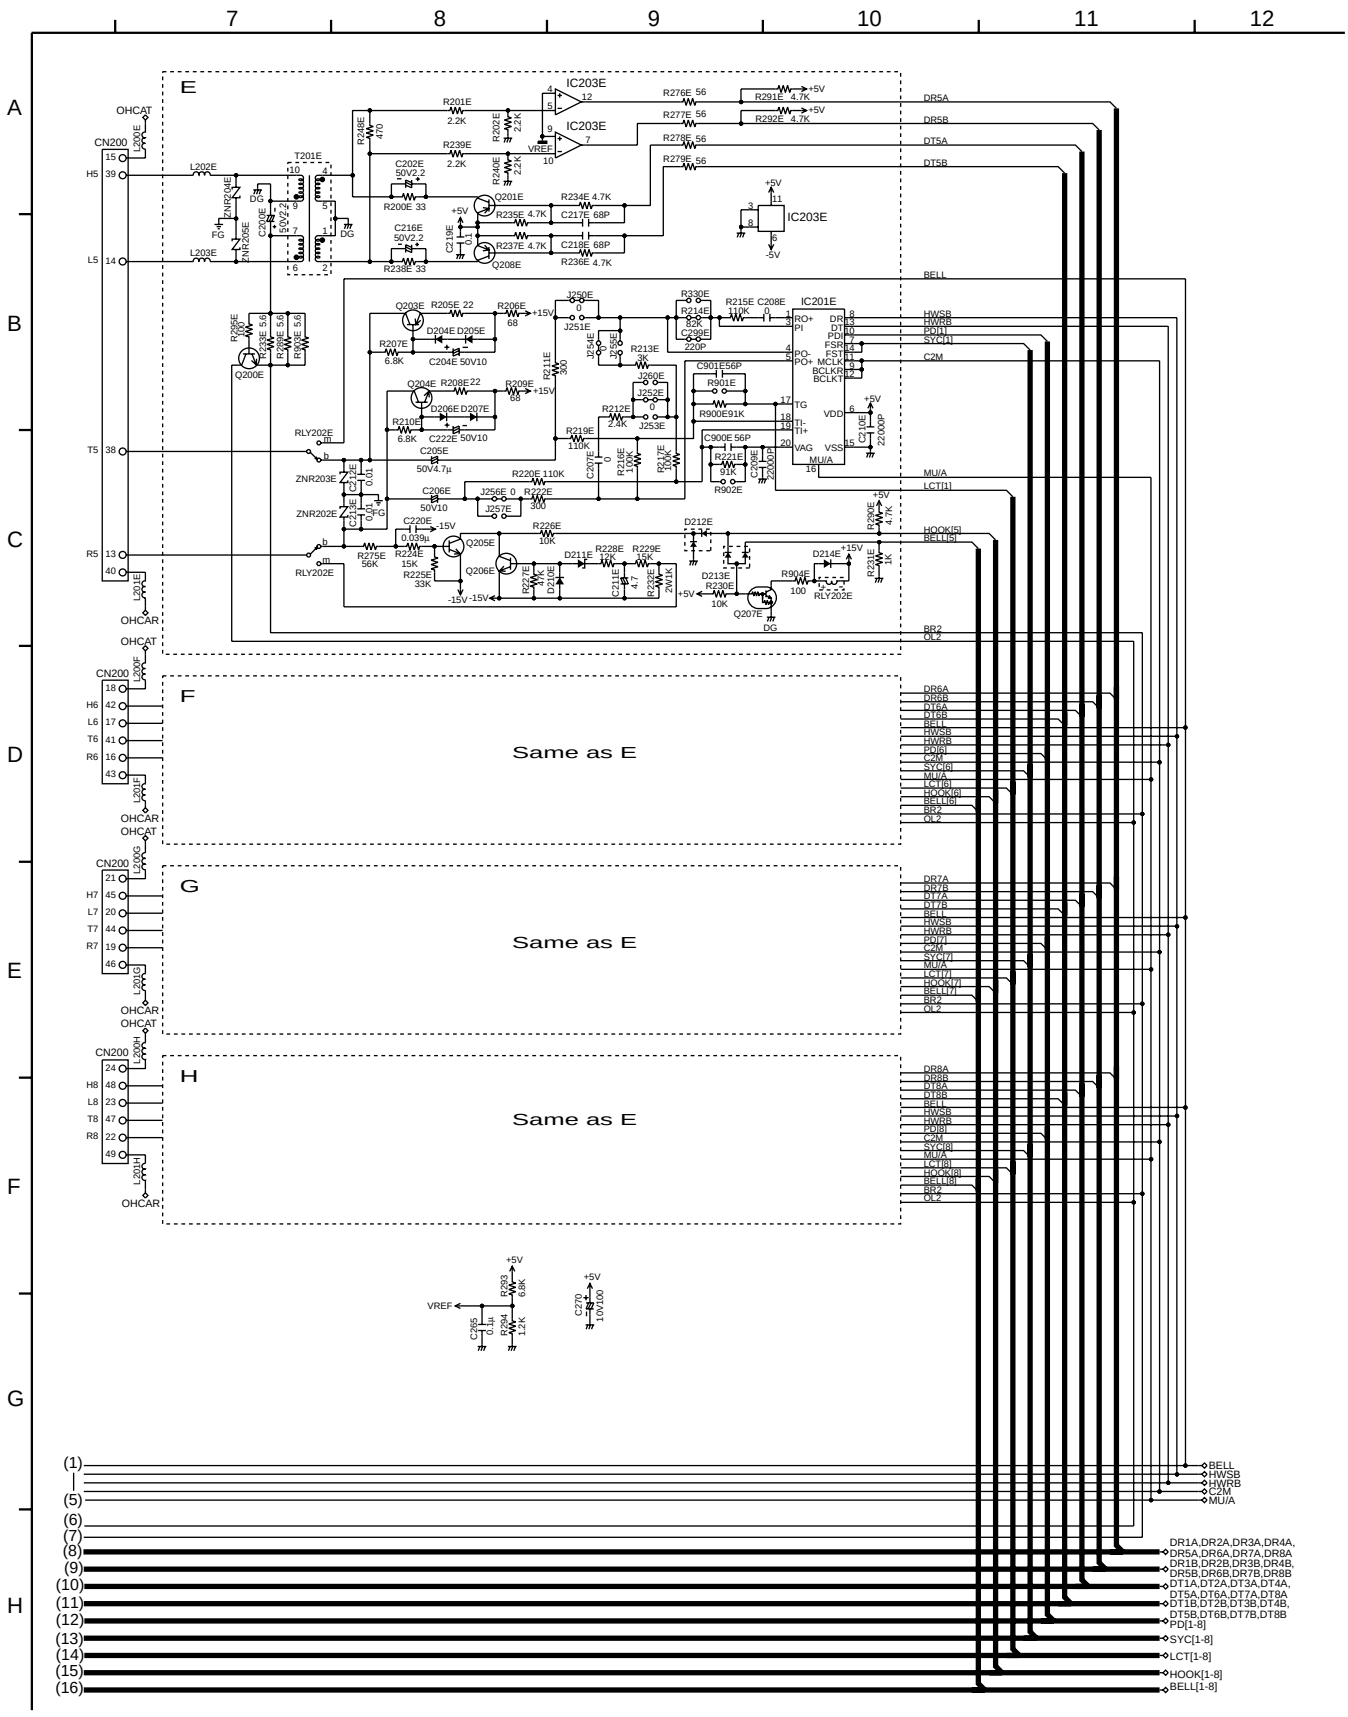
7
8
9
10
11
12
A
B
C
D
E
F
G
H
E
F
G
H
Same as E
Same as E
Same as E
IC203E
IC201E
OHCAT
OHCAR
CN200
T201E
RLY202E
ZNR203E
ZNR202E
Q200E
Q201E
Q208E
Q203E
Q204E
Q206E
Q205E
Q207E
D204E D205E
D206E D207E
D212E
C204E 50V10
C222E 50V10
C205E 50V4.7µ
C206E 50V10
C216E 50V2.2
C202E 50V2.2
C220E 0.039µ
R201E 2.2K
R202E 22K
R239E 2.2K
R240E 22K
R248E 470
R200E 33
R238E 33
R234E 4.7K
R235E 4.7K
R237E 4.7K
R236E 4.7K
C217E 68P
C218E 68P
R276E 56
R277E 56
R278E 56
R279E 56
R291E 4.7K
R292E 4.7K
R205E 22
R206E 68
R207E 6.8K
R208E 22
R209E 68
R210E 6.8K
R211E 300
R212E 2.4K
R213E 3K
R214E 82K
R215E 110K
C208E 0
C209E 220P
R330E 0
R216E 10K
R217E 0
R218E 10K
R219E 110K
R220E 110K
R221E 91K
R222E 300
R223E 0
R224E 15K
R225E 33K
R226E 10K
R227E 10K
R228E 12K
R229E 15K
R230E 10K
R231E 2M
R232E 2M
R900E 91K
R901E
R902E
R903E 4.7K
R904E 100
R905E 1K
C901E 56P
C900E 56P
C902E 2200P
C210E 22000P
C211E 0.01
C212E 0.01
C213E 0.01
C214E 0.01
C215E 0.01
C207E 0
J250E 0
J251E 0
J252E 0
J253E 0
J254E 0
J255E 0
J256E 0
J257E 0
J260E 0
R203 6.8K
R204 1.2K
C265 0.1µ
C270 10V100
VREF
+5V
-5V
+15V
-15V
DR5A
DR5B
DT5A
DT5B
BELL
HWSB
HWRB
PD[1]
SYC[1]
C2M
MU/A
LCT[1]
HOOK[5]
BELL[5]
BR2
OL2
DR6A
DR6B
DT6A
DT6B
BELL
HWSB
HWRB
PD[6]
C2M
SYC[6]
MU/A
LCT[6]
HOOK[6]
BELL[6]
BR2
OL2
DR7A
DR7B
DT7A
DT7B
BELL
HWSB
HWRB
PD[7]
C2M
SYC[7]
MU/A
LCT[7]
HOOK[7]
BELL[7]
BR2
OL2
DR8A
DR8B
DT8A
DT8B
BELL
HWSB
HWRB
PD[8]
C2M
SYC[8]
MU/A
LCT[8]
HOOK[8]
BELL[8]
BR2
OL2
(1)
(5)
(6)
(7)
(8)
(9)
(10)
(11)
(12)
(13)
(14)
(15)
(16)
BELL
HWSB
HWRB
C2M
MU/A
DR1A,DR2A,DR3A,DR4A,
DR5A,DR6A,DR7A,DR8A
DR1B,DR2B,DR3B,DR4B,
DR5B,DR6B,DR7B,DR8B
DT1A,DT2A,DT3A,DT4A,
DT5A,DT6A,DT7A,DT8A
DT1B,DT2B,DT3B,DT4B,
DT5B,DT6B,DT7B,DT8B
PD[1-8]
SYC[1-8]
LCT[1-8]
HOOK[1-8]
BELL[1-8]

5 SCHEMATIC DIAGRAM (CO CIRCUIT)

Change from the Original Service Manual pages 90~92.

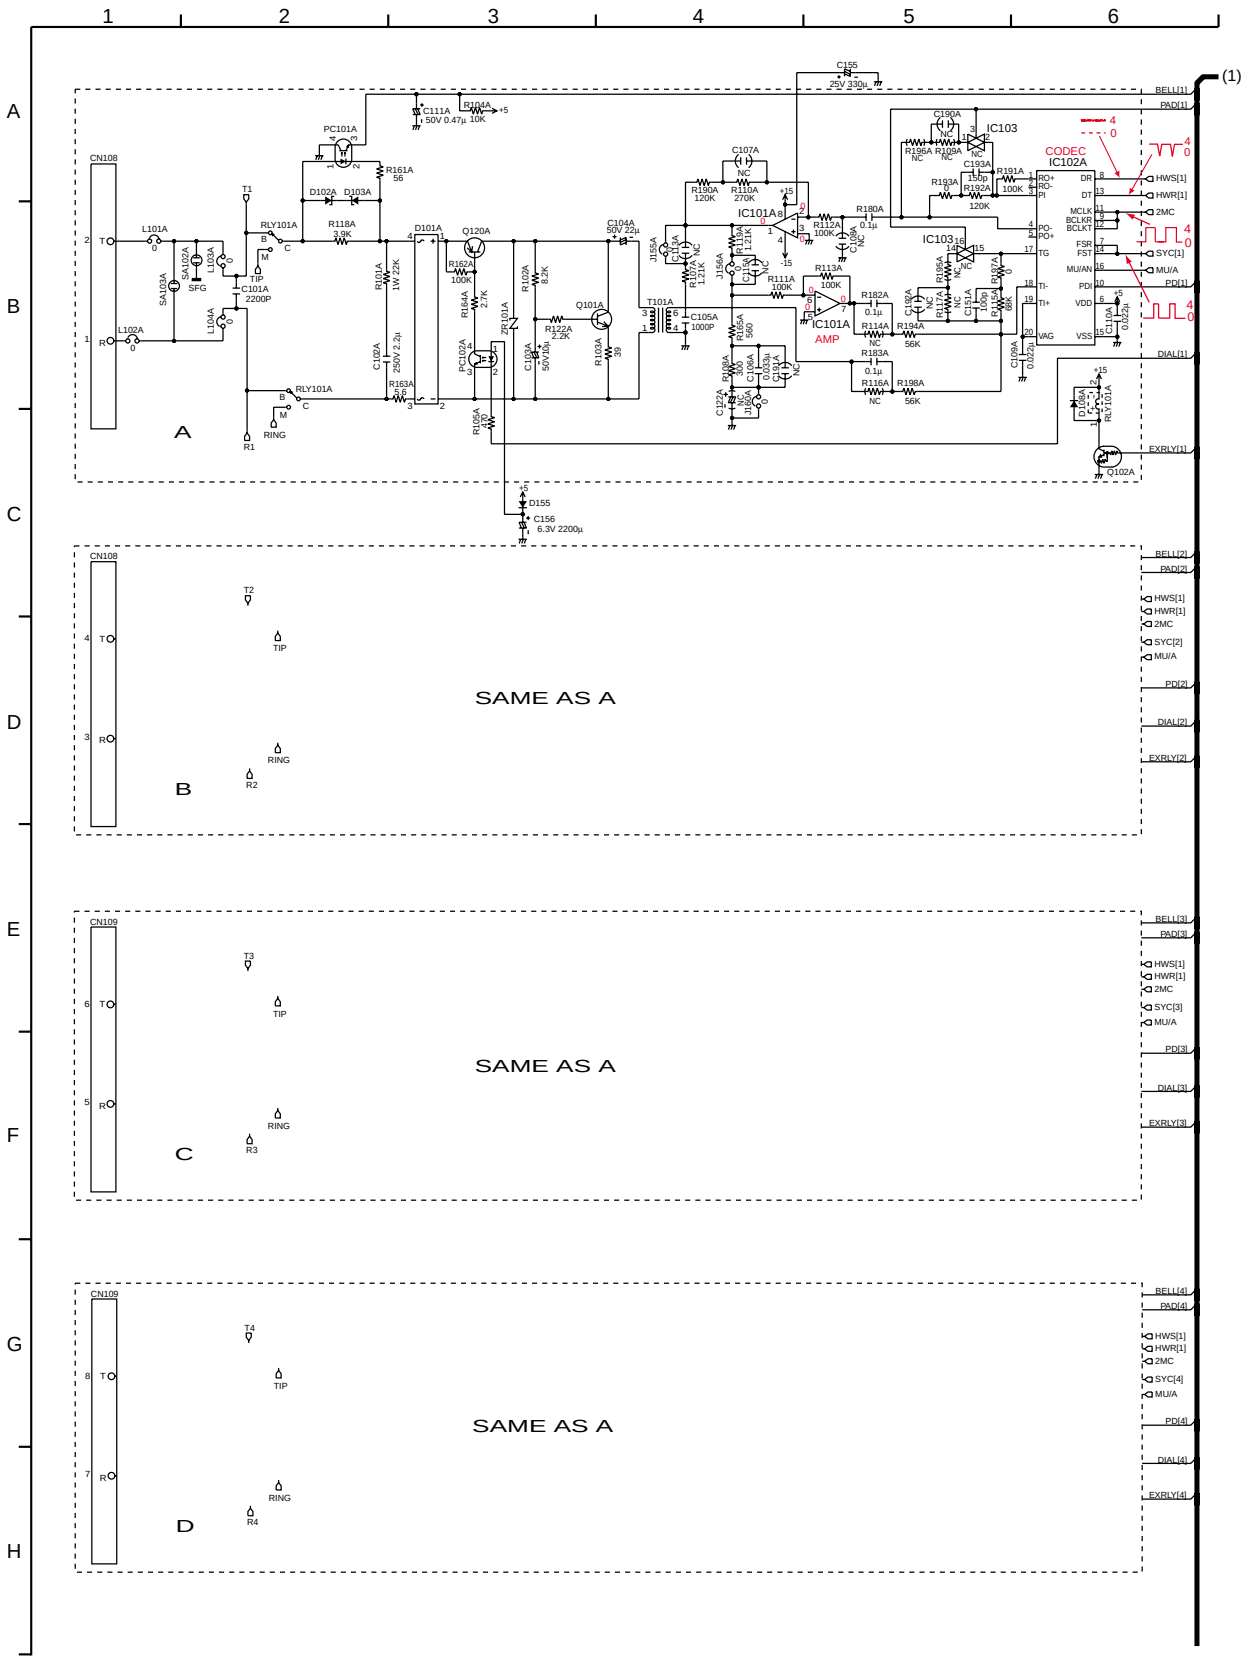

KX-TD1232BX SCHEMATIC DIAGRAM (CO LINE)

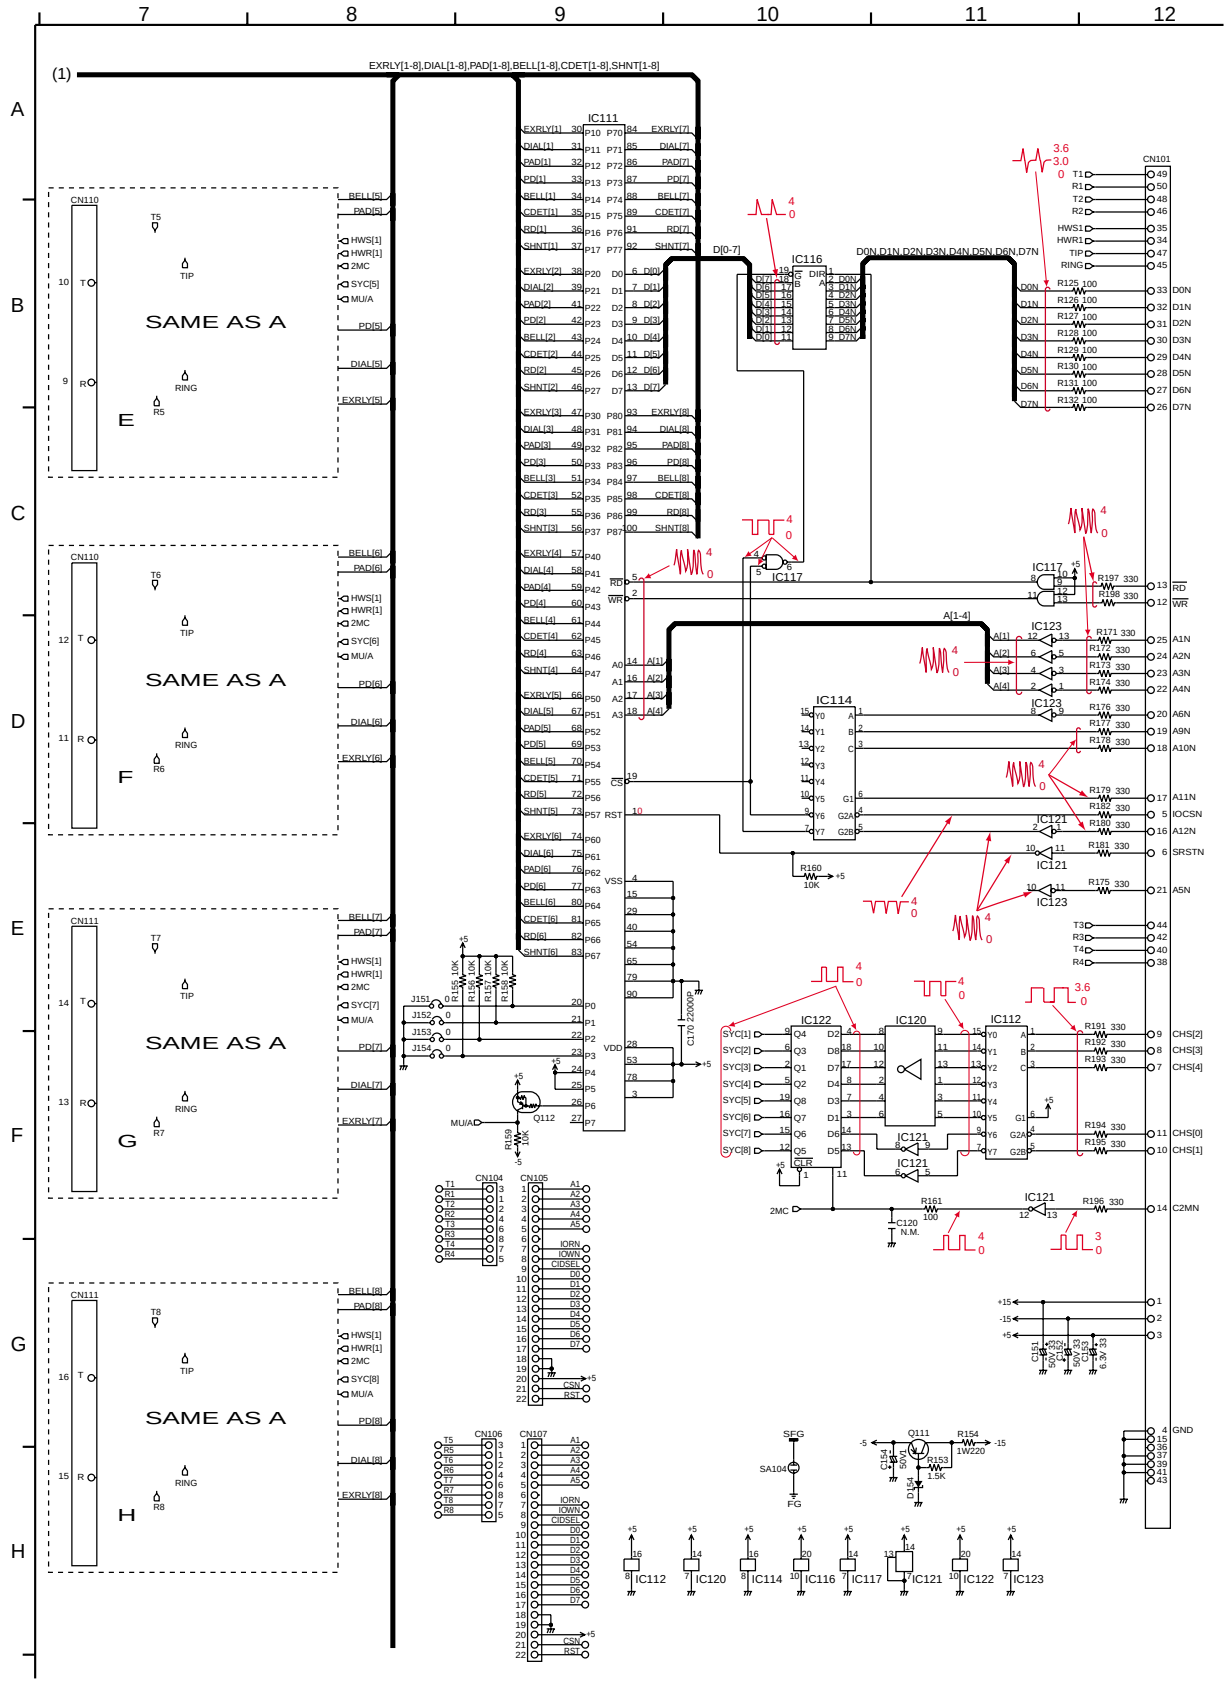
7
8
9
10
11
12
A
B
C
D
E
F
G
H
(1)
EXRLY[1-8],DIAL[1-8],PAD[1-8],BELL[1-8],CDET[1-8],SHNT[1-8]
IC111
CN110
CN111
SAME AS A
E
F
G
H
D[0-7]
IC116
D0N,D1N,D2N,D3N,D4N,D5N,D6N,D7N
CN101
IC117
A[1-4]
IC123
IC114
IC121
IC122
IC120
IC112
CN104
CN105
CN106
CN107
Q112
MU/A
2MC
C120
N.M.
SEG
SA104
FG
Q111
IC112
IC120
IC114
IC116
IC117
IC121
IC122
IC123

2.2. Change from Supplement-2 page 6.

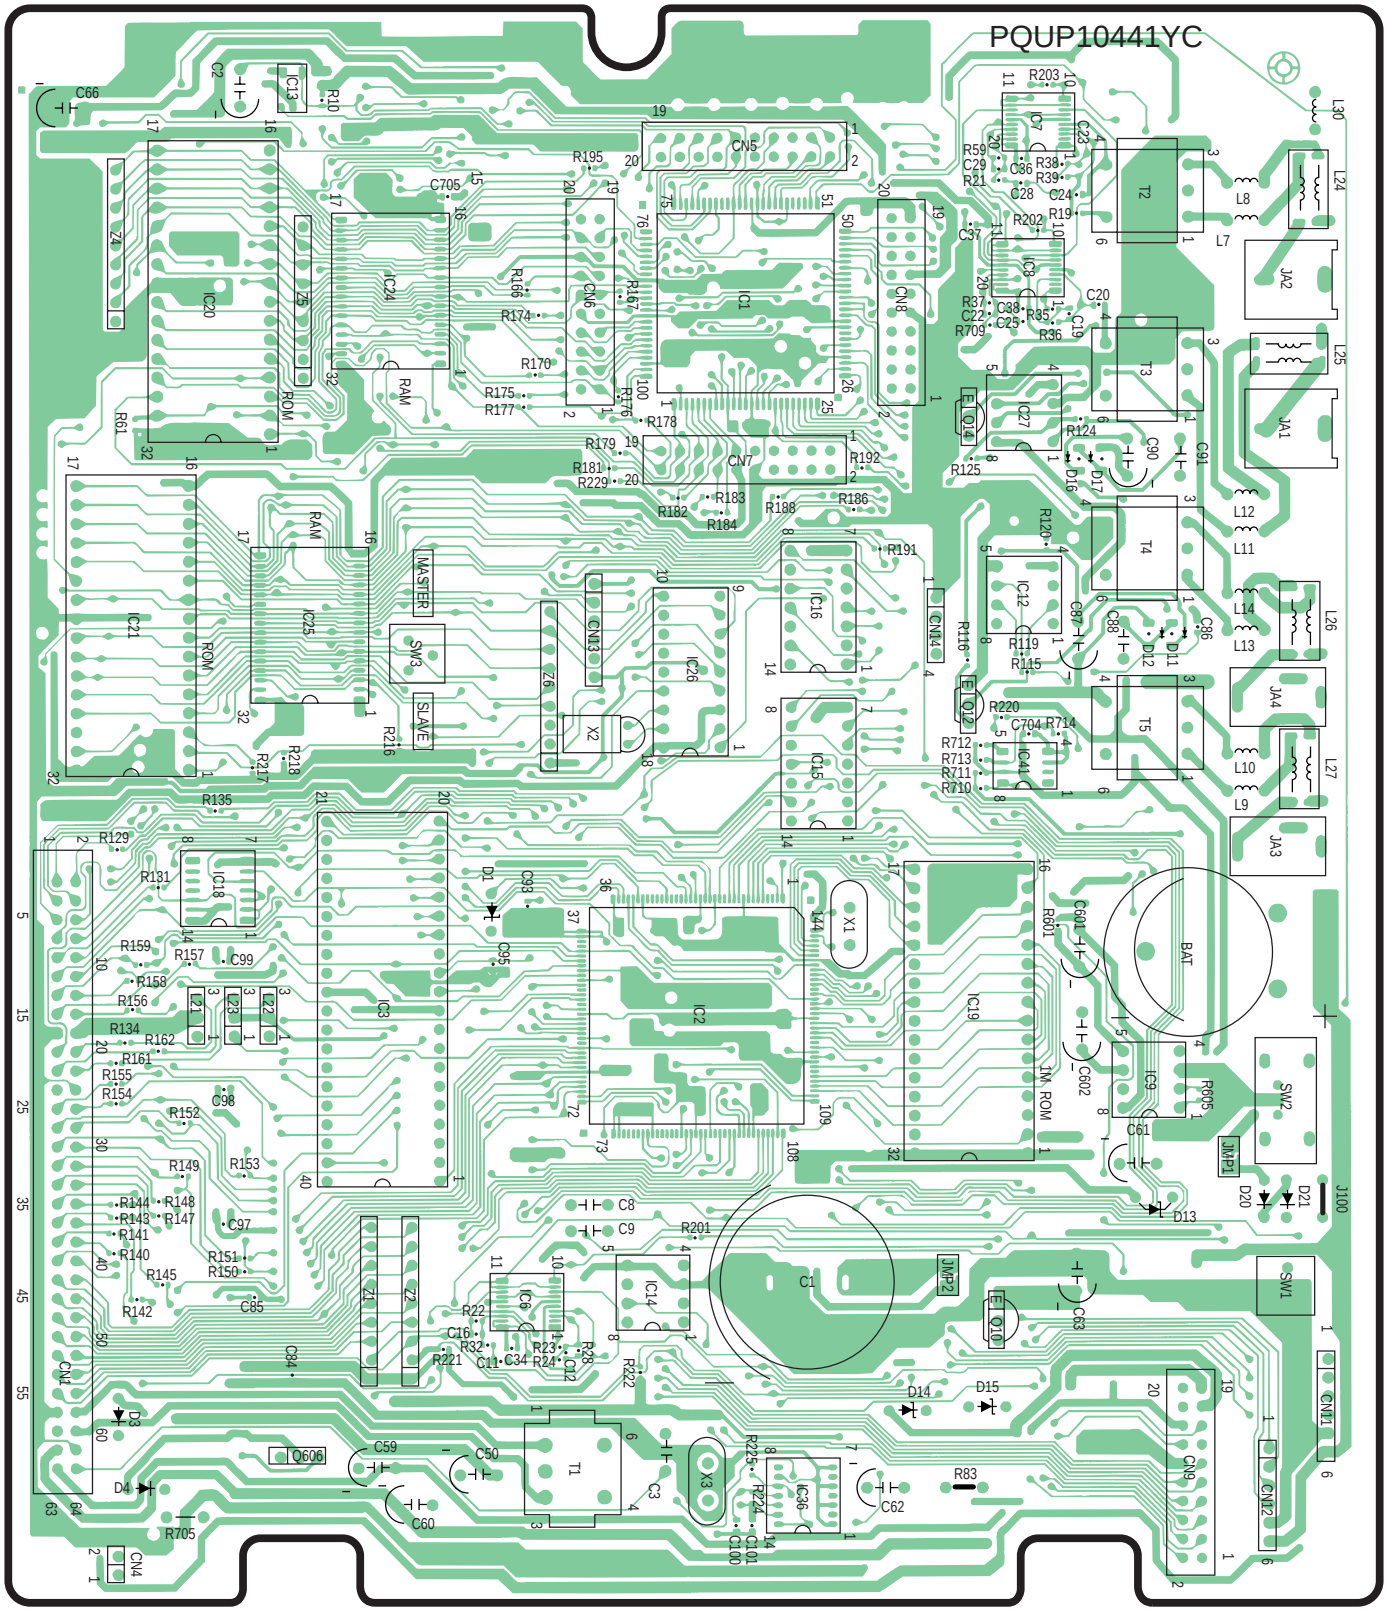

Component View

3 SCHEMATIC DIAGRAM (CPU CIRCUIT)

3.1. Change from Supplement-2 page 7.

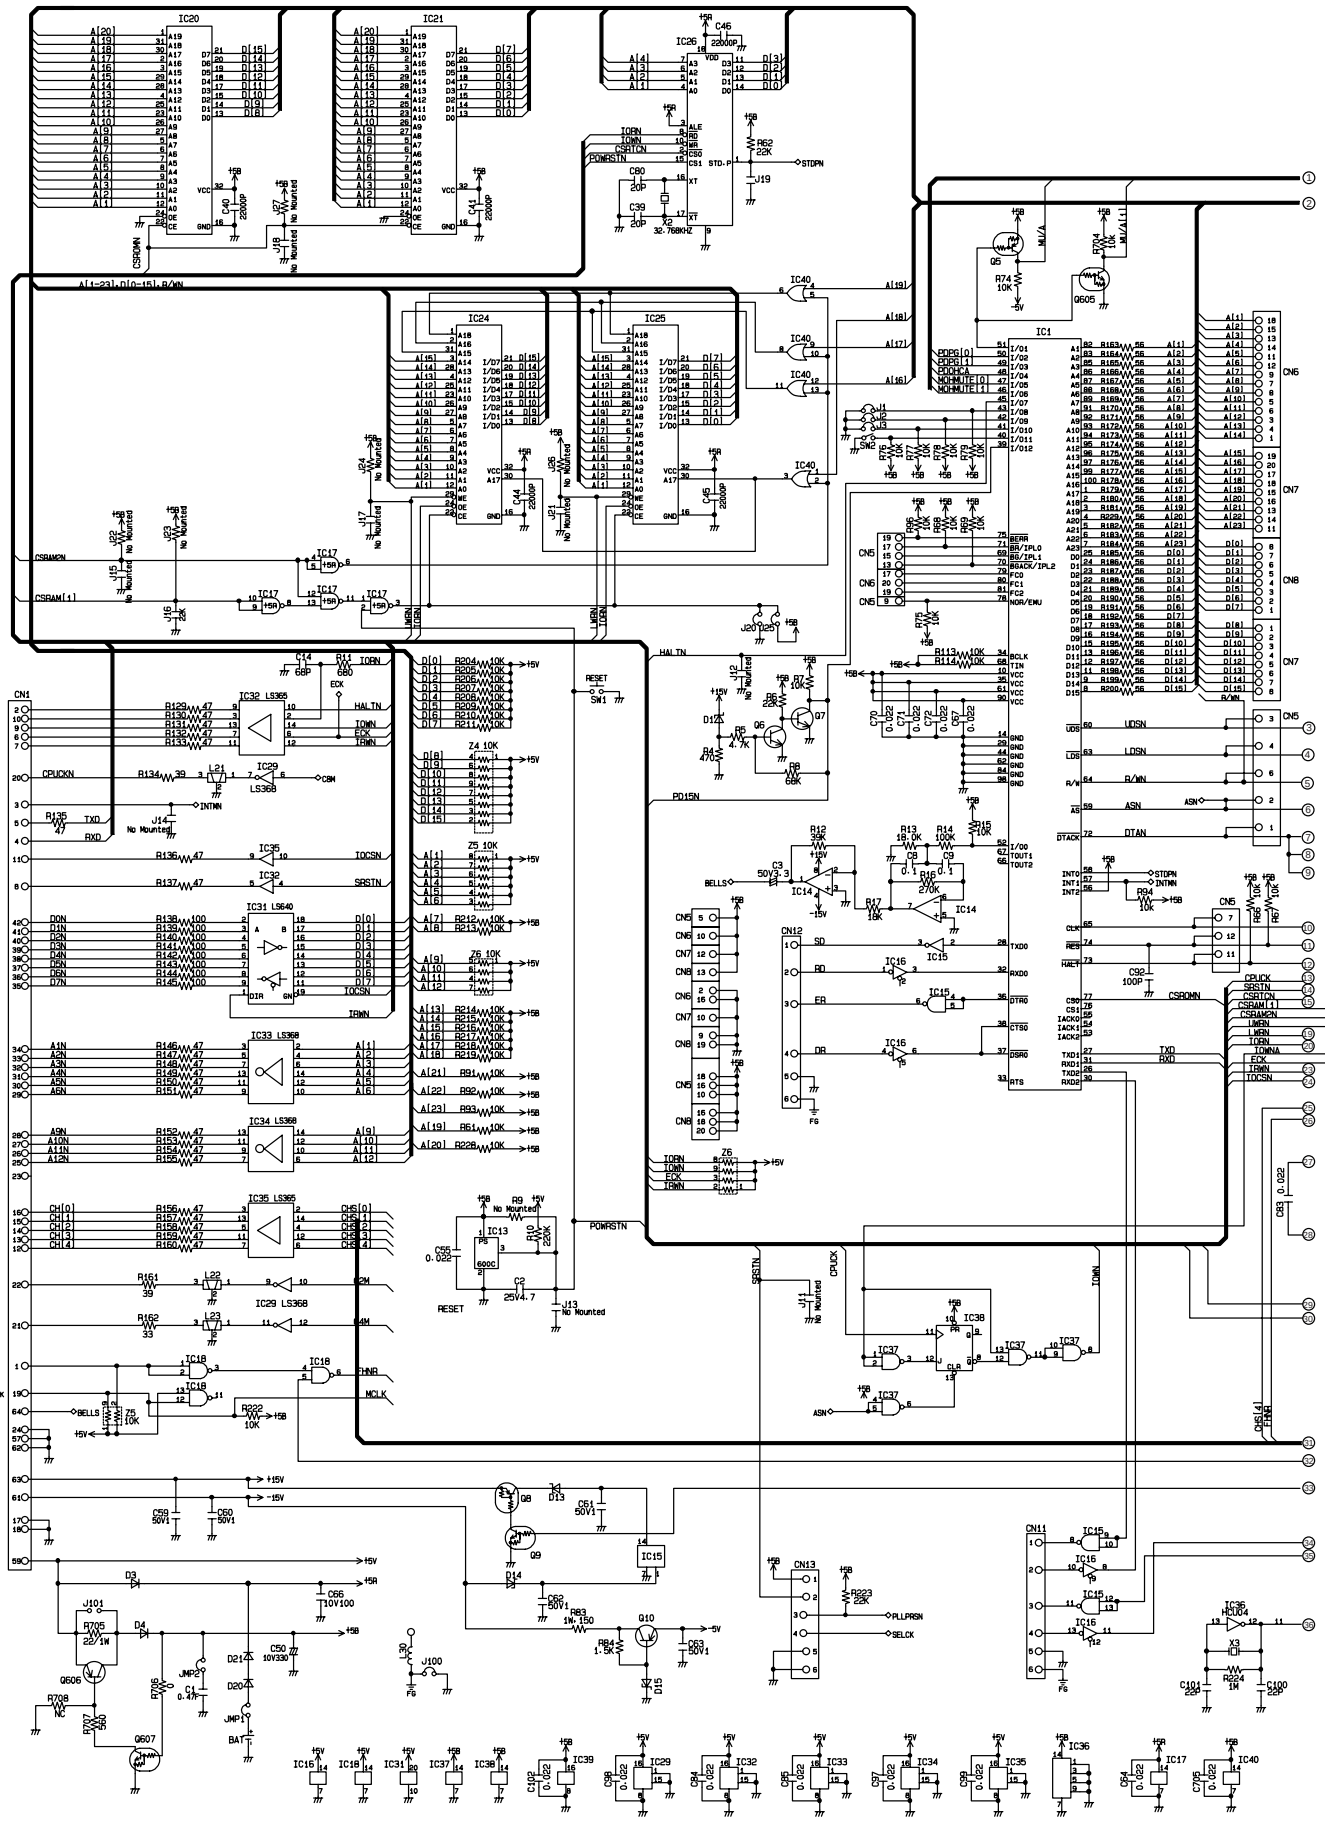

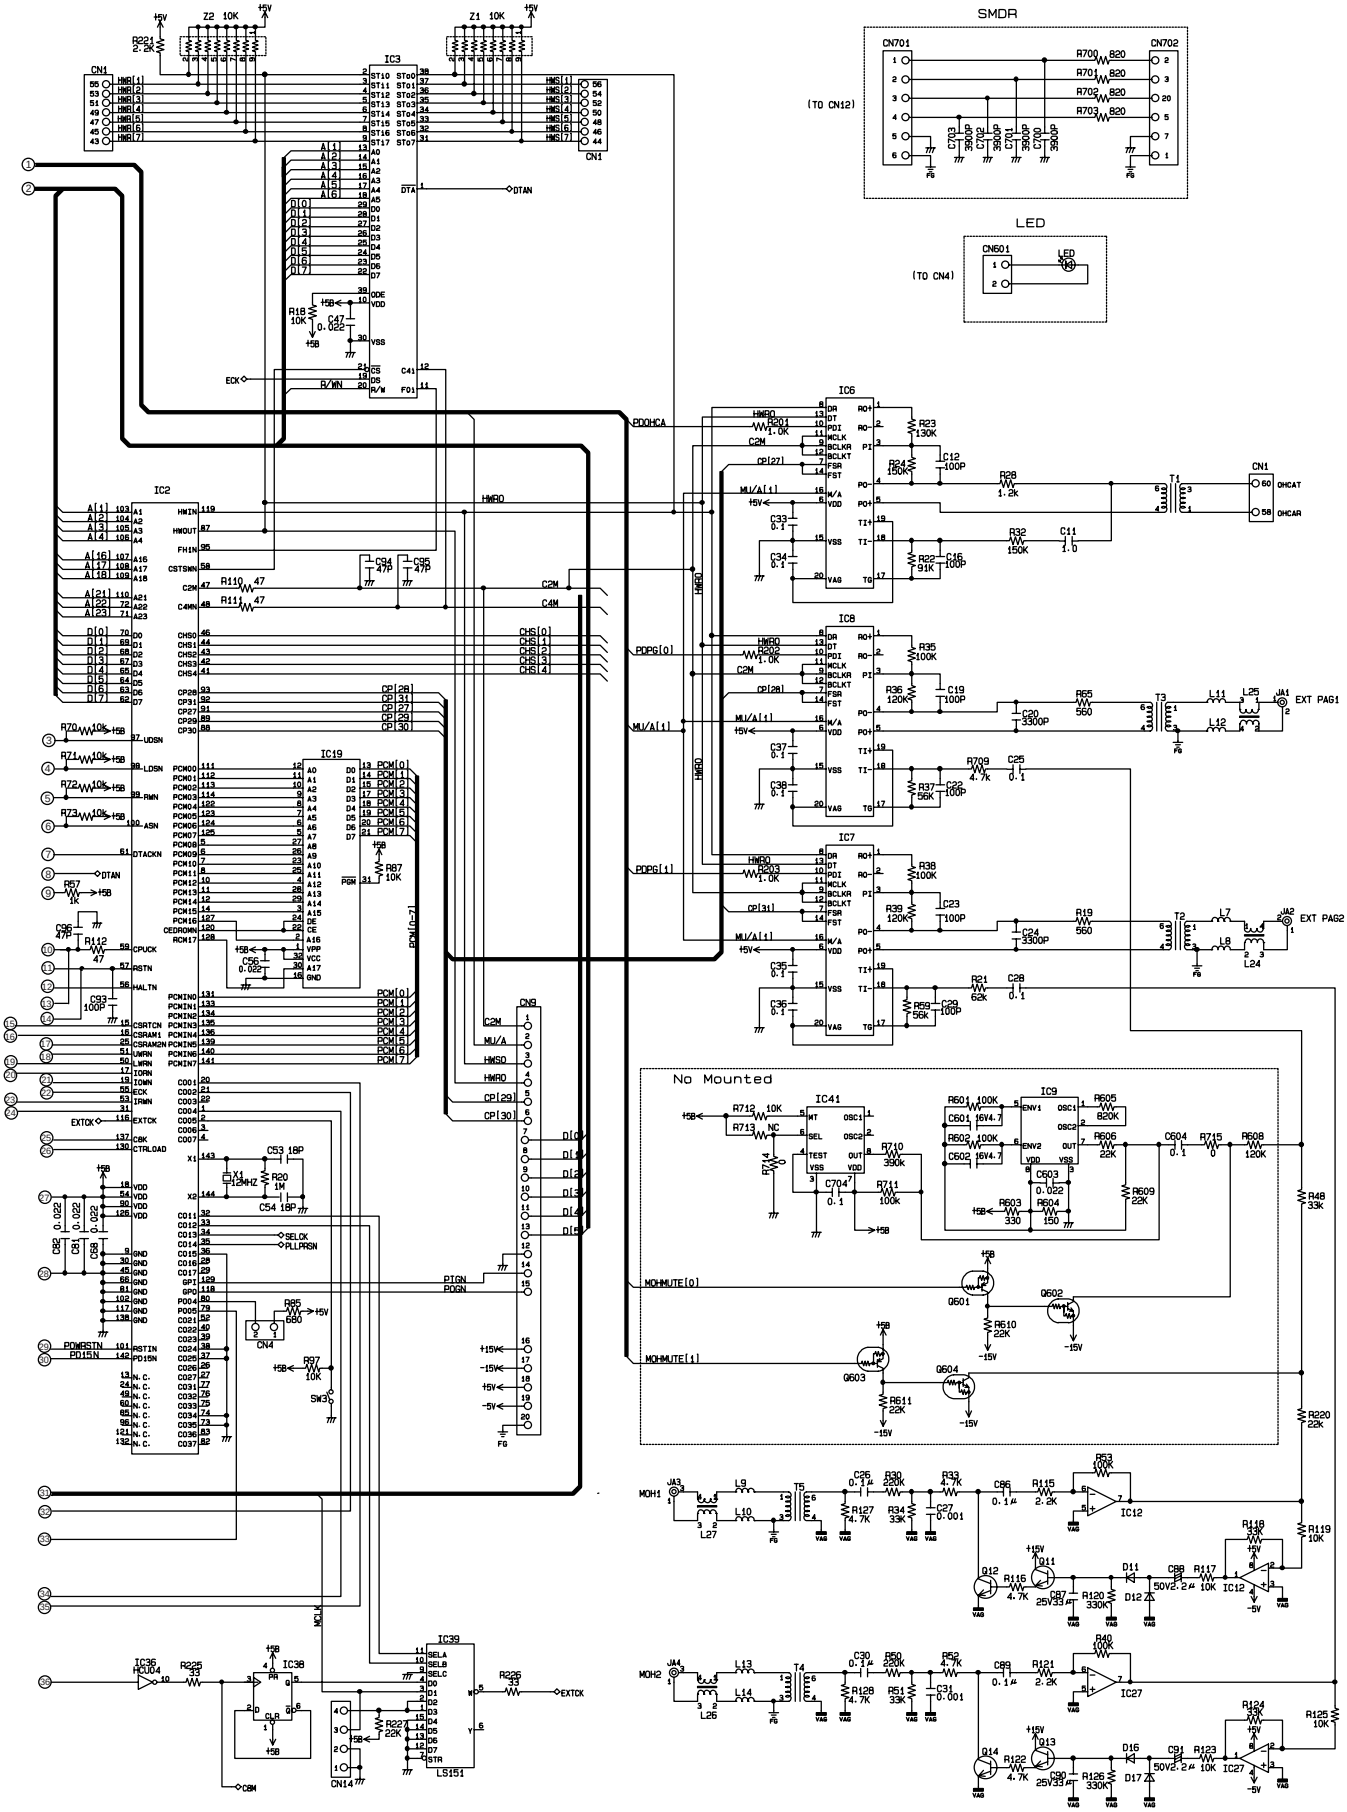

N.T.(Q)
KXTD1232MUK
Printed in Japan

ORDER NO. KMS0109288S1
F5

Service Manual

DIGITAL SUPER HYBRID SYSTEM

Supplement

KX-TD1232

(for U.S.A.)

Please file and use this supplement manual together with the service manual for model KX-TD1232 Order No. KM49311699A1.

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public.
It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product.
Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

Note:Supplement-1~5 have already supplied with printed matter. So please refer to that.

Panasonic

© 2001 Kyushu Matsushita Electric Co., Ltd. All rights reserved. Unauthorized copying and distribution is a violation of law.

1 CHANGES

1.1. REPLACEMENT PARTS LIST

Reason for Change (Symbol:A) Following 1-8 reasons are indicated on the Notes in the bottom column.	
1. Improve performance	
2. Change of material or dimension	
3. To meet approved specification	
4. Standardization	
5. Addition	
6. Deletion	
7. Correction	
8. Other	

Interchangeability Code (Symbol:B) Following V-Z interchange abilities are indicated on the Notes in the bottom column.		
Parts	Set Production	
V Original New	Early (before change) Late (after change)	Original or new parts may be used in early or late production sets. Use original parts until exhausted, then stock new parts.
W Original New	Early (before change) Late (after change)	Original parts may be used in early production sets only. New parts may be used in early or late production sets. Use original parts where possible, then stock new parts.
X Original New	Early (before change) Late (after change)	New parts only may be used in early or late production sets. Stock new parts.
Y Original New	Early (before change) Late (after change)	Original parts may be used in early production sets only. New parts may be used in late production sets only. Stock both original and new parts.
Z Other		

Ref. No.	Part No.		Part Name & Description	Pcs	Remarks	Notes		Time of change (Suffix)
	Original Part	**New Part**						
EXTENSION BOARD PARTS								
Q201E→ Q201F	2SB1218A	2SB1218A	TRANSISTOR (SI) S (OR 2SA1576R)	1		7		
RY200A,RY200B→ RLY200A,RLY200B	PQSL44Z	PQSL44Z	REPLAY	1		7		
RY201A→RLY201A	PQSL119Z	PQSL119Z	REPLAY	1		7		
RY202A~RY202H→ RLY202A~RLY202H	PQSL119Z	PQSL119Z	REPLAY	1		7		
ZR202A~ZR202H→ ZNR202A~ZNR202H	PQVDNV039D03	PQVDNV039D03	VARISTOR	1		7		
ZR203A~ZR203H→ ZNR203A~ZNR203H	PQVDNV039D03	PQVDNV039D03	VARISTOR	1		7		
ZR204A~ZR204H→ ZNR204A~ZNR204H	PQVDNV039D03	PQVDNV039D03	VARISTOR	1		7		
ZR205A~ZR205H→ ZNR205A~ZNR205H	PQVDNV039D03	PQVDNV039D03	VARISTOR	1		7		
POWER SUPPLY UNIT								
93	PQHR477Z	**PQHR447Z**	SPACER-A	1		7		
R30	ERG1SJ100	**ERG1SJ100E**	RESISTOR, 10Ω	1		7		
R35	ERG1SJ100	**ERG1SJ100E**	RESISTOR, 10Ω	1		7		
R37	ERG1SJ100	**ERG1SJ100E**	RESISTOR, 10Ω	1		7		
R39	ERG1SJ100	**ERG1SJ100E**	RESISTOR, 10Ω	1		7		
C3	PSSCEMU2D471	**PSCCEMU2D471**	CAPACITOR, 470µF	1		7		
C5	PSCCEST1H220	**PSCCELT1H010**	CAPACITOR, 1µF	1		7		

2 CABINET AND ELECTRICAL PARTS LOCATION

2.1. Power Supply Section.....Change from Service Manual Supplement-6 page 13. (KX-TD1232:Order No.KMS0008871S1)

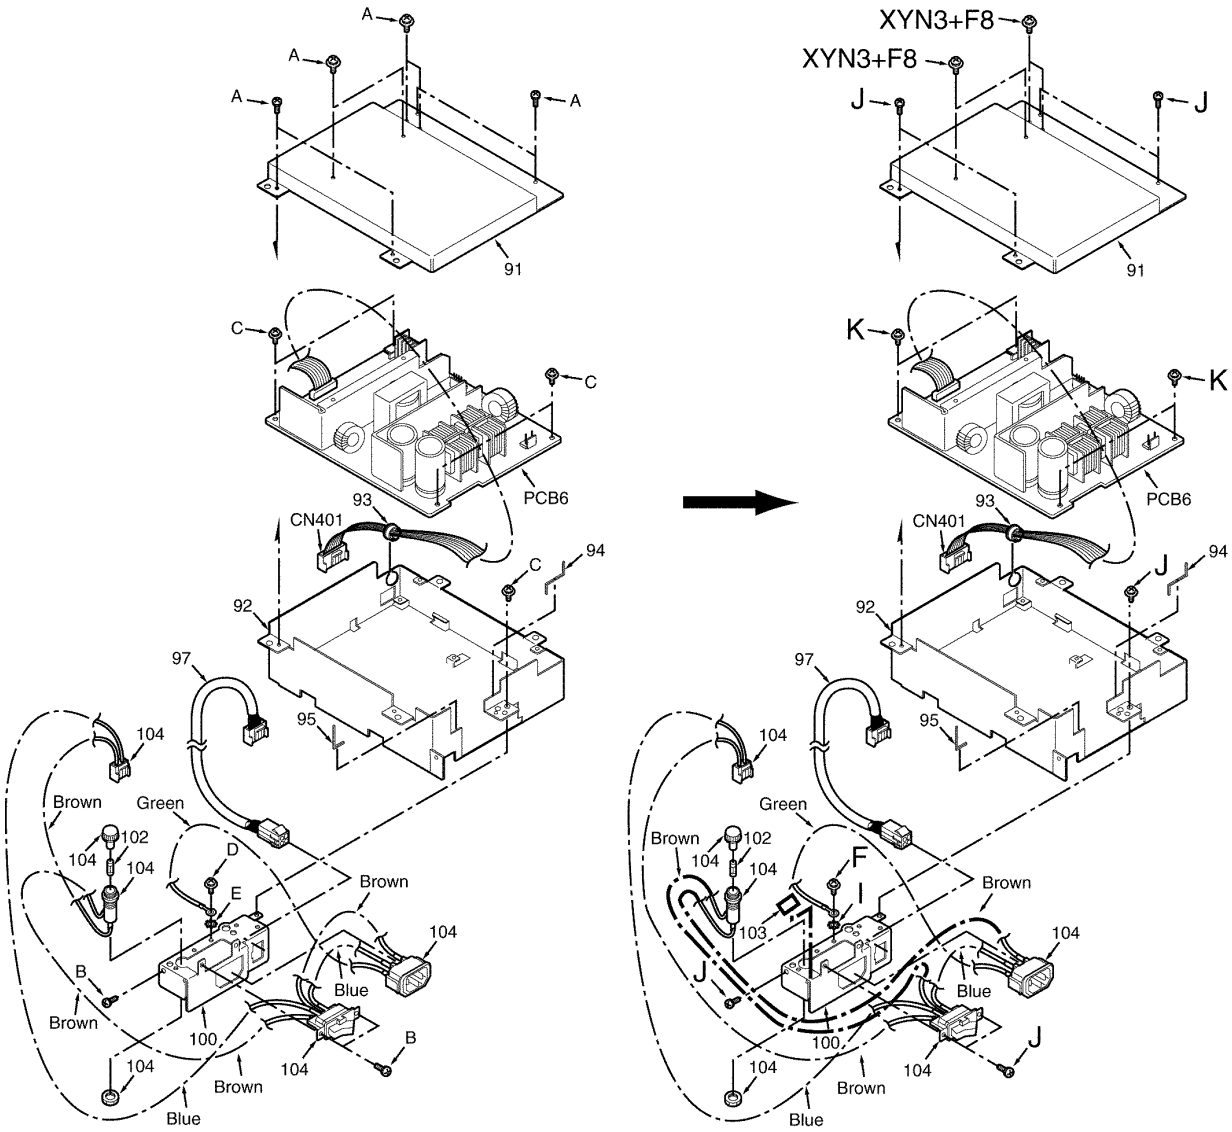

Addition: 103

[OLD] [CORRECTED]

ORDER NO. KMS0011997S1

Service Manual

DIGITAL SUPER HYBRID SYSTEM

KX-TD1232

(for U.S.A.)

Please file and use this supplement manual together with the service manual for Model KX-TD1232, Order No.KM49311699A1.

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public.
It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product.
Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

Note:Supplement-1~5 have already supplied with printed matter. So please refer to that.

Panasonic

© 2000 Kyushu Matsushita Electric Co., Ltd. All rights reserved. Unauthorized copying and distribution is a violation of law.

1 CHANGES

1.1. Subject

Suffix	Reason for suffix change
M→N	Change of the software. (IC20/IC21:ROM Ver. P231UA/P232UA→P211A/P212A)
N→O	Change of the software. (IC20/IC21:ROM Ver. P211A/P212A→P211C/P212C) There is no change in the replacement parts list.
O→P	Change of the software. (IC20/IC21:ROM Ver. P211C/P212C→P211D/P212D) There is no change in the replacement parts list.
P→Q	Change of the CPU BOARD. (PQUP10441YB→PQUP10441YC) Change of the software. (IC20/IC21:ROM Ver. P211D/P212D→P211H/P212H)

1.2. Suffix location



1.3. REPLACEMENT PARTS LIST

Reason for Change (Symbol:A) Following 1-8 reasons are indicated on the Notes in the bottom column.

1. Improve performance	Remark: 1. Part with mark *1 has not changed on the Supplement-7.
2. Change of material or dimension	
3. To meet approved specification	
4. Standardization	
5. Addition	
6. Deletion	
7. Correction	
8. Other	

Interchangeability code (Symbol:B) Following V-Z interchangeabilities are indicated on the Notes in the bottom column.

Parts	Set Production	Description
V	Original → Early (before change) New → Late (after change)	Original or new parts may be used in early or late production sets. Use original parts until exhausted, then stock new parts.
W	Original → Early (before change) New → Late (after change)	Original parts may be used in early production sets only. New parts may be used in early or late production sets. Use original parts where possible, then stock new parts.
X	Original → Early (before change) New → Late (after change)	New parts only may be used in early or late production sets. Stock new parts.
Y	Original → Early (before change) New → Late (after change)	Original parts may be used in early production sets only. New parts may be used in late production sets only. Stock both original and new parts.
Z	Other	

Ref. No.	Parts No.		Part Name & description	Pcs	Remarks	Notes		Time of change (Suffix)
	Original Part	**New part**						
CABINET AND ELECTRICAL PARTS								
	PSGT1453W	**PSGT1453V**	NAME PLATE	1		8	X	
ACCESSORIES AND PACKING MATERIALS								
A8	PQQX10173V	**PSQX2021Z**	USER MANUAL	1		8	X	N
CPU BOARD PARTS (All parts are shown bellow.)								
PCB1	PSWP11232MU1	**PSWP11232MU2**	CPU BOARD ASS'Y (RTL)	1		1	V	Q
IC1	PQVI68301FCG	**PQVI68301FCG**	IC	1	*1			
IC2	PQVI620890F	**PQVI620890F**	IC	1	*1			
IC3	PQVIMT8980DE	**PQVIMT8980DE**	IC	1	*1			
IC6~IC8	PQVIMC45503P	**PQVIMC45503W**	IC	3		1	Y	Q
IC10, IC11	PQVINJM4558D	**----------**	IC	0		6		Q
IC12, IC14	PQVINJM4558D	**PQVINJM4558D**	IC	2	*1			
IC13	PQVIPS520C	**PSVIPS600CMT**	IC	1		1	Y	Q
IC15	PQVIHD75188P	**PQVIHD75188P**	IC	1	*1			
IC16	PQVIHD75189P	**PQVIHD75189P**	IC	1	*1			
IC17	PSVITC7HT00A	**PSVITC7HT00A**	IC	1	*1			
IC18	PQVISN7L00S	**PQVISN7L00S**	IC	1	*1			
IC19	PQWI2D1232UK	**PQWI2D1232UK**	IC (ROM)	1	*1			

IC20,IC21	PSWI11232M15	**PSWI11232M17**	IC (ROM KIT)	1		1	X	N/O
	PSWI11232M17	**PSWI11232M20**	IC (ROM KIT)	1			X	Q
IC24	PSVICX582MD	**PSVITC5401AE**	IC	1		1	Y	Q
IC25	PSVICX582MD	**PSVITC5401AE**	IC	1		1	Y	Q
IC26	PQVICX581APD	**PQVICX581APD**	IC	1	*1			
IC27	PQVINJM4558D	**PQVINJM4558D**	IC		*1			
IC29	PQVISN7L368M	**PQVISN7L368M**	IC	1	*1			
IC31	PQVISN7L640M	**PQVISN7L640M**	IC	1	*1			
IC32	PQVISN7L365S	**PQVISN7L365S**	IC	1	*1			
IC33, IC34	PQVISN7L368M	**PQVISN7L368M**	IC	2	*1			
IC35	PQVISN7L365S	**PQVISN7L365S**	IC	1	*1			
IC36	PQVIMB7HU04F	**PQVIMB7HU04F**	IC	1	*1			
IC37	PQVISN7H00S	**PQVISN7H00S**	IC	1	*1			
IC38	PQVISN7H74S	**PQVISN7H74S**	IC	1	*1			
IC39	PQVISN7L151M	**PQVISN7L151M**	IC	1	*1			
IC40	----------	**PQVISN7L32S**	IC	1		5	Y	Q
Q5	PQVTDTA144EK	**PQVTDTA144EK**	TRANSISTOR (SI)	1	*1			
Q6	2SC2412K	**2SC2412K**	TRANSISTOR (SI)	1	*1			
Q7	2SC2412K	**2SC2412K**	TRANSISTOR (SI)	1	*1			
Q8	PQVTDTA143E	**PQVTDTA143E**	TRANSISTOR (SI)	1	*1			
Q9	PQVTDTC144E	**PQVTDTC144E**	TRANSISTOR (SI)	1	*1			
Q10	2SA933	**2SA933**	TRANSISTOR (SI) (or 2SA1317)	1	*1			
Q11	2SC2412K	**2SC2412K**	TRANSISTOR (SI)	1	*1			
Q12	2SC2878	**2SC2878**	TRANSISTOR (SI)	1	*1			
Q13	2SC2412K	**2SC2412K**	TRANSISTOR (SI)	1	*1			
Q14	2SC2878	**2SC2878**	TRANSISTOR (SI)	1	*1			
Q605	----------	**PQVTDTC144E**	TRANSISTOR (SI)	1		5		Q
Q606	----------	**2SB1237R**	TRANSISTOR (SI)	1		5		Q
Q607	----------	**PQVTDTC143E**	TRANSISTOR (SI)	1		5		Q
D1	MA4091	**MA4091**	DIODE (SI)	1	*1			
D4	PQVDAK03	**PQVDAK03**	DIODE (SI)	1	*1			
D11, D12	RLS71	**RLS71**	DIODE (SI)	2	*1			
D13, D14	MA4030	**MA4030**	DIODE (SI)	2	*1			
D15	MA4056	**MA4056**	DIODE (SI)	1	*1			
D16, D17	RLS71	**RLS71**	DIODE (SI)	2	*1			
D3, D20, D21	MA723	**MA723**	DIODE (SI)	3	*1			
R4	PQ4R10XJ471	**ERJ3GEYJ471**	RESISTOR, 470Ω	1		1	Y	Q
R5	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	Q
R6	PQ4R10XJ223	**ERJ3GEYJ223**	RESISTOR, 22kΩ	1		1	Y	Q
R7	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R8	PQ4R10XJ683	**ERJ3GEYJ683**	RESISTOR, 68kΩ	1		1	Y	Q
R10	PQ4R10XJ224	**ERJ3GEYJ224**	RESISTOR, 220kΩ	1		1	Y	Q
R11	PQ4R10XJ681	**ERJ3GEYJ681**	RESISTOR, 680Ω	1		1	Y	Q
R12	PQ4R10XJ393	**ERJ3GEYJ393**	RESISTOR, 39kΩ	1		1	Y	Q
R13	PQ4R10XF1782	**ERJ3GEYJ183**	RESISTOR, 18kΩ	1		1	Y	Q
R14	PQ4R10XJ104	**ERJ3GEYJ104**	RESISTOR, 100kΩ	1		1	Y	Q
R15	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R16	PQ4R10XJ274	**ERJ3GEYJ274**	RESISTOR, 270kΩ	1		1	Y	Q
R17	PQ4R10XJ183	**ERJ3GEYJ183**	RESISTOR, 18kΩ	1		1	Y	Q
R18	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R19	PQ4R10XJ561	**ERJ3GEYJ561**	RESISTOR, 560Ω	1		1	Y	Q
R20	PQ4R10XJ105	**ERJ3GEYJ105**	RESISTOR, 1MΩ	1		1	Y	Q
R21	PQ4R10XJ563	**ERJ3GEYJ623**	RESISTOR, 62kΩ	1		1	Y	Q
R22	PQ4R10XJ104	**ERJ3GEYJ913**	RESISTOR, 91kΩ	1		1	Y	Q
R23	PQ4R10XJ104	**ERJ3GEYJ134**	RESISTOR, 130kΩ	1		1	Y	Q
R24	PQ4R10XJ124	**ERJ3GEYJ154**	RESISTOR, 150kΩ	1		1	Y	Q
R25	PQ4R10XJ823	----------	RESISTOR, 82kΩ	0		6		Q
R26	PQ4R10XJ104	----------	RESISTOR, 100kΩ	0		6		Q
R27	PQ4R10XJ104	----------	RESISTOR, 100kΩ	0		6		Q
R28	PQ4R10XF1211	**ERJ3GEYF122**	RESISTOR, 1.2kΩ	1		1	Y	Q
R29	PQ4R10XF1211	----------	RESISTOR, 1.21kΩ	0		6		Q
R30	PQ4R10XJ224	**ERJ3GEYJ224**	RESISTOR, 220kΩ	1		1	Y	Q
R31	PQ4R10XF1401	----------	RESISTOR, 1.4kΩ	1		6		Q
R32	PQ4R10XJ823	**ERJ3GEYJ154**	RESISTOR, 150Ω	1		1	Y	Q
R33	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	Q
R34	PQ4R10XJ333	**ERJ3GEYJ333**	RESISTOR, 33kΩ	1		1	Y	Q
R35	PQ4R10XJ104	**ERJ3GEYJ104**	RESISTOR, 100kΩ	1		1	Y	Q
R36	PQ4R10XJ124	**ERJ3GEYJ124**	RESISTOR, 120kΩ	1		1	Y	Q

R37	PQ4R10XJ104	**ERJ3GEYJ563**	RESISTOR, 56kΩ	1		1	Y	Q
R38	PQ4R10XJ104	**ERJ3GEYJ104**	RESISTOR, 100kΩ	1		1	Y	Q
R39	PQ4R10XJ124	**ERJ3GEYJ124**	RESISTOR, 120kΩ	1		1	Y	Q
R40	PQ4R10XJ104	**ERJ3GEYJ104**	RESISTOR, 100kΩ	1		1	Y	Q
R48	PQ4R10XJ333	**ERJ3GEYJ333**	RESISTOR, 33kΩ	1		1	Y	Q
R50	PQ4R10XJ224	**ERJ3GEYJ224**	RESISTOR, 220kΩ	1		1	Y	Q
R51	PQ4R10XJ333	**ERJ3GEYJ333**	RESISTOR, 33kΩ	1		1	Y	Q
R52	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	Q
R53	PQ4R10XJ104	**ERJ3GEYJ104**	RESISTOR, 100kΩ	1		1	Y	Q
R57	PQ4R10XJ102	**ERJ3GEYJ102**	RESISTOR, 1kΩ	1		1	Y	Q
R59	PQ4R10XJ104	**ERJ3GEYJ563**	RESISTOR, 56kΩ	1		1	Y	Q
R61	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R62	PQ4R10XJ223	**ERJ3GEYJ223**	RESISTOR, 22kΩ	1		1	Y	Q
R65	PQ4R10XJ561	**ERJ3GEYJ561**	RESISTOR, 560Ω	1		1	Y	Q
R66	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R67	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R68	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R69	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R70	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R71	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R72	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R73	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R74	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R75	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R76	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R77	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R78	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R79	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R83	ERDS1TJ151	**ERDS1TJ151**	RESISTOR, 150Ω	1	*1			
R84	PQ4R10XJ152	**ERJ3GEYJ152**	RESISTOR, 1.5kΩ	1		1	Y	Q
R85	PQ4R10XJ681	**ERJ3GEYJ681**	RESISTOR, 680Ω	1		1	Y	Q
R87	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R91	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R92	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R93	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R94	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R96	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R97	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R110	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R111	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R112	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R113	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R114	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R115	PQ4R10XJ222	**ERJ3GEYJ222**	RESISTOR, 2.2kΩ	1		1	Y	Q
R116	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	Q
R117	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R118	PQ4R10XJ333	**ERJ3GEYJ333**	RESISTOR, 33kΩ	1		1	Y	Q
R119	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R120	PQ4R10XJ334	**ERJ3GEYJ334**	RESISTOR, 330kΩ	1		1	Y	Q
R121	PQ4R10XJ222	**ERJ3GEYJ222**	RESISTOR, 2.2kΩ	1		1	Y	Q
R122	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	Q
R123	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R124	PQ4R10XJ333	**ERJ3GEYJ333**	RESISTOR, 33kΩ	1		1	Y	Q
R125	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R126	PQ4R10XJ334	**ERJ3GEYJ334**	RESISTOR, 330kΩ	1		1	Y	Q
R127	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	Q
R128	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	Q
R129	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R130	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R131	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R132	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R133	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R134	PQ4R10XJ390	**ERJ3GEYJ390**	RESISTOR, 39Ω	1		1	Y	Q
R135	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R136	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R137	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R138	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	Q
R139	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	Q

R140	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	Q
R141	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	Q
R142	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	Q
R143	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	Q
R144	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	Q
R145	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	Q
R146	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R147	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R148	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R149	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R150	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R151	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R152	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R153	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R154	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R155	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R156	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R157	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R158	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R159	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R160	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R161	PQ4R10XJ390	**ERJ3GEYJ390**	RESISTOR, 39Ω	1		1	Y	Q
R162	PQ4R10XJ330	**ERJ3GEYJ330**	RESISTOR, 33Ω	1		1	Y	Q
R163	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R164	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R165	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R166	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R167	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R168	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R169	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R170	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R171	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R172	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R173	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R174	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R175	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R176	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R177	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R178	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R179	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R180	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R181	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R182	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R183	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R184	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R185	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R186	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R187	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R188	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R189	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R190	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R191	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R192	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R193	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R194	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R195	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R196	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R197	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R198	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R199	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R200	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R201	PQ4R10XJ102	**ERJ3GEYJ102**	RESISTOR, 1kΩ	1		1	Y	Q
R202	PQ4R10XJ102	**ERJ3GEYJ102**	RESISTOR, 1kΩ	1		1	Y	Q
R203	PQ4R10XJ102	**ERJ3GEYJ102**	RESISTOR, 1kΩ	1		1	Y	Q
R204	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R205	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R206	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R207	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q

R208	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R209	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R210	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R211	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R212	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R213	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R214	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R215	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R216	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R217	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R218	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R219	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R220	PQ4R10XJ223	**ERJ3GEYJ223**	RESISTOR, 22kΩ	1		1	Y	Q
R221	PQ4R10XJ222	**ERJ3GEYJ222**	RESISTOR, 2.2kΩ	1		1	Y	Q
R222	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R223	PQ4R10XJ223	**ERJ3GEYJ223**	RESISTOR, 22kΩ	1		1	Y	Q
R224	PQ4R10XJ105	**ERJ3GEYJ105**	RESISTOR, 1MΩ	1		1	Y	Q
R225, R226	PQ4R10XJ330	**ERJ3GEYJ330**	RESISTOR, 33Ω	2		1	Y	Q
R227	PQ4R10XJ223	**ERJ3GEYJ223**	RESISTOR, 22kΩ	1		1	Y	Q
R228	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R229	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R704	----------	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		5		Q
R705	----------	**PQRD1VJ220**	RESISTOR, 22Ω	1		5		Q
R706	----------	**ERJ3GEY0R00**	RESISTOR, 0Ω	1		5		Q
R707	----------	**ERJ3GEYJ561**	RESISTOR, 560Ω	1		5		Q
R709	----------	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		5		Q
J1	----------	**ERJ3GEY0R00**	RESISTOR, 0Ω	1		5		Q
J6	PQ4R10XJ000	**----------**	RESISTOR, 0Ω	0		6		Q
J16	PQ4R10XJ223	**ERJ3GEYJ223**	RESISTOR, 22KΩ	1		1	Y	Q
C1	EECFE5R5474	**EECFE5R5474**	CAPACITOR, 0.47µF	1	*1			
C2	ECEA1EU4R7	**ECEA1EU4R7**	CAPACITOR, 4.7µF	1	*1			
C3	ECEA1HN3R3S	**ECEA1HN3R3S**	CAPACITOR, 3.3µF	1	*1			
C8	ECQV1H104JZ	**ECQV1H104JZ**	CAPACITOR, 0.1µF	1	*1			
C9	ECQV1H104JZ	**ECQV1H104JZ**	CAPACITOR, 0.1µF	1	*1			
C11	PQCUV1H104ZF	**PQCUV1H105JC**	CAPACITOR, 1µF	1		1	Y	Q
C12	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	Q
C13	PQCUV1H682KB	**----------**	CAPACITOR, 0.0068µF	0		6		Q
C14	PQCUV1H680JC	**ECUV1H680JCV**	CAPACITOR, 68pF	1		1	Y	Q
C16	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	Q
C17	PQCUV1H104ZF	**----------**	CAPACITOR, 0.1µF	0		6		Q
C19	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	Q
C20	PQCUV1H332KB	**ECUV1H332KBV**	CAPACITOR, 0.0033µF	1		1	Y	Q
C21	PQCUV1H104ZF	**----------**	CAPACITOR, 0.1µF	0		6		Q
C22	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	Q
C23	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	Q
C24	PQCUV1H332KB	**ECUV1H332KBV**	CAPACITOR, 0.0033µF	1		1	Y	Q
C25	PQCUV1H104ZF	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	Q
C26	PQCUV1H104ZF	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	Q
C27	PQCUV1H102J	**ECUV1H102KBV**	CAPACITOR, 0.001µF	1		1	Y	Q
C28	PQCUV1H104ZF	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	Q
C29	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	Q
C30	PQCUV1H104ZF	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	Q
C31	PQCUV1H102J	**ECUV1H102KBV**	CAPACITOR, 0.001µF	1		1	Y	Q
C33	PQCUV1H223KB	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	Q
C34	PQCUV1H223KB	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	Q
C35	PQCUV1H223KB	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	Q
C36	PQCUV1H223KB	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	Q
C37	PQCUV1H223KB	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	Q
C38	PQCUV1H223KB	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	Q
C39	PQCUV1H200JC	**ECUV1H200JCV**	CAPACITOR, 20pF	1		1	Y	Q
C40	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C41	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C44	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C45	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C46	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C47	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C50	ECEA1EU331	**ECEA1EU331**	CAPACITOR, 330	1	*1			
C53	PQCUV1H180JC	**ECUV1H180JCV**	CAPACITOR, 18pF	1		1	Y	Q

C54	PQCUV1H180JC	**ECUV1H180JCV**	CAPACITOR, 18pF	1		1	Y	Q
C55	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C56	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C59	ECEA1HU010	**ECEA1HU010**	CAPACITOR, 1µF	1	*1			
C60	ECEA1HU010	**ECEA1HU010**	CAPACITOR, 1µF	1	*1			
C61	ECEA1HU010	**ECEA1HU010**	CAPACITOR, 1µF	1	*1			
C62	ECEA1HU010	**ECEA1HU010**	CAPACITOR, 1µF	1	*1			
C63	ECEA1HU010	**ECEA1HU010**	CAPACITOR, 1µF	1	*1			
C64	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C66	ECEA1AU101	**ECEA1AU101**	CAPACITOR, 100µF	1	*1			
C67	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C68	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C70	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C71	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C72	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C80	PQCUV1H200JC	**ECUV1H200JCV**	CAPACITOR, 20pF	1		1	Y	Q
C81	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C82	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C83	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C84	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C85	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C86	PQCUV1H104ZF	**ECUV1C104KBV**	CAPACITOR, 1µF	1		1	Y	Q
C87	ECEA1AKS330	**ECEA1AKS330**	CAPACITOR, 33µF	1	*1			
C88	ECEA1HN2R2S	**ECEA1HN2R2S**	CAPACITOR, 2.2µF	1	*1			
C89	PQCUV1H104ZF	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	Q
C90	ECEA1VU330	**ECEA1VU330**	CAPACITOR, 33µF	1	*1			
C91	ECEA1HN2R2S	**ECEA1HN2R2S**	CAPACITOR, 2.2µF	1	*1			
C92	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	Q
C93	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	Q
C94	PQCUV1H470JC	**ECUV1H470JCV**	CAPACITOR, 47pF	1		1	Y	Q
C95	PQCUV1H470JC	**ECUV1H470JCV**	CAPACITOR, 47pF	1		1	Y	Q
C96	PQCUV1H470JC	**ECUV1H470JCV**	CAPACITOR, 47pF	1		1	Y	Q
C97	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C98	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C99	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C100, C101	PQCUV1H220JC	**ECUV1H220JCV**	CAPACITOR, 22pF	2		1	Y	Q
C102	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C705	----------	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		5		Q
T1	ETA14Y180AY	**ETA14Y180AY**	TRANSFORMER	1	*1			
T2~T5	PQLT2D6A	**PQLT2D6A**	TRANSFORMER	4	*1			
L7~L14	PQLE106	**PQLE106**	COIL	8	*1			
L21~L23	PQVFTU50MT	**PQVFTU50MT**	CERAMIC FILTER	3	*1			
L24~L27	PQVFCM04RC01	**PQVFCM04RC01**	CERAMIC FILTER	4	*1			
L30	JUMPER WIRE	**JUMPER WIRE**	JUMPER WIRE	1	*1			
JAC1, JAC2	PQJJ1G1Z	**PQJJ1G1Z**	JACK, PAGING	2	*1			
JAC3, JAC4	PQJJ1D3Z	**PQJJ1D3Z**	JACK, EP	2	*1			
CN1	PQJS64R15Z	**PQJS64R15Z**	CONNECTOR, 64P	1	*1			
CN4	PQJP2D70Z	**PQJP2D70Z**	CONNECTOR, 2P	1	*1			
CN5~CN8	PSJS20A25Z	**PSJS20A25Z**	CONNECTOR, 20P	4	*1			
CN9	PQJP20A08Z	**PQJP20A08Z**	CONNECTOR, 20P	1	*1			
CN12	PQJP6D70Z	**PQJP6D70Z**	CONNECTOR, 6P	1	*1			
CN13	PQJS6H30Z	**PQJS6H30Z**	CONNECTOR, 6P	1	*1			
CN14	PQJS4H30Z	**PQJS4H30Z**	CONNECTOR, 4P	1	*1			
BAT	CR23541GUF	**CR23541GUF**	LITHIUM BATTERY	1	*1			
SW1	EVQ21409K	**EVQ21409K**	SWITCH	1	*1			
SW2	PQSS2A24Z	**PQSS2A24Z**	SWITCH	1	*1			
SW3	ESD11V120	**ESD11V120**	SWITCH	1	*1			
X1	PQVCJ12000N8	**PQVCJ12000N8**	CRYSTAL OSCILLATOR	1	*1			
X2	PQVCL3276N6Z	**PQVCL3276N6Z**	CRYSTAL OSCILLATOR	1	*1			
X3	PQVCJ8192N8Z	**PQVCJ8192N8Z**	CRYSTAL OSCILLATOR	1	*1			
Z1, Z2, Z4~Z6	PQRSLD8X103J	**PQRSLD8X103J**	RESISTOR ARRAY	5	*1			

2 PRINTED CIRCUIT BOARD (CPU BOARD)

2.1. Change from Supplement-2 page 5.

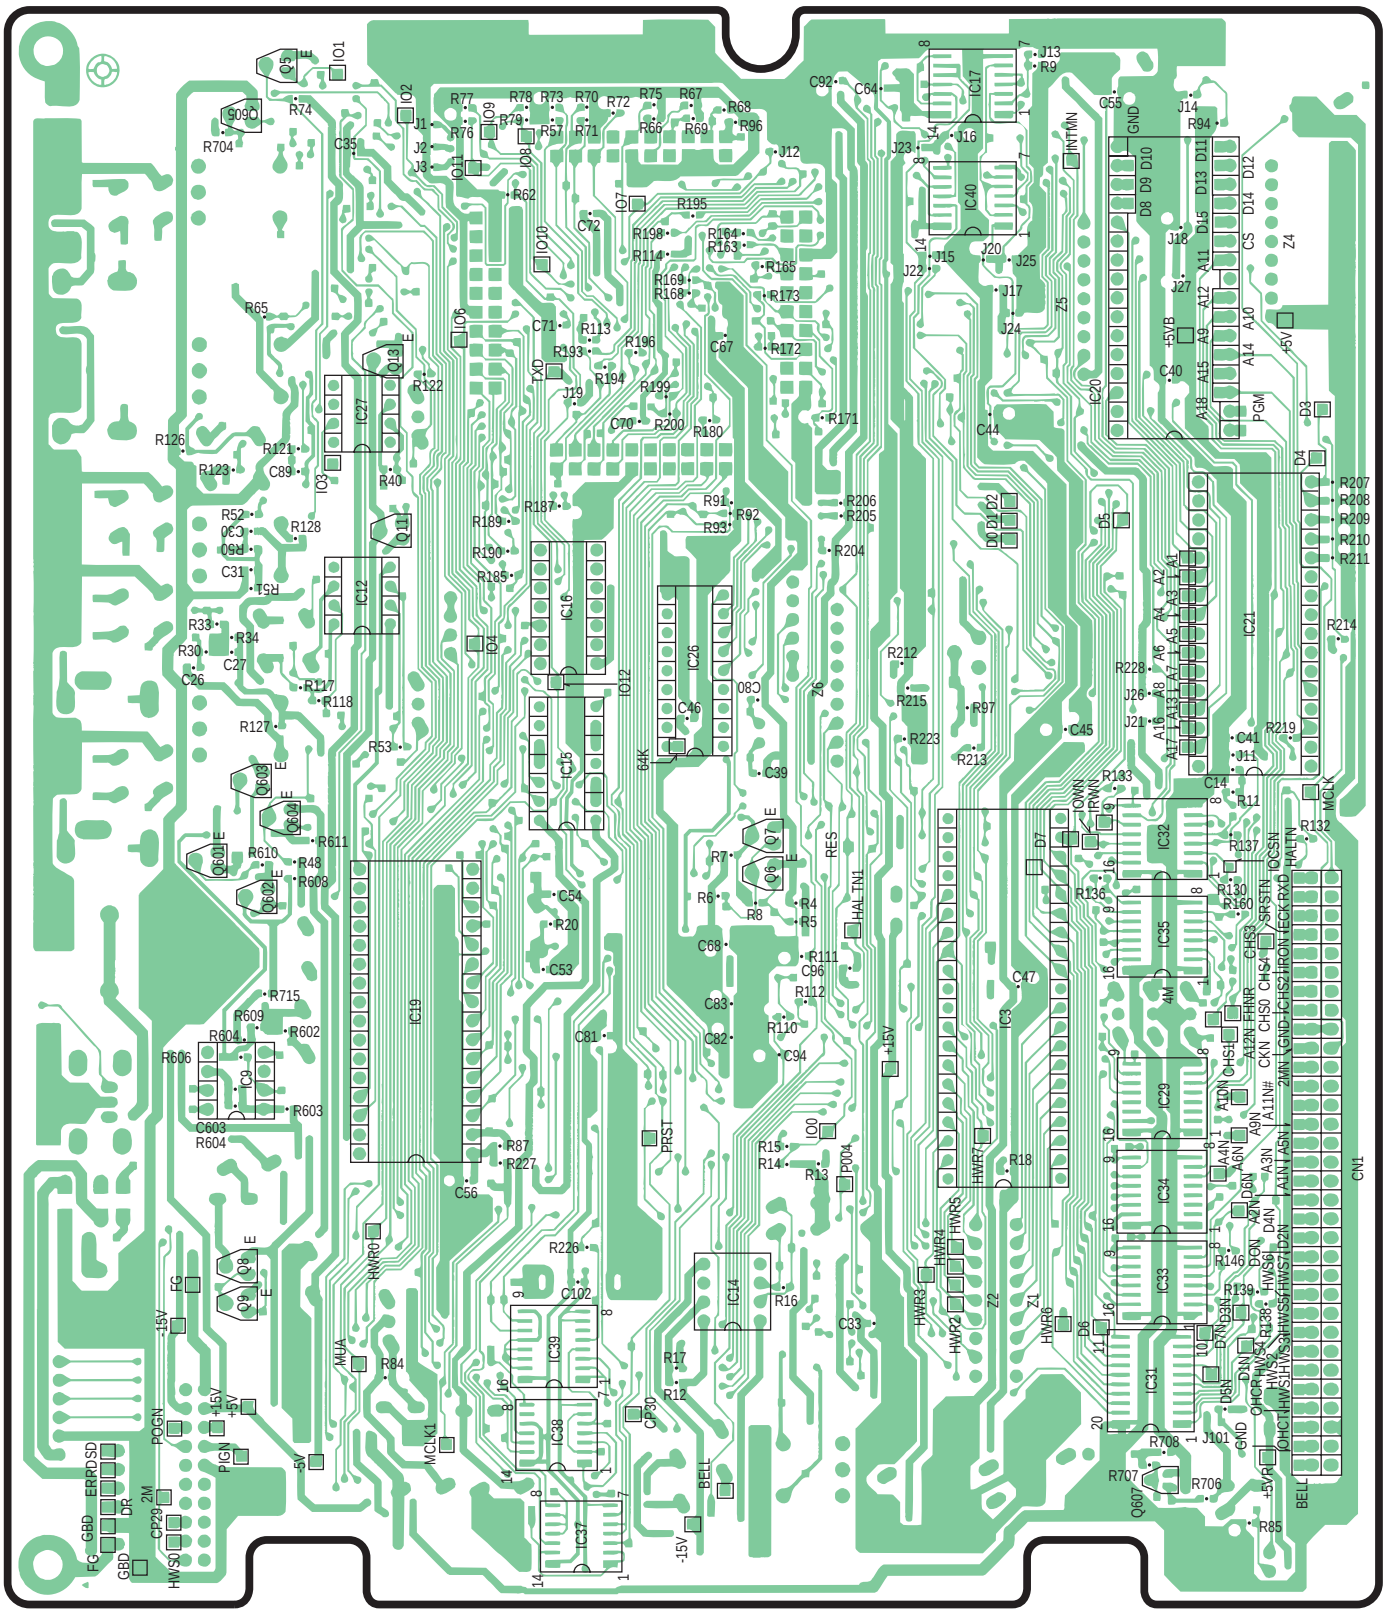

Bottom View

2.2. Change from Supplement-2 page 6.

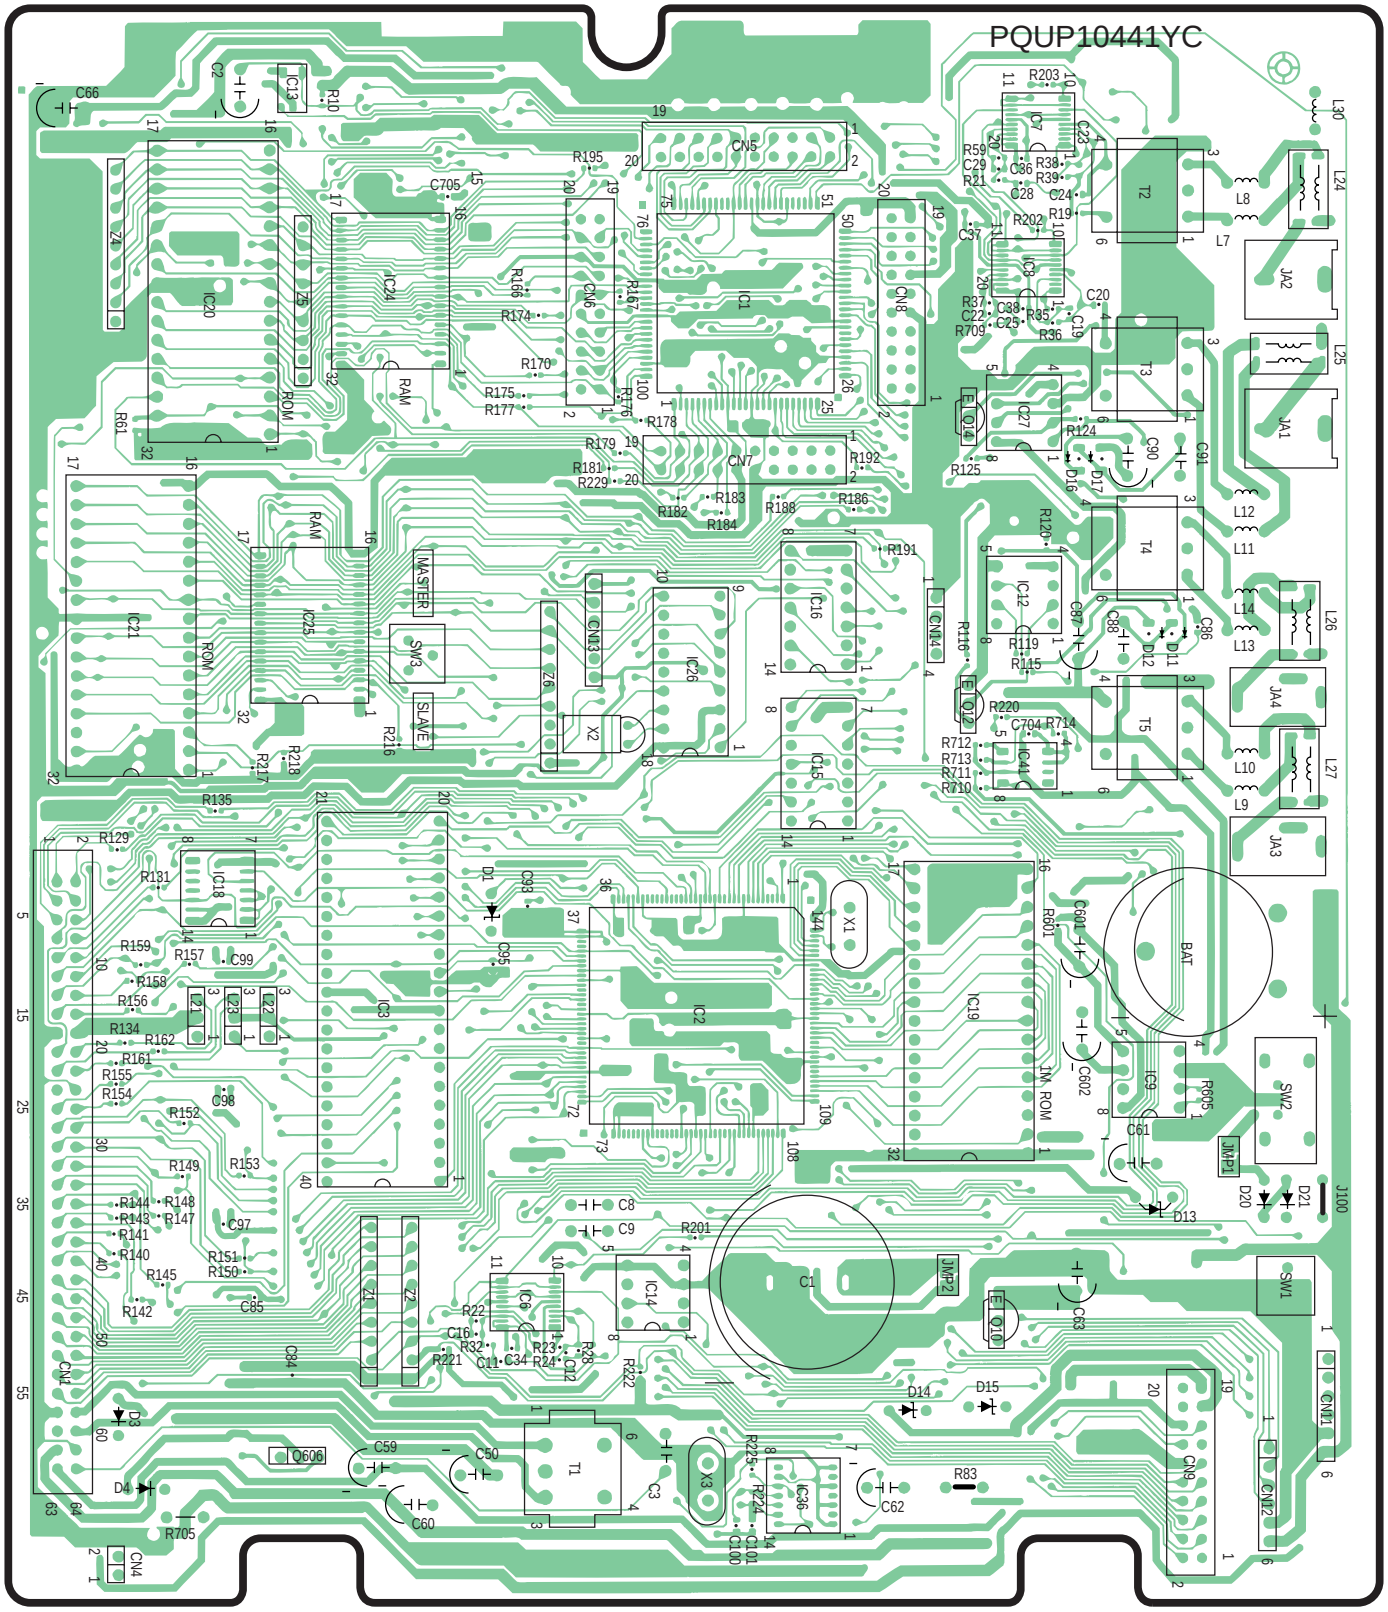

Component View

3 SCHEMATIC DIAGRAM (CPU CIRCUIT)

3.1. Change from Supplement-2 page 7.

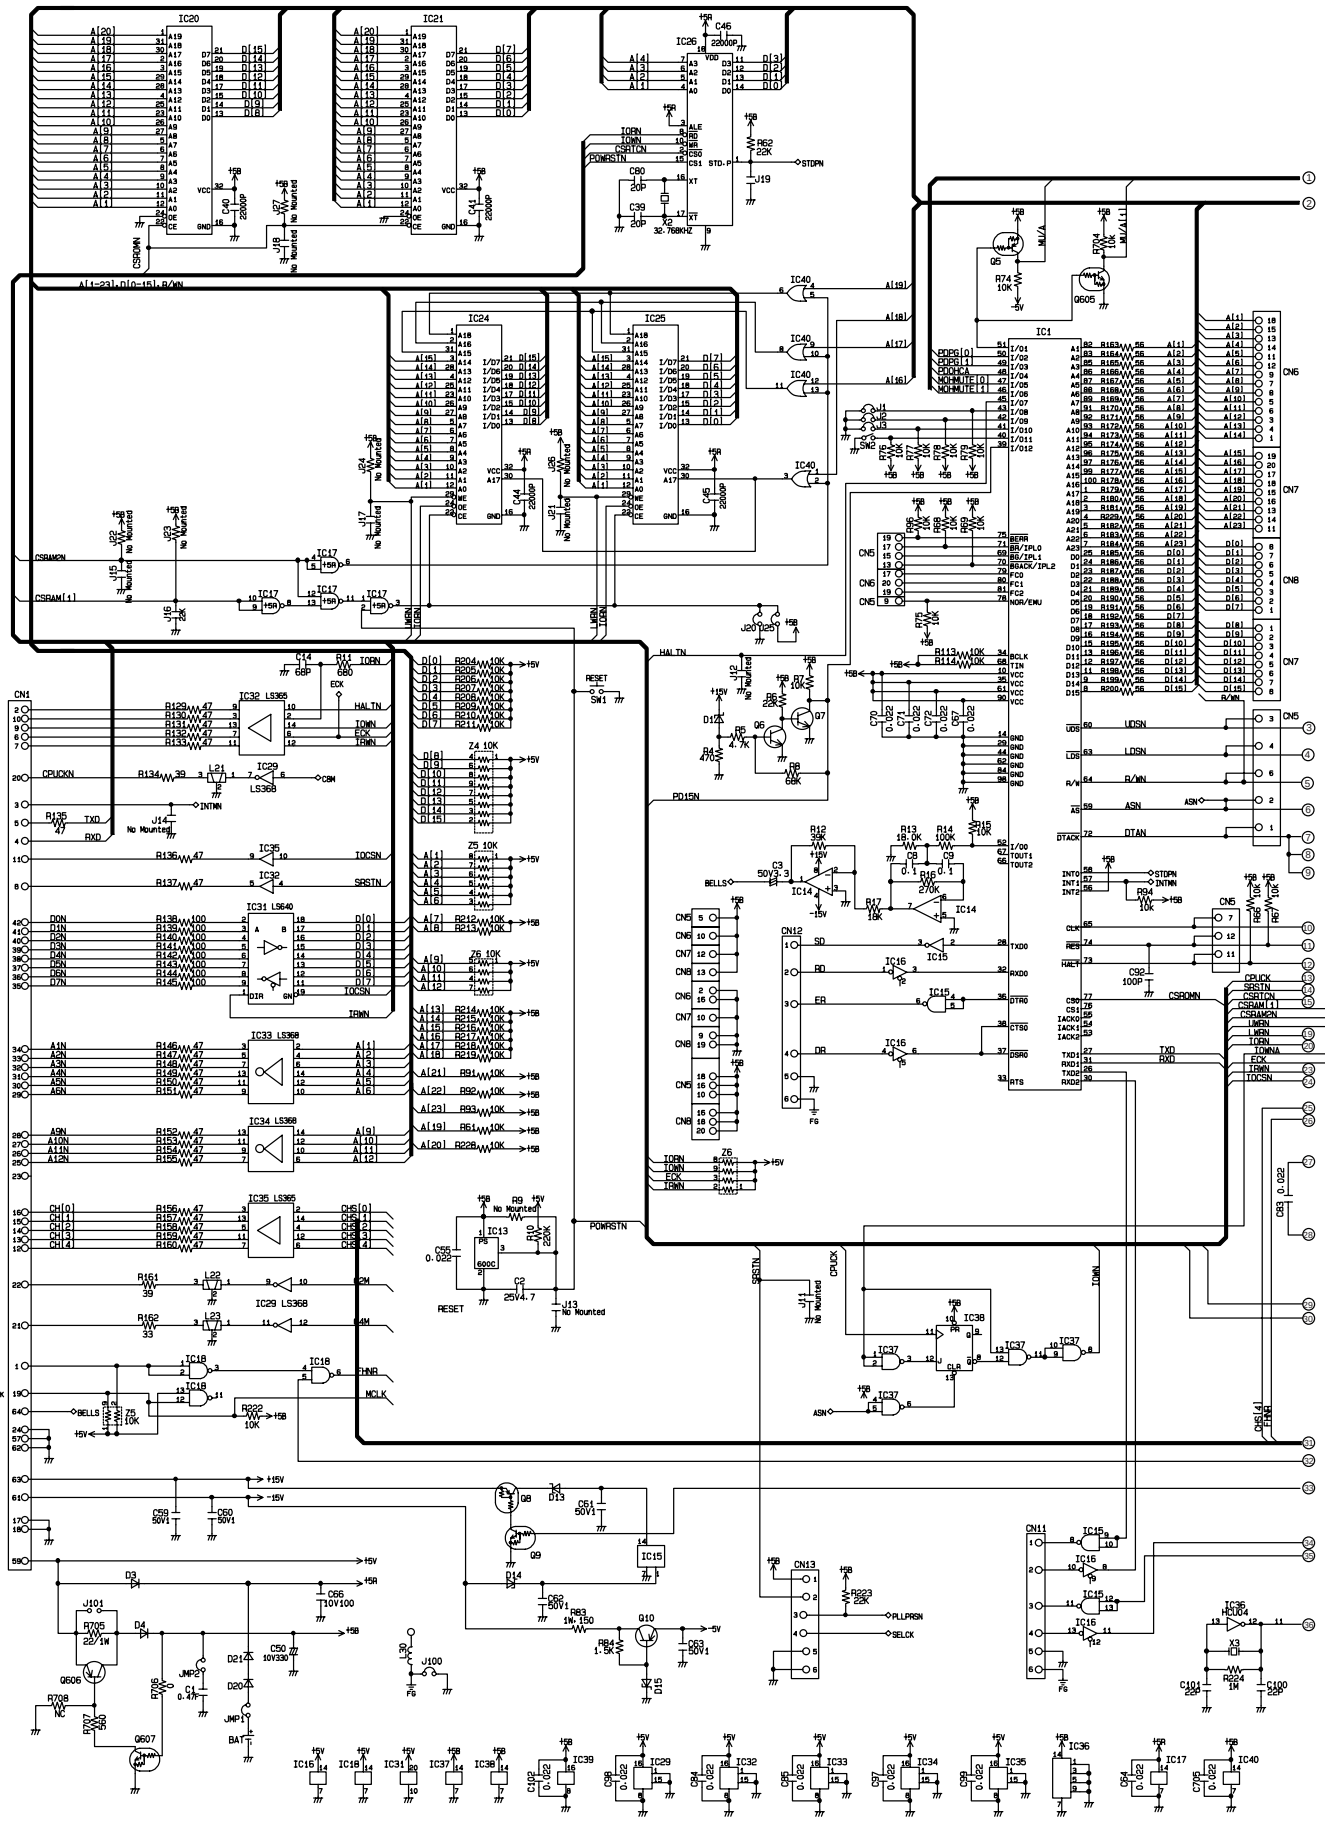

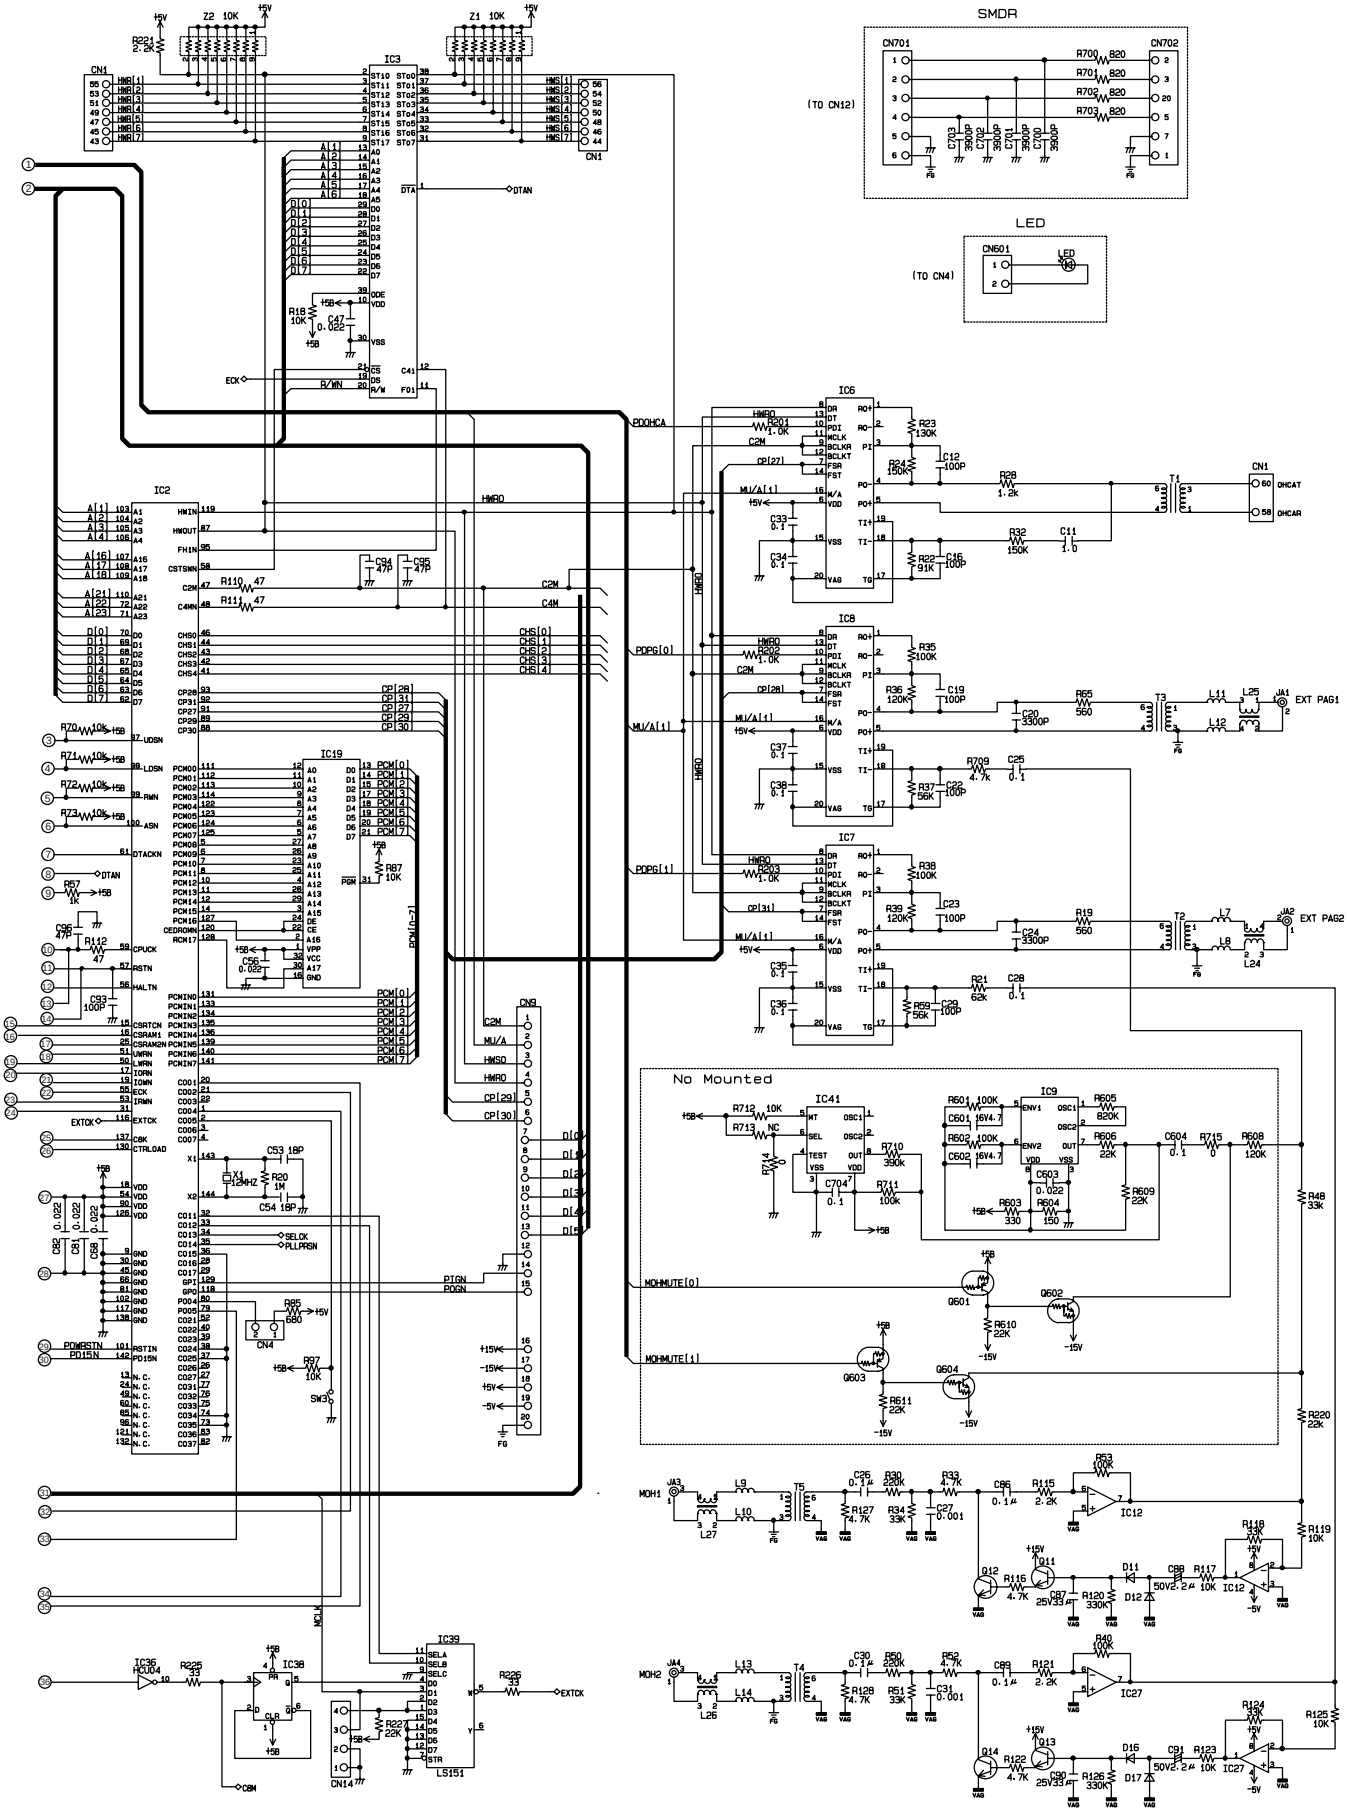

N.T.(Q)
KXTD1232MUK
Printed in Japan

ORDER NO. KMS0008871S1

Service Manual

DIGITAL SUPER HYBRID SYSTEM

KX-TD1232

(for U.S.A.)

Please file and use this supplement manual together with the service manual for model No.KX-TD1232, Order No. KM493116991A.

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public.
It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product.
Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

Note:Supplement-1~5 have already supplied with printed matter. So please refer to that.

Panasonic

© 2000 Kyushu Matsushita Electric Co., Ltd. All rights reserved. Unauthorized copying and distribution is a violation of law.

1 CHANGES

1.1. Subject

Suffix	Reason for suffix change
L→M	Change of the software. (IC20/21:ROM Ver. P231T/P232T→P231UA/P232UA) (There is no change in the replacement parts list.)
Not used	Change of the power supply unit. (PQLP10005ZA→PSLP1150ZA)

1.2. Suffix location



1.3. REPLACEMENT PARTS LIST

Reason for Change (Symbol:A) Following 1-8 reasons are indicated on the Notes in the bottom column.

1. Improve performance 2. Change of material or dimension 3. To meet approved specification 4. Standardization 5. Addition 6. Deletion 7. Correction 8. Other	**Note** Part with mark *1 has been written at the next page in the new Power Supply Unit parts.

Interchangeability code (Symbol:B) Following V-Z interchangeabilities are indicated on the Notes in the bottom column.

Parts	Set Production	Description
V Original / New	Early (before change) / Late (after change)	Original or new parts may be used in early or late production sets. Use original parts until exhausted, then stock new parts.
W Original / New	Early (before change) / Late (after change)	Original parts may be used in early production sets only. New parts may be used in early or late production sets. Use original parts where possible, then stock new parts.
X Original / New	Early (before change) / Late (after change)	New parts only may be used in early or late production sets. Stock new parts.
Y Original / New	Early (before change) / Late (after change)	Original parts may be used in early production sets only. New parts may be used in late production sets only. Stock both original and new parts.
Z Other		

Ref. No.	Parts No.		Part Name & description	Pcs	Remarks	Notes		Time of change (Suffix)
	Original Part	**New part**						
ACCESSORIES AND PACKING MATERIALS								
A8	PQQX10173W	**PQQX10173V**	USER MANUAL	1		8	X	
A13	PQQX10782X	**PQQX10782W**	REFERENCE GUIDE (T7000)	1		8	X	
	PSQX1360Y	----------	INSTALLATION MANUAL FOR KX-TD185	0		6		
	PSQX1416Z	----------	INSTALLATION MANUAL FOR KX-TD171/194	0		6		
POWER SUPPLY UNIT PARTS								
90	PQQT4164Z	----------	CAUTION LABEL	0		6		
91	PQMC10053X	**PSMC1084Z**	SHIELD COVER ⚠	1	*1	8	Y	
92	PQMC10052X	**PSMC1085Z**	SHIELD CASE ⚠	1	*1	8	Y	
95	PQHR10179Z	**PSHE1095Z**	SPACER-B	1	*1	8	Y	
96	PQJS02R46Z	----------	CONNECTOR, 2P ⚠	0		6		
97	PQJP04R07Y	**PQJP04R07X**	CONNECTOR, 4P	1		8	V	
98	PQJP3A3Z	----------	SOCET, AC ⚠	0		6		
99	EST15304T	----------	SWITCH, POWER ⚠ ;	0		6		
100	PQMH10027Z	**PSMH1183Z**	ANGLE, POWER SW ⚠	1	*1	8	Y	
101	PQJV3Z	----------	HOLDER, FUSE ⚠	0		6		
102	XBA2C25ND1L	**XBA1C50ND1L**	FUSE ⚠	1	*1	7		
103	PQQT10469Z	**PSQT1766Z**	FUSE LABEL ⚠	1	*1	8	Y	

PCB6	PSLP1009Z	**PSWP6TD1232C**	POWER SUPPLY BOARD ASS'Y RTL ⚠	1		8	Y	

1.4. NEW POWER SUPPLY UNIT PARTS

Note:

1. RTL (Retention Time Limited)

   The marking (RTL) indicates that the Retention Time is limited for this item.

   After the discontinuation of this assembly in production, the item will continue to be available for a specific period of time. The retention period of availability is dependent on the type of assembly, and in accordance with the laws governing part and product retention.

   After the end of this period, the assembly will no longer be available.

2. Important safety notice

   Components identified by the ⚠ mark special characteristics important for safety. When replacing any of these components, use only manufacture´s specified parts.

3. The S mark indicates service standard parts and may differ from production parts.

4. RESISTORS & CAPACITORS

   Unless otherwise specified;

   All resistors are in ohms (Ω) K=1000Ω, M=1000kΩ

   All capacitors are in MICRO FARADS (µF) P=µµF

   *Type & Wattage of Resistor

Type

ERC:Solid ERD:Carbon PQRD:Carbon	ERX:Metal Film ERG:Metal Oxide ER0:Metal Film	PQ4R:Carbon ERS:Fusible Resistor ERF:Cement Resistor

Wattege

10,16:1/8W	14,25:1/4W	12:1/2W	1:1W	2:2W	3:3W

*Type & Voltage of Capacitor

Type

ECFD:Semi-Conductor ECQS:Styrol PQCUV:Chip ECQMS:Mica	ECCD,ECKD,ECBT,PQCBC:Ceramic ECQE,ECQV,ECQG:Polyester ECEA,ECSZ:Electlytic ECQP:Polypropylene

Voltage

ECQ Type	ECQG ECQV Type	ECSZ Type	Others	
1H:50V 2A:100V 2E:250V 2H:500V	05:50V 1:100V 2:200V	0F:3.15V 1A:10V 1V:35V 0J:6.3V	0J :6.3V 1A :10V 1C :16V 1E,25:25V	1V :35V 50,1H:50V 1J :63V 2A :100V

Ref. No.	Part No.	Part Name & Description	Remarks
91	PSMC1084Z	SHIELD COVER	⚠
92	PSMC1085Z	SHIELD CASE	⚠
93	PQHR477Z	SPACER-A	⚠
94	PSHE1095Z	SPACER-B	
95	PSHE1095Z	SPACER-B	
97	PQJP04R07X	CONNECTOR, 4P	
100	PSMH1183Z	ANGLE, POWER SW	⚠ ;
102	XBA1C50ND1L	FUSE	⚠
103	PSQT1766Z	FUSE LABEL	⚠
104	PSWE1012Z	INLET ASS´Y	⚠
PCB6	PSWP6TD1232C	POWER SUPPLY BOARD ASS´Y RTL	⚠
IC1	PSVIKA1M0880	IC	
IC2	PSVIKA3843B	IC	
IC4	PSVIKA431Z	IC	
IC5	PSVIKA431Z	IC	
IC9	PQVILA6500	IC	

Ref. No.	Part No.	Part Name & Description	Remarks
		(TRANSISTOR)	
Q2	KSP2222A	TRANSISTOR	
Q3	KSP2222A	TRANSISTOR	
Q4	KSP2907A	TRANSISTOR	
Q5	PSVTIRFZ44	TRANSISTOR	
Q6	KSA1220A0	TRANSISTOR	
Q7	KSP2222A	TRANSISTOR	
Q8	KSP2222A	TRANSISTOR	
Q9	KSP2907A	TRANSISTOR	
Q10	KSP2222A	TRANSISTOR	
Q13	KSP2222A	TRANSISTOR	
Q14	KSP2907A	TRANSISTOR	
Q15	KSP2222A	TRANSISTOR	
		(DIODES)	
D1	PSVDUF4007	DIODE	
D2	PSVDBYW32	DIODE	
D3	PSVDIN4004GP	DIODE	
D4	PSVDIN4004GP	DIODE	
D5	PSVDP6KE350A	DIODE	
D8	PSVDS20LC20U	DIODE	
D10	PSVDSF10SC4	DIODE	
D11	PSVDBYV27200	DIODE	
D12	PSVDS20LC20U	DIODE	
D13	PSVDBYV27200	DIODE	
D14	PSVD1N4148	DIODE	
D15	PSVD1N4148	DIODE	
D16	PSVD1N4148	DIODE	
D19	PSVDBYV38	DIODE	
ZD1	PQVDMZJ6R2B	DIODE	
ZD2	PQVDMZJ36B	DIODE	
ZD3	PQVDMZJ5R1B	DIODE	
DB1	PSVDD5SBA60	DIODE	
		(RESISTOR)	
R1	ERDS2TJ474	47k	
R2	ERDS1TJ204	200k	
R3	ERDS1TJ204	200k	
R4	ERG3SJ104	100k	
R5	ERG1SJ473	47k	
R6	ERDS2TJ472	4.7k	
R8	ERDS2TJ102	1k	
R9	ERDS2TJ242	2.4k	
R10	ERDS2TJ242	2.4k	
R11	ER016CKF1202	12k	
R12	ERDS2TJ513	51k	
R13	ERDS1TJ101	100	
R14	PSRMPR5R50MJ	0.05	
R15	ERDS2TJ202	2k	
R16	ERDS2TJ513	51k	
R17	ERDS2TJ472	4.7k	
R18	ERDS2TJ362	3.6k	
R19	ERDS2TJ390	39	
R20	ERG3SJ361	360	
R21	ER016CKF4701	4.7k	
R23	ERDS2TJ330	33	
R24	ERDS2TJ101	100	
R30	ERG1SJ100	10	
R31	ERDS2TJ472	4.7k	
R32	ERDS2TJ243	24k	
R33	ERDS2TJ432	4.3k	
R34	ERDS2TJ101	100	
R35	ERG1SJ100	10	
R36	PSRRQR5W270J	270	
R37	ERG1SJ100	10	
R38	ERG1SJ201	200	
R39	ERG1SJ100	10	
R40	ERDS2TJ511	510	
R41	ERDS1TJ241	240	
R43	ERDS2TJ243	24k	
R44	PSRMPR5R80MJ	0.08	
R51	ERDS2TJ474	470k	

Ref. No.	Part No.	Part Name & Description	Remarks
R57	ERDS2TJ123	12k	
R62	ERDS2TJ472	4.7k	
R63	ERDS2TJ562	5.6k	
R64	ERDS2TJ202	2k	
R65	ERDS2TJ561	560	
R66	ERDS2TJ2R2	2.2	
R67	ERDS1TJ101	100	
R68	ERDS2TJ472	4.7k	
R69	ERG3SJ104	100k	
R70	PSRMPR5R50MJ	0.05	
R71	ERDS2TJ472	4.7k	
R72	ERDS2TJ203	20k	
R73	ERDS2TJ472	4.7k	
R74	ERDS2TJ513	51k	
R75	ERDS2TJ472	4.7k	
R88	ERDS2TJ472	4.7k	
R89	ERDS2TJ472	4.7k	
		(CAPACITORS)	
C1	PSCCEMU2D471	470µF	
C2	PSC223K630	0.022µF	
C3	PSSCEMU2D471	470µF	
C4	PSCCEST1H220	22µF	
C5	PSCCELT1H010	1µF	
C8	PSCKR215C683	0.068µF	
C9	PSC154K400	0.15µF	
C10	PSCCELT1H010	1µF	
C14	PSCS215C104J	0.1µF	
C15	PSCS215C222J	2200pF	
C16	PSCCELT1H010	1µF	
C17	PSCS215C102J	1000pF	
C18	PSCCELT1H010	1µF	
C19	PSCCEMZ1E152	1500µF	
C20	PSCCEMZ1E152	1500µF	
C23	PSCS215C103J	0.01µF	
C25	PSCCEMZ1E221	220µF	
C27	PSCCEMZ1A152	1500µF	
C28	PSCYB2H222K	2200pF	
C29	PSCYB2H222K	2200pF	
C30	PSCCELT1H100	10µF	
C31	PSCCEMZ1E221	220µF	
C32	PSCCELT1H010	1µF	
C33	PSCS215C104J	0.1µF	
C34	PSCS215C104J	0.1µF	
C35	PSCYB2H222K	2200pF	
C36	PSCYB2H222K	2200pF	
C37	PSCCEMZ1E152	1500µF	
C38	PSCCEMZ1E152	1500µF	
C39	PSCCEMZ1E221	220µF	
C40	PSCS215C104J	0.1µF	
C49	PSCS215C104J	0.1µF	
C50	PSCCEMZ1C221	220µF	
C52	PSCCELT2W010	1µF	
C60	PSCCELT1H100	10µF	
C101	PSCP2335M104	0.1µF	
C102	PSCP2335M224	0.22µF	
C103	PSCHCYE2G222	2200pF	
C104	PSCHCYE2G222	2200pF	
C105	PSCHCYE2G332	3300pF	
C106	PSCHCYE2G332	3300pF	
		(VARISTORS)	
ZNR1	PSVDNR10D471	VARISTOR	
ZNR2	PSVDNR10D471	VARISTOR	
ZNR3	PSVDV151RA07	VARISTOR	
ZNR4	PSVDV151RA07	VARISTOR	
		(SURGE ABSORBER)	
SA1	PSVDMP362ME	SURGE ABSORBER	⚠
		(VARIABLE RESISTORS)	
VR1	EVNDXAA03B52	SEMI-FIXED RESISTOR 500Ω (B)	
VR2	EVNDXAA03B52	SEMI-FIXED RESISTOR 500Ω (B)	

Ref. No.	Part No.	Part Name & Description	Remarks
		(CONNECTORS)	
CN400	PQJP2D98Z	CONNECTOR. 2P	
CN401	PSJS07Q91Z	CONNECTOR. 7P	
CN402	PQJP4D30Z	CONNECTOR. 4P	
CN403	PQJP4D46Z	CONNECTOR. 4P	
LG1	PSJT1035Z	CONNECTOR-LUG	
LG2	PSJT1035Z	CONNECTOR-LUG	
		(THYRISTOR)	
SCR1	PSVDTYN058	THYRISTOR	
		(COILS)	
L1	PSLECCM011	COIL	
L2	PSLECC022	COIL	
L3	PSLECCM001	COIL	
L4	PSLECCM011	COIL	
L5	PSLEMGM001	COIL	
L6	PSLECCM002	COIL	
L7	PSLECCM011	COIL	
L8	PSLE04TB101K	COIL	
L10	PSLECCM011	COIL	
L11	PSLESA08230A	COIL	
L12	PSLECA115005	COIL	
L13	PSLECA115005	COIL	
L14	PSLE04TB510M	COIL	
		(TRANSFORMER)	
T1	PSLTTSM001	TRANSFORMER	⚠
		(PHOTO ERECTRIC TRANSDUCERS)	
PC1	PSVIKPC817	PHOTO COUPLER	⚠
PC2	PSVIKPC817	PHOTO COUPLER	⚠
		(THERMISTORS)	
TH1	PSRT5R114	THERMISTOR	⚠
TH2	PSRT5R114	TRANSFORMER	⚠
		(FUSE)	
F2	PSBATEST396	FUSE	⚠
		(CORES)	
B1	PSXCELBC4865	CORE	
B2	PSXCELBC4865	CORE	
B3	PSXCELBC3533	CORE	
B4	PSXCELBC3533	CORE	
J1	W5NL7.5T	JUMPER-WIRE	

Change from original Service Manual page 11. (KX-TD1232C:Order No.KM49307582C1)

Ref. No. 7	**HOW TO REMOVE THE POWER SUPPLY BOARD**
Procedure 1→2→6→7	

1. Remove the eight screws (A).
2. Remove the shield cover.
3. Remove the two screws (B).
4. Remove the four screws (C).
5. Remove the Power Supply Board.

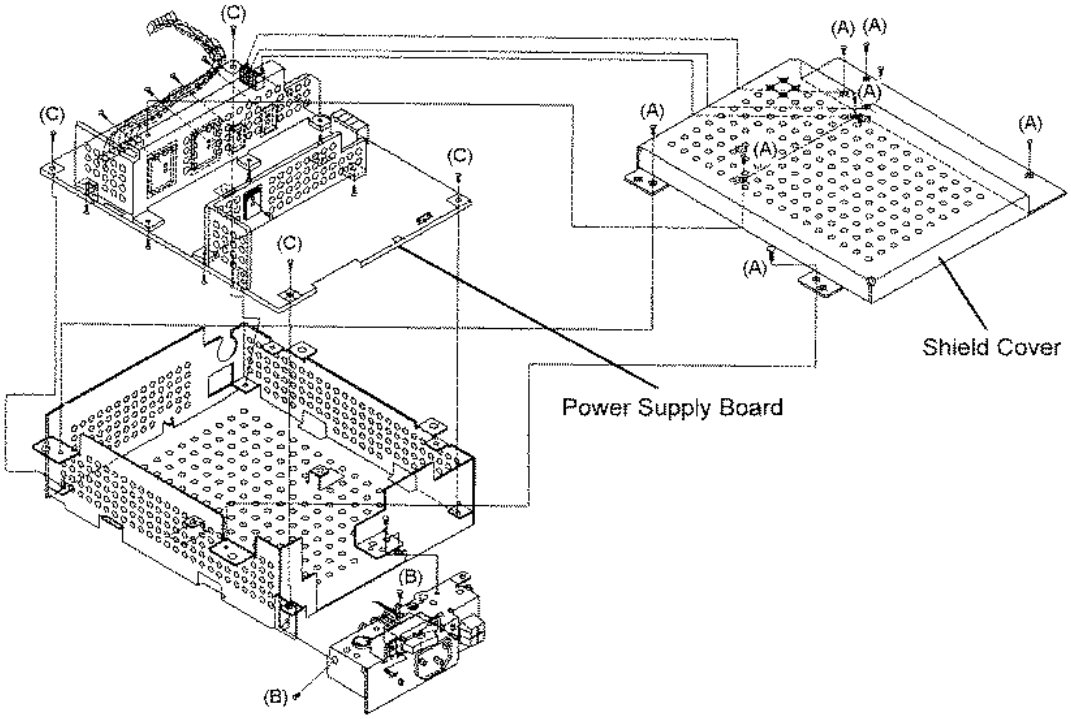

1.5. Chang from original Service Manual page 31.

3 EXPLANATION OF CIRCUIT OPERATION

3-1. BASIC

1) POWER SUPPLY UNIT

POWER SUPPLY UNIT consists of the following.
Line Filter Section
Rectifier and Smoothing Section
Switching Section
Control Section
+15 V Circuit
- 15 V Circuit
+5.3 V Circuit
Bell Amp Circuit

POWER UNIT

Line Filter Section

Common mode noise is removed by C103, C104 and C105 to C106 and normal mode noise by L11, L12 and L13. Lightening surges are absorbed by ZNR1.

Rectifier and Smoothing Section

The input signal is full-wave rectified by bridge diode DB1 and smoothed by C1, C3 resulting in a DC current. TH1 is power thermister.

Swtching Section

The switching section is a basic Forward Converter uses the IC1 included power MOS.FET. D1, R4 and C2 are for resetting the excitation energy stored in T1 while T1 is OFF.

Control Section

IC1 is a Forward Converter type switching module adopted power MOS.FET. The block diagram of IC1 has the following roles.
C9, D3, R5 : FOR starting
C10 : FOR soft start delay
C8 : FOR feed back compensating
PC1 : FOR feed back
R57, Q14, C34 : For over voltage protector circuit.
R89, PC2, D14
R88, C33, Q13
Q15

BLOCK DIAGRAM

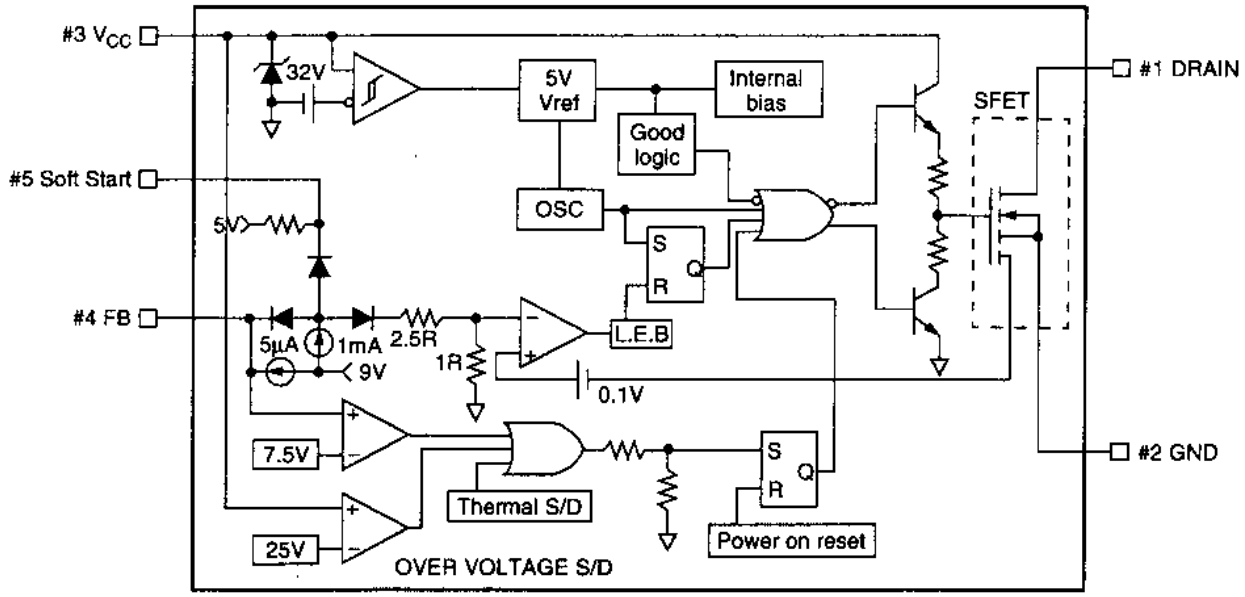

+15V Circuit

The circuit connected pin (8-9)-(10-11) of switching transformer T1 generates +15V. With feed back on the primary side from +15V line, +15V is stabilized by the PWM controller of the primary side. The following is the roles of main surrounding circuit.
D8, L3, C19, C20 : Rectifier and smoothing circuit
L4, C31 : Filter
IC4, C32, R31 : Free back circuit
PC1, R32, R33,
VR2
R34, Q8, R72 : Over current detection circuit
R71, C40, Q9,
R70

-15V Circuit

-15V is generated from the circuit connected to pin (12, 13)-14 of switching transformer. -15V cannot be stabilized by PWM controller of the primary side since feed back is not done on the primary side from -15V line. So, the bleeder circuit stabilizes -15V. The following is the roles of main surrounding circuit.
D12, L6, C37, C38 : Rectifier and smoothing circuit
L7, C39 : Filter
IC5, R21, C18 : -15V stabilizing circuit
R41, R43, R22,
R40, Q6, D11,
R38, D13
R24, Q7, C17 : Over current detection circuit
R44

+5.3V Circuit

+5.3V is generated by PMW controller, IC2 connected to the +15V output. It has an over voltage protection circuit to prevent abnormal output voltage.
The following is the roles surrounding circuit.
L1, C25 : Filter
L8, C30 : Filter
L2, C27 : Filter
L10, C50 : Filter
SCR1, F2 : Over voltage chopper circuit
ZD1, R19, C14 : Over voltage detection circuit
R8
R17, R18, VR1 : Feed back circuit
C15, R11 : For selecting oscillator frequency and duty cycles
Q2, R9, R10 : For duty cycle control
R14, Q4, R15 : Over Current detection circuit
C16, R16, Q3

Bell Amp Circuit

It increases bell signals sent from CPU board in Power Op. Amp, IC9 and sends them into the bell amp. Then, they are sent to the extension boards.

CIRCUIT DIAGRAM

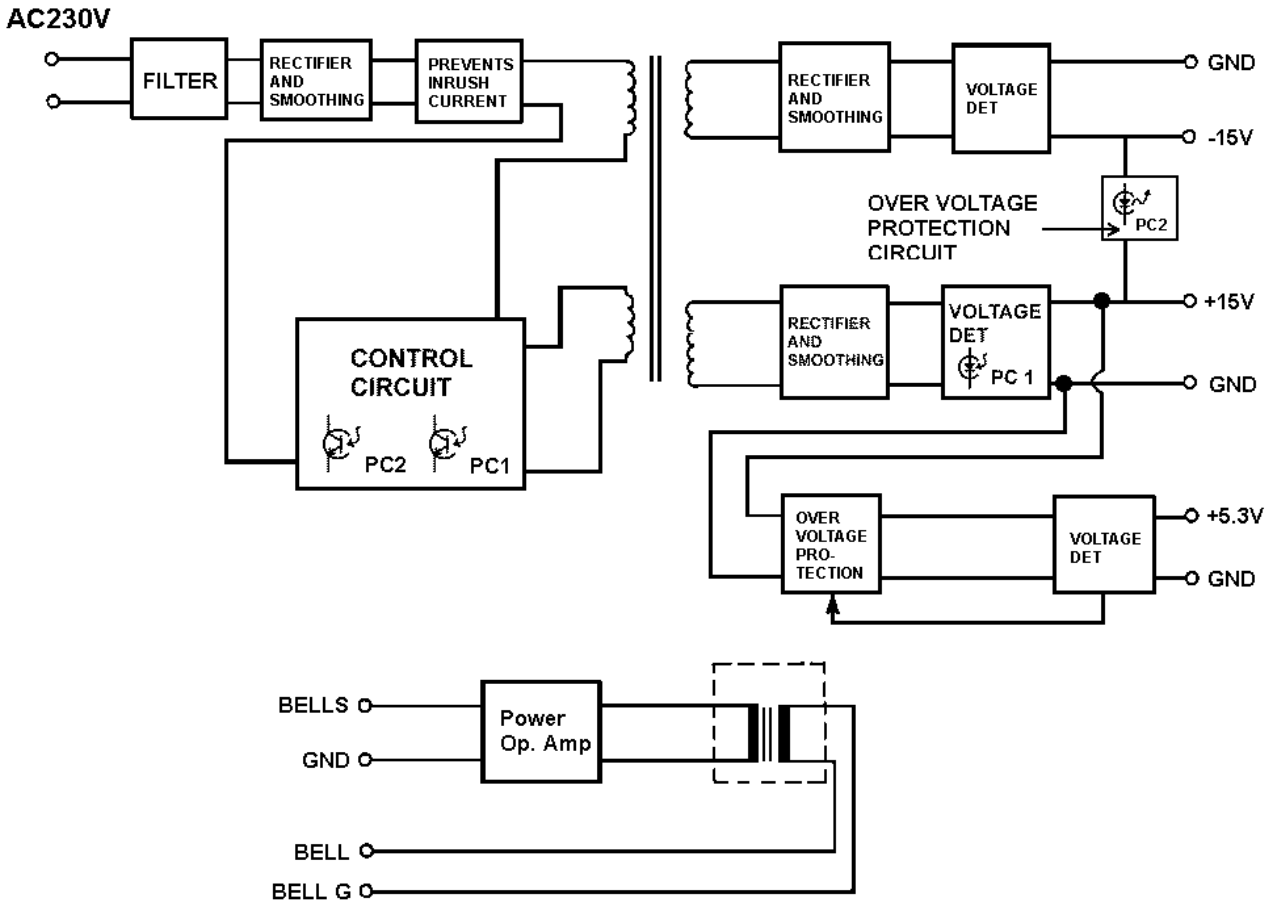

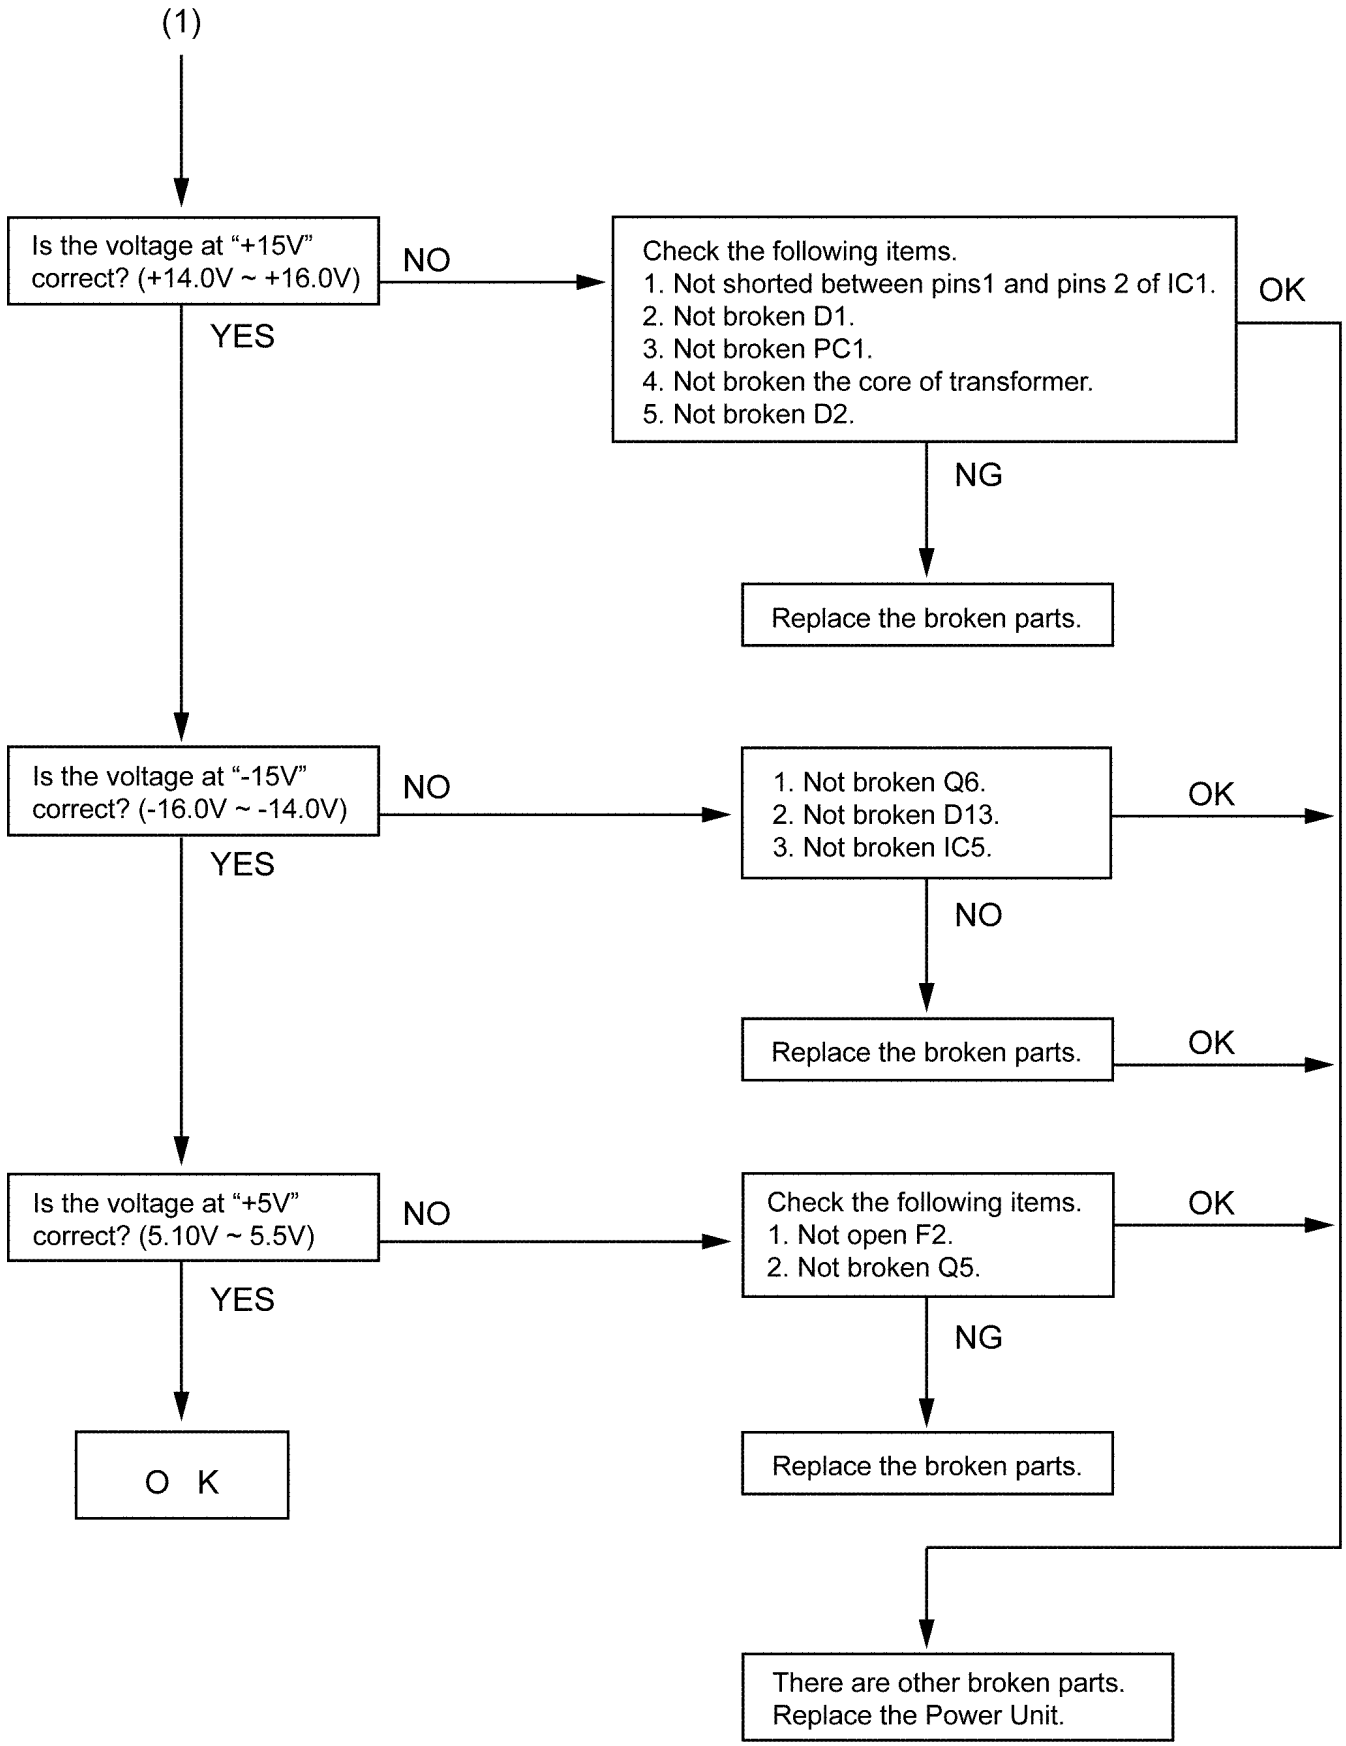
(1)
Is the voltage at “+15V” correct? (+14.0V ~ +16.0V)
NO
YES
Check the following items.
1. Not shorted between pins1 and pins 2 of IC1.
2. Not broken D1.
3. Not broken PC1.
4. Not broken the core of transformer.
5. Not broken D2.
OK
NG
Replace the broken parts.
Is the voltage at “-15V” correct? (-16.0V ~ -14.0V)
NO
YES
1. Not broken Q6.
2. Not broken D13.
3. Not broken IC5.
OK
NO
Replace the broken parts.
OK
Is the voltage at “+5V” correct? (5.10V ~ 5.5V)
NO
YES
Check the following items.
1. Not open F2.
2. Not broken Q5.
OK
NG
Replace the broken parts.
O K
There are other broken parts.
Replace the Power Unit.

1.6. TERMINAL GUIDE OF IC'S, TRANSISTORS AND DIODES

1.6.1. Addition from original page 107

Pin description of IC's

 KSP2222A KSP2907A	 KSA1220A-O	 PSVTIRFZA4	 PSVIKA431Z	 PSVDTYN058

2 PRINTED CIRCUIT BOARD & SCHEMATICDIAGRAM

2.1. POWER SUPPLY BOARD

2.1.1. Change from original pages 105-106 (KX-TD1232C:Order No. KM49307582C1)

(Component View)

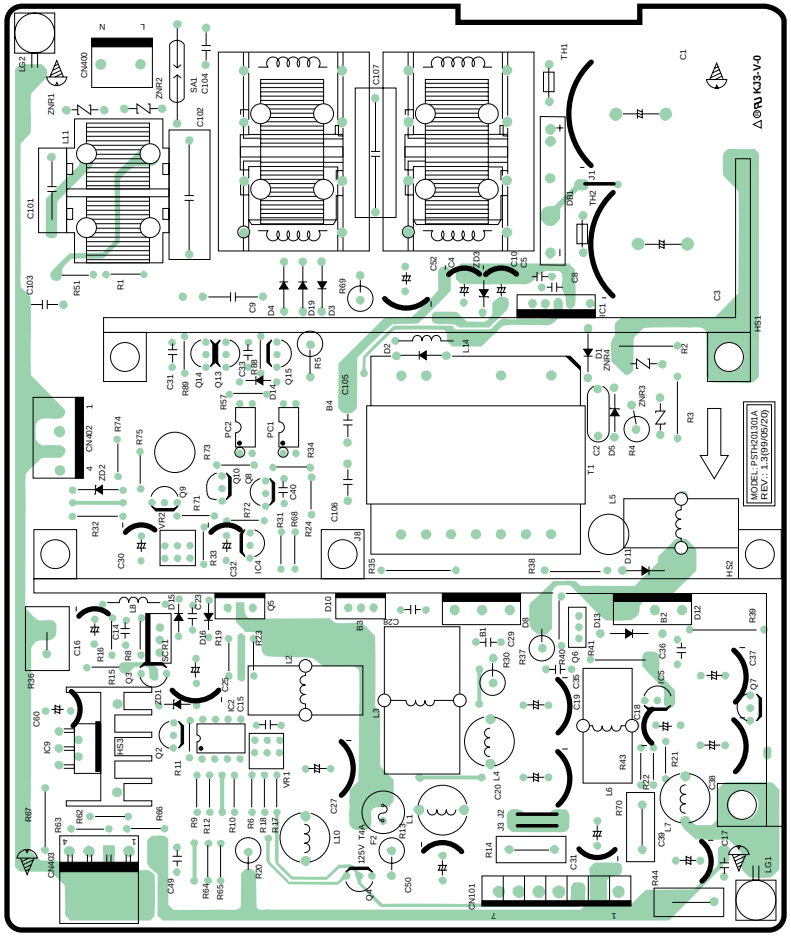

(Supplement-6)

2.2. POWER SUPPLY CIRCUIT

2.2.1. Change from original pages 103-104 (KX-TD1232C:Order No. KM49307582C1)

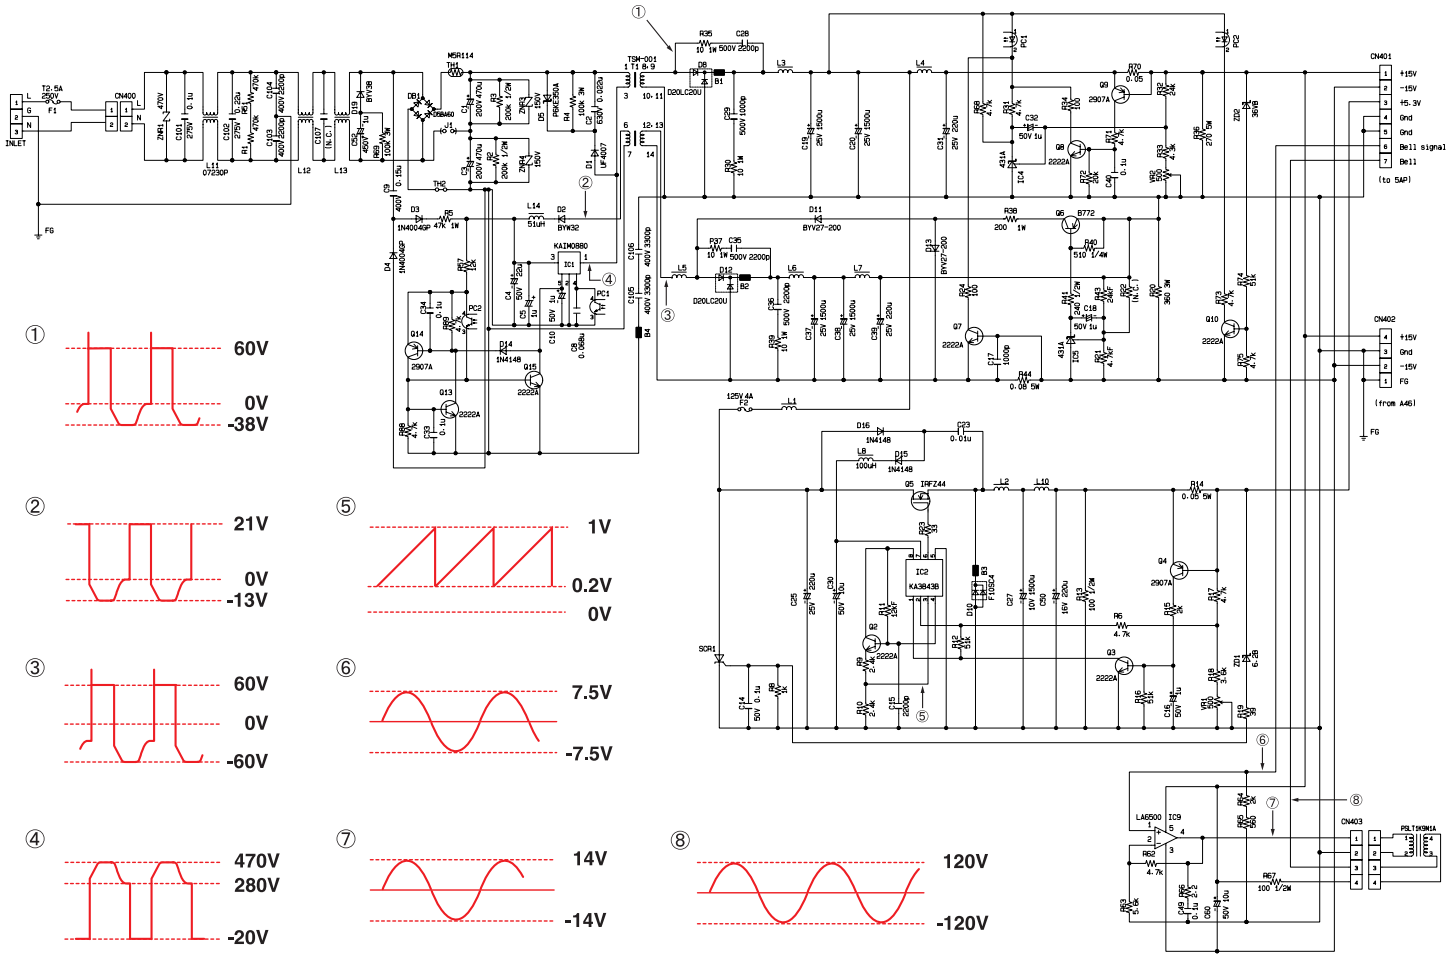

3 CABINET AND ELECTRICAL PARTS LOCATION

3.1. POWER SUPPLY SECTION.....Change from original Service Manual page 111. (KX-TD1232C:Order No. KM49307582C1)

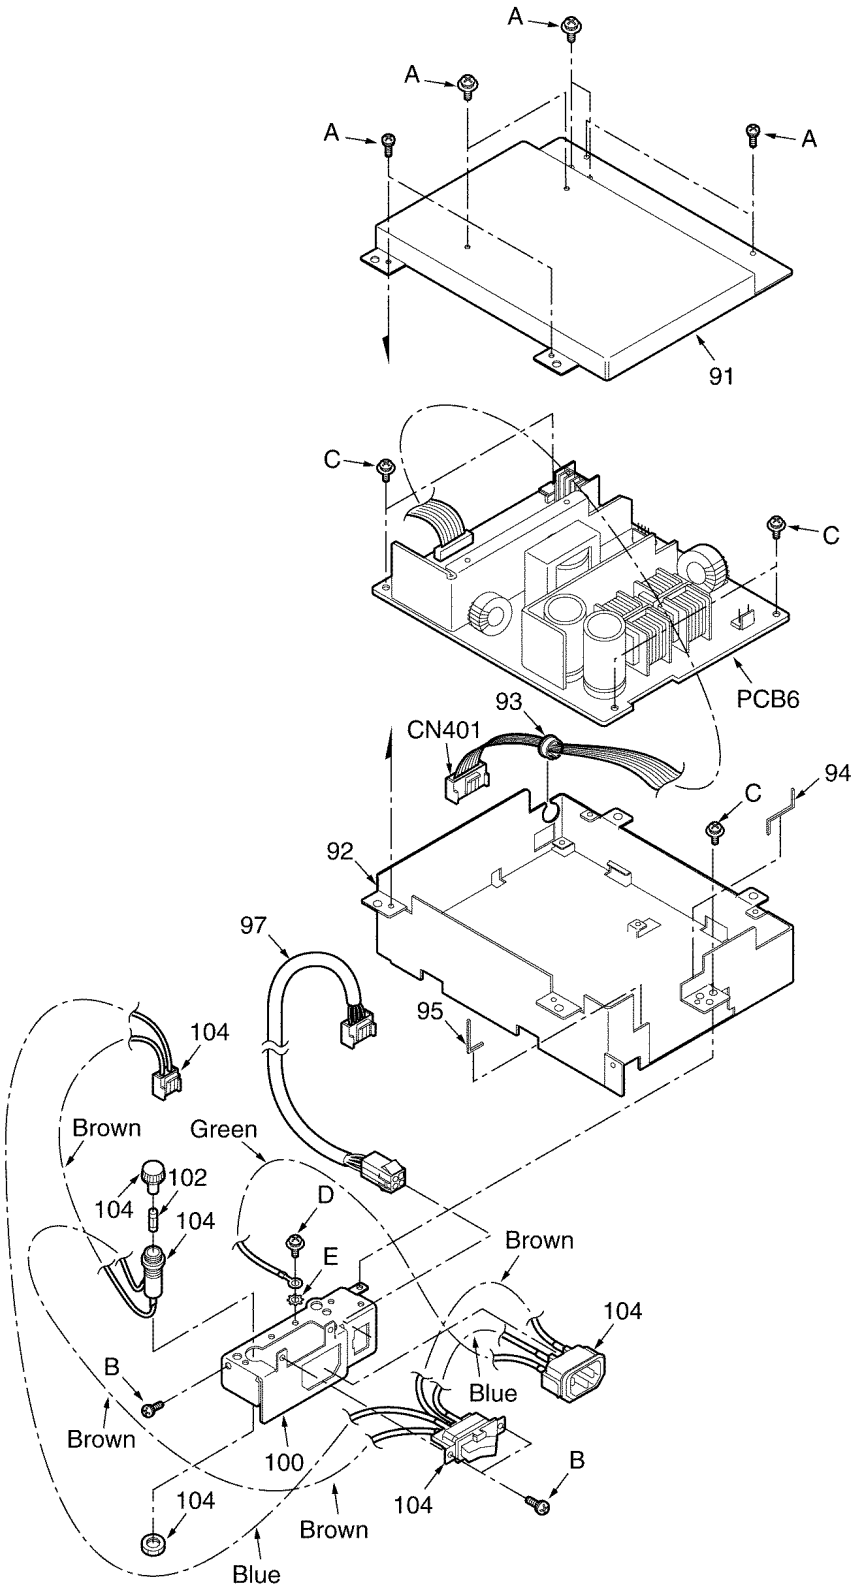

N.T.(Q)
KXTD1232
Printed in Japan

Ref. No. 7	HOW TO REMOVE THE POWER SUPPLY BOARD
Procedure 1→2→6→7	

1. Remove the eight screws (A).
2. Remove the shield cover.
3. Remove the two screws (B).
4. Remove the four screws (C).
5. Remove the Power Supply Board.

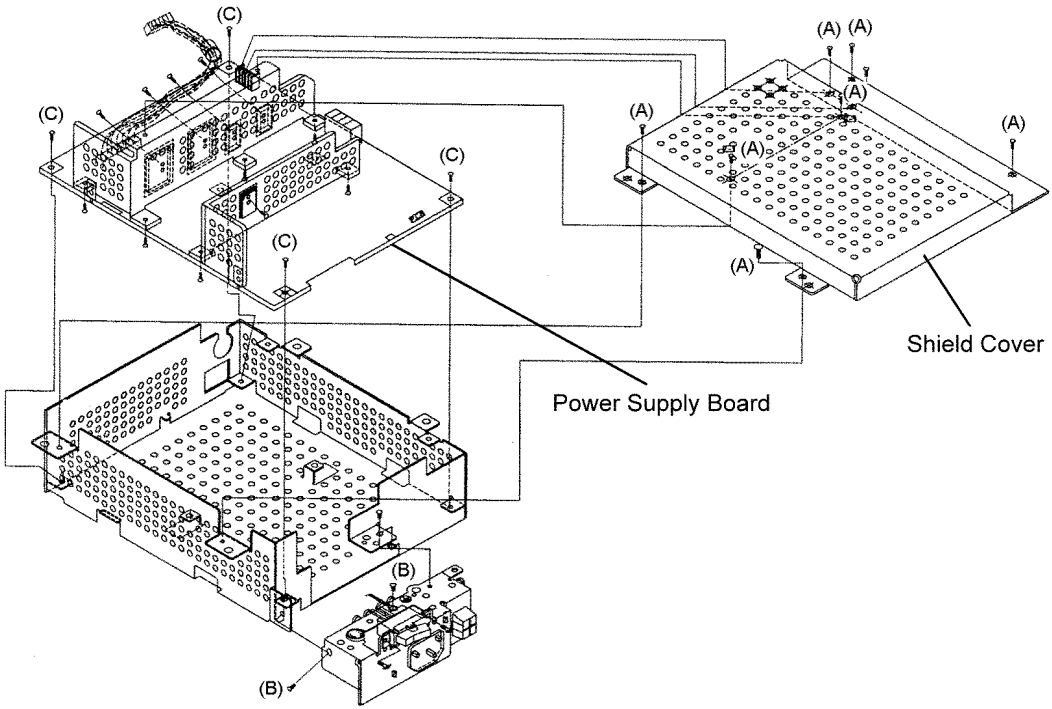

(Component View)

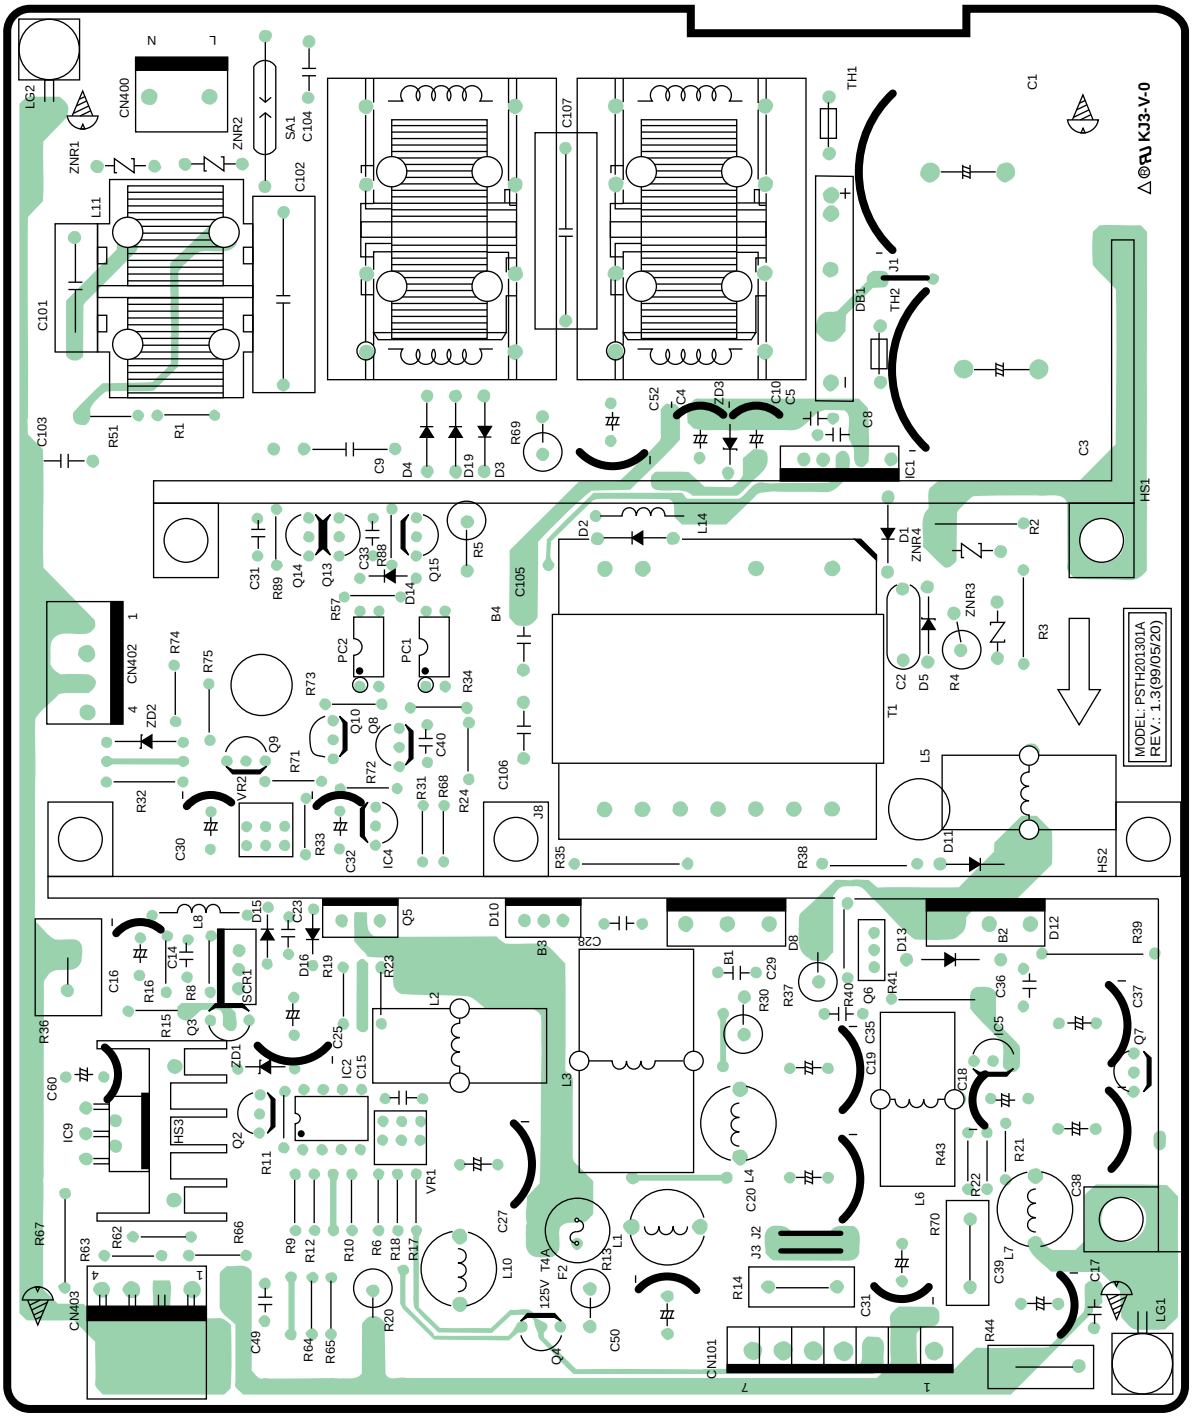

(Supplement-6)

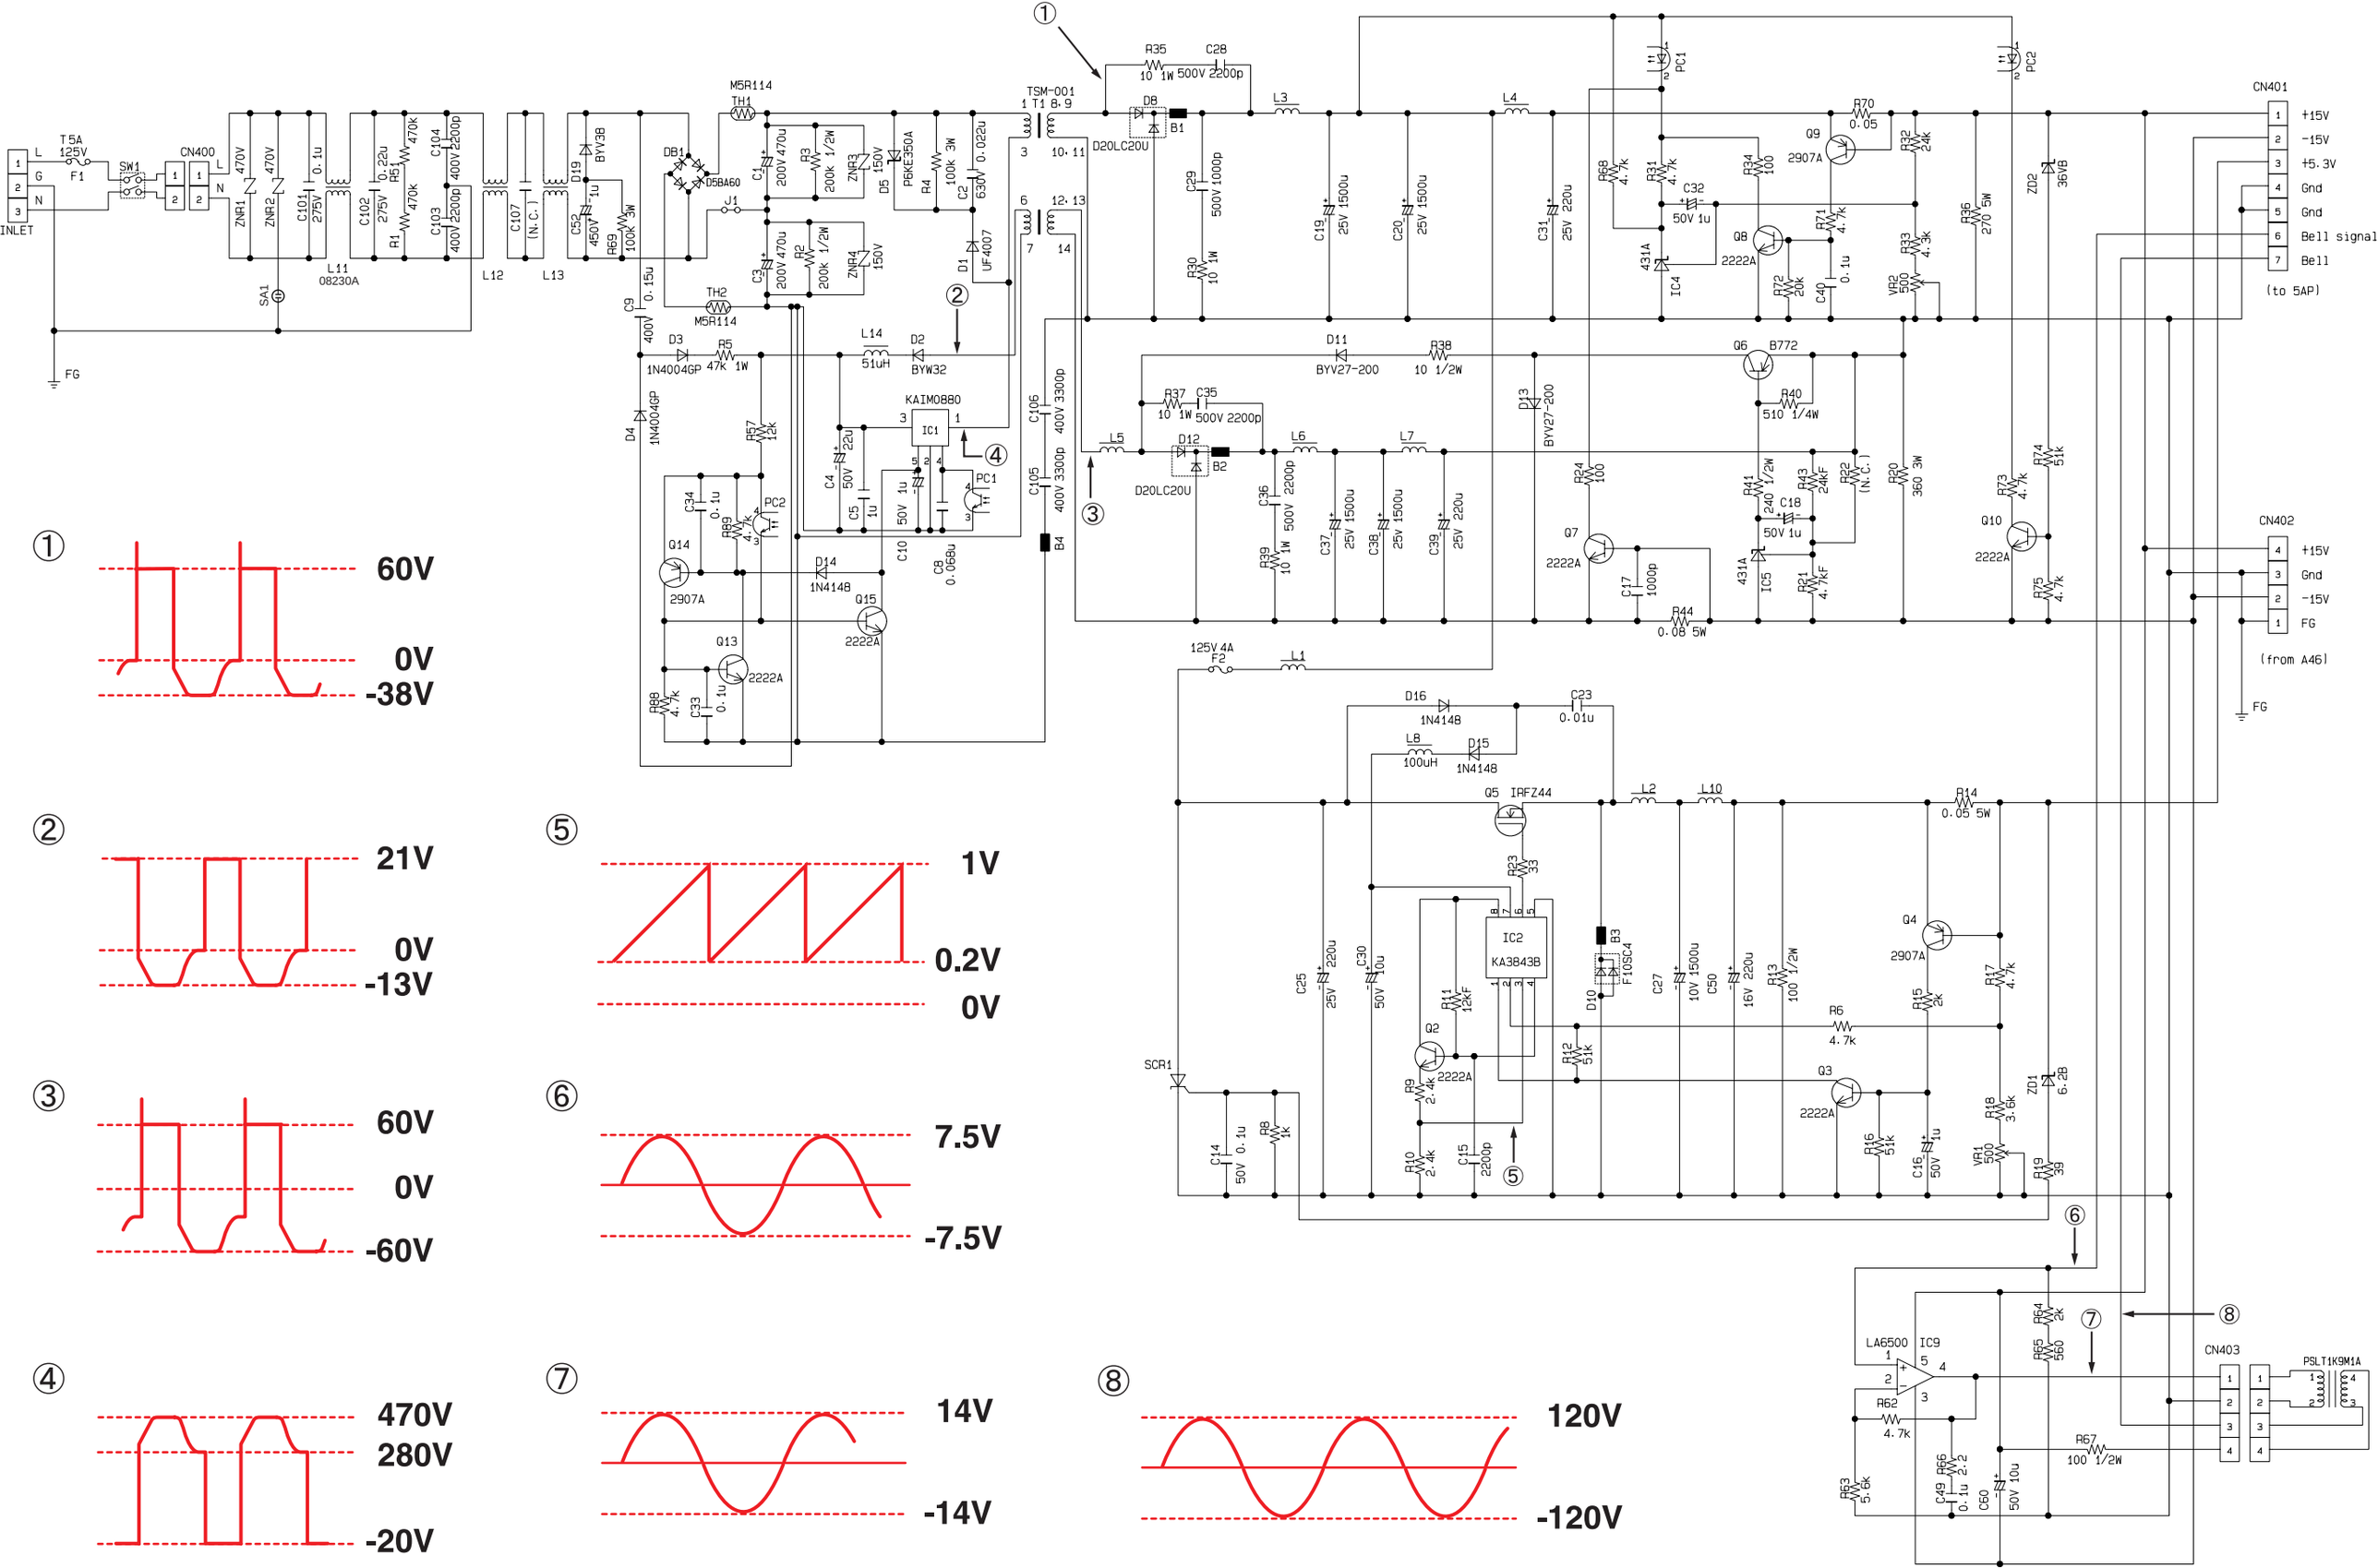
①
60V
0V
-38V
②
21V
0V
-13V
③
60V
0V
-60V
④
470V
280V
-20V
⑤
1V
0.2V
0V
⑥
7.5V
-7.5V
⑦
14V
-14V
⑧
120V
-120V
T5A 125V
F1
INLET
SW1
CN400
SA1
FG
ZNR1 470V
ZNR2 470V
C101 0.1u 275V
C102 0.22u 275V
C103 400V 2200p
C104 400V 2200p
R51 470k
R1 470k
L11 08230A
L12
L13
C107 (N.C.)
D19 BYV38
C52 1u 450V
R69 100k 3W
DB1 D5BA60
TH1 M5R114
TH2 M5R114
J1
C1 200V 470u
C3 200V 470u
R3 200k 1/2W
R2 200k 1/2W
ZNR3 150V
ZNR4 150V
D5 PKE350A
R4 100k 3W
C2 630V 0.022u
D1 UF4007
C9 400V 0.15u
D3 1N4004GP
R5 47k 1W
D4 1N4004GP
L14 51uH
D2 BYW32
R57 12k
C4 50V 22u
C5 50V 1u
C10
C8 0.068u
KAIM0880
IC1
C106 400V 3300p
C105 400V 3300p
B4
C34 0.1u
R89 4.7k
PC2
Q14 2907A
D14 1N4148
Q15 2222A
Q13 2222A
R88 4.7k
C33 0.1u
TSM-001
1 T1 8.9
3 10.11
6 12.13
7 14
D20LC20U
B1
R35 10 1W
C28 500V 2200p
C29 500V 1000p
R30 10 1W
D8
L3
L4
C19 25V 1500u
C20 25V 1500u
C31 25V 220u
D11 BYV27-200
R38 10 1/2W
R37 10 1W
C35 500V 2200p
D12
B2
D20LC20U
L5
L6
L7
C36 500V 2200p
R39 10 1W
C37 25V 1500u
C38 25V 1500u
C39 25V 220u
D13 BYV27-200
Q6 B772
R40 510 1/4W
R24 100
Q7 2222A
C17 1000p
R44 0.08 5W
R41 240 1/2W
C18 50V 1u
R43 24kF
R22 (N.C.)
R20 360 3W
431A IC5
R21 4.7kF
Q10 2222A
R73 4.7k
R74 51k
R75 4.7k
125V 4A
F2
L1
D16 1N4148
C23 0.01u
L8 100uH
D15 1N4148
Q5 IRFZ44
L2
L10
R14 0.05 5W
R23 33
IC2 KA3843B
B3 F10SC4
C25 25V 220u
C30 50V 10u
R11 12kF
D10
C27 10V 1500u
C50 16V 220u
R13 100 1/2W
Q4 2907A
R17 4.7k
R15 2k
R6 4.7k
Q2 2222A
R9 2.4k
R12 51k
Q3 2222A
R18 3.6k
ZD1 6.2B
SCR1
C14 50V 0.1u
R8 1k
R10 2.4k
C15 2200p
R16 51k
C16 50V 1u
VR1 500
R19 39
R70 0.05
Q9 2907A
R32 24k
R34 100
R71 4.7k
R72 20k
C40 0.1u
R33 4.3k
VR2 500
R36 270 5W
ZD2 36VB
PC1
PC2
C32 50V 1u
R68 4.7k
R31 4.7k
431A IC4
CN401
+15V
-15V
+5.3V
Gnd
Gnd
Bell signal
Bell
(to 5AP)
CN402
+15V
Gnd
-15V
FG
(from A46)
FG
LA6500 IC9
R64 2k
R65 560
R62 4.7k
R63 5.6k
C49 0.1u
R66 2.2
C60 50V 10u
R67 100 1/2W
CN403
PSLT1K9M1A

ORDER NO. KMS0008871S1

Service Manual

DIGITAL SUPER HYBRID SYSTEM

KX-TD1232

(for U.S.A.)

Please file and use this supplement manual together with the service manual for model No.KX-TD1232, Order No. KM493116991A.

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public.
It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product.
Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

Note:Supplement-1~5 have already supplied with printed matter. So please refer to that.

Panasonic

© 2000 Kyushu Matsushita Electric Co., Ltd. All rights reserved. Unauthorized copying and distribution is a violation of law.

1 CHANGES

1.1. Subject

Suffix	Reason for suffix change
L→M	Change of the software. (IC20/21:ROM Ver. P231T/P232T→P231UA/P232UA) (There is no change in the replacement parts list.)
Not used	Change of the power supply unit. (PQLP10005ZA→PSLP1150ZA)

1.2. Suffix location



1.3. REPLACEMENT PARTS LIST

Reason for Change (Symbol:A) Following 1-8 reasons are indicated on the Notes in the bottom column.

1. Improve performance 2. Change of material or dimension 3. To meet approved specification 4. Standardization 5. Addition 6. Deletion 7. Correction 8. Other	**Note** Part with mark *1 has been written at the next page in the new Power Supply Unit parts.

Interchangeability code (Symbol:B) Following V-Z interchangeabilities are indicated on the Notes in the bottom column.

Parts	Set Production	Description
V Original / New	Early (before change) / Late (after change)	Original or new parts may be used in early or late production sets. Use original parts until exhausted, then stock new parts.
W Original / New	Early (before change) / Late (after change)	Original parts may be used in early production sets only. New parts may be used in early or late production sets. Use original parts where possible, then stock new parts.
X Original / New	Early (before change) / Late (after change)	New parts only may be used in early or late production sets. Stock new parts.
Y Original / New	Early (before change) / Late (after change)	Original parts may be used in early production sets only. New parts may be used in late production sets only. Stock both original and new parts.
Z Other		

Ref. No.	Parts No.		Part Name & description	Pcs	Remarks	Notes		Time of change (Suffix)
	Original Part	**New part**						
ACCESSORIES AND PACKING MATERIALS								
A8	PQQX10173W	**PQQX10173V**	USER MANUAL	1		8	X	
A13	PQQX10782X	**PQQX10782W**	REFERENCE GUIDE (T7000)	1		8	X	
	PSQX1360Y	----------	INSTALLATION MANUAL FOR KX-TD185	0		6		
	PSQX1416Z	----------	INSTALLATION MANUAL FOR KX-TD171/194	0		6		
POWER SUPPLY UNIT PARTS								
90	PQQT4164Z	----------	CAUTION LABEL	0		6		
91	PQMC10053X	**PSMC1084Z**	SHIELD COVER ⚠	1	*1	8	Y	
92	PQMC10052X	**PSMC1085Z**	SHIELD CASE ⚠	1	*1	8	Y	
95	PQHR10179Z	**PSHE1095Z**	SPACER-B	1	*1	8	Y	
96	PQJS02R46Z	----------	CONNECTOR, 2P ⚠	0		6		
97	PQJP04R07Y	**PQJP04R07X**	CONNECTOR, 4P	1		8	V	
98	PQJP3A3Z	----------	SOCET, AC ⚠	0		6		
99	EST15304T	----------	SWITCH, POWER ⚠ ;	0		6		
100	PQMH10027Z	**PSMH1183Z**	ANGLE, POWER SW ⚠	1	*1	8	Y	
101	PQJV3Z	----------	HOLDER, FUSE ⚠	0		6		
102	XBA2C25ND1L	**XBA1C50ND1L**	FUSE ⚠	1	*1	7		
103	PQQT10469Z	**PSQT1766Z**	FUSE LABEL ⚠	1	*1	8	Y	

PCB6	PSLP1009Z	**PSWP6TD1232C**	POWER SUPPLY BOARD ASS'Y RTL ⚠	1		8	Y	

1.4. NEW POWER SUPPLY UNIT PARTS

Note:

1. RTL (Retention Time Limited)

   The marking (RTL) indicates that the Retention Time is limited for this item.

   After the discontinuation of this assembly in production, the item will continue to be available for a specific period of time. The retention period of availability is dependent on the type of assembly, and in accordance with the laws governing part and product retention.

   After the end of this period, the assembly will no longer be available.

2. Important safety notice

   Components identified by the ⚠ mark special characteristics important for safety. When replacing any of these components, use only manufacture´s specified parts.

3. The S mark indicates service standard parts and may differ from production parts.

4. RESISTORS & CAPACITORS

   Unless otherwise specified;

   All resistors are in ohms (Ω) K=1000Ω, M=1000kΩ

   All capacitors are in MICRO FARADS (µF) P=µµF

   *Type & Wattage of Resistor

Type

ERC:Solid ERD:Carbon PQRD:Carbon	ERX:Metal Film ERG:Metal Oxide ER0:Metal Film	PQ4R:Carbon ERS:Fusible Resistor ERF:Cement Resistor

Wattege

10,16:1/8W	14,25:1/4W	12:1/2W	1:1W	2:2W	3:3W

*Type & Voltage of Capacitor

Type

ECFD:Semi-Conductor ECQS:Styrol PQCUV:Chip ECQMS:Mica	ECCD,ECKD,ECBT,PQCBC:Ceramic ECQE,ECQV,ECQG:Polyester ECEA,ECSZ:Electlytic ECQP:Polypropylene

Voltage

ECQ Type	ECQG ECQV Type	ECSZ Type	Others	
1H:50V 2A:100V 2E:250V 2H:500V	05:50V 1:100V 2:200V	0F:3.15V 1A:10V 1V:35V 0J:6.3V	0J :6.3V 1A :10V 1C :16V 1E,25:25V	1V :35V 50,1H:50V 1J :63V 2A :100V

Ref. No.	Part No.	Part Name & Description	Remarks
91	PSMC1084Z	SHIELD COVER	⚠
92	PSMC1085Z	SHIELD CASE	⚠
93	PQHR477Z	SPACER-A	⚠
94	PSHE1095Z	SPACER-B	
95	PSHE1095Z	SPACER-B	
97	PQJP04R07X	CONNECTOR, 4P	
100	PSMH1183Z	ANGLE, POWER SW	⚠ ;
102	XBA1C50ND1L	FUSE	⚠
103	PSQT1766Z	FUSE LABEL	⚠
104	PSWE1012Z	INLET ASS´Y	⚠
PCB6	PSWP6TD1232C	POWER SUPPLY BOARD ASS´Y RTL	⚠
IC1	PSVIKA1M0880	IC	
IC2	PSVIKA3843B	IC	
IC4	PSVIKA431Z	IC	
IC5	PSVIKA431Z	IC	
IC9	PQVILA6500	IC	

Ref. No.	Part No.	Part Name & Description	Remarks
		(TRANSISTOR)	
Q2	KSP2222A	TRANSISTOR	
Q3	KSP2222A	TRANSISTOR	
Q4	KSP2907A	TRANSISTOR	
Q5	PSVTIRFZ44	TRANSISTOR	
Q6	KSA1220A0	TRANSISTOR	
Q7	KSP2222A	TRANSISTOR	
Q8	KSP2222A	TRANSISTOR	
Q9	KSP2907A	TRANSISTOR	
Q10	KSP2222A	TRANSISTOR	
Q13	KSP2222A	TRANSISTOR	
Q14	KSP2907A	TRANSISTOR	
Q15	KSP2222A	TRANSISTOR	
		(DIODES)	
D1	PSVDUF4007	DIODE	
D2	PSVDBYW32	DIODE	
D3	PSVDIN4004GP	DIODE	
D4	PSVDIN4004GP	DIODE	
D5	PSVDP6KE350A	DIODE	
D8	PSVDS20LC20U	DIODE	
D10	PSVDSF10SC4	DIODE	
D11	PSVDBYV27200	DIODE	
D12	PSVDS20LC20U	DIODE	
D13	PSVDBYV27200	DIODE	
D14	PSVD1N4148	DIODE	
D15	PSVD1N4148	DIODE	
D16	PSVD1N4148	DIODE	
D19	PSVDBYV38	DIODE	
ZD1	PQVDMZJ6R2B	DIODE	
ZD2	PQVDMZJ36B	DIODE	
ZD3	PQVDMZJ5R1B	DIODE	
DB1	PSVDD5SBA60	DIODE	
		(RESISTOR)	
R1	ERDS2TJ474	47k	
R2	ERDS1TJ204	200k	
R3	ERDS1TJ204	200k	
R4	ERG3SJ104	100k	
R5	ERG1SJ473	47k	
R6	ERDS2TJ472	4.7k	
R8	ERDS2TJ102	1k	
R9	ERDS2TJ242	2.4k	
R10	ERDS2TJ242	2.4k	
R11	ER016CKF1202	12k	
R12	ERDS2TJ513	51k	
R13	ERDS1TJ101	100	
R14	PSRMPR5R50MJ	0.05	
R15	ERDS2TJ202	2k	
R16	ERDS2TJ513	51k	
R17	ERDS2TJ472	4.7k	
R18	ERDS2TJ362	3.6k	
R19	ERDS2TJ390	39	
R20	ERG3SJ361	360	
R21	ER016CKF4701	4.7k	
R23	ERDS2TJ330	33	
R24	ERDS2TJ101	100	
R30	ERG1SJ100	10	
R31	ERDS2TJ472	4.7k	
R32	ERDS2TJ243	24k	
R33	ERDS2TJ432	4.3k	
R34	ERDS2TJ101	100	
R35	ERG1SJ100	10	
R36	PSRRQR5W270J	270	
R37	ERG1SJ100	10	
R38	ERG1SJ201	200	
R39	ERG1SJ100	10	
R40	ERDS2TJ511	510	
R41	ERDS1TJ241	240	
R43	ERDS2TJ243	24k	
R44	PSRMPR5R80MJ	0.08	
R51	ERDS2TJ474	470k	

Ref. No.	Part No.	Part Name & Description	Remarks
R57	ERDS2TJ123	12k	
R62	ERDS2TJ472	4.7k	
R63	ERDS2TJ562	5.6k	
R64	ERDS2TJ202	2k	
R65	ERDS2TJ561	560	
R66	ERDS2TJ2R2	2.2	
R67	ERDS1TJ101	100	
R68	ERDS2TJ472	4.7k	
R69	ERG3SJ104	100k	
R70	PSRMPR5R50MJ	0.05	
R71	ERDS2TJ472	4.7k	
R72	ERDS2TJ203	20k	
R73	ERDS2TJ472	4.7k	
R74	ERDS2TJ513	51k	
R75	ERDS2TJ472	4.7k	
R88	ERDS2TJ472	4.7k	
R89	ERDS2TJ472	4.7k	
		(CAPACITORS)	
C1	PSCCEMU2D471	470µF	
C2	PSC223K630	0.022µF	
C3	PSSCEMU2D471	470µF	
C4	PSCCEST1H220	22µF	
C5	PSCCELT1H010	1µF	
C8	PSCKR215C683	0.068µF	
C9	PSC154K400	0.15µF	
C10	PSCCELT1H010	1µF	
C14	PSCS215C104J	0.1µF	
C15	PSCS215C222J	2200pF	
C16	PSCCELT1H010	1µF	
C17	PSCS215C102J	1000pF	
C18	PSCCELT1H010	1µF	
C19	PSCCEMZ1E152	1500µF	
C20	PSCCEMZ1E152	1500µF	
C23	PSCS215C103J	0.01µF	
C25	PSCCEMZ1E221	220µF	
C27	PSCCEMZ1A152	1500µF	
C28	PSCYB2H222K	2200pF	
C29	PSCYB2H222K	2200pF	
C30	PSCCELT1H100	10µF	
C31	PSCCEMZ1E221	220µF	
C32	PSCCELT1H010	1µF	
C33	PSCS215C104J	0.1µF	
C34	PSCS215C104J	0.1µF	
C35	PSCYB2H222K	2200pF	
C36	PSCYB2H222K	2200pF	
C37	PSCCEMZ1E152	1500µF	
C38	PSCCEMZ1E152	1500µF	
C39	PSCCEMZ1E221	220µF	
C40	PSCS215C104J	0.1µF	
C49	PSCS215C104J	0.1µF	
C50	PSCCEMZ1C221	220µF	
C52	PSCCELT2W010	1µF	
C60	PSCCELT1H100	10µF	
C101	PSCP2335M104	0.1µF	
C102	PSCP2335M224	0.22µF	
C103	PSCHCYE2G222	2200pF	
C104	PSCHCYE2G222	2200pF	
C105	PSCHCYE2G332	3300pF	
C106	PSCHCYE2G332	3300pF	
		(VARISTORS)	
ZNR1	PSVDNR10D471	VARISTOR	
ZNR2	PSVDNR10D471	VARISTOR	
ZNR3	PSVDV151RA07	VARISTOR	
ZNR4	PSVDV151RA07	VARISTOR	
		(SURGE ABSORBER)	
SA1	PSVDMP362ME	SURGE ABSORBER	⚠
		(VARIABLE RESISTORS)	
VR1	EVNDXAA03B52	SEMI-FIXED RESISTOR 500Ω (B)	
VR2	EVNDXAA03B52	SEMI-FIXED RESISTOR 500Ω (B)	

Ref. No.	Part No.	Part Name & Description	Remarks
		(CONNECTORS)	
CN400	PQJP2D98Z	CONNECTOR. 2P	
CN401	PSJS07Q91Z	CONNECTOR. 7P	
CN402	PQJP4D30Z	CONNECTOR. 4P	
CN403	PQJP4D46Z	CONNECTOR. 4P	
LG1	PSJT1035Z	CONNECTOR-LUG	
LG2	PSJT1035Z	CONNECTOR-LUG	
		(THYRISTOR)	
SCR1	PSVDTYN058	THYRISTOR	
		(COILS)	
L1	PSLECCM011	COIL	
L2	PSLECC022	COIL	
L3	PSLECCM001	COIL	
L4	PSLECCM011	COIL	
L5	PSLEMGM001	COIL	
L6	PSLECCM002	COIL	
L7	PSLECCM011	COIL	
L8	PSLE04TB101K	COIL	
L10	PSLECCM011	COIL	
L11	PSLESA08230A	COIL	
L12	PSLECA115005	COIL	
L13	PSLECA115005	COIL	
L14	PSLE04TB510M	COIL	
		(TRANSFORMER)	
T1	PSLTTSM001	TRANSFORMER	⚠
		(PHOTO ERECTRIC TRANSDUCERS)	
PC1	PSVIKPC817	PHOTO COUPLER	⚠
PC2	PSVIKPC817	PHOTO COUPLER	⚠
		(THERMISTORS)	
TH1	PSRT5R114	THERMISTOR	⚠
TH2	PSRT5R114	TRANSFORMER	⚠
		(FUSE)	
F2	PSBATEST396	FUSE	⚠
		(CORES)	
B1	PSXCELBC4865	CORE	
B2	PSXCELBC4865	CORE	
B3	PSXCELBC3533	CORE	
B4	PSXCELBC3533	CORE	
J1	W5NL7.5T	JUMPER-WIRE	

Change from original Service Manual page 11. (KX-TD1232C:Order No.KM49307582C1)

Ref. No. 7	**HOW TO REMOVE THE POWER SUPPLY BOARD**
Procedure 1→2→6→7	

1. Remove the eight screws (A).
2. Remove the shield cover.
3. Remove the two screws (B).
4. Remove the four screws (C).
5. Remove the Power Supply Board.

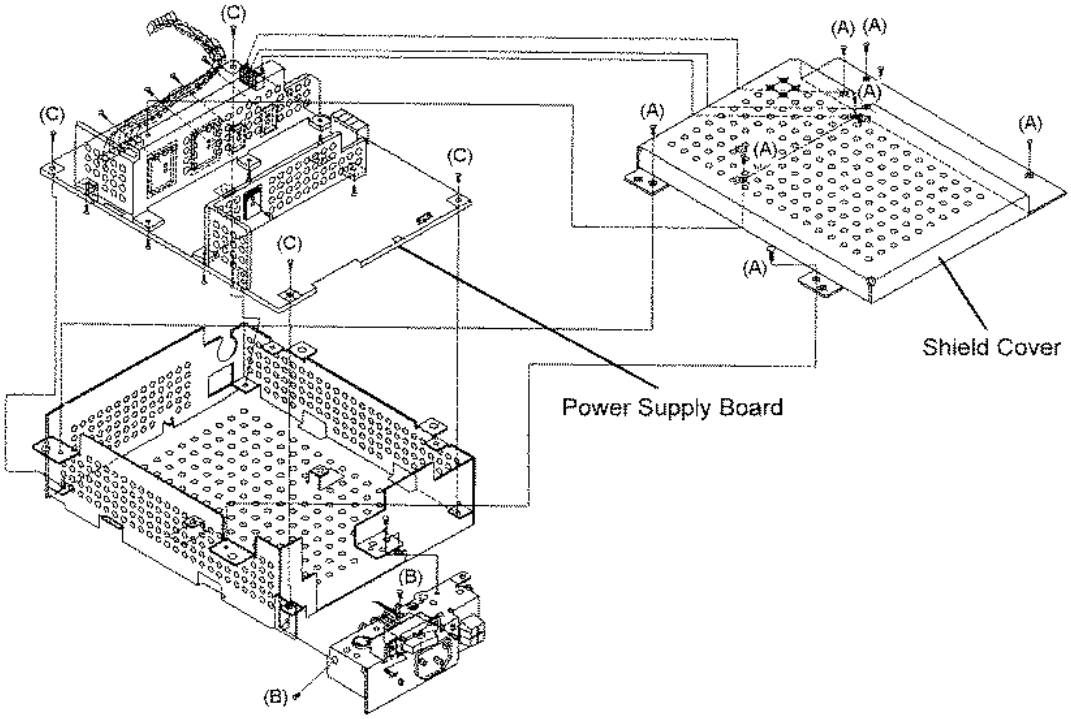

1.5. Chang from original Service Manual page 31.

3 EXPLANATION OF CIRCUIT OPERATION

3-1. BASIC

1) POWER SUPPLY UNIT

POWER SUPPLY UNIT consists of the following.
Line Filter Section
Rectifier and Smoothing Section
Switching Section
Control Section
+15 V Circuit
- 15 V Circuit
+5.3 V Circuit
Bell Amp Circuit

POWER UNIT

Line Filter Section

Common mode noise is removed by C103, C104 and C105 to C106 and normal mode noise by L11, L12 and L13. Lightening surges are absorbed by ZNR1.

Rectifier and Smoothing Section

The input signal is full-wave rectified by bridge diode DB1 and smoothed by C1, C3 resulting in a DC current. TH1 is power thermister.

Swtching Section

The switching section is a basic Forward Converter uses the IC1 included power MOS.FET. D1, R4 and C2 are for resetting the excitation energy stored in T1 while T1 is OFF.

Control Section

IC1 is a Forward Converter type switching module adopted power MOS.FET. The block diagram of IC1 has the following roles.
C9, D3, R5 : FOR starting
C10 : FOR soft start delay
C8 : FOR feed back compensating
PC1 : FOR feed back
R57, Q14, C34 : For over voltage protector circuit.
R89, PC2, D14
R88, C33, Q13
Q15

BLOCK DIAGRAM

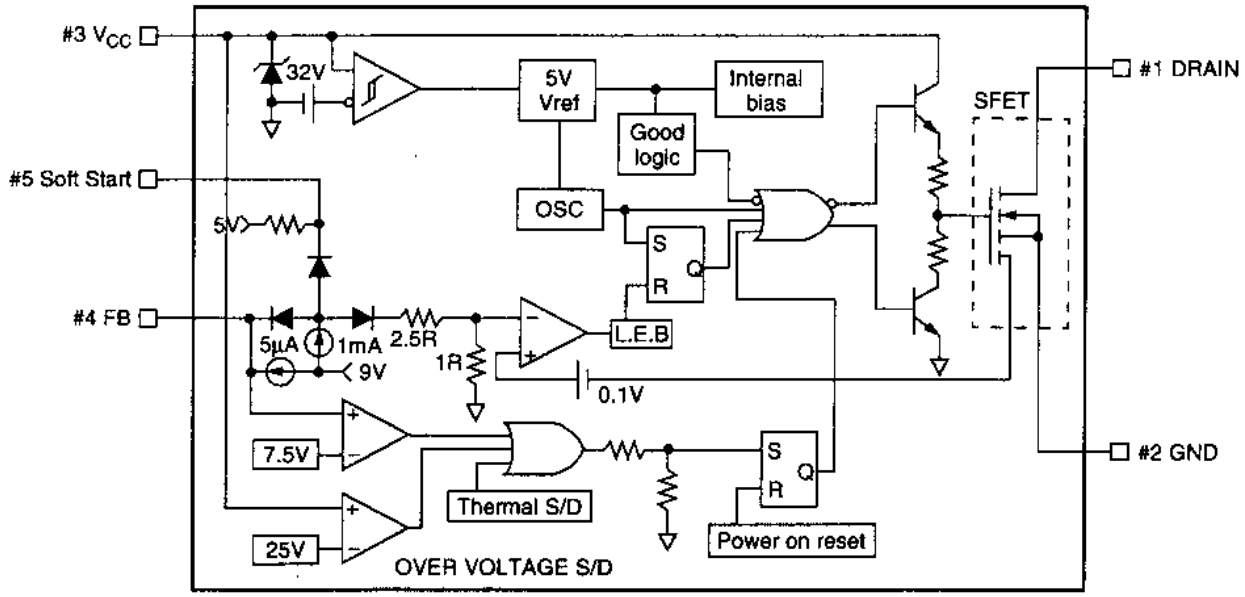

+15V Circuit

The circuit connected pin (8-9)-(10-11) of switching transformer T1 generates +15V. With feed back on the primary side from +15V line, +15V is stabilized by the PWM controller of the primary side. The following is the roles of main surrounding circuit.
D8, L3, C19, C20 : Rectifier and smoothing circuit
L4, C31 : Filter
IC4, C32, R31 : Free back circuit
PC1, R32, R33,
VR2
R34, Q8, R72 : Over current detection circuit
R71, C40, Q9,
R70

-15V Circuit

-15V is generated from the circuit connected to pin (12, 13)-14 of switching transformer. -15V cannot be stabilized by PWM controller of the primary side since feed back is not done on the primary side from -15V line. So, the bleeder circuit stabilizes -15V. The following is the roles of main surrounding circuit.
D12, L6, C37, C38 : Rectifier and smoothing circuit
L7, C39 : Filter
IC5, R21, C18 : -15V stabilizing circuit
R41, R43, R22,
R40, Q6, D11,
R38, D13
R24, Q7, C17 : Over current detection circuit
R44

+5.3V Circuit

+5.3V is generated by PMW controller, IC2 connected to the +15V output. It has an over voltage protection circuit to prevent abnormal output voltage.
The following is the roles surrounding circuit.
L1, C25 : Filter
L8, C30 : Filter
L2, C27 : Filter
L10, C50 : Filter
SCR1, F2 : Over voltage chopper circuit
ZD1, R19, C14 : Over voltage detection circuit
R8
R17, R18, VR1 : Feed back circuit
C15, R11 : For selecting oscillator frequency and duty cycles
Q2, R9, R10 : For duty cycle control
R14, Q4, R15 : Over Current detection circuit
C16, R16, Q3

Bell Amp Circuit

It increases bell signals sent from CPU board in Power Op. Amp, IC9 and sends them into the bell amp. Then, they are sent to the extension boards.

CIRCUIT DIAGRAM

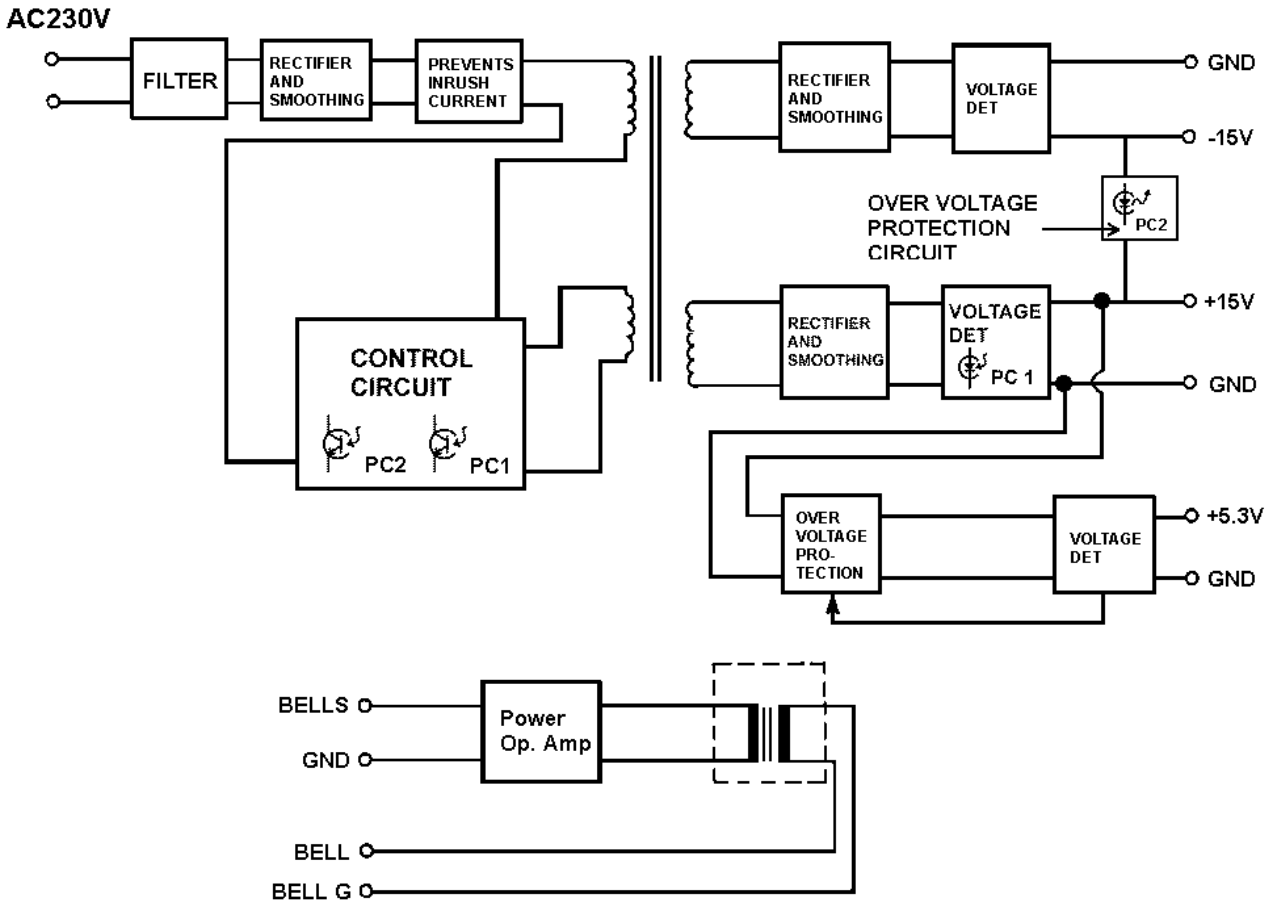

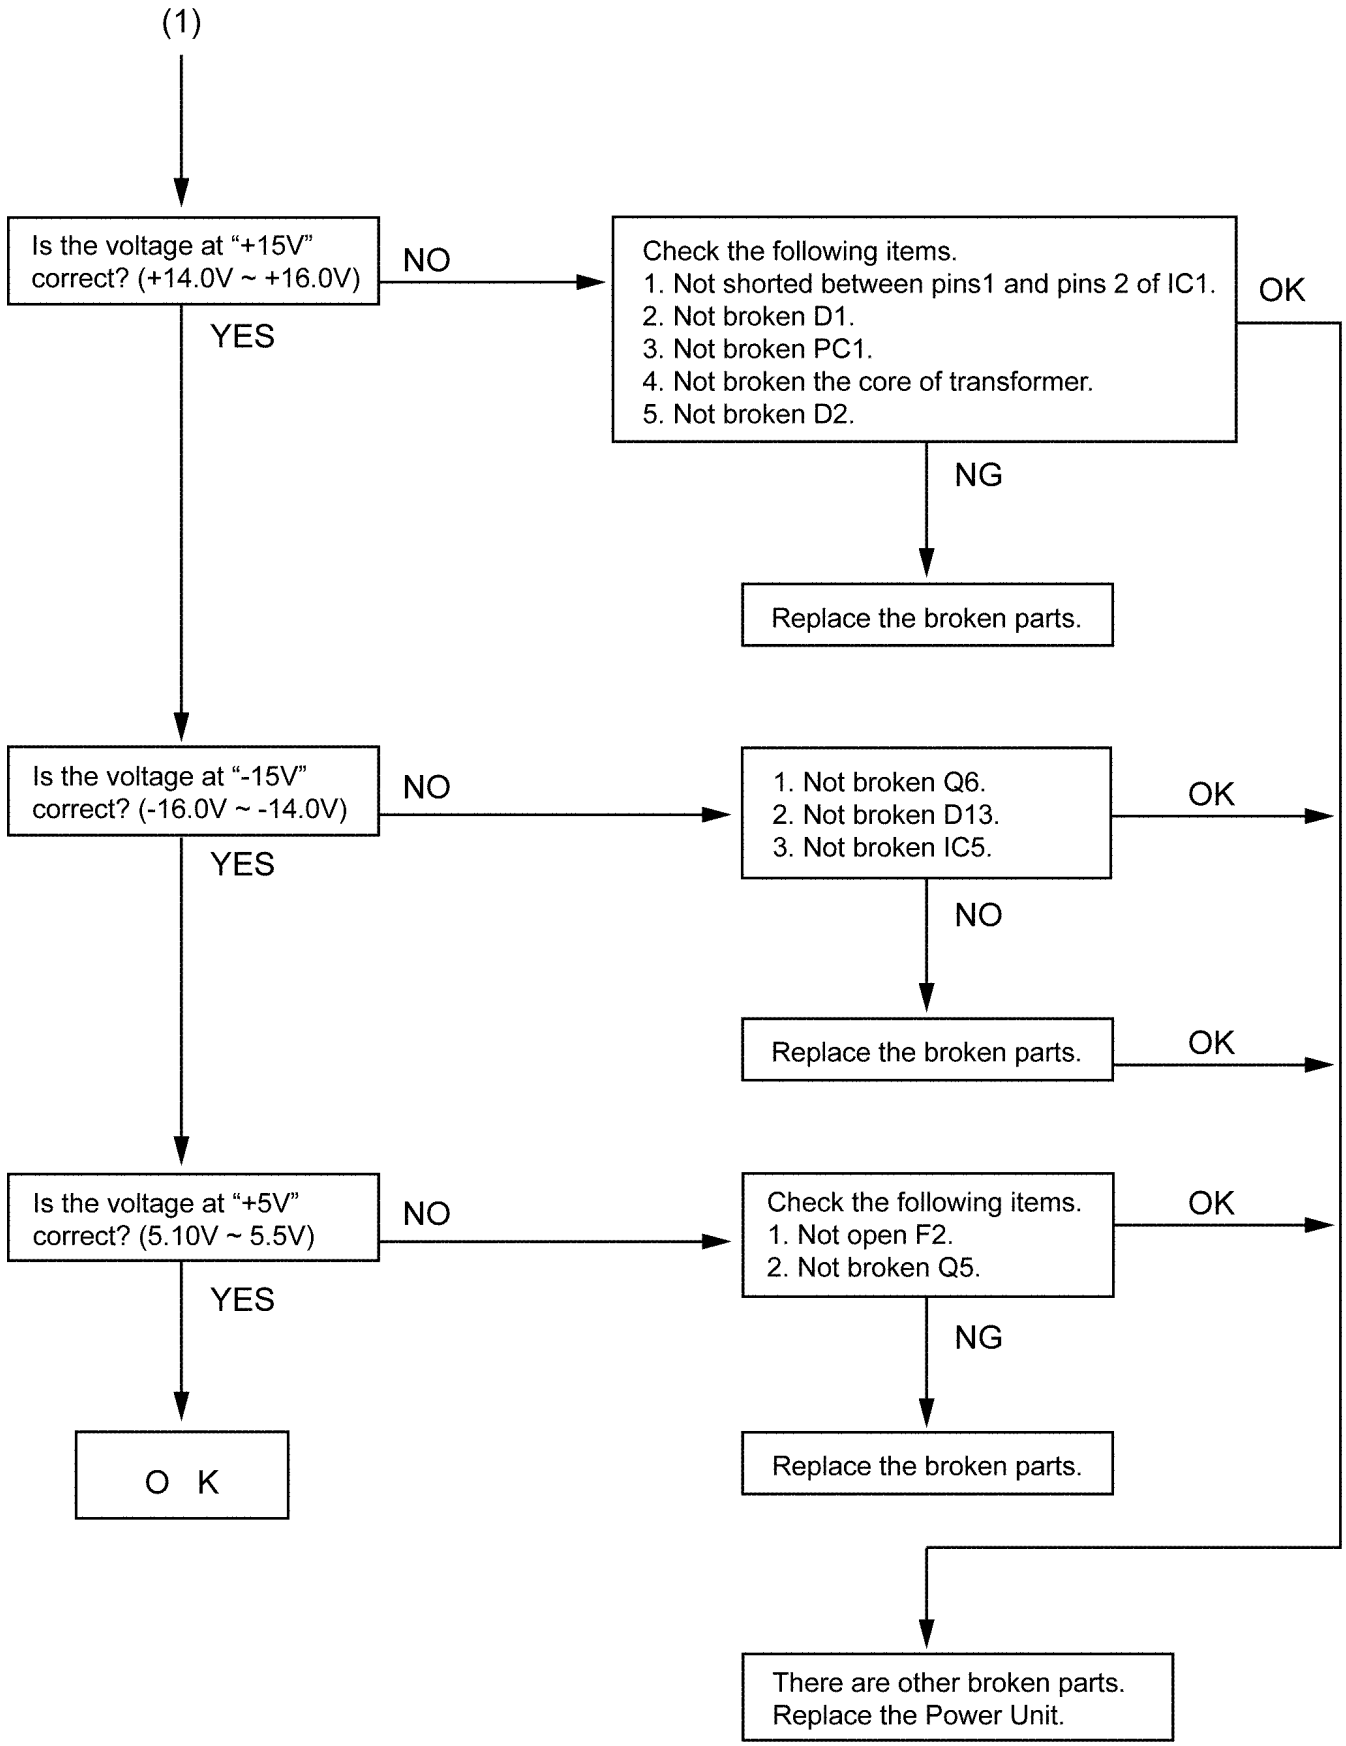
(1)
Is the voltage at “+15V” correct? (+14.0V ~ +16.0V)
NO
YES
Check the following items.
1. Not shorted between pins1 and pins 2 of IC1.
2. Not broken D1.
3. Not broken PC1.
4. Not broken the core of transformer.
5. Not broken D2.
OK
NG
Replace the broken parts.
Is the voltage at “-15V” correct? (-16.0V ~ -14.0V)
NO
YES
1. Not broken Q6.
2. Not broken D13.
3. Not broken IC5.
OK
NO
Replace the broken parts.
OK
Is the voltage at “+5V” correct? (5.10V ~ 5.5V)
NO
YES
Check the following items.
1. Not open F2.
2. Not broken Q5.
OK
NG
Replace the broken parts.
O K
There are other broken parts.
Replace the Power Unit.

1.6. TERMINAL GUIDE OF IC'S, TRANSISTORS AND DIODES

1.6.1. Addition from original page 107

Pin description of IC's

 KSP2222A KSP2907A	 KSA1220A-O	 PSVTIRFZA4	 PSVIKA431Z	 PSVDTYN058

2 PRINTED CIRCUIT BOARD & SCHEMATICDIAGRAM

2.1. POWER SUPPLY BOARD

2.1.1. Change from original pages 105-106 (KX-TD1232C:Order No. KM49307582C1)

(Component View)

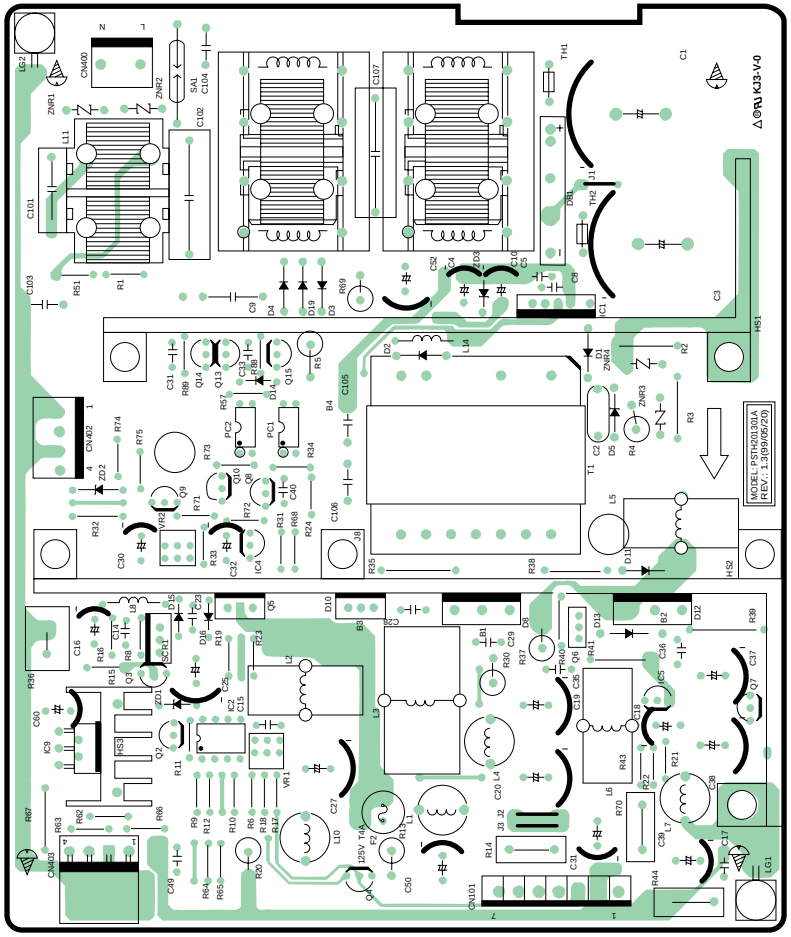

(Supplement-6)

2.2. POWER SUPPLY CIRCUIT

2.2.1. Change from original pages 103-104 (KX-TD1232C:Order No. KM49307582C1)

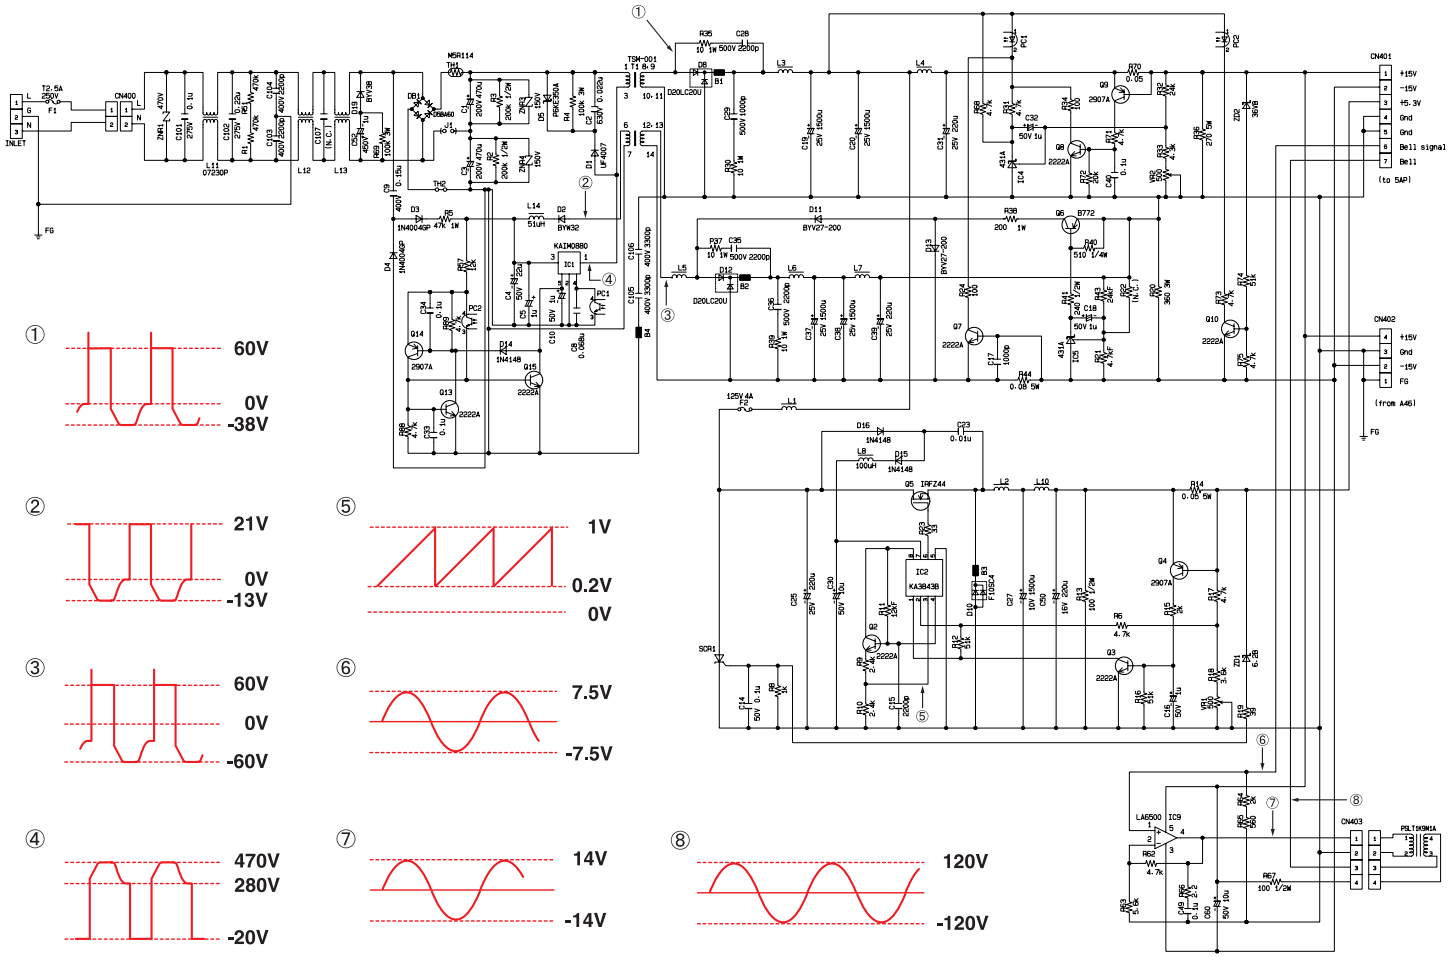

3 CABINET AND ELECTRICAL PARTS LOCATION

3.1. POWER SUPPLY SECTION.....Change from original Service Manual page 111. (KX-TD1232C:Order No. KM49307582C1)

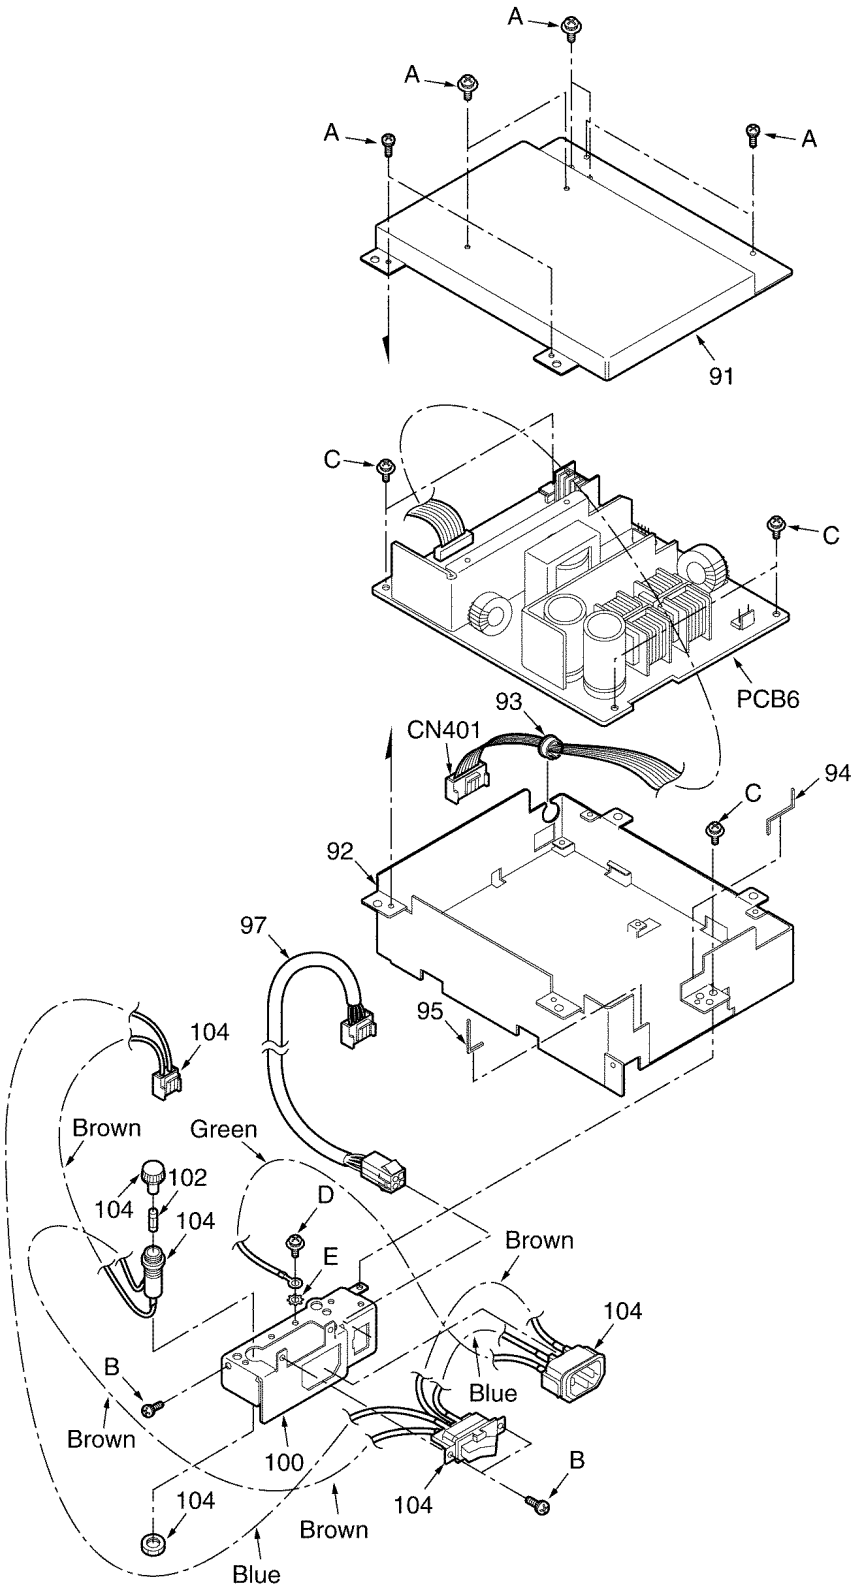

N.T.(Q)
KXTD1232
Printed in Japan

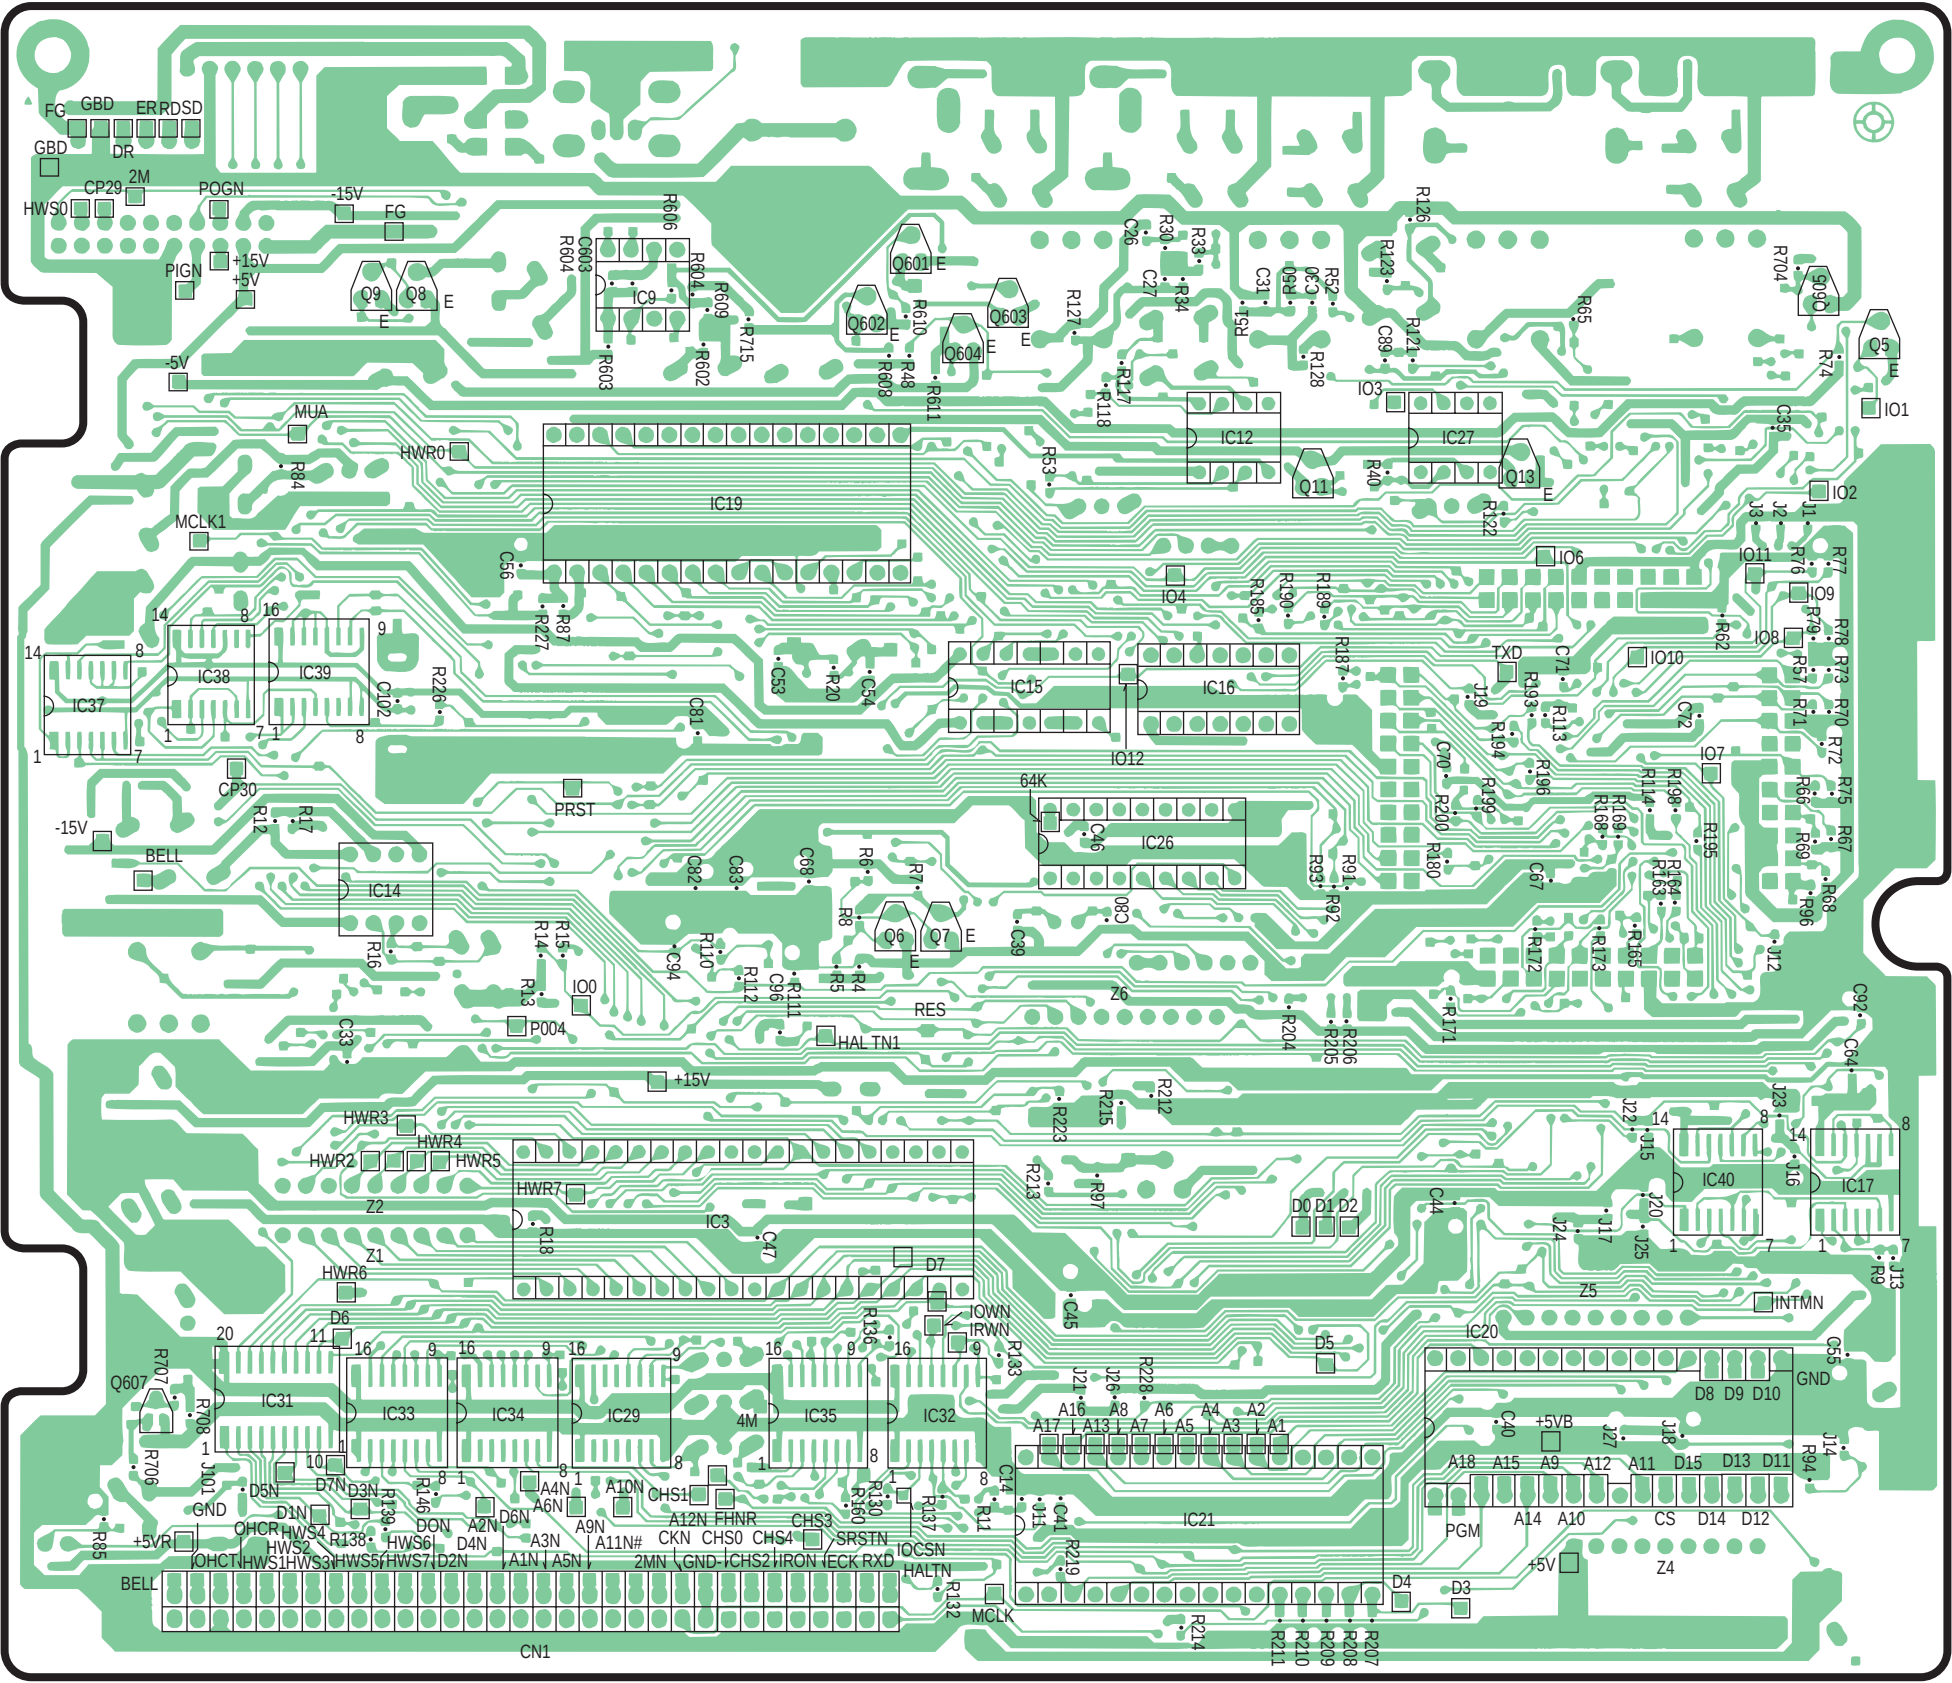
FG
GBD
ERR
RDSD
DR
CP29
2M
POGN
-15V
HWS0
PIGN
+15V
+5V
-5V
MUA
HWR0
MCLK1
IC19
IC38
IC39
IC37
IC14
IC15
IC16
IC12
IC27
IC26
IC9
IC3
IC31
IC33
IC34
IC29
IC35
IC32
IC40
IC17
IC20
IC21
Q601
Q602
Q603
Q604
Q5
Q6
Q7
Q8
Q9
Q11
Q13
Q607
IO0
IO1
IO2
IO3
IO4
IO6
IO7
IO8
IO9
IO10
IO11
IO12
PRST
CP30
BELL
64K
RES
HALTN1
P004
Z1
Z2
Z4
Z5
Z6
HWR2
HWR3
HWR4
HWR5
HWR6
HWR7
TXD
INTMN
IOWN
IRWN
IOCSN
HALTN
MCLK
PGM
CS
GND
CN1

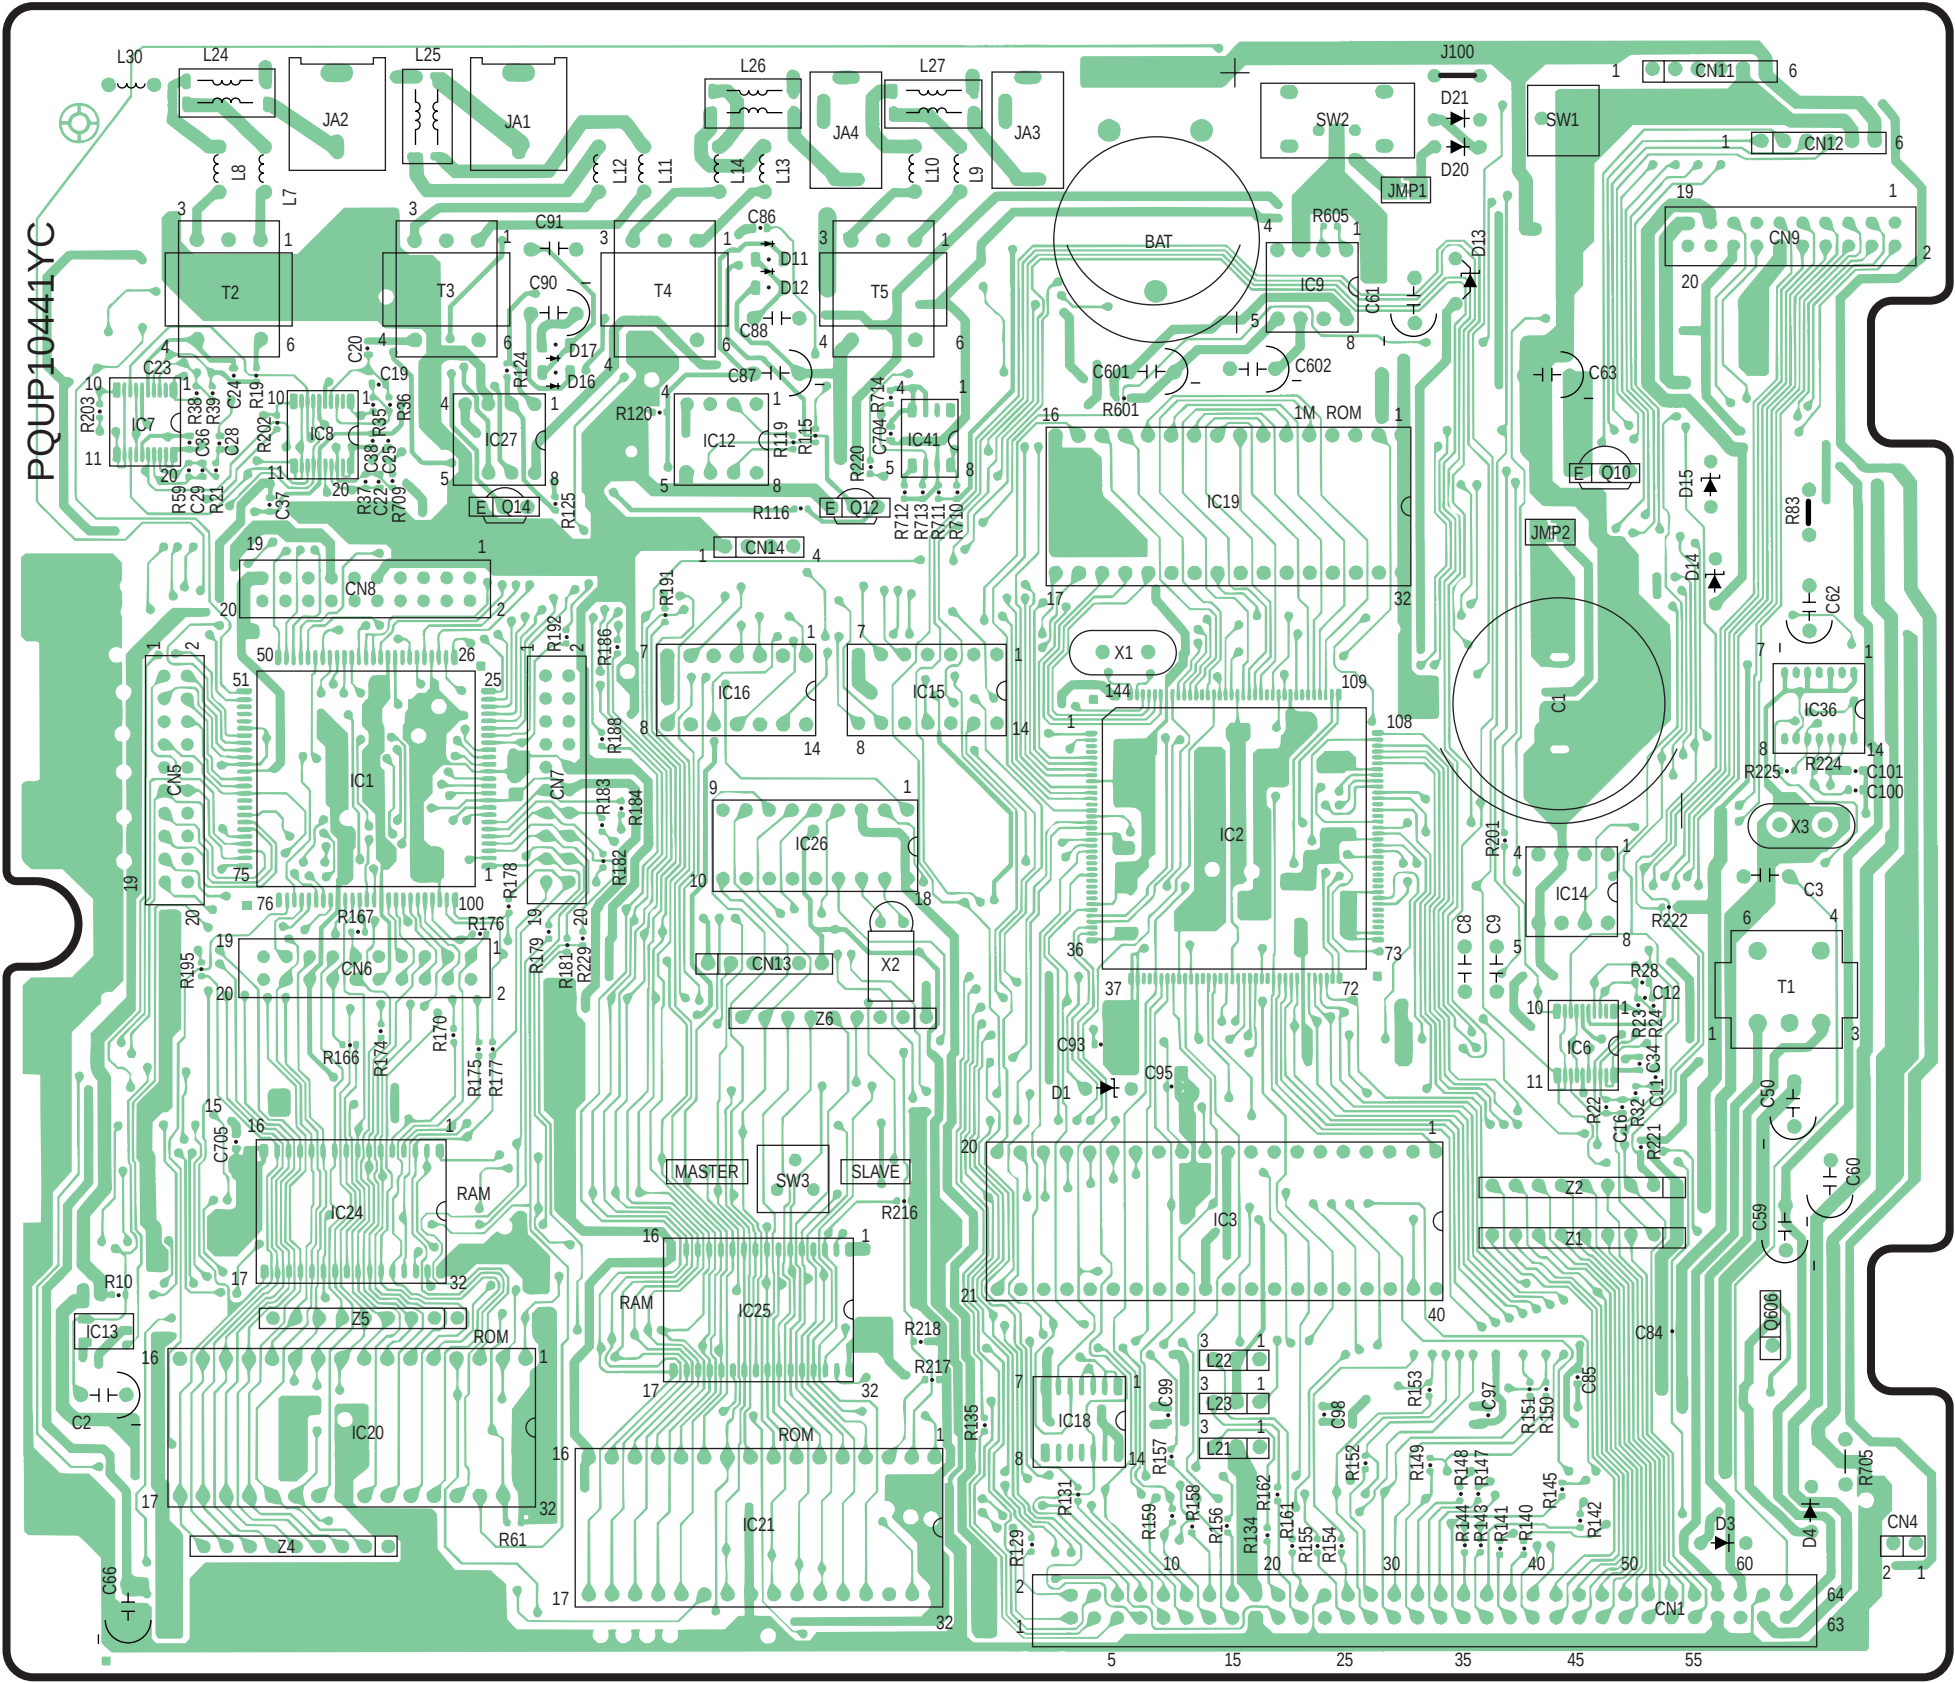
PQUP10441YC
L30
L24
L25
L26
L27
JA2
JA1
JA4
JA3
J100
SW2
SW1
D21
D20
CN11
CN12
JMP1
L8
L7
L12
L11
L14
L13
L10
L9
T2
T3
T4
T5
C91
C90
C86
D11
D12
C88
D17
D16
C87
BAT
R605
IC9
C61
D13
CN9
C23
C20
C19
C24
R124
R120
IC12
R119
R115
C704
R714
IC41
C601
C602
R601
1M ROM
IC19
C63
Q10
D15
R83
IC7
IC8
IC27
R203
R202
R38
R39
R36
C38
C25
C28
R19
R35
C36
R59
C29
R21
C37
R709
R125
Q14
R116
Q12
R712
R713
R711
R710
JMP2
D14
CN14
CN8
R191
R192
R186
R188
IC16
IC15
X1
C62
IC36
R225
R224
C101
C100
X3
CN5
IC1
CN7
R183
R184
R182
R178
IC26
IC2
C1
C3
R201
IC14
R222
C8
C9
R28
C12
T1
R167
R176
R179
R181
R229
CN13
X2
Z6
R195
CN6
R166
R174
R170
R175
R177
C93
C95
D1
IC6
R23
R24
C34
C11
R22
C16
R32
R221
C50
C60
C59
C705
IC24
RAM
MASTER
SW3
SLAVE
R216
IC3
Z2
Z1
R10
IC13
Z5
ROM
IC25
RAM
R218
R217
R135
IC18
L22
L23
L21
C99
C98
C97
C85
C84
Q606
R153
R151
R150
R152
R149
R148
R147
R145
R142
R157
R131
R159
R158
R156
R162
R134
R161
R155
R154
R144
R143
R141
R140
R129
C2
IC20
R61
Z4
IC21
C66
D3
D4
R705
CN4
CN1

SMDR

(TO CN12)

CN701

CN702

R700 820

R701 820

R702 820

R703 820

C703 3900P

C702 3900P

C701 3900P

C700 3900P

LED

(TO CN4)

CN601

LED

IC20

IC21

IC24

IC25

IC26

IC40

IC1

IC2

IC3

CN1

CN6

CN7

CN8

CN5

Z1 10K

Z2 10K

R221 2.2K

R18 10K

C47 0.022

C46 2200P

C80 20P

C39 20P

X2 32.768KHZ

R62 22K

J19

R74 10K

Q5

Q605

R73 10K

R18 10K

C47 0.022

A[1-23],D[0-15],R/WN

CSROMN

CSRAM2N

CSRAM1N

CSRAM0N

IORN

IOWN

CSRTCN

POWRSTN

PDPG[0]

PDPG[1]

PDPG[2]

PDPG[3]

PDOHCA

MOHMUTE[0]

MOHMUTE[1]

HALTN

RESET

SW1

PD15N

BELLS

ECK

R/WN

ASN

DTACN

UDSN

LDSN

CPUCKN

SRSTN

IRWN

IOWN

MCLK

FHNR

C2M

C4M

CSROMN

CSRAM2N

CSRAM1N

CSRAM0N

CSRTCN

EXTCK

PLLPRSN

SELCK

CHS[0]

CHS[1]

CHS[2]

CHS[3]

CHS[4]

PIGN

POGN

HWRO

MU/A

HWSO

CP[291]

CP[30]

CP[281]

CP[311]

CP[271]

CP[291]

CP[301]

PCM[0-7]

PCM[0]

PCM[1]

PCM[2]

PCM[3]

PCM[4]

PCM[5]

PCM[6]

PCM[7]

D[0]

D[1]

D[2]

D[3]

D[4]

D[5]

IC6

IC7

IC8

IC9

IC41

IC12

IC27

IC39

IC19

IC36

IC38

IC37

IC15

IC16

IC14

IC13

IC17

IC18

IC29

IC32

IC33

IC34

IC35

IC31

IC30

IC39

IC40

R201 1.0K

R202 1.0K

R203 1.0K

R303 1.0K

R23 130K

R24 150K

R35 100K

R36 120K

R38 100K

R39 120K

R28 1.2k

R32 150K

R22 91K

R11 1.0

C16 100P

C19 100P

C20 3300P

C22 100P

C23 100P

C24 3300P

C29 100P

R19 560

R21 62k

C28 0.1

R59 56k

C12 100P

C11 1.0

R65 560

R709 4.7k

C25 0.1

T1

T3

T2

L11

L12

L25

L7

L8

L24

JA1

JA2

EXT PAG1

EXT PAG2

R712 10K

R713 NC

R714

R710 390K

R711 100k

C704 0.1

R601 100K

C601 16V4.7

C602 16V4.7

R603 330

R604 150

C603 0.022

R605 820K

R606 22K

R609 22K

C604 0.1

R715 0

R608 120K

R48 33k

R220 22k

Q601

Q602

Q603

Q604

R610 22K

R611 22K

R85 680

CN4

R97 10K

SW3

R53 100K

R118 33K

R119 10K

R40 100K

R124 33K

R125 10K

R116 4.7K

R120 330K

R117 10K

R122 4.7K

R126 330K

C86 0.1 μ

C87 25V33 μ

C88 50V2.2 μ

C89 0.1 μ

C90 25V33 μ

C91 50V2.2 μ

D11

D12

D16

D17

R115 2.2K

R121 2.2K

R123 10K

L9

L10

L27

L13

L14

L26

T5

T4

C26 0.1 μ

C30 0.1 μ

R30 220K

R50 220K

R33 4.7K

R52 4.7K

R127 4.7K

R128 4.7K

R34 33K

R51 33K

C27 0.001

C31 0.001

R223 22K

R224 1M

R225 33

R226 33

R227 22K

C101 22P

C100 22P

X3

R57 1K

R94 10K

R96 10K

R97 10K

R112 10K

R113 10K

R70 10K

R21 10K

R22 10K

R23 10K

R75 10K

R76 10K

R77 10K

R78 10K

R79 10K

R80 10K

R81 10K

R82 10K

R83 1W,150

R84 1.5K

R110 47

R111 47

R129 47

R130 47

R131 47

R132 47

R133 47

R134 39

R135 47

R136 47

R137 47

R138 100

R139 100

R140 100

R141 100

R142 100

R143 100

R144 100

R145 100

R146 47

R147 47

R148 47

R149 47

R150 47

R151 47

R152 47

R153 47

R154 47

R155 47

R156 47

R157 47

R158 47

R159 47

R160 47

R161 39

R162 33

R163 56

R164 56

R165 56

R166 56

R167 56

R168 56

R169 56

R170 56

R171 56

R172 56

R173 56

R174 56

R175 56

R176 56

R177 56

R178 56

R179 56

R180 56

R229 56

R182 56

R183 56

R184 56

R185 56

R186 56

R187 56

R188 56

R189 56

R190 56

R191 56

R192 56

R193 56

R194 56

R195 56

R196 56

R197 56

R198 56

R199 56

R200 56

R204 10K

R205 10K

R206 10K

R207 10K

R208 10K

R209 10K

R210 10K

R211 10K

R212 10K

R213 10K

R214 10K

R215 10K

R216 10K

R217 10K

R218 10K

R219 10K

R91 10K

R92 10K

R93 10K

R61 10K

R228 10K

R222 10K

R9 No Mounted

R10 20K

R12 39K

R13 18.0K

R14 100K

R15 10K

R16 270K

R17 18K

R6 22K

R5 4.7K

R8 68K

R7 10K

R4 4.7K

R3 4.7K

R2 4.7K

R1 4.7K

R109 4.7K

R108 4.7K

R107 4.7K

R106 4.7K

R105 4.7K

R104 4.7K

R103 4.7K

R102 4.7K

R101 4.7K

R100 4.7K

R99 4.7K

R98 4.7K

R97 4.7K

R96 4.7K

R95 4.7K

R94 4.7K

R93 4.7K

R92 4.7K

R91 4.7K

R90 4.7K

R89 4.7K

R88 4.7K

R87 4.7K

R86 4.7K

R85 4.7K

R84 4.7K

R83 4.7K

R82 4.7K

R81 4.7K

R80 4.7K

R79 4.7K

R78 4.7K

R77 4.7K

R76 4.7K

R75 4.7K

R74 4.7K

R73 4.7K

R72 4.7K

R71 4.7K

R70 4.7K

R69 4.7K

R68 4.7K

R67 4.7K

R66 4.7K

R65 4.7K

R64 4.7K

R63 4.7K

R62 4.7K

R61 4.7K

R60 4.7K

R59 4.7K

R58 4.7K

R57 4.7K

R56 4.7K

R55 4.7K

R54 4.7K

R53 4.7K

R52 4.7K

R51 4.7K

R50 4.7K

R49 4.7K

R48 4.7K

R47 4.7K

R46 4.7K

R45 4.7K

R44 4.7K

R43 4.7K

R42 4.7K

R41 4.7K

R40 4.7K

R39 4.7K

R38 4.7K

R37 4.7K

R36 4.7K

R35 4.7K

R34 4.7K

R33 4.7K

R32 4.7K

R31 4.7K

R30 4.7K

R29 4.7K

R28 4.7K

R27 4.7K

R26 4.7K

R25 4.7K

R24 4.7K

R23 4.7K

R22 4.7K

R21 4.7K

R20 4.7K

R19 4.7K

R18 4.7K

R17 4.7K

R16 4.7K

R15 4.7K

R14 4.7K

R13 4.7K

R12 4.7K

R11 4.7K

R10 4.7K

R9 4.7K

R8 4.7K

R7 4.7K

R6 4.7K

R5 4.7K

R4 4.7K

R3 4.7K

R2 4.7K

R1 4.7K

C1 0.47F

C2 25V4.7

C3 50V3.3

C4 0.1

C5 0.1

C6 0.1

C7 0.1

C8 0.1

C9 0.1

C10 0.1

C11 0.1

C12 0.1

C13 0.1

C14 0.1

C15 0.1

C16 0.1

C17 0.1

C18 0.1

C19 0.1

C20 0.1

C21 0.1

C22 0.1

C23 0.1

C24 0.1

C25 0.1

C26 0.1

C27 0.1

C28 0.1

C29 0.1

C30 0.1

C31 0.1

C32 0.1

C33 0.1

C34 0.1

C35 0.1

C36 0.1

C37 0.1

C38 0.1

C39 0.1

C40 2200P

C41 2200P

C42 2200P

C43 2200P

C44 2200P

C45 2200P

C46 2200P

C47 0.022

C48 0.022

C49 0.022

C50 10V330

C51 0.022

C52 0.022

C53 18P

C54 18P

C55 0.022

C56 0.022

C57 0.022

C58 0.022

C59 50V1

C60 50V1

C61 50V1

C62 50V1

C63 50V1

C64 0.022

C65 0.022

C66 10V100

C67 0.022

C68 0.022

C69 0.022

C70 0.022

C71 0.022

C72 0.022

C73 0.022

C74 0.022

C75 0.022

C76 0.022

C77 0.022

C78 0.022

C79 0.022

C80 20P

C81 0.022

C82 0.022

C83 0.022

C84 0.022

C85 0.022

C86 0.1 μ

C87 25V33 μ

C88 50V2.2 μ

C89 0.1 μ

C90 25V33 μ

C91 50V2.2 μ

C92 100P

C93 100P

C94 47P

C95 47P

C96 47P

C97 47P

C98 0.022

C99 0.022

C100 22P

C101 22P

C102 0.022

C103 0.022

C104 0.022

C105 0.022

C106 0.022

C107 0.022

C108 0.022

C109 0.022

C110 0.022

C111 0.022

C112 0.022

C113 0.022

C114 0.022

C115 0.022

C116 0.022

C117 0.022

C118 0.022

C119 0.022

C120 0.022

C121 0.022

ORDER NO. KMS0008871S1

Service Manual

DIGITAL SUPER HYBRID SYSTEM

KX-TD1232

(for U.S.A.)

Please file and use this supplement manual together with the service manual for model No.KX-TD1232, Order No. KM493116991A.

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public.
It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product.
Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

Note:Supplement-1~5 have already supplied with printed matter. So please refer to that.

Panasonic

© 2000 Kyushu Matsushita Electric Co., Ltd. All rights reserved. Unauthorized copying and distribution is a violation of law.

1 CHANGES

1.1. Subject

Suffix	Reason for suffix change
L→M	Change of the software. (IC20/21:ROM Ver. P231T/P232T→P231UA/P232UA) (There is no change in the replacement parts list.)
Not used	Change of the power supply unit. (PQLP10005ZA→PSLP1150ZA)

1.2. Suffix location



1.3. REPLACEMENT PARTS LIST

Reason for Change (Symbol:A) Following 1-8 reasons are indicated on the Notes in the bottom column.

1. Improve performance 2. Change of material or dimension 3. To meet approved specification 4. Standardization 5. Addition 6. Deletion 7. Correction 8. Other	**Note** Part with mark *1 has been written at the next page in the new Power Supply Unit parts.

Interchangeability code (Symbol:B) Following V-Z interchangeabilities are indicated on the Notes in the bottom column.

Parts	Set Production	Description
V Original / New	Early (before change) / Late (after change)	Original or new parts may be used in early or late production sets. Use original parts until exhausted, then stock new parts.
W Original / New	Early (before change) / Late (after change)	Original parts may be used in early production sets only. New parts may be used in early or late production sets. Use original parts where possible, then stock new parts.
X Original / New	Early (before change) / Late (after change)	New parts only may be used in early or late production sets. Stock new parts.
Y Original / New	Early (before change) / Late (after change)	Original parts may be used in early production sets only. New parts may be used in late production sets only. Stock both original and new parts.
Z Other		

Ref. No.	Parts No.		Part Name & description	Pcs	Remarks	Notes		Time of change (Suffix)
	Original Part	**New part**						
ACCESSORIES AND PACKING MATERIALS								
A8	PQQX10173W	**PQQX10173V**	USER MANUAL	1		8	X	
A13	PQQX10782X	**PQQX10782W**	REFERENCE GUIDE (T7000)	1		8	X	
	PSQX1360Y	----------	INSTALLATION MANUAL FOR KX-TD185	0		6		
	PSQX1416Z	----------	INSTALLATION MANUAL FOR KX-TD171/194	0		6		
POWER SUPPLY UNIT PARTS								
90	PQQT4164Z	----------	CAUTION LABEL	0		6		
91	PQMC10053X	**PSMC1084Z**	SHIELD COVER ⚠	1	*1	8	Y	
92	PQMC10052X	**PSMC1085Z**	SHIELD CASE ⚠	1	*1	8	Y	
95	PQHR10179Z	**PSHE1095Z**	SPACER-B	1	*1	8	Y	
96	PQJS02R46Z	----------	CONNECTOR, 2P ⚠	0		6		
97	PQJP04R07Y	**PQJP04R07X**	CONNECTOR, 4P	1		8	V	
98	PQJP3A3Z	----------	SOCET, AC ⚠	0		6		
99	EST15304T	----------	SWITCH, POWER ⚠ ;	0		6		
100	PQMH10027Z	**PSMH1183Z**	ANGLE, POWER SW ⚠	1	*1	8	Y	
101	PQJV3Z	----------	HOLDER, FUSE ⚠	0		6		
102	XBA2C25ND1L	**XBA1C50ND1L**	FUSE ⚠	1	*1	7		
103	PQQT10469Z	**PSQT1766Z**	FUSE LABEL ⚠	1	*1	8	Y	

PCB6	PSLP1009Z	**PSWP6TD1232C**	POWER SUPPLY BOARD ASS'Y RTL ⚠	1		8	Y	

1.4. NEW POWER SUPPLY UNIT PARTS

Note:

1. RTL (Retention Time Limited)

   The marking (RTL) indicates that the Retention Time is limited for this item.

   After the discontinuation of this assembly in production, the item will continue to be available for a specific period of time. The retention period of availability is dependent on the type of assembly, and in accordance with the laws governing part and product retention.

   After the end of this period, the assembly will no longer be available.

2. Important safety notice

   Components identified by the ⚠ mark special characteristics important for safety. When replacing any of these components, use only manufacture´s specified parts.

3. The S mark indicates service standard parts and may differ from production parts.

4. RESISTORS & CAPACITORS

   Unless otherwise specified;

   All resistors are in ohms (Ω) K=1000Ω, M=1000kΩ

   All capacitors are in MICRO FARADS (µF) P=µµF

   *Type & Wattage of Resistor

Type

ERC:Solid ERD:Carbon PQRD:Carbon	ERX:Metal Film ERG:Metal Oxide ER0:Metal Film	PQ4R:Carbon ERS:Fusible Resistor ERF:Cement Resistor

Wattege

10,16:1/8W	14,25:1/4W	12:1/2W	1:1W	2:2W	3:3W

*Type & Voltage of Capacitor

Type

ECFD:Semi-Conductor ECQS:Styrol PQCUV:Chip ECQMS:Mica	ECCD,ECKD,ECBT,PQCBC:Ceramic ECQE,ECQV,ECQG:Polyester ECEA,ECSZ:Electlytic ECQP:Polypropylene

Voltage

ECQ Type	ECQG ECQV Type	ECSZ Type	Others	
1H:50V 2A:100V 2E:250V 2H:500V	05:50V 1:100V 2:200V	0F:3.15V 1A:10V 1V:35V 0J:6.3V	0J :6.3V 1A :10V 1C :16V 1E,25:25V	1V :35V 50,1H:50V 1J :63V 2A :100V

Ref. No.	Part No.	Part Name & Description	Remarks
91	PSMC1084Z	SHIELD COVER	⚠
92	PSMC1085Z	SHIELD CASE	⚠
93	PQHR477Z	SPACER-A	⚠
94	PSHE1095Z	SPACER-B	
95	PSHE1095Z	SPACER-B	
97	PQJP04R07X	CONNECTOR, 4P	
100	PSMH1183Z	ANGLE, POWER SW	⚠ ;
102	XBA1C50ND1L	FUSE	⚠
103	PSQT1766Z	FUSE LABEL	⚠
104	PSWE1012Z	INLET ASS´Y	⚠
PCB6	PSWP6TD1232C	POWER SUPPLY BOARD ASS´Y RTL	⚠
IC1	PSVIKA1M0880	IC	
IC2	PSVIKA3843B	IC	
IC4	PSVIKA431Z	IC	
IC5	PSVIKA431Z	IC	
IC9	PQVILA6500	IC	

Ref. No.	Part No.	Part Name & Description	Remarks
		(TRANSISTOR)	
Q2	KSP2222A	TRANSISTOR	
Q3	KSP2222A	TRANSISTOR	
Q4	KSP2907A	TRANSISTOR	
Q5	PSVTIRFZ44	TRANSISTOR	
Q6	KSA1220A0	TRANSISTOR	
Q7	KSP2222A	TRANSISTOR	
Q8	KSP2222A	TRANSISTOR	
Q9	KSP2907A	TRANSISTOR	
Q10	KSP2222A	TRANSISTOR	
Q13	KSP2222A	TRANSISTOR	
Q14	KSP2907A	TRANSISTOR	
Q15	KSP2222A	TRANSISTOR	
		(DIODES)	
D1	PSVDUF4007	DIODE	
D2	PSVDBYW32	DIODE	
D3	PSVDIN4004GP	DIODE	
D4	PSVDIN4004GP	DIODE	
D5	PSVDP6KE350A	DIODE	
D8	PSVDS20LC20U	DIODE	
D10	PSVDSF10SC4	DIODE	
D11	PSVDBYV27200	DIODE	
D12	PSVDS20LC20U	DIODE	
D13	PSVDBYV27200	DIODE	
D14	PSVD1N4148	DIODE	
D15	PSVD1N4148	DIODE	
D16	PSVD1N4148	DIODE	
D19	PSVDBYV38	DIODE	
ZD1	PQVDMZJ6R2B	DIODE	
ZD2	PQVDMZJ36B	DIODE	
ZD3	PQVDMZJ5R1B	DIODE	
DB1	PSVDD5SBA60	DIODE	
		(RESISTOR)	
R1	ERDS2TJ474	47k	
R2	ERDS1TJ204	200k	
R3	ERDS1TJ204	200k	
R4	ERG3SJ104	100k	
R5	ERG1SJ473	47k	
R6	ERDS2TJ472	4.7k	
R8	ERDS2TJ102	1k	
R9	ERDS2TJ242	2.4k	
R10	ERDS2TJ242	2.4k	
R11	ER016CKF1202	12k	
R12	ERDS2TJ513	51k	
R13	ERDS1TJ101	100	
R14	PSRMPR5R50MJ	0.05	
R15	ERDS2TJ202	2k	
R16	ERDS2TJ513	51k	
R17	ERDS2TJ472	4.7k	
R18	ERDS2TJ362	3.6k	
R19	ERDS2TJ390	39	
R20	ERG3SJ361	360	
R21	ER016CKF4701	4.7k	
R23	ERDS2TJ330	33	
R24	ERDS2TJ101	100	
R30	ERG1SJ100	10	
R31	ERDS2TJ472	4.7k	
R32	ERDS2TJ243	24k	
R33	ERDS2TJ432	4.3k	
R34	ERDS2TJ101	100	
R35	ERG1SJ100	10	
R36	PSRRQR5W270J	270	
R37	ERG1SJ100	10	
R38	ERG1SJ201	200	
R39	ERG1SJ100	10	
R40	ERDS2TJ511	510	
R41	ERDS1TJ241	240	
R43	ERDS2TJ243	24k	
R44	PSRMPR5R80MJ	0.08	
R51	ERDS2TJ474	470k	

Ref. No.	Part No.	Part Name & Description	Remarks
R57	ERDS2TJ123	12k	
R62	ERDS2TJ472	4.7k	
R63	ERDS2TJ562	5.6k	
R64	ERDS2TJ202	2k	
R65	ERDS2TJ561	560	
R66	ERDS2TJ2R2	2.2	
R67	ERDS1TJ101	100	
R68	ERDS2TJ472	4.7k	
R69	ERG3SJ104	100k	
R70	PSRMPR5R50MJ	0.05	
R71	ERDS2TJ472	4.7k	
R72	ERDS2TJ203	20k	
R73	ERDS2TJ472	4.7k	
R74	ERDS2TJ513	51k	
R75	ERDS2TJ472	4.7k	
R88	ERDS2TJ472	4.7k	
R89	ERDS2TJ472	4.7k	
		(CAPACITORS)	
C1	PSCCEMU2D471	470µF	
C2	PSC223K630	0.022µF	
C3	PSSCEMU2D471	470µF	
C4	PSCCEST1H220	22µF	
C5	PSCCELT1H010	1µF	
C8	PSCKR215C683	0.068µF	
C9	PSC154K400	0.15µF	
C10	PSCCELT1H010	1µF	
C14	PSCS215C104J	0.1µF	
C15	PSCS215C222J	2200pF	
C16	PSCCELT1H010	1µF	
C17	PSCS215C102J	1000pF	
C18	PSCCELT1H010	1µF	
C19	PSCCEMZ1E152	1500µF	
C20	PSCCEMZ1E152	1500µF	
C23	PSCS215C103J	0.01µF	
C25	PSCCEMZ1E221	220µF	
C27	PSCCEMZ1A152	1500µF	
C28	PSCYB2H222K	2200pF	
C29	PSCYB2H222K	2200pF	
C30	PSCCELT1H100	10µF	
C31	PSCCEMZ1E221	220µF	
C32	PSCCELT1H010	1µF	
C33	PSCS215C104J	0.1µF	
C34	PSCS215C104J	0.1µF	
C35	PSCYB2H222K	2200pF	
C36	PSCYB2H222K	2200pF	
C37	PSCCEMZ1E152	1500µF	
C38	PSCCEMZ1E152	1500µF	
C39	PSCCEMZ1E221	220µF	
C40	PSCS215C104J	0.1µF	
C49	PSCS215C104J	0.1µF	
C50	PSCCEMZ1C221	220µF	
C52	PSCCELT2W010	1µF	
C60	PSCCELT1H100	10µF	
C101	PSCP2335M104	0.1µF	
C102	PSCP2335M224	0.22µF	
C103	PSCHCYE2G222	2200pF	
C104	PSCHCYE2G222	2200pF	
C105	PSCHCYE2G332	3300pF	
C106	PSCHCYE2G332	3300pF	
		(VARISTORS)	
ZNR1	PSVDNR10D471	VARISTOR	
ZNR2	PSVDNR10D471	VARISTOR	
ZNR3	PSVDV151RA07	VARISTOR	
ZNR4	PSVDV151RA07	VARISTOR	
		(SURGE ABSORBER)	
SA1	PSVDMP362ME	SURGE ABSORBER	⚠
		(VARIABLE RESISTORS)	
VR1	EVNDXAA03B52	SEMI-FIXED RESISTOR 500Ω (B)	
VR2	EVNDXAA03B52	SEMI-FIXED RESISTOR 500Ω (B)	

Ref. No.	Part No.	Part Name & Description	Remarks
		(CONNECTORS)	
CN400	PQJP2D98Z	CONNECTOR. 2P	
CN401	PSJS07Q91Z	CONNECTOR. 7P	
CN402	PQJP4D30Z	CONNECTOR. 4P	
CN403	PQJP4D46Z	CONNECTOR. 4P	
LG1	PSJT1035Z	CONNECTOR-LUG	
LG2	PSJT1035Z	CONNECTOR-LUG	
		(THYRISTOR)	
SCR1	PSVDTYN058	THYRISTOR	
		(COILS)	
L1	PSLECCM011	COIL	
L2	PSLECC022	COIL	
L3	PSLECCM001	COIL	
L4	PSLECCM011	COIL	
L5	PSLEMGM001	COIL	
L6	PSLECCM002	COIL	
L7	PSLECCM011	COIL	
L8	PSLE04TB101K	COIL	
L10	PSLECCM011	COIL	
L11	PSLESA08230A	COIL	
L12	PSLECA115005	COIL	
L13	PSLECA115005	COIL	
L14	PSLE04TB510M	COIL	
		(TRANSFORMER)	
T1	PSLTTSM001	TRANSFORMER	⚠
		(PHOTO ERECTRIC TRANSDUCERS)	
PC1	PSVIKPC817	PHOTO COUPLER	⚠
PC2	PSVIKPC817	PHOTO COUPLER	⚠
		(THERMISTORS)	
TH1	PSRT5R114	THERMISTOR	⚠
TH2	PSRT5R114	TRANSFORMER	⚠
		(FUSE)	
F2	PSBATEST396	FUSE	⚠
		(CORES)	
B1	PSXCELBC4865	CORE	
B2	PSXCELBC4865	CORE	
B3	PSXCELBC3533	CORE	
B4	PSXCELBC3533	CORE	
J1	W5NL7.5T	JUMPER-WIRE	

Change from original Service Manual page 11. (KX-TD1232C:Order No.KM49307582C1)

Ref. No. 7	**HOW TO REMOVE THE POWER SUPPLY BOARD**
Procedure 1→2→6→7	

1. Remove the eight screws (A).
2. Remove the shield cover.
3. Remove the two screws (B).
4. Remove the four screws (C).
5. Remove the Power Supply Board.

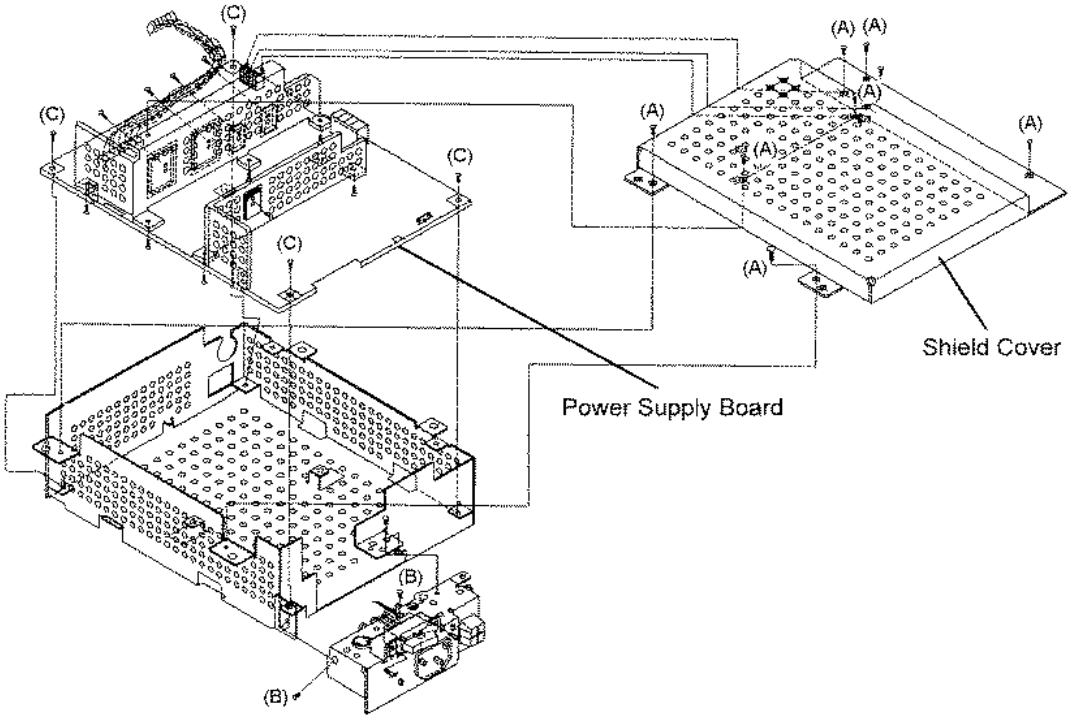

1.5. Chang from original Service Manual page 31.

3 EXPLANATION OF CIRCUIT OPERATION

3-1. BASIC

1) POWER SUPPLY UNIT

POWER SUPPLY UNIT consists of the following.
Line Filter Section
Rectifier and Smoothing Section
Switching Section
Control Section
+15 V Circuit
- 15 V Circuit
+5.3 V Circuit
Bell Amp Circuit

POWER UNIT

Line Filter Section

Common mode noise is removed by C103, C104 and C105 to C106 and normal mode noise by L11, L12 and L13. Lightening surges are absorbed by ZNR1.

Rectifier and Smoothing Section

The input signal is full-wave rectified by bridge diode DB1 and smoothed by C1, C3 resulting in a DC current. TH1 is power thermister.

Swtching Section

The switching section is a basic Forward Converter uses the IC1 included power MOS.FET. D1, R4 and C2 are for resetting the excitation energy stored in T1 while T1 is OFF.

Control Section

IC1 is a Forward Converter type switching module adopted power MOS.FET. The block diagram of IC1 has the following roles.
C9, D3, R5 : FOR starting
C10 : FOR soft start delay
C8 : FOR feed back compensating
PC1 : FOR feed back
R57, Q14, C34 : For over voltage protector circuit.
R89, PC2, D14
R88, C33, Q13
Q15

BLOCK DIAGRAM

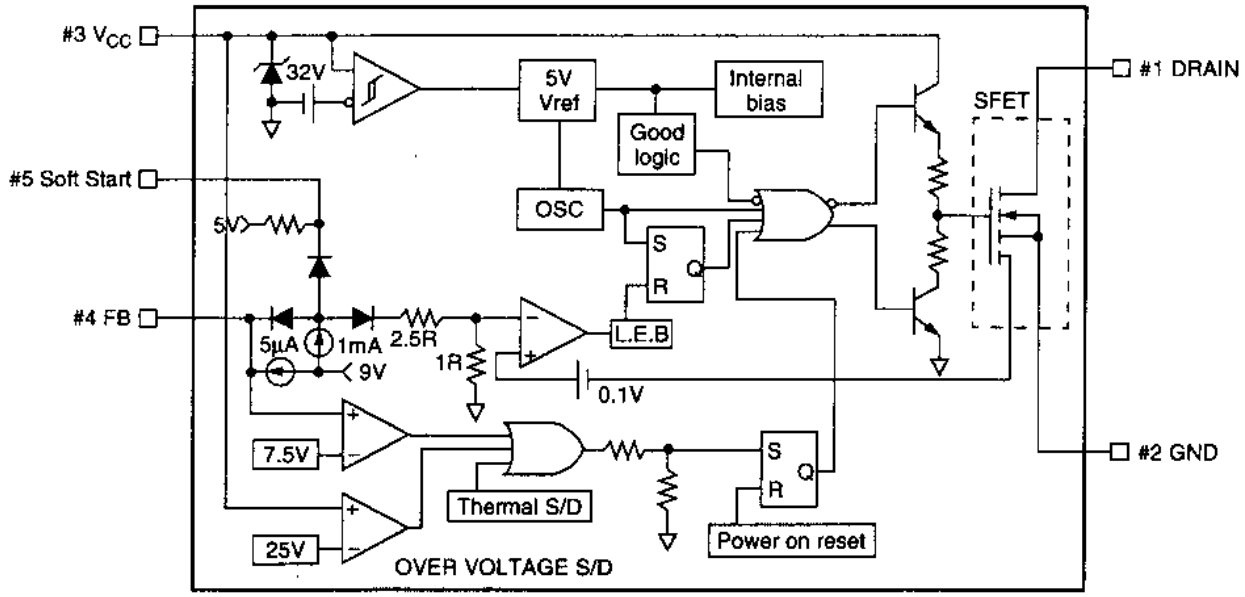

+15V Circuit

The circuit connected pin (8-9)-(10-11) of switching transformer T1 generates +15V. With feed back on the primary side from +15V line, +15V is stabilized by the PWM controller of the primary side. The following is the roles of main surrounding circuit.
D8, L3, C19, C20 : Rectifier and smoothing circuit
L4, C31 : Filter
IC4, C32, R31 : Free back circuit
PC1, R32, R33,
VR2
R34, Q8, R72 : Over current detection circuit
R71, C40, Q9,
R70

-15V Circuit

-15V is generated from the circuit connected to pin (12, 13)-14 of switching transformer. -15V cannot be stabilized by PWM controller of the primary side since feed back is not done on the primary side from -15V line. So, the bleeder circuit stabilizes -15V. The following is the roles of main surrounding circuit.
D12, L6, C37, C38 : Rectifier and smoothing circuit
L7, C39 : Filter
IC5, R21, C18 : -15V stabilizing circuit
R41, R43, R22,
R40, Q6, D11,
R38, D13
R24, Q7, C17 : Over current detection circuit
R44

+5.3V Circuit

+5.3V is generated by PMW controller, IC2 connected to the +15V output. It has an over voltage protection circuit to prevent abnormal output voltage.
The following is the roles surrounding circuit.
L1, C25 : Filter
L8, C30 : Filter
L2, C27 : Filter
L10, C50 : Filter
SCR1, F2 : Over voltage chopper circuit
ZD1, R19, C14 : Over voltage detection circuit
R8
R17, R18, VR1 : Feed back circuit
C15, R11 : For selecting oscillator frequency and duty cycles
Q2, R9, R10 : For duty cycle control
R14, Q4, R15 : Over Current detection circuit
C16, R16, Q3

Bell Amp Circuit

It increases bell signals sent from CPU board in Power Op. Amp, IC9 and sends them into the bell amp. Then, they are sent to the extension boards.

CIRCUIT DIAGRAM

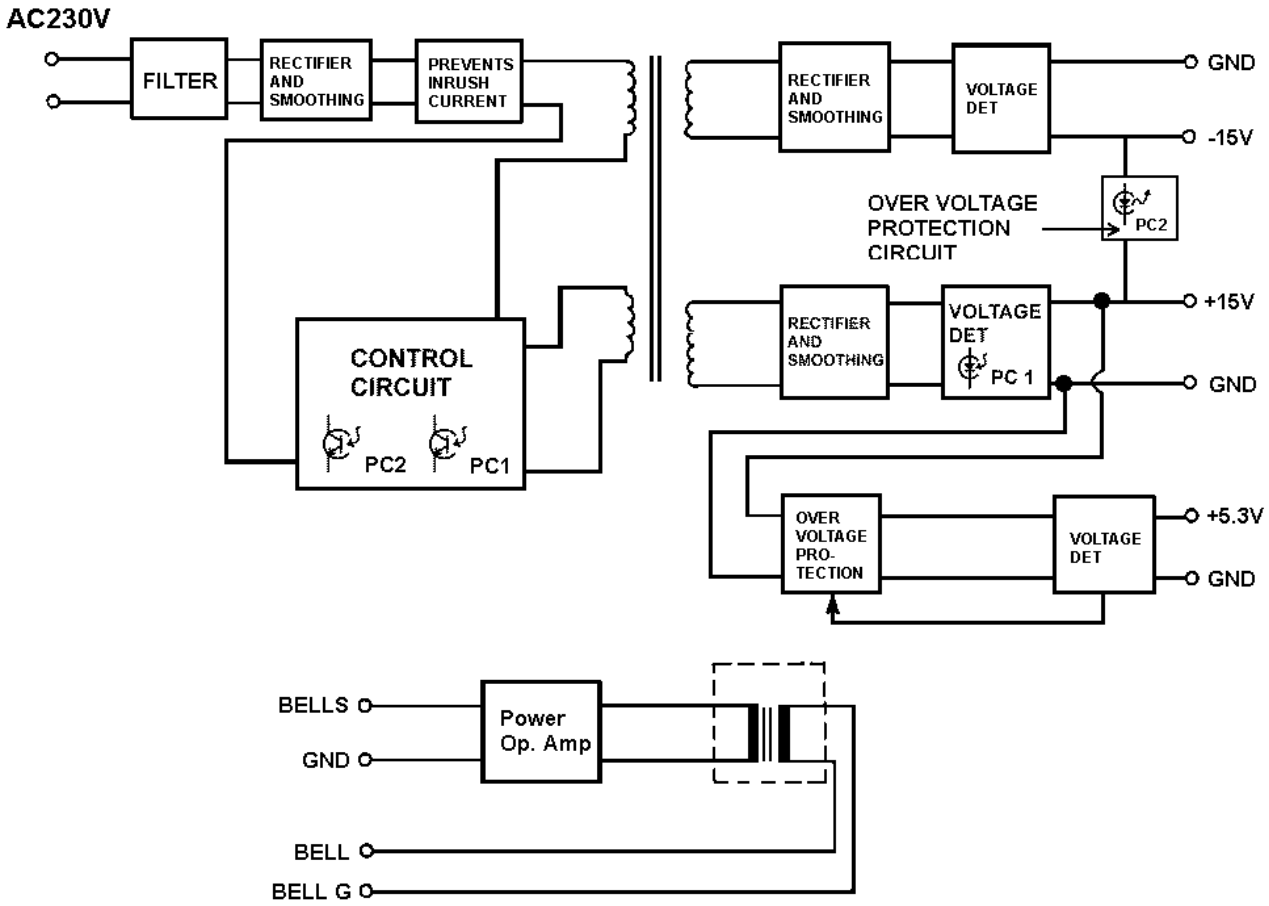

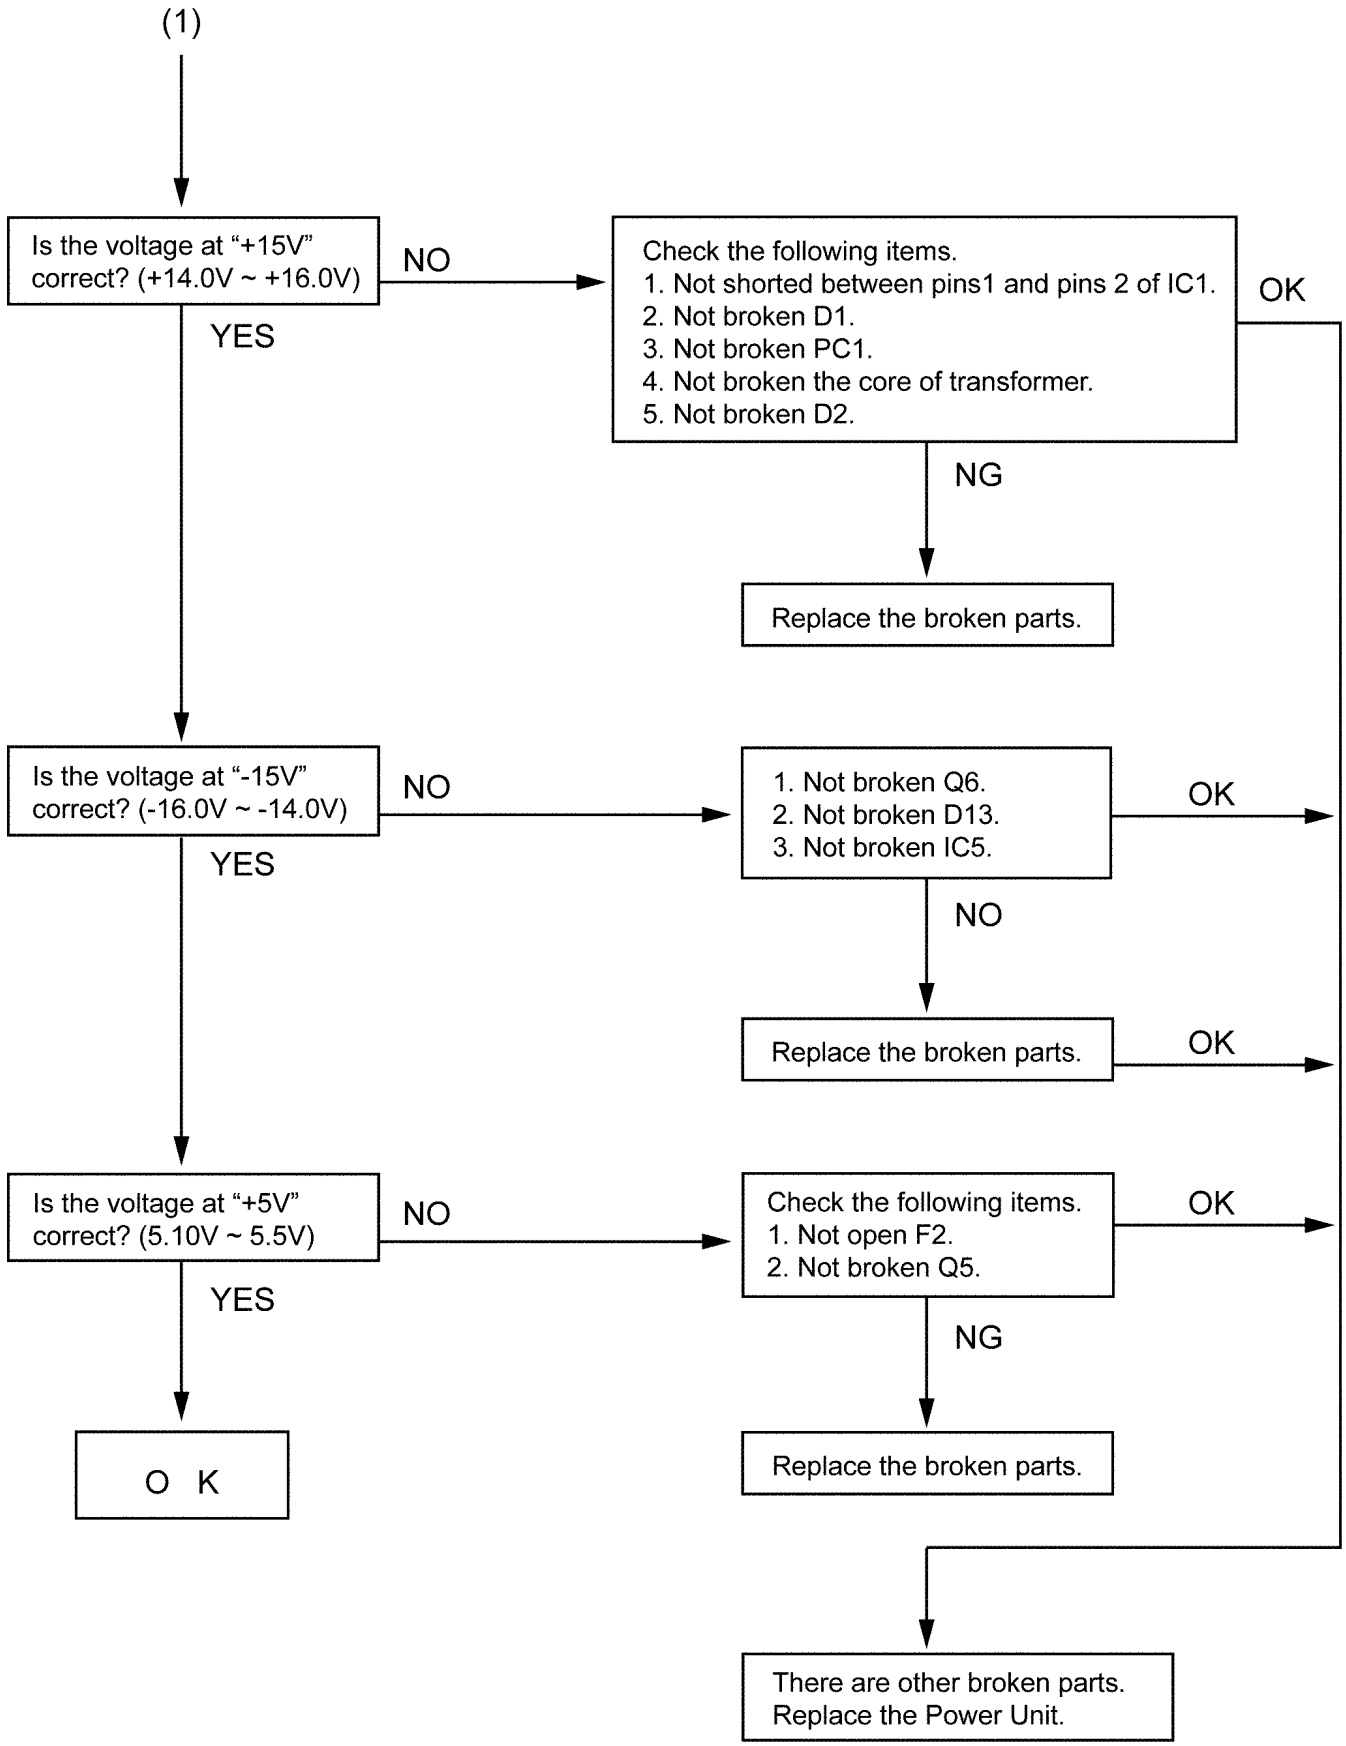
(1)
Is the voltage at “+15V” correct? (+14.0V ~ +16.0V)
NO
YES
Check the following items.
1. Not shorted between pins1 and pins 2 of IC1.
2. Not broken D1.
3. Not broken PC1.
4. Not broken the core of transformer.
5. Not broken D2.
OK
NG
Replace the broken parts.
Is the voltage at “-15V” correct? (-16.0V ~ -14.0V)
NO
YES
1. Not broken Q6.
2. Not broken D13.
3. Not broken IC5.
OK
NO
Replace the broken parts.
OK
Is the voltage at “+5V” correct? (5.10V ~ 5.5V)
NO
YES
Check the following items.
1. Not open F2.
2. Not broken Q5.
OK
NG
Replace the broken parts.
O K
There are other broken parts.
Replace the Power Unit.

1.6. TERMINAL GUIDE OF IC'S, TRANSISTORS AND DIODES

1.6.1. Addition from original page 107

Pin description of IC's

 KSP2222A KSP2907A	 KSA1220A-O	 PSVTIRFZA4	 PSVIKA431Z	 PSVDTYN058

2 PRINTED CIRCUIT BOARD & SCHEMATICDIAGRAM

2.1. POWER SUPPLY BOARD

2.1.1. Change from original pages 105-106 (KX-TD1232C:Order No. KM49307582C1)

(Component View)

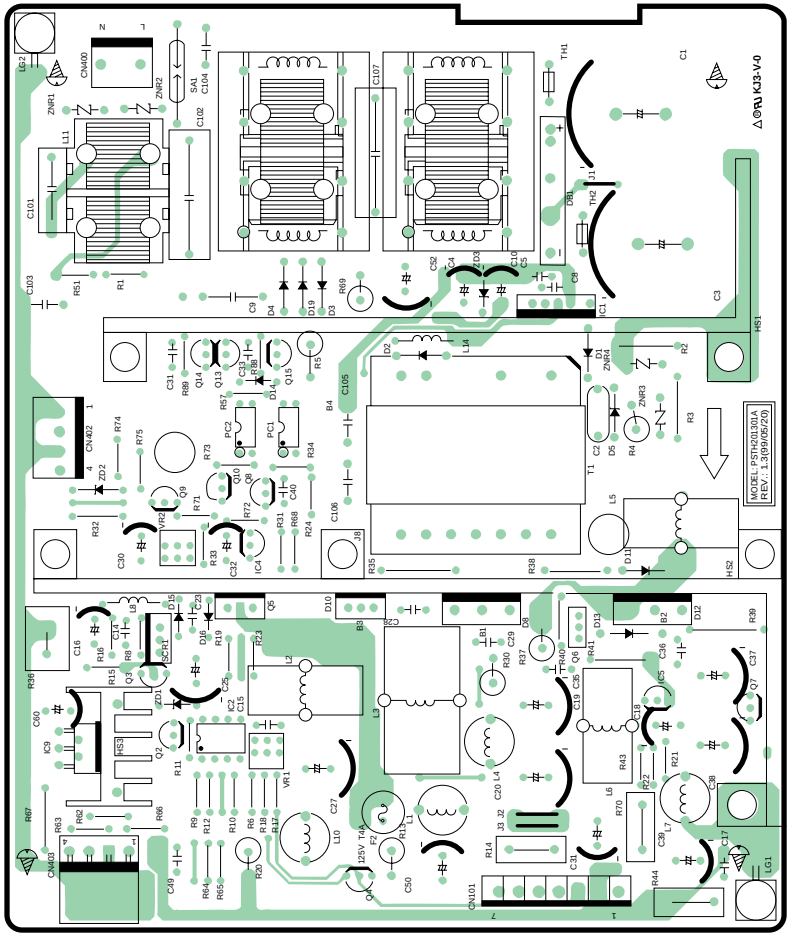

(Supplement-6)

2.2. POWER SUPPLY CIRCUIT

2.2.1. Change from original pages 103-104 (KX-TD1232C:Order No. KM49307582C1)

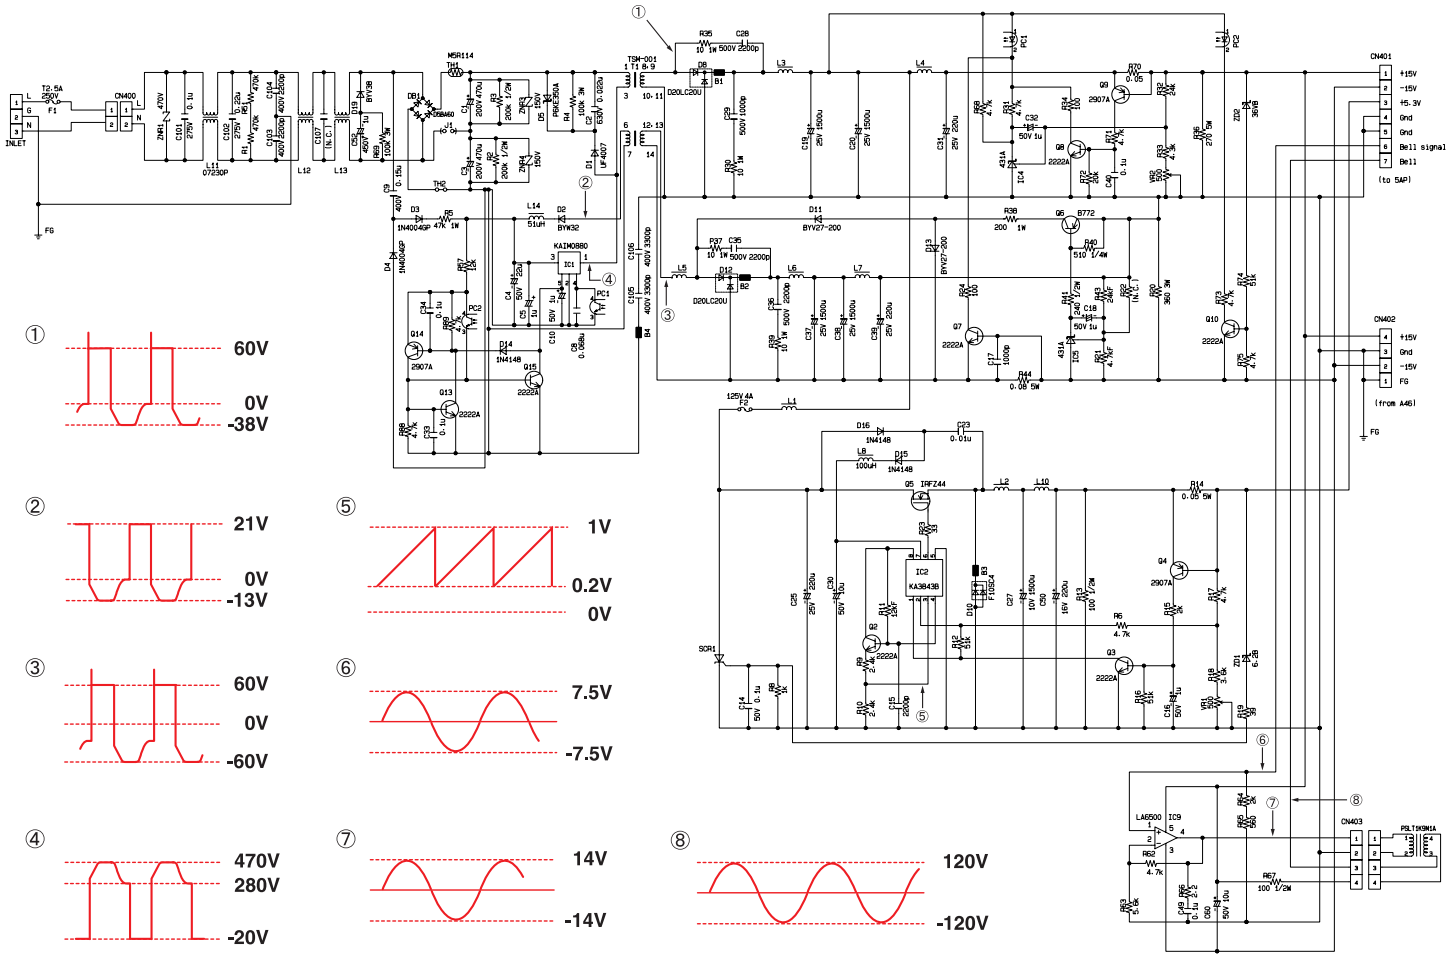

3 CABINET AND ELECTRICAL PARTS LOCATION

3.1. POWER SUPPLY SECTION.....Change from original Service Manual page 111. (KX-TD1232C:Order No. KM49307582C1)

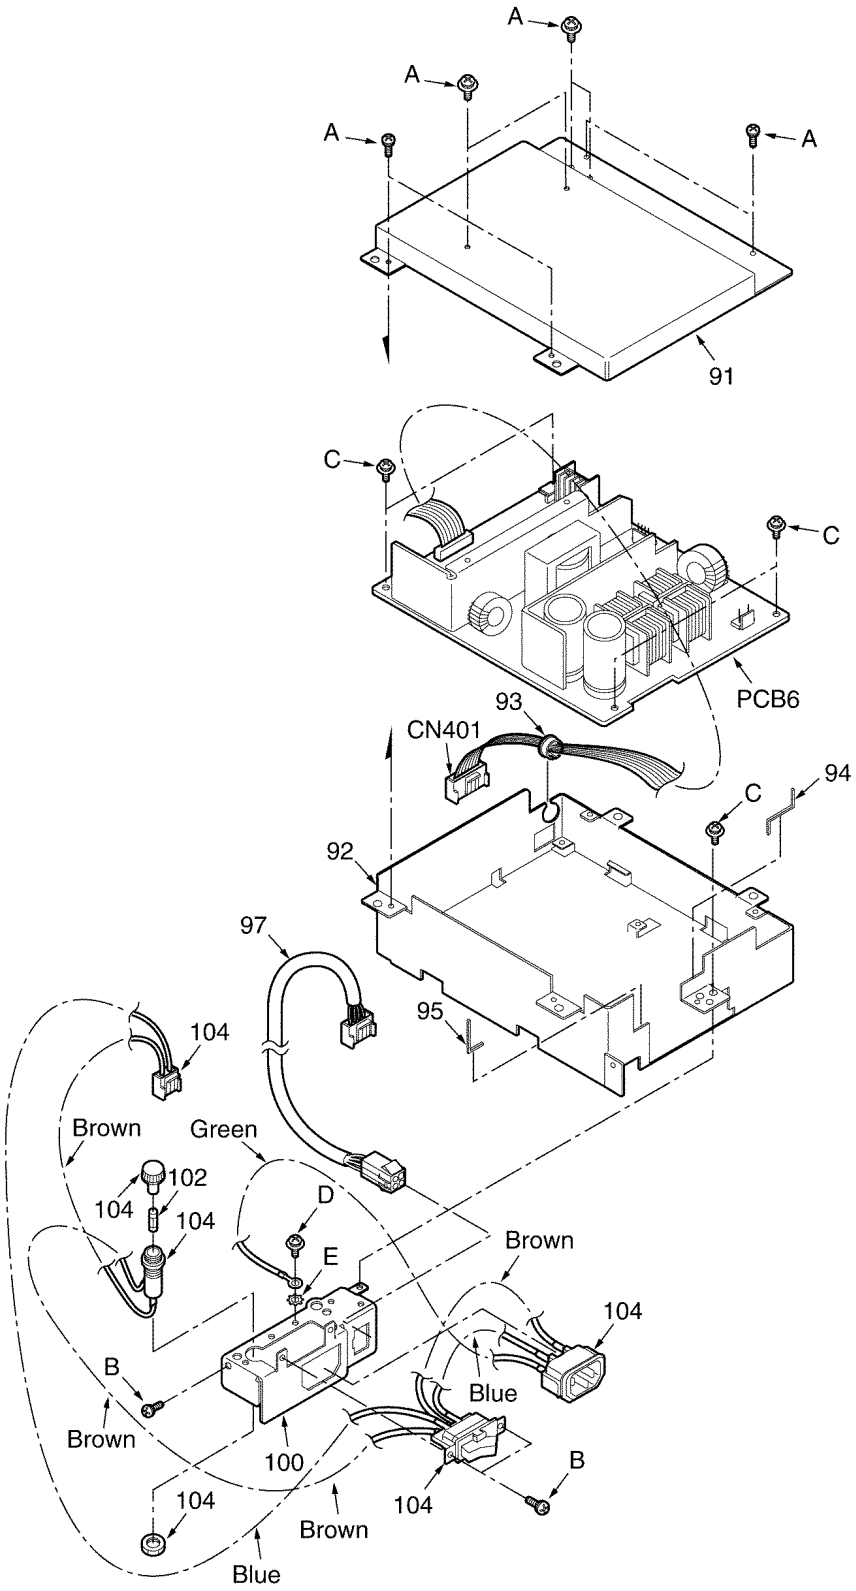

N.T.(Q)
KXTD1232
Printed in Japan

ORDER NO. KMS0011997S1

Service Manual

DIGITAL SUPER HYBRID SYSTEM

KX-TD1232

(for U.S.A.)

Please file and use this supplement manual together with the service manual for Model KX-TD1232, Order No.KM49311699A1.

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public.
It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product.
Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

Note:Supplement-1~5 have already supplied with printed matter. So please refer to that.

Panasonic

© 2000 Kyushu Matsushita Electric Co., Ltd. All rights reserved. Unauthorized copying and distribution is a violation of law.

1 CHANGES

1.1. Subject

Suffix	Reason for suffix change
M→N	Change of the software. (IC20/IC21:ROM Ver. P231UA/P232UA→P211A/P212A)
N→O	Change of the software. (IC20/IC21:ROM Ver. P211A/P212A→P211C/P212C) There is no change in the replacement parts list.
O→P	Change of the software. (IC20/IC21:ROM Ver. P211C/P212C→P211D/P212D) There is no change in the replacement parts list.
P→Q	Change of the CPU BOARD. (PQUP10441YB→PQUP10441YC) Change of the software. (IC20/IC21:ROM Ver. P211D/P212D→P211H/P212H)

1.2. Suffix location



1.3. REPLACEMENT PARTS LIST

Reason for Change (Symbol:A) Following 1-8 reasons are indicated on the Notes in the bottom column.

1. Improve performance	Remark: 1. Part with mark *1 has not changed on the Supplement-7.
2. Change of material or dimension	
3. To meet approved specification	
4. Standardization	
5. Addition	
6. Deletion	
7. Correction	
8. Other	

Interchangeability code (Symbol:B) Following V-Z interchangeabilities are indicated on the Notes in the bottom column.

Parts	Set Production	Description
V	Original → Early (before change) New → Late (after change)	Original or new parts may be used in early or late production sets. Use original parts until exhausted, then stock new parts.
W	Original → Early (before change) New → Late (after change)	Original parts may be used in early production sets only. New parts may be used in early or late production sets. Use original parts where possible, then stock new parts.
X	Original → Early (before change) New → Late (after change)	New parts only may be used in early or late production sets. Stock new parts.
Y	Original → Early (before change) New → Late (after change)	Original parts may be used in early production sets only. New parts may be used in late production sets only. Stock both original and new parts.
Z	Other	

Ref. No.	Parts No.		Part Name & description	Pcs	Remarks	Notes		Time of change (Suffix)
	Original Part	**New part**						
CABINET AND ELECTRICAL PARTS								
	PSGT1453W	**PSGT1453V**	NAME PLATE	1		8	X	
ACCESSORIES AND PACKING MATERIALS								
A8	PQQX10173V	**PSQX2021Z**	USER MANUAL	1		8	X	N
CPU BOARD PARTS (All parts are shown bellow.)								
PCB1	PSWP11232MU1	**PSWP11232MU2**	CPU BOARD ASS'Y (RTL)	1		1	V	Q
IC1	PQVI68301FCG	**PQVI68301FCG**	IC	1	*1			
IC2	PQVI620890F	**PQVI620890F**	IC	1	*1			
IC3	PQVIMT8980DE	**PQVIMT8980DE**	IC	1	*1			
IC6~IC8	PQVIMC45503P	**PQVIMC45503W**	IC	3		1	Y	Q
IC10, IC11	PQVINJM4558D	**----------**	IC	0		6		Q
IC12, IC14	PQVINJM4558D	**PQVINJM4558D**	IC	2	*1			
IC13	PQVIPS520C	**PSVIPS600CMT**	IC	1		1	Y	Q
IC15	PQVIHD75188P	**PQVIHD75188P**	IC	1	*1			
IC16	PQVIHD75189P	**PQVIHD75189P**	IC	1	*1			
IC17	PSVITC7HT00A	**PSVITC7HT00A**	IC	1	*1			
IC18	PQVISN7L00S	**PQVISN7L00S**	IC	1	*1			
IC19	PQWI2D1232UK	**PQWI2D1232UK**	IC (ROM)	1	*1			

IC20,IC21	PSWI11232M15	**PSWI11232M17**	IC (ROM KIT)	1		1	X	N/O
	PSWI11232M17	**PSWI11232M20**	IC (ROM KIT)	1			X	Q
IC24	PSVICX582MD	**PSVITC5401AE**	IC	1		1	Y	Q
IC25	PSVICX582MD	**PSVITC5401AE**	IC	1		1	Y	Q
IC26	PQVICX581APD	**PQVICX581APD**	IC	1	*1			
IC27	PQVINJM4558D	**PQVINJM4558D**	IC		*1			
IC29	PQVISN7L368M	**PQVISN7L368M**	IC	1	*1			
IC31	PQVISN7L640M	**PQVISN7L640M**	IC	1	*1			
IC32	PQVISN7L365S	**PQVISN7L365S**	IC	1	*1			
IC33, IC34	PQVISN7L368M	**PQVISN7L368M**	IC	2	*1			
IC35	PQVISN7L365S	**PQVISN7L365S**	IC	1	*1			
IC36	PQVIMB7HU04F	**PQVIMB7HU04F**	IC	1	*1			
IC37	PQVISN7H00S	**PQVISN7H00S**	IC	1	*1			
IC38	PQVISN7H74S	**PQVISN7H74S**	IC	1	*1			
IC39	PQVISN7L151M	**PQVISN7L151M**	IC	1	*1			
IC40	----------	**PQVISN7L32S**	IC	1		5	Y	Q
Q5	PQVTDTA144EK	**PQVTDTA144EK**	TRANSISTOR (SI)	1	*1			
Q6	2SC2412K	**2SC2412K**	TRANSISTOR (SI)	1	*1			
Q7	2SC2412K	**2SC2412K**	TRANSISTOR (SI)	1	*1			
Q8	PQVTDTA143E	**PQVTDTA143E**	TRANSISTOR (SI)	1	*1			
Q9	PQVTDTC144E	**PQVTDTC144E**	TRANSISTOR (SI)	1	*1			
Q10	2SA933	**2SA933**	TRANSISTOR (SI) (or 2SA1317)	1	*1			
Q11	2SC2412K	**2SC2412K**	TRANSISTOR (SI)	1	*1			
Q12	2SC2878	**2SC2878**	TRANSISTOR (SI)	1	*1			
Q13	2SC2412K	**2SC2412K**	TRANSISTOR (SI)	1	*1			
Q14	2SC2878	**2SC2878**	TRANSISTOR (SI)	1	*1			
Q605	----------	**PQVTDTC144E**	TRANSISTOR (SI)	1		5		Q
Q606	----------	**2SB1237R**	TRANSISTOR (SI)	1		5		Q
Q607	----------	**PQVTDTC143E**	TRANSISTOR (SI)	1		5		Q
D1	MA4091	**MA4091**	DIODE (SI)	1	*1			
D4	PQVDAK03	**PQVDAK03**	DIODE (SI)	1	*1			
D11, D12	RLS71	**RLS71**	DIODE (SI)	2	*1			
D13, D14	MA4030	**MA4030**	DIODE (SI)	2	*1			
D15	MA4056	**MA4056**	DIODE (SI)	1	*1			
D16, D17	RLS71	**RLS71**	DIODE (SI)	2	*1			
D3, D20, D21	MA723	**MA723**	DIODE (SI)	3	*1			
R4	PQ4R10XJ471	**ERJ3GEYJ471**	RESISTOR, 470Ω	1		1	Y	Q
R5	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	Q
R6	PQ4R10XJ223	**ERJ3GEYJ223**	RESISTOR, 22kΩ	1		1	Y	Q
R7	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R8	PQ4R10XJ683	**ERJ3GEYJ683**	RESISTOR, 68kΩ	1		1	Y	Q
R10	PQ4R10XJ224	**ERJ3GEYJ224**	RESISTOR, 220kΩ	1		1	Y	Q
R11	PQ4R10XJ681	**ERJ3GEYJ681**	RESISTOR, 680Ω	1		1	Y	Q
R12	PQ4R10XJ393	**ERJ3GEYJ393**	RESISTOR, 39kΩ	1		1	Y	Q
R13	PQ4R10XF1782	**ERJ3GEYJ183**	RESISTOR, 18kΩ	1		1	Y	Q
R14	PQ4R10XJ104	**ERJ3GEYJ104**	RESISTOR, 100kΩ	1		1	Y	Q
R15	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R16	PQ4R10XJ274	**ERJ3GEYJ274**	RESISTOR, 270kΩ	1		1	Y	Q
R17	PQ4R10XJ183	**ERJ3GEYJ183**	RESISTOR, 18kΩ	1		1	Y	Q
R18	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R19	PQ4R10XJ561	**ERJ3GEYJ561**	RESISTOR, 560Ω	1		1	Y	Q
R20	PQ4R10XJ105	**ERJ3GEYJ105**	RESISTOR, 1MΩ	1		1	Y	Q
R21	PQ4R10XJ563	**ERJ3GEYJ623**	RESISTOR, 62kΩ	1		1	Y	Q
R22	PQ4R10XJ104	**ERJ3GEYJ913**	RESISTOR, 91kΩ	1		1	Y	Q
R23	PQ4R10XJ104	**ERJ3GEYJ134**	RESISTOR, 130kΩ	1		1	Y	Q
R24	PQ4R10XJ124	**ERJ3GEYJ154**	RESISTOR, 150kΩ	1		1	Y	Q
R25	PQ4R10XJ823	----------	RESISTOR, 82kΩ	0		6		Q
R26	PQ4R10XJ104	----------	RESISTOR, 100kΩ	0		6		Q
R27	PQ4R10XJ104	----------	RESISTOR, 100kΩ	0		6		Q
R28	PQ4R10XF1211	**ERJ3GEYF122**	RESISTOR, 1.2kΩ	1		1	Y	Q
R29	PQ4R10XF1211	----------	RESISTOR, 1.21kΩ	0		6		Q
R30	PQ4R10XJ224	**ERJ3GEYJ224**	RESISTOR, 220kΩ	1		1	Y	Q
R31	PQ4R10XF1401	----------	RESISTOR, 1.4kΩ	1		6		Q
R32	PQ4R10XJ823	**ERJ3GEYJ154**	RESISTOR, 150Ω	1		1	Y	Q
R33	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	Q
R34	PQ4R10XJ333	**ERJ3GEYJ333**	RESISTOR, 33kΩ	1		1	Y	Q
R35	PQ4R10XJ104	**ERJ3GEYJ104**	RESISTOR, 100kΩ	1		1	Y	Q
R36	PQ4R10XJ124	**ERJ3GEYJ124**	RESISTOR, 120kΩ	1		1	Y	Q

R37	PQ4R10XJ104	**ERJ3GEYJ563**	RESISTOR, 56kΩ	1		1	Y	Q
R38	PQ4R10XJ104	**ERJ3GEYJ104**	RESISTOR, 100kΩ	1		1	Y	Q
R39	PQ4R10XJ124	**ERJ3GEYJ124**	RESISTOR, 120kΩ	1		1	Y	Q
R40	PQ4R10XJ104	**ERJ3GEYJ104**	RESISTOR, 100kΩ	1		1	Y	Q
R48	PQ4R10XJ333	**ERJ3GEYJ333**	RESISTOR, 33kΩ	1		1	Y	Q
R50	PQ4R10XJ224	**ERJ3GEYJ224**	RESISTOR, 220kΩ	1		1	Y	Q
R51	PQ4R10XJ333	**ERJ3GEYJ333**	RESISTOR, 33kΩ	1		1	Y	Q
R52	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	Q
R53	PQ4R10XJ104	**ERJ3GEYJ104**	RESISTOR, 100kΩ	1		1	Y	Q
R57	PQ4R10XJ102	**ERJ3GEYJ102**	RESISTOR, 1kΩ	1		1	Y	Q
R59	PQ4R10XJ104	**ERJ3GEYJ563**	RESISTOR, 56kΩ	1		1	Y	Q
R61	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R62	PQ4R10XJ223	**ERJ3GEYJ223**	RESISTOR, 22kΩ	1		1	Y	Q
R65	PQ4R10XJ561	**ERJ3GEYJ561**	RESISTOR, 560Ω	1		1	Y	Q
R66	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R67	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R68	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R69	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R70	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R71	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R72	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R73	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R74	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R75	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R76	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R77	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R78	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R79	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R83	ERDS1TJ151	**ERDS1TJ151**	RESISTOR, 150Ω	1	*1			
R84	PQ4R10XJ152	**ERJ3GEYJ152**	RESISTOR, 1.5kΩ	1		1	Y	Q
R85	PQ4R10XJ681	**ERJ3GEYJ681**	RESISTOR, 680Ω	1		1	Y	Q
R87	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R91	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R92	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R93	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R94	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R96	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R97	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R110	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R111	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R112	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R113	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R114	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R115	PQ4R10XJ222	**ERJ3GEYJ222**	RESISTOR, 2.2kΩ	1		1	Y	Q
R116	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	Q
R117	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R118	PQ4R10XJ333	**ERJ3GEYJ333**	RESISTOR, 33kΩ	1		1	Y	Q
R119	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R120	PQ4R10XJ334	**ERJ3GEYJ334**	RESISTOR, 330kΩ	1		1	Y	Q
R121	PQ4R10XJ222	**ERJ3GEYJ222**	RESISTOR, 2.2kΩ	1		1	Y	Q
R122	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	Q
R123	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R124	PQ4R10XJ333	**ERJ3GEYJ333**	RESISTOR, 33kΩ	1		1	Y	Q
R125	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R126	PQ4R10XJ334	**ERJ3GEYJ334**	RESISTOR, 330kΩ	1		1	Y	Q
R127	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	Q
R128	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	Q
R129	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R130	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R131	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R132	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R133	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R134	PQ4R10XJ390	**ERJ3GEYJ390**	RESISTOR, 39Ω	1		1	Y	Q
R135	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R136	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R137	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R138	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	Q
R139	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	Q

R140	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	Q
R141	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	Q
R142	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	Q
R143	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	Q
R144	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	Q
R145	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	Q
R146	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R147	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R148	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R149	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R150	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R151	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R152	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R153	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R154	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R155	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R156	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R157	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R158	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R159	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R160	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	Q
R161	PQ4R10XJ390	**ERJ3GEYJ390**	RESISTOR, 39Ω	1		1	Y	Q
R162	PQ4R10XJ330	**ERJ3GEYJ330**	RESISTOR, 33Ω	1		1	Y	Q
R163	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R164	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R165	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R166	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R167	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R168	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R169	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R170	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R171	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R172	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R173	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R174	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R175	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R176	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R177	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R178	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R179	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R180	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R181	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R182	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R183	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R184	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R185	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R186	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R187	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R188	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R189	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R190	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R191	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R192	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R193	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R194	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R195	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R196	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R197	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R198	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R199	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R200	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R201	PQ4R10XJ102	**ERJ3GEYJ102**	RESISTOR, 1kΩ	1		1	Y	Q
R202	PQ4R10XJ102	**ERJ3GEYJ102**	RESISTOR, 1kΩ	1		1	Y	Q
R203	PQ4R10XJ102	**ERJ3GEYJ102**	RESISTOR, 1kΩ	1		1	Y	Q
R204	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R205	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R206	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R207	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q

R208	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R209	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R210	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R211	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R212	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R213	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R214	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R215	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R216	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R217	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R218	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R219	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R220	PQ4R10XJ223	**ERJ3GEYJ223**	RESISTOR, 22kΩ	1		1	Y	Q
R221	PQ4R10XJ222	**ERJ3GEYJ222**	RESISTOR, 2.2kΩ	1		1	Y	Q
R222	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R223	PQ4R10XJ223	**ERJ3GEYJ223**	RESISTOR, 22kΩ	1		1	Y	Q
R224	PQ4R10XJ105	**ERJ3GEYJ105**	RESISTOR, 1MΩ	1		1	Y	Q
R225, R226	PQ4R10XJ330	**ERJ3GEYJ330**	RESISTOR, 33Ω	2		1	Y	Q
R227	PQ4R10XJ223	**ERJ3GEYJ223**	RESISTOR, 22kΩ	1		1	Y	Q
R228	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	Q
R229	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	Q
R704	----------	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		5		Q
R705	----------	**PQRD1VJ220**	RESISTOR, 22Ω	1		5		Q
R706	----------	**ERJ3GEY0R00**	RESISTOR, 0Ω	1		5		Q
R707	----------	**ERJ3GEYJ561**	RESISTOR, 560Ω	1		5		Q
R709	----------	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		5		Q
J1	----------	**ERJ3GEY0R00**	RESISTOR, 0Ω	1		5		Q
J6	PQ4R10XJ000	**----------**	RESISTOR, 0Ω	0		6		Q
J16	PQ4R10XJ223	**ERJ3GEYJ223**	RESISTOR, 22KΩ	1		1	Y	Q
C1	EECFE5R5474	**EECFE5R5474**	CAPACITOR, 0.47µF	1	*1			
C2	ECEA1EU4R7	**ECEA1EU4R7**	CAPACITOR, 4.7µF	1	*1			
C3	ECEA1HN3R3S	**ECEA1HN3R3S**	CAPACITOR, 3.3µF	1	*1			
C8	ECQV1H104JZ	**ECQV1H104JZ**	CAPACITOR, 0.1µF	1	*1			
C9	ECQV1H104JZ	**ECQV1H104JZ**	CAPACITOR, 0.1µF	1	*1			
C11	PQCUV1H104ZF	**PQCUV1H105JC**	CAPACITOR, 1µF	1		1	Y	Q
C12	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	Q
C13	PQCUV1H682KB	**----------**	CAPACITOR, 0.0068µF	0		6		Q
C14	PQCUV1H680JC	**ECUV1H680JCV**	CAPACITOR, 68pF	1		1	Y	Q
C16	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	Q
C17	PQCUV1H104ZF	**----------**	CAPACITOR, 0.1µF	0		6		Q
C19	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	Q
C20	PQCUV1H332KB	**ECUV1H332KBV**	CAPACITOR, 0.0033µF	1		1	Y	Q
C21	PQCUV1H104ZF	**----------**	CAPACITOR, 0.1µF	0		6		Q
C22	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	Q
C23	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	Q
C24	PQCUV1H332KB	**ECUV1H332KBV**	CAPACITOR, 0.0033µF	1		1	Y	Q
C25	PQCUV1H104ZF	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	Q
C26	PQCUV1H104ZF	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	Q
C27	PQCUV1H102J	**ECUV1H102KBV**	CAPACITOR, 0.001µF	1		1	Y	Q
C28	PQCUV1H104ZF	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	Q
C29	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	Q
C30	PQCUV1H104ZF	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	Q
C31	PQCUV1H102J	**ECUV1H102KBV**	CAPACITOR, 0.001µF	1		1	Y	Q
C33	PQCUV1H223KB	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	Q
C34	PQCUV1H223KB	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	Q
C35	PQCUV1H223KB	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	Q
C36	PQCUV1H223KB	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	Q
C37	PQCUV1H223KB	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	Q
C38	PQCUV1H223KB	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	Q
C39	PQCUV1H200JC	**ECUV1H200JCV**	CAPACITOR, 20pF	1		1	Y	Q
C40	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C41	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C44	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C45	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C46	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C47	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C50	ECEA1EU331	**ECEA1EU331**	CAPACITOR, 330	1	*1			
C53	PQCUV1H180JC	**ECUV1H180JCV**	CAPACITOR, 18pF	1		1	Y	Q

C54	PQCUV1H180JC	**ECUV1H180JCV**	CAPACITOR, 18pF	1		1	Y	Q
C55	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C56	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C59	ECEA1HU010	**ECEA1HU010**	CAPACITOR, 1µF	1	*1			
C60	ECEA1HU010	**ECEA1HU010**	CAPACITOR, 1µF	1	*1			
C61	ECEA1HU010	**ECEA1HU010**	CAPACITOR, 1µF	1	*1			
C62	ECEA1HU010	**ECEA1HU010**	CAPACITOR, 1µF	1	*1			
C63	ECEA1HU010	**ECEA1HU010**	CAPACITOR, 1µF	1	*1			
C64	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C66	ECEA1AU101	**ECEA1AU101**	CAPACITOR, 100µF	1	*1			
C67	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C68	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C70	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C71	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C72	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C80	PQCUV1H200JC	**ECUV1H200JCV**	CAPACITOR, 20pF	1		1	Y	Q
C81	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C82	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C83	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C84	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C85	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C86	PQCUV1H104ZF	**ECUV1C104KBV**	CAPACITOR, 1µF	1		1	Y	Q
C87	ECEA1AKS330	**ECEA1AKS330**	CAPACITOR, 33µF	1	*1			
C88	ECEA1HN2R2S	**ECEA1HN2R2S**	CAPACITOR, 2.2µF	1	*1			
C89	PQCUV1H104ZF	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	Q
C90	ECEA1VU330	**ECEA1VU330**	CAPACITOR, 33µF	1	*1			
C91	ECEA1HN2R2S	**ECEA1HN2R2S**	CAPACITOR, 2.2µF	1	*1			
C92	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	Q
C93	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	Q
C94	PQCUV1H470JC	**ECUV1H470JCV**	CAPACITOR, 47pF	1		1	Y	Q
C95	PQCUV1H470JC	**ECUV1H470JCV**	CAPACITOR, 47pF	1		1	Y	Q
C96	PQCUV1H470JC	**ECUV1H470JCV**	CAPACITOR, 47pF	1		1	Y	Q
C97	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C98	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C99	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C100, C101	PQCUV1H220JC	**ECUV1H220JCV**	CAPACITOR, 22pF	2		1	Y	Q
C102	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	Q
C705	----------	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		5		Q
T1	ETA14Y180AY	**ETA14Y180AY**	TRANSFORMER	1	*1			
T2~T5	PQLT2D6A	**PQLT2D6A**	TRANSFORMER	4	*1			
L7~L14	PQLE106	**PQLE106**	COIL	8	*1			
L21~L23	PQVFTU50MT	**PQVFTU50MT**	CERAMIC FILTER	3	*1			
L24~L27	PQVFCM04RC01	**PQVFCM04RC01**	CERAMIC FILTER	4	*1			
L30	JUMPER WIRE	**JUMPER WIRE**	JUMPER WIRE	1	*1			
JAC1, JAC2	PQJJ1G1Z	**PQJJ1G1Z**	JACK, PAGING	2	*1			
JAC3, JAC4	PQJJ1D3Z	**PQJJ1D3Z**	JACK, EP	2	*1			
CN1	PQJS64R15Z	**PQJS64R15Z**	CONNECTOR, 64P	1	*1			
CN4	PQJP2D70Z	**PQJP2D70Z**	CONNECTOR, 2P	1	*1			
CN5~CN8	PSJS20A25Z	**PSJS20A25Z**	CONNECTOR, 20P	4	*1			
CN9	PQJP20A08Z	**PQJP20A08Z**	CONNECTOR, 20P	1	*1			
CN12	PQJP6D70Z	**PQJP6D70Z**	CONNECTOR, 6P	1	*1			
CN13	PQJS6H30Z	**PQJS6H30Z**	CONNECTOR, 6P	1	*1			
CN14	PQJS4H30Z	**PQJS4H30Z**	CONNECTOR, 4P	1	*1			
BAT	CR23541GUF	**CR23541GUF**	LITHIUM BATTERY	1	*1			
SW1	EVQ21409K	**EVQ21409K**	SWITCH	1	*1			
SW2	PQSS2A24Z	**PQSS2A24Z**	SWITCH	1	*1			
SW3	ESD11V120	**ESD11V120**	SWITCH	1	*1			
X1	PQVCJ12000N8	**PQVCJ12000N8**	CRYSTAL OSCILLATOR	1	*1			
X2	PQVCL3276N6Z	**PQVCL3276N6Z**	CRYSTAL OSCILLATOR	1	*1			
X3	PQVCJ8192N8Z	**PQVCJ8192N8Z**	CRYSTAL OSCILLATOR	1	*1			
Z1, Z2, Z4~Z6	PQRSLD8X103J	**PQRSLD8X103J**	RESISTOR ARRAY	5	*1			

2 PRINTED CIRCUIT BOARD (CPU BOARD)

2.1. Change from Supplement-2 page 5.

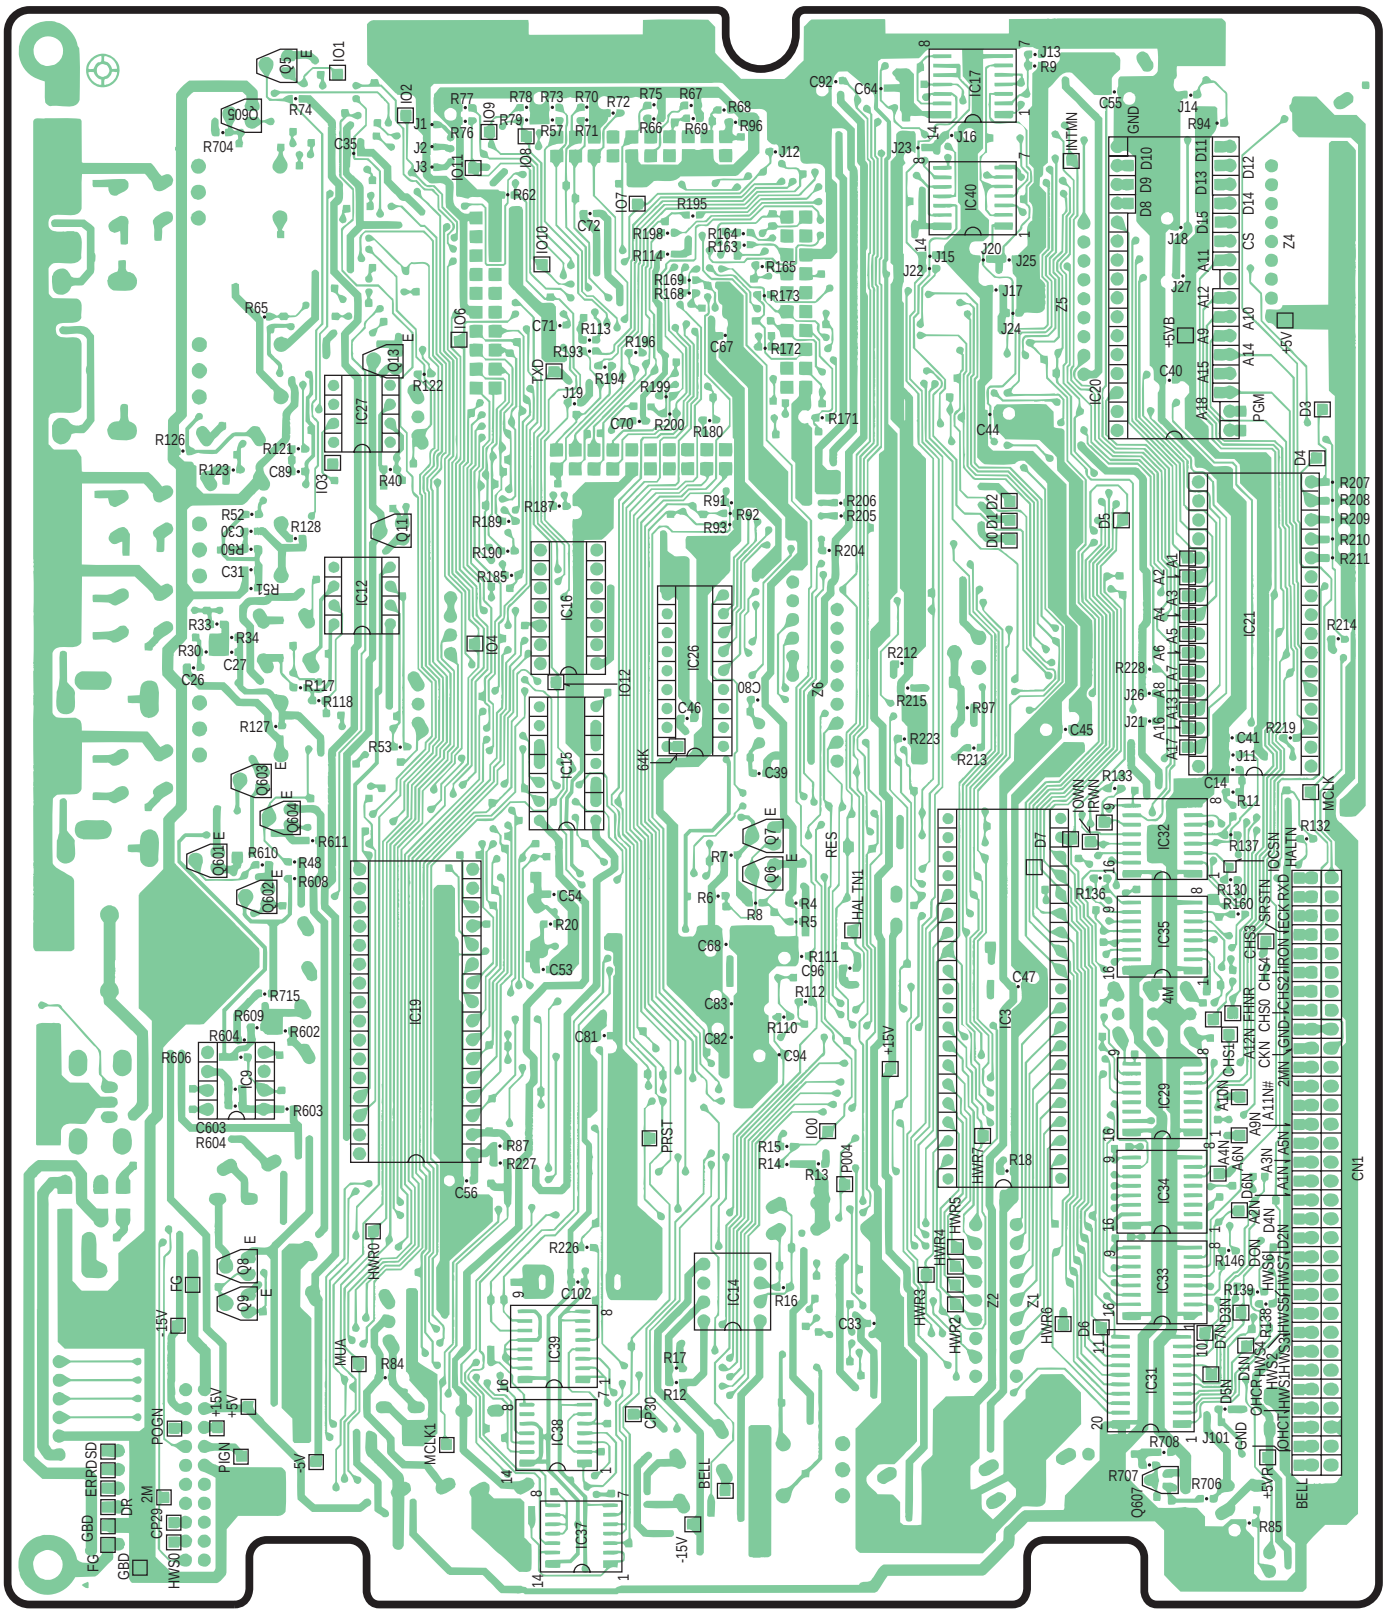

Bottom View

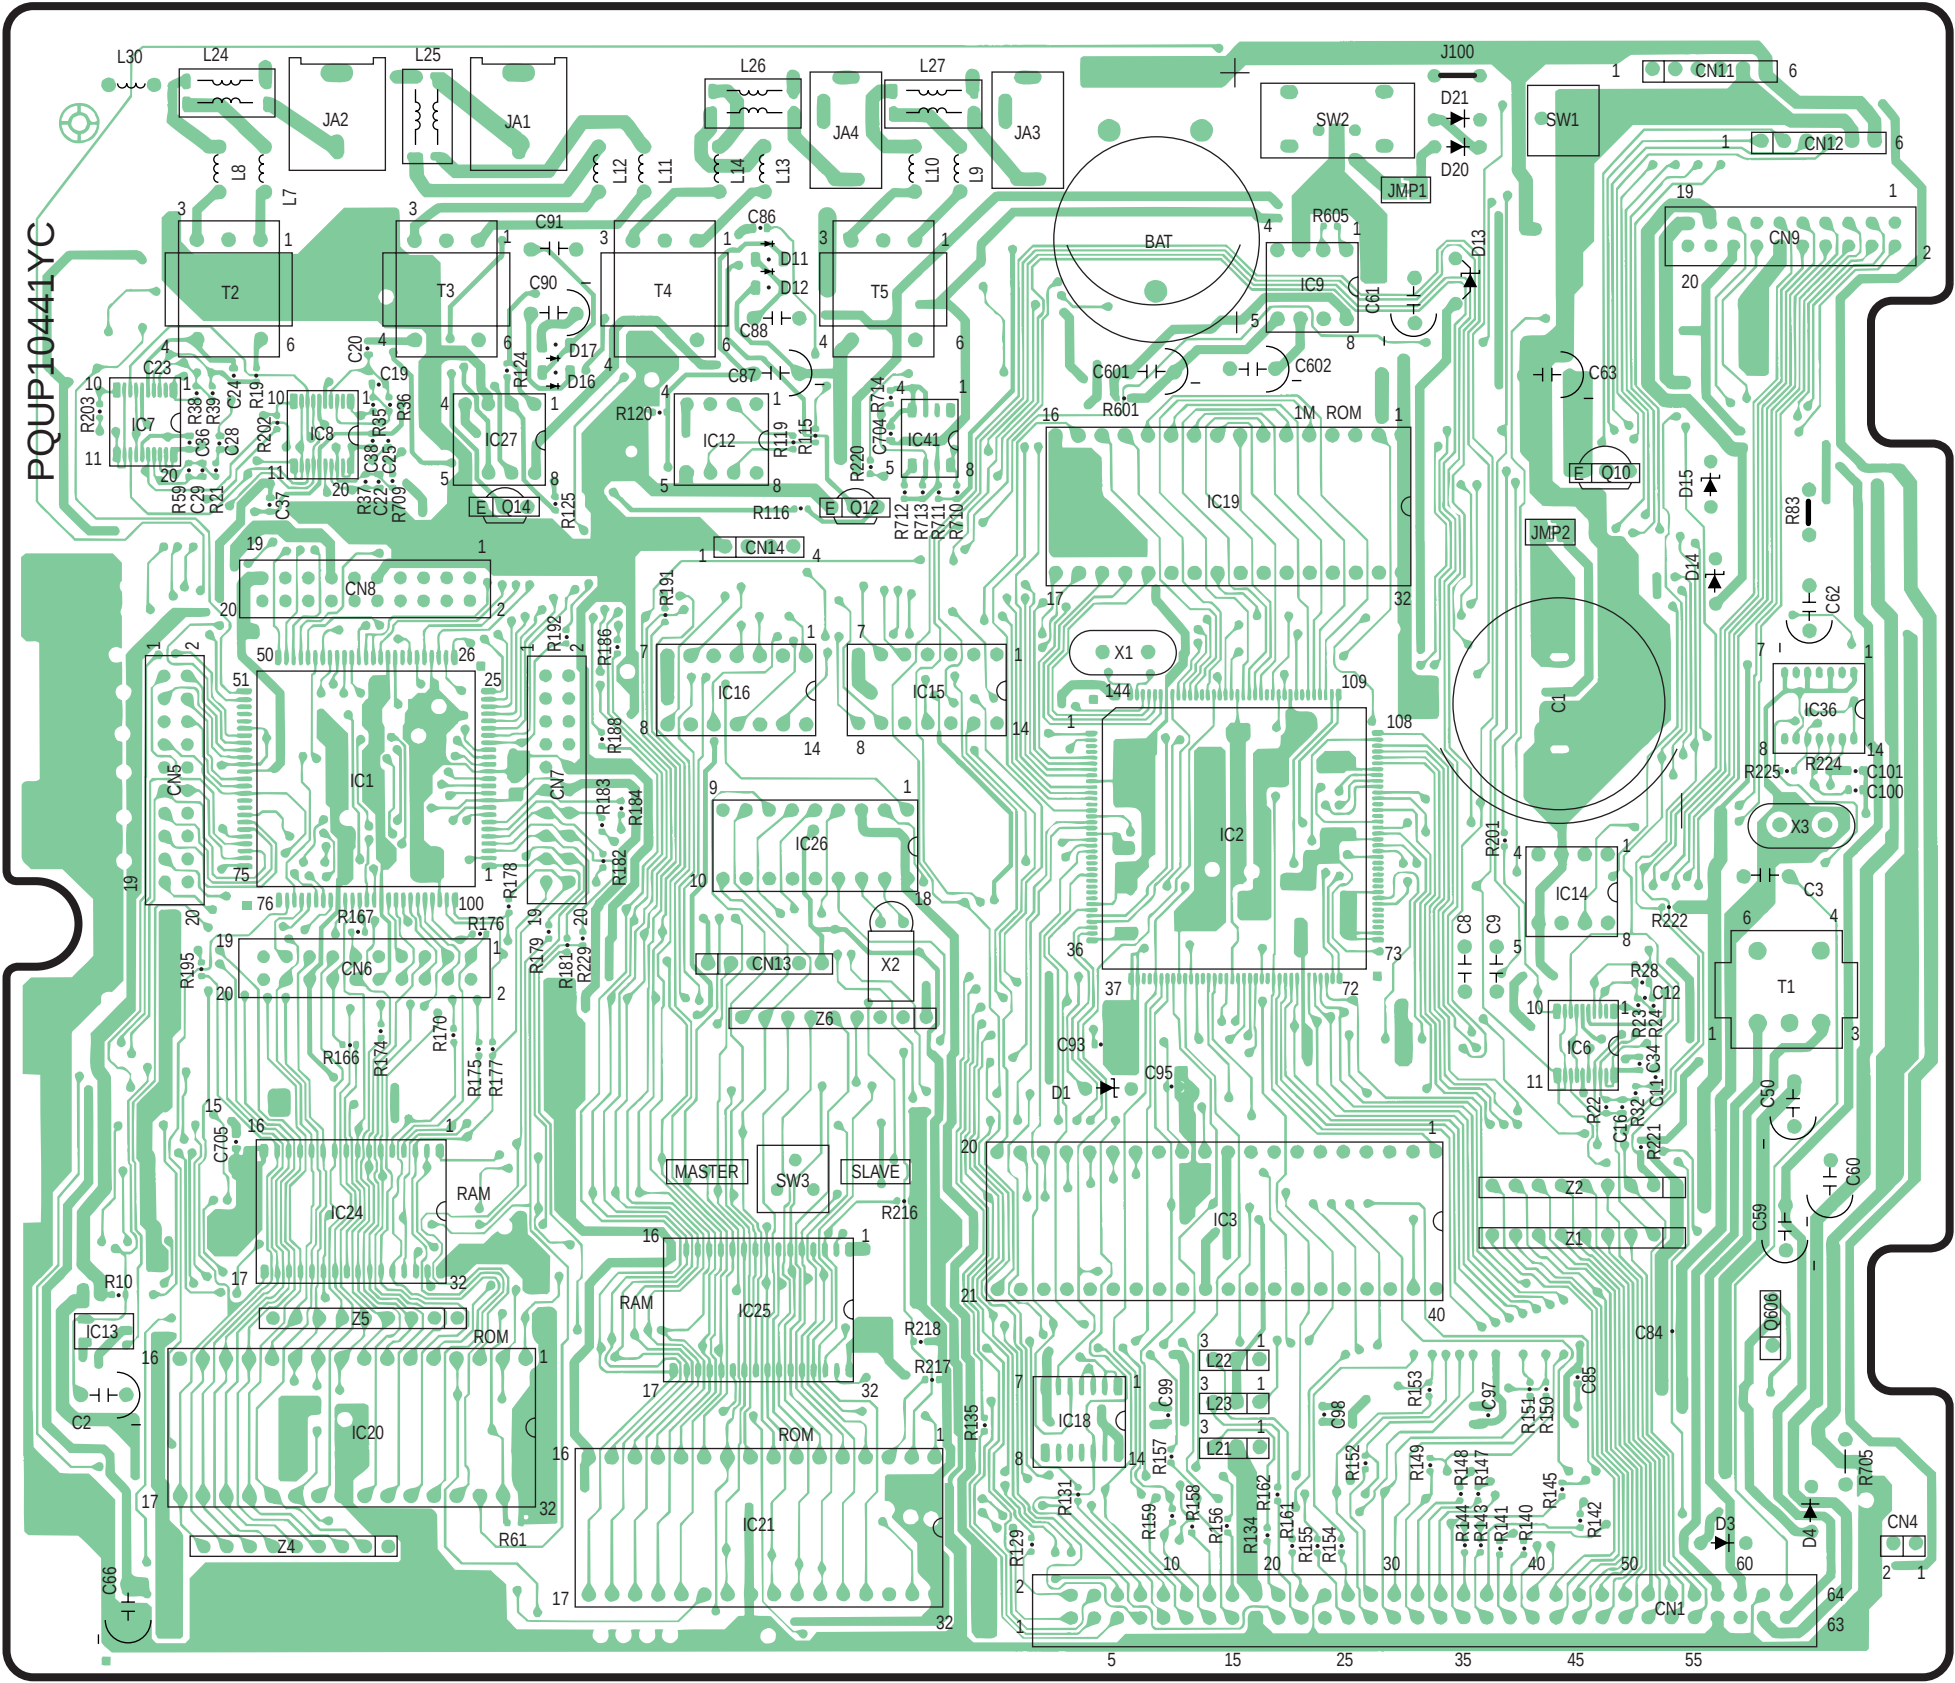
PQUP10441YC
L30
L24
L25
L26
L27
JA2
JA1
JA4
JA3
J100
SW2
SW1
D21
D20
CN11
CN12
JMP1
L8
L7
L12
L11
L14
L13
L10
L9
T2
T3
T4
T5
C91
C90
C86
D11
D12
C88
D17
D16
C87
BAT
R605
IC9
C61
D13
CN9
C23
C20
C19
C24
R124
R120
IC12
R119
R115
C704
R714
IC41
C601
C602
R601
1M ROM
IC19
C63
Q10
D15
R83
IC7
IC8
IC27
R203
R202
R38
R39
R36
C38
C25
C28
R19
R35
C36
R59
C29
R21
C37
R709
R125
Q14
R116
Q12
R712
R713
R711
R710
JMP2
D14
CN14
CN8
R191
R192
R186
R188
IC16
IC15
X1
C62
IC36
R225
R224
C101
C100
X3
CN5
IC1
CN7
R183
R184
R182
R178
IC26
IC2
C1
C3
R201
IC14
R222
C8
C9
R28
C12
T1
R167
R176
R179
R181
R229
CN13
X2
Z6
R195
CN6
R166
R174
R170
R175
R177
C93
C95
D1
IC6
R23
R24
C34
C11
R22
C16
R32
R221
C50
C60
C59
C705
IC24
RAM
MASTER
SW3
SLAVE
R216
IC3
Z2
Z1
R10
IC13
Z5
ROM
IC25
RAM
R218
R217
R135
IC18
L22
L23
L21
C99
C98
C97
C85
C84
Q606
R153
R151
R150
R152
R149
R148
R147
R145
R142
R157
R131
R159
R158
R156
R162
R134
R161
R155
R154
R144
R143
R141
R140
R129
C2
IC20
R61
Z4
IC21
C66
D3
D4
R705
CN4
CN1

SMDR

(TO CN12)

CN701

CN702

R700 820

R701 820

R702 820

R703 820

C703 3900P

C702 3900P

C701 3900P

C700 3900P

LED

(TO CN4)

CN601

LED

IC20

IC21

IC24

IC25

IC26

IC40

IC1

IC2

IC3

CN1

CN6

CN7

CN8

CN5

Z1 10K

Z2 10K

R221 2.2K

R18 10K

C47 0.022

C46 2200P

C80 20P

C39 20P

X2 32.768KHZ

R62 22K

J19

R74 10K

Q5

Q605

R73 10K

R18 10K

C47 0.022

A[1-23],D[0-15],R/WN

CSROMN

CSRAM2N

CSRAM1N

CSRAM0N

IORN

IOWN

CSRTCN

POWRSTN

PDPG[0]

PDPG[1]

PDPG[2]

PDPG[3]

PDOHCA

MOHMUTE[0]

MOHMUTE[1]

HALTN

RESET

SW1

PD15N

BELLS

ECK

R/WN

ASN

DTACN

UDSN

LDSN

CPUCKN

SRSTN

IRWN

IOWN

MCLK

FHNR

C2M

C4M

CSROMN

CSRAM2N

CSRAM1N

CSRAM0N

CSRTCN

EXTCK

PLLPRSN

SELCK

CHS[0]

CHS[1]

CHS[2]

CHS[3]

CHS[4]

PIGN

POGN

HWRO

MU/A

HWSO

CP[291]

CP[30]

CP[281]

CP[311]

CP[271]

CP[291]

CP[301]

PCM[0-7]

PCM[0]

PCM[1]

PCM[2]

PCM[3]

PCM[4]

PCM[5]

PCM[6]

PCM[7]

D[0]

D[1]

D[2]

D[3]

D[4]

D[5]

IC6

IC7

IC8

IC9

IC41

IC12

IC27

IC39

IC19

IC36

IC38

IC37

IC15

IC16

IC14

IC13

IC17

IC18

IC29

IC32

IC33

IC34

IC35

IC31

IC30

IC39

IC40

R201 1.0K

R202 1.0K

R203 1.0K

R303 1.0K

R23 130K

R24 150K

R35 100K

R36 120K

R38 100K

R39 120K

R28 1.2k

R32 150K

R22 91K

R11 1.0

C16 100P

C19 100P

C20 3300P

C22 100P

C23 100P

C24 3300P

C29 100P

R19 560

R21 62k

C28 0.1

R59 56k

C12 100P

C11 1.0

R65 560

R709 4.7k

C25 0.1

T1

T3

T2

L11

L12

L25

L7

L8

L24

JA1

JA2

EXT PAG1

EXT PAG2

R712 10K

R713 NC

R714

R710 390K

R711 100k

C704 0.1

R601 100K

C601 16V4.7

C602 16V4.7

R603 330

R604 150

C603 0.022

R605 820K

R606 22K

R609 22K

C604 0.1

R715 0

R608 120K

R48 33k

R220 22k

Q601

Q602

Q603

Q604

R610 22K

R611 22K

R85 680

CN4

R97 10K

SW3

R53 100K

R118 33K

R119 10K

R40 100K

R124 33K

R125 10K

R116 4.7K

R120 330K

R117 10K

R122 4.7K

R126 330K

C86 0.1 μ

C87 25V33 μ

C88 50V2.2 μ

C89 0.1 μ

C90 25V33 μ

C91 50V2.2 μ

D11

D12

D16

D17

R115 2.2K

R121 2.2K

R123 10K

L9

L10

L27

L13

L14

L26

T5

T4

C26 0.1 μ

C30 0.1 μ

R30 220K

R50 220K

R33 4.7K

R52 4.7K

R127 4.7K

R128 4.7K

R34 33K

R51 33K

C27 0.001

C31 0.001

R223 22K

R224 1M

R225 33

R226 33

R227 22K

C101 22P

C100 22P

X3

R57 1K

R94 10K

R96 10K

R97 10K

R112 10K

R113 10K

R70 10K

R21 10K

R22 10K

R23 10K

R75 10K

R76 10K

R77 10K

R78 10K

R79 10K

R80 10K

R81 10K

R82 10K

R83 1W,150

R84 1.5K

R110 47

R111 47

R129 47

R130 47

R131 47

R132 47

R133 47

R134 39

R135 47

R136 47

R137 47

R138 100

R139 100

R140 100

R141 100

R142 100

R143 100

R144 100

R145 100

R146 47

R147 47

R148 47

R149 47

R150 47

R151 47

R152 47

R153 47

R154 47

R155 47

R156 47

R157 47

R158 47

R159 47

R160 47

R161 39

R162 33

R163 56

R164 56

R165 56

R166 56

R167 56

R168 56

R169 56

R170 56

R171 56

R172 56

R173 56

R174 56

R175 56

R176 56

R177 56

R178 56

R179 56

R180 56

R229 56

R182 56

R183 56

R184 56

R185 56

R186 56

R187 56

R188 56

R189 56

R190 56

R191 56

R192 56

R193 56

R194 56

R195 56

R196 56

R197 56

R198 56

R199 56

R200 56

R204 10K

R205 10K

R206 10K

R207 10K

R208 10K

R209 10K

R210 10K

R211 10K

R212 10K

R213 10K

R214 10K

R215 10K

R216 10K

R217 10K

R218 10K

R219 10K

R91 10K

R92 10K

R93 10K

R61 10K

R228 10K

R222 10K

R9 No Mounted

R10 20K

R12 39K

R13 18.0K

R14 100K

R15 10K

R16 270K

R17 18K

R6 22K

R5 4.7K

R8 68K

R7 10K

R4 4.7K

R3 4.7K

R2 4.7K

R1 4.7K

R109 4.7K

R108 4.7K

R107 4.7K

R106 4.7K

R105 4.7K

R104 4.7K

R103 4.7K

R102 4.7K

R101 4.7K

R100 4.7K

R99 4.7K

R98 4.7K

R97 4.7K

R96 4.7K

R95 4.7K

R94 4.7K

R93 4.7K

R92 4.7K

R91 4.7K

R90 4.7K

R89 4.7K

R88 4.7K

R87 4.7K

R86 4.7K

R85 4.7K

R84 4.7K

R83 4.7K

R82 4.7K

R81 4.7K

R80 4.7K

R79 4.7K

R78 4.7K

R77 4.7K

R76 4.7K

R75 4.7K

R74 4.7K

R73 4.7K

R72 4.7K

R71 4.7K

R70 4.7K

R69 4.7K

R68 4.7K

R67 4.7K

R66 4.7K

R65 4.7K

R64 4.7K

R63 4.7K

R62 4.7K

R61 4.7K

R60 4.7K

R59 4.7K

R58 4.7K

R57 4.7K

R56 4.7K

R55 4.7K

R54 4.7K

R53 4.7K

R52 4.7K

R51 4.7K

R50 4.7K

R49 4.7K

R48 4.7K

R47 4.7K

R46 4.7K

R45 4.7K

R44 4.7K

R43 4.7K

R42 4.7K

R41 4.7K

R40 4.7K

R39 4.7K

R38 4.7K

R37 4.7K

R36 4.7K

R35 4.7K

R34 4.7K

R33 4.7K

R32 4.7K

R31 4.7K

R30 4.7K

R29 4.7K

R28 4.7K

R27 4.7K

R26 4.7K

R25 4.7K

R24 4.7K

R23 4.7K

R22 4.7K

R21 4.7K

R20 4.7K

R19 4.7K

R18 4.7K

R17 4.7K

R16 4.7K

R15 4.7K

R14 4.7K

R13 4.7K

R12 4.7K

R11 4.7K

R10 4.7K

R9 4.7K

R8 4.7K

R7 4.7K

R6 4.7K

R5 4.7K

R4 4.7K

R3 4.7K

R2 4.7K

R1 4.7K

C1 0.47F

C2 25V4.7

C3 50V3.3

C4 0.1

C5 0.1

C6 0.1

C7 0.1

C8 0.1

C9 0.1

C10 0.1

C11 0.1

C12 0.1

C13 0.1

C14 0.1

C15 0.1

C16 0.1

C17 0.1

C18 0.1

C19 0.1

C20 0.1

C21 0.1

C22 0.1

C23 0.1

C24 0.1

C25 0.1

C26 0.1

C27 0.1

C28 0.1

C29 0.1

C30 0.1

C31 0.1

C32 0.1

C33 0.1

C34 0.1

C35 0.1

C36 0.1

C37 0.1

C38 0.1

C39 0.1

C40 2200P

C41 2200P

C42 2200P

C43 2200P

C44 2200P

C45 2200P

C46 2200P

C47 0.022

C48 0.022

C49 0.022

C50 10V330

C51 0.022

C52 0.022

C53 18P

C54 18P

C55 0.022

C56 0.022

C57 0.022

C58 0.022

C59 50V1

C60 50V1

C61 50V1

C62 50V1

C63 50V1

C64 0.022

C65 0.022

C66 10V100

C67 0.022

C68 0.022

C69 0.022

C70 0.022

C71 0.022

C72 0.022

C73 0.022

C74 0.022

C75 0.022

C76 0.022

C77 0.022

C78 0.022

C79 0.022

C80 20P

C81 0.022

C82 0.022

C83 0.022

C84 0.022

C85 0.022

C86 0.1 μ

C87 25V33 μ

C88 50V2.2 μ

C89 0.1 μ

C90 25V33 μ

C91 50V2.2 μ

C92 100P

C93 100P

C94 47P

C95 47P

C96 47P

C97 47P

C98 0.022

C99 0.022

C100 22P

C101 22P

C102 0.022

C103 0.022

C104 0.022

C105 0.022

C106 0.022

C107 0.022

C108 0.022

C109 0.022

C110 0.022

C111 0.022

C112 0.022

C113 0.022

C114 0.022

C115 0.022

C116 0.022

C117 0.022

C118 0.022

C119 0.022

C120 0.022

C121 0.022

ORDER NO. KMS0008864S1

Service Manual

DIGITAL SUPER HYBRID SYSTEM

KX-TD1232C-1

(for Canada)

Please file and use this supplement manual together with the service manual for Model KX-TD1232C-1, Order No. KMS9704238A1.

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public.
It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product.
Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

Note:Supplement-1~5 have already supplied with printed matter. So please refer to that.

Panasonic

© 2000 Kyushu Matsushita Electric Co., Ltd. All rights reserved. Unauthorized copying and distribution is a violation of law.

1 CHANGES

1.1. Subject

Suffix	Reason for suffix change
O→P	Change of the software (IC20/21:ROM Ver. P231S/P232S→P211D/P212D)
P→Q	Change of the Diode for performance improvement.

1.2. Suffix location



1.3. REPLACEMENT PARTS LIST

Reason for Change (Symbol:A) Following 1-8 reasons are indicated on the Notes in the bottom column.	
1. Improve performance	
2. Change of material or dimension	
3. To meet approved specification	
4. Standardization	
5. Addition	
6. Deletion	
7. Correction	
8. Other	

Interchangeability code (Symbol:B) Following V-Z interchangeabilities are indicated on the Notes in the bottom column.		
Parts	Set Production	Description
V Original / New	Early (before change) / Late (after change)	Original or new parts may be used in early or late production sets. Use original parts until exhausted, then stock new parts.
W Original / New	Early (before change) / Late (after change)	Original parts may be used in early production sets only. New parts may be used in early or late production sets. Use original parts where possible, then stock new parts.
X Original / New	Early (before change) / Late (after change)	New parts only may be used in early or late production sets. Stock new parts.
Y Original / New	Early (before change) / Late (after change)	Original parts may be used in early production sets only. New parts may be used in late production sets only. Stock both original and new parts.
Z Other		

Ref. No.	Part No.		Part Name & Description	Pcs	Remarks	Notes		Time of change (Suffix)
	Original Part	**New Part**						
CPU BOARD PARTS								
IC21~IC24	PSWI1D1232C4	**PSWI11232M19**	IC (ROM KIT)	1		1	X	P
CO LINE BOARD PARTS								
D102A-D102H	PQVDHZS2B1	**PSVDHZS2B3**	DIODE (SI)	8		1	X	Q
D103A-D103H	PQVDHZS2B1	**PSVDHZS2B3**	DIODE (SI)	8		1	X	Q
POWER SUPLLY UNIT PARTS								
ZD3	PSVDMZJ5R1B	**PQVDMZJ5R1B**	DIODE	1		7		
R38	ERDS1TJ100	**ERG1SJ201**	RESISTOR, 200Ω	1		1	X	
C5	PSCK105Z20Z	**PSCCELT1H101**	CAPACITOR, 1μF	1		1	X	

1.4. POWER SUPPLY CIRCUIT

1.4.1. Change from supplement-5 page 19. (Order No.KMS0005677S1)

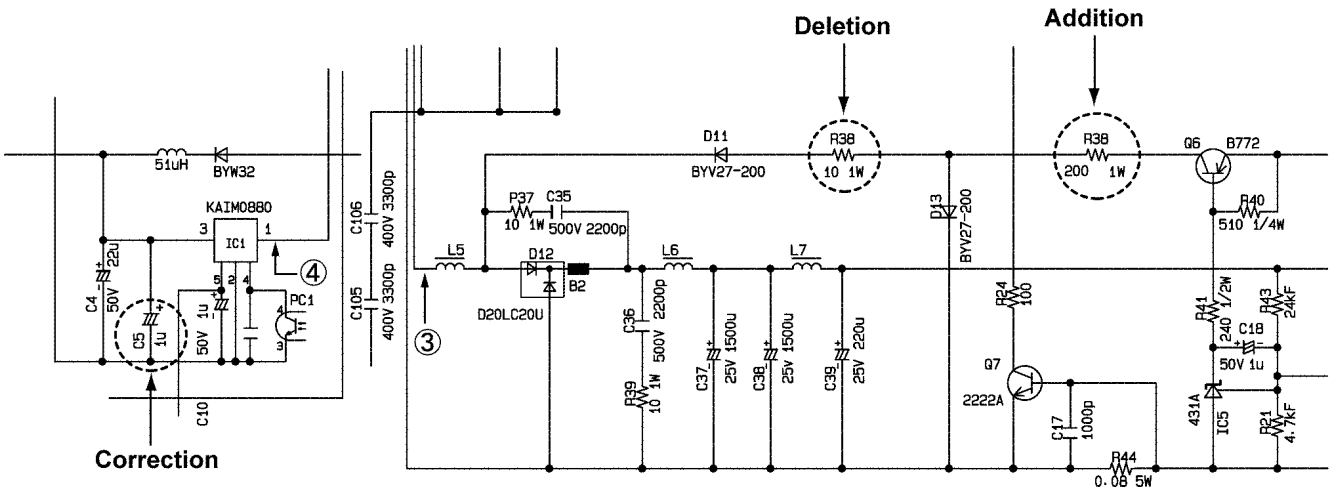

N.T.(Q)
KXTD1232C-1
Printed in Japan

ORDER NO. KMS0011995S1

Service Manual

DIGITAL SUPER HYBRID SYSTEM

KX-TD1232C-1

(for Canada)

Please file and use this supplement manual together with the service manual for Model KX-TD1232C-1, Order No.KMS9704238A1.

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public.
It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product.
Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

Note:Supplement-1~5 have already supplied with printed matter. So please refer to that.

Panasonic

© 2000 Kyushu Matsushita Electric Co., Ltd. All rights reserved. Unauthorized copying and distribution is a violation of law.

1 CHANGES

1.1. Subject

Suffix	Reason for suffix change
Q→R	Change of the cpu Board. (PQUP10441YB→PQUP10441YC)
	Change of the software. (IC20/IC21 ROM Ver. P211D/P212D→P211H/P212H)

1.2. Suffix location



1.3. REPLACEMENT PARTS LIST

Reason for Change (Symbol:A) Following 1-8 reasons are indicated on the Notes in the bottom column.

1. Improve performance	Remark: 1. Part with mark *1 has not changed on the Supplement-7.
2. Change of material or dimension	
3. To meet approved specification	
4. Standardization	
5. Addition	
6. Deletion	
7. Correction	
8. Other	

Interchangeability code (Symbol:B) Following V-Z interchangeabilities are indicated on the Notes in the bottom column.

Parts	Set Production	Description
V	Original → Early (before change) New → Late (after change)	Original or new parts may be used in early or late production sets. Use original parts until exhausted, then stock new parts.
W	Original → Early (before change) New → Late (after change)	Original parts may be used in early production sets only. New parts may be used in early or late production sets. Use original parts where possible, then stock new parts.
X	Original → Early (before change) New → Late (after change)	New parts only may be used in early or late production sets. Stock new parts.
Y	Original → Early (before change) New → Late (after change)	Original parts may be used in early production sets only. New parts may be used in late production sets only. Stock both original and new parts.
Z	Other	

Ref. No.	Parts No.		Part Name & description	Pcs	Remarks	Notes		Time of change (Suffix)
	Original Part	**New part**						
NEW POWER SUPPLY UNIT PARTS								
PCB6	PSWP6D1232BX	**PSWP6TD1232C**	POWER SUPPLY BOARD ASS'Y (RTL) ⚠	1		7		
CPU BOARD PARTS (All parts are shown bellow.)								
PCB1	PSWP1D1232C3	**PSWP1D1232C4**	CPU BOARD ASS'Y (RTL)	1		1	V	R
IC1	PQVI68301FCG	**PQVI68301FCG**	IC	1	*1			
IC2	PQVI620890F	**PQVI620890F**	IC	1	*1			
IC3	PQVIMT8980DE	**PQVIMT8980DE**	IC	1	*1			
IC6~8	PQVIMC45503P	**PSVIMC14548V**	IC	3		1	Y	R
IC10,IC11	PQVINJM4558D	----------	IC	0		6		R
IC12,IC14	PQVINJM4558D	**PQVINJM4558D**	IC	2	*1			
IC13	PQVIPS520C	**PSVIPS600CMT**	IC	1		1	Y	R
IC15	PQVIHD75188P	**PQVIHD75188P**	IC	1	*1			
IC16	PQVIHD75189P	**PQVIHD75189P**	IC	1	*1			
IC17	PSVITC7HT00A	**PSVITC7HT00A**	IC	1	*1			
IC18	PQVISN7L00S	**PQVISN7L00S**	IC	1	*1			
IC19	PQWI2TD816C	**PQWI2TD816C**	IC (ROM)	1	*1			
IC20,IC21	PSWI1D1232C4	**PSWI11232M19**	IC (ROM KIT)	1		7		
	PSWI11232M19	**PSWI11232M20**	IC (ROM KIT)	1		1	X	R
IC22,IC23	PSWI11232M19	**PSVILHP832DD**	IC	2		7		
	PSVILHP832DD	----------	IC	0		6		R

IC24	PSWI11232M19	**PSVICX582MD**	IC	1		7		
	PSVICX582MD	**PSVITC5401AE**	IC	1		1	Y	R
IC25	PSVICX582MD	**PSVITC5401AE**	IC	1		1	Y	R
IC26	PQVIMS6242BS	**PQVIMS6242BS**	IC	1	*1			
IC27	PQVINJM4558D	**PQVINJM4558D**	IC	1	*1			
IC29	PQVISN7L368M	**PQVISN7L368M**	IC	1	*1			
IC31	PQVISN7L640M	**PQVISN7L640M**	IC	1	*1			
IC32	PQVISN7L365S	**PQVISN7L365S**	IC	1	*1			
IC33,IC34	PQVISN7L368M	**PQVISN7L368M**	IC	2	*1			
IC35	PQVISN7L365S	**PQVISN7L365S**	IC	1	*1			
IC36	PQVIMB7HU04F	**PQVIMB7HU04F**	IC	1	*1			
IC37	PQVISN7H00S	**PQVISN7H00S**	IC	1	*1			
IC38	PQVISN7H74S	**PQVISN7H74S**	IC	1	*1			
IC39	PQVISN7L151M	**PQVISN7L151M**	IC	1	*1			
IC40	----------	**PQVISN7L32S**	IC	1		5	Y	R
Q5	PQVTDTA144EK	**PQVTDTA144EK**	TRANSISTOR (SI)	1	*1			
Q6	2SC2412K	**2SC2412K**	TRANSISTOR (SI)	1	*1			
Q7	2SC2412K	**2SC2412K**	TRANSISTOR (SI)	1	*1			
Q8	PQVTDTA143E	**PQVTDTA143E**	TRANSISTOR (SI)	1	*1			
Q9	PQVTDTC144E	**PQVTDTC144E**	TRANSISTOR (SI)	1	*1			
Q10	2SA933	**2SA933**	TRANSISTOR (SI) (or 2SA1317)	1	*1			
Q11	2SC2412K	**2SC2412K**	TRANSISTOR (SI)	1	*1			
Q12	2SC2878	**2SC2878**	TRANSISTOR (SI)	1	*1			
Q13	2SC2412K	**2SC2412K**	TRANSISTOR (SI)	1	*1			
Q14	2SC2878	**2SC2878**	TRANSISTOR (SI)	1	*1			
Q605	----------	**PQVTDTC144E**	TRANSISTOR (SI)	1		5		R
Q606	----------	**2SB1237R**	TRANSISTOR (SI)	1		5		R
Q607	----------	**PQVTDTC143E**	TRANSISTOR (SI)	1		5		R
D1	MA4091	**MA4091**	DIODE (SI)	1	*1			
D4	PQVDAK03	**PQVDAK03**	DIODE (SI)	1	*1			
D7~10	MA4068	**----------**	DIODE (SI)	0		6		R
D11,12	RLS71	**RLS71**	DIODE (SI)	2	*1			
D13,14	MA4030	**MA4030**	DIODE (SI)	2	*1			
D15	MA4056	**MA4056**	DIODE (SI)	1	*1			
D16,17	RLS71	**RLS71**	DIODE (SI)	2	*1			
D3,20,21	MA723	**MA723**	DIODE (SI)	3	*1			
R4	PQ4R10XJ471	**ERJ3GEYJ471**	RESISTOR, 470Ω	1		1	Y	R
R5	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	R
R6	PQ4R10XJ223	**ERJ3GEYJ223**	RESISTOR, 22kΩ	1		1	Y	R
R7	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R8	PQ4R10XJ683	**ERJ3GEYJ683**	RESISTOR, 68kΩ	1		1	Y	R
R10	PQ4R10XJ224	**ERJ3GEYJ224**	RESISTOR, 220kΩ	1		1	Y	R
R11	PQ4R10XJ681	**ERJ3GEYJ681**	RESISTOR, 680Ω	1		1	Y	R
R12	PQ4R10XJ393	**ERJ3GEYJ393**	RESISTOR, 39kΩ	1		1	Y	R
R13	PQ4R10XF1782	**ERJ3GEYJ183**	RESISTOR, 18kΩ	1		1	Y	R
R14	PQ4R10XJ104	**ERJ3GEYJ104**	RESISTOR, 100kΩ	1		1	Y	R
R15	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R16	PQ4R10XJ274	**ERJ3GEYJ274**	RESISTOR, 270kΩ	1		1	Y	R
R17	PQ4R10XJ183	**ERJ3GEYJ183**	RESISTOR, 18kΩ	1		1	Y	R
R18	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R19	PQ4R10XJ561	**ERJ3GEYJ561**	RESISTOR, 560Ω	1		1	Y	R
R20	PQ4R10XJ105	**ERJ3GEYJ105**	RESISTOR, 1MΩ	1		1	Y	R
R21	PQ4R10XJ563	**ERJ3GEYJ623**	RESISTOR, 62kΩ	1		1	Y	R
R22	PQ4R10XJ104	**ERJ3GEYJ913**	RESISTOR, 91kΩ	1		1	Y	R
R23	PQ4R10XJ104	**ERJ3GEYJ134**	RESISTOR, 130kΩ	1		1	Y	R
R24	PQ4R10XJ124	**ERJ3GEYJ154**	RESISTOR, 150kΩ	1		1	Y	R
R25	PQ4R10XJ823	**----------**	RESISTOR, 82kΩ	0		6		R
R26	PQ4R10XJ104	**----------**	RESISTOR, 100kΩ	0		6		R
R27	PQ4R10XJ104	**----------**	RESISTOR, 100kΩ	0		6		R
R28	PQ4R10XF1211	**ERJ3GEYF122**	RESISTOR, 1.2kΩ	1		1	Y	R
R29	PQ4R10XF1211	**----------**	RESISTOR, 1.21kΩ	0		6		R
R30	PQ4R10XJ224	**ERJ3GEYJ224**	RESISTOR, 220kΩ	1		1	Y	R
R31	PQ4R10XF1401	**----------**	RESISTOR, 1.4kΩ	1		6		R
R32	PQ4R10XJ823	**ERJ3GEYJ154**	RESISTOR, 150Ω	1		1	Y	R
R33	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	R
R34	PQ4R10XJ333	**ERJ3GEYJ333**	RESISTOR, 33kΩ	1		1	Y	R
R35	PQ4R10XJ104	**ERJ3GEYJ104**	RESISTOR, 100kΩ	1		1	Y	R
R36	PQ4R10XJ124	**ERJ3GEYJ124**	RESISTOR, 120kΩ	1		1	Y	R

R37	PQ4R10XJ104	**ERJ3GEYJ563**	RESISTOR, 56kΩ	1		1	Y	R
R38	PQ4R10XJ104	**ERJ3GEYJ104**	RESISTOR, 100kΩ	1		1	Y	R
R39	PQ4R10XJ124	**ERJ3GEYJ124**	RESISTOR, 120kΩ	1		1	Y	R
R40	PQ4R10XJ104	**ERJ3GEYJ104**	RESISTOR, 100kΩ	1		1	Y	R
R48	PQ4R10XJ333	**ERJ3GEYJ333**	RESISTOR, 33kΩ	1		1	Y	R
R50	PQ4R10XJ224	**ERJ3GEYJ224**	RESISTOR, 220kΩ	1		1	Y	R
R51	PQ4R10XJ333	**ERJ3GEYJ333**	RESISTOR, 33kΩ	1		1	Y	R
R52	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	R
R53	PQ4R10XJ104	**ERJ3GEYJ104**	RESISTOR, 100kΩ	1		1	Y	R
R57	PQ4R10XJ102	**ERJ3GEYJ102**	RESISTOR, 1kΩ	1		1	Y	R
R59	PQ4R10XJ104	**ERJ3GEYJ563**	RESISTOR, 56kΩ	1		1	Y	R
R61	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R62	PQ4R10XJ223	**ERJ3GEYJ223**	RESISTOR, 22kΩ	1		1	Y	R
R65	PQ4R10XJ561	**ERJ3GEYJ561**	RESISTOR, 560Ω	1		1	Y	R
R66	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R67	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R68	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R69	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R70	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R71	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R72	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R73	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R74	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R75	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R76	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R77	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R78	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R79	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R83	ERDS1TJ151	**ERDS1TJ151**	RESISTOR, 150Ω	1	*1			
R84	PQ4R10XJ152	**ERJ3GEYJ152**	RESISTOR, 1.5kΩ	1		1	Y	R
R85	PQ4R10XJ681	**ERJ3GEYJ681**	RESISTOR, 680Ω	1		1	Y	R
R87	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R91	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R92	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R93	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R94	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R96	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R97	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R110	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R111	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R112	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R113	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R114	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R115	PQ4R10XJ222	**ERJ3GEYJ222**	RESISTOR, 2.2kΩ	1		1	Y	R
R116	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	R
R117	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R118	PQ4R10XJ333	**ERJ3GEYJ333**	RESISTOR, 33kΩ	1		1	Y	R
R119	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R120	PQ4R10XJ334	**ERJ3GEYJ334**	RESISTOR, 330kΩ	1		1	Y	R
R121	PQ4R10XJ222	**ERJ3GEYJ222**	RESISTOR, 2.2kΩ	1		1	Y	R
R122	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	R
R123	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R124	PQ4R10XJ333	**ERJ3GEYJ333**	RESISTOR, 33kΩ	1		1	Y	R
R125	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R126	PQ4R10XJ334	**ERJ3GEYJ334**	RESISTOR, 330kΩ	1		1	Y	R
R127	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kKΩ	1		1	Y	R
R128	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	R
R129	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R130	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R131	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R132	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R133	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R134	PQ4R10XJ390	**ERJ3GEYJ390**	RESISTOR, 39Ω	1		1	Y	R
R135	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R136	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R137	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R138	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	R
R139	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	R

R140	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	R
R141	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	R
R142	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	R
R143	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	R
R144	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	R
R145	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	R
R146	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R147	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R148	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R149	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R150	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R151	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R152	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R153	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R154	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R155	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R156	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R157	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R158	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R159	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R160	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R161	PQ4R10XJ390	**ERJ3GEYJ390**	RESISTOR, 39Ω	1		1	Y	R
R162	PQ4R10XJ330	**ERJ3GEYJ330**	RESISTOR, 33Ω	1		1	Y	R
R163	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R164	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R165	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R166	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R167	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R168	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R169	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R170	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R171	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R172	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R173	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R174	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R175	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R176	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R177	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R178	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R179	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R180	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R181	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R182	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R183	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R184	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R185	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R186	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R187	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R188	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R189	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R190	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R191	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R192	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R193	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R194	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R195	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R196	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R197	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R198	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R199	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R200	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R201	PQ4R10XJ102	**ERJ3GEYJ102**	RESISTOR, 1kΩ	1		1	Y	R
R202	PQ4R10XJ102	**ERJ3GEYJ102**	RESISTOR, 1kΩ	1		1	Y	R
R203	PQ4R10XJ102	**ERJ3GEYJ102**	RESISTOR, 1kΩ	1		1	Y	R
R204	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R205	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R206	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R207	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R

R208	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R209	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R210	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R211	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R212	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R213	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R214	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R215	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R216	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R217	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R218	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R219	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R220	PQ4R10XJ223	**ERJ3GEYJ223**	RESISTOR, 22kΩ	1		1	Y	R
R221	PQ4R10XJ222	**ERJ3GEYJ222**	RESISTOR, 2.2kΩ	1		1	Y	R
R222	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R223	PQ4R10XJ223	**ERJ3GEYJ223**	RESISTOR, 22kΩ	1		1	Y	R
R224	PQ4R10XJ105	**ERJ3GEYJ105**	RESISTOR, 1MΩ	1		1	Y	R
R225,226	PQ4R10XJ330	**ERJ3GEYJ330**	RESISTOR, 33Ω	2		1	Y	R
R227	PQ4R10XJ223	**ERJ3GEYJ223**	RESISTOR, 22kΩ	1		1	Y	R
R228	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R229	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R704	----------	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		5		R
R705	----------	**PQRD1VJ220**	RESISTOR, 22Ω	1		5		R
R706	----------	**ERJ3GEY0R00**	RESISTOR, 0Ω	1		5		R
R707	----------	**ERJ3GEYJ561**	RESISTOR, 560Ω	1		5		R
R709	----------	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		5		R
J6	PQ4R10XJ000	**----------**	RESISTOR, 0Ω	0		6		R
J16	PQ4R10XJ223	**ERJ3GEYJ223**	RESISTOR, 22kΩ	1		1	Y	R
C1	EECFE5R5474	**EECFE5R5474**	CAPACITOR, 0.47µF	1	*1			
C2	ECEA1EU4R7	**ECEA1EU4R7**	CAPACITOR, 4.7µF	1	*1			
C3	ECEA1HN3R3S	**ECEA1HN3R3S**	CAPACITOR, 3.3µF	1	*1			
C8	ECQV1H104JZ	**ECQV1H104JZ**	CAPACITOR, 0.1µF	1	*1			
C9	ECQV1H104JZ	**ECQV1H104JZ**	CAPACITOR, 0.1µF	1	*1			
C11	PQCUV1H104ZF	**PQCUV1H105JC**	CAPACITOR, 1µF	1		1	Y	R
C12	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	R
C13	PQCUV1H682KB	**----------**	CAPACITOR, 0.0068µF	0		6		R
C14	PQCUV1H680JC	**ECUV1H680JCV**	CAPACITOR, 68pF	1		1	Y	R
C16	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	R
C17	PQCUV1H104ZF	**----------**	CAPACITOR, 0.1µF	0		6		R
C19	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	R
C20	PQCUV1H332KB	**ECUV1H332KBV**	CAPACITOR, 0.0033µF	1		1	Y	R
C21	PQCUV1H104ZF	**----------**	CAPACITOR, 0.1µF	0		6		R
C22	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	R
C23	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	R
C24	PQCUV1H332KB	**ECUV1H332KBV**	CAPACITOR, 0.0033µF	1		1	Y	R
C25	PQCUV1H104ZF	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	R
C26	PQCUV1H104ZF	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	R
C27	PQCUV1H102J	**ECUV1H102KBV**	CAPACITOR, 0.001µF	1		1	Y	R
C28	PQCUV1H104ZF	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	R
C29	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	R
C30	PQCUV1H104ZF	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	R
C31	PQCUV1H102J	**ECUV1H102KBV**	CAPACITOR, 0.001µF	1		1	Y	R
C33	PQCUV1H223KB	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	R
C34	PQCUV1H223KB	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	R
C35	PQCUV1H223KB	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	R
C36	PQCUV1H223KB	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	R
C37	PQCUV1H223KB	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	R
C38	PQCUV1H223KB	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	R
C39	PQCUV1H200JC	**ECUV1H200JCV**	CAPACITOR, 20pF	1		1	Y	R
C40	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C41	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C44	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C45	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C46	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C47	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C50	ECEA1EU331	**ECEA1EU331**	CAPACITOR, 330	1	*1			
C53	PQCUV1H180JC	**ECUV1H180JCV**	CAPACITOR, 18pF	1		1	Y	R
C54	PQCUV1H180JC	**ECUV1H180JCV**	CAPACITOR, 18pF	1		1	Y	R

C55	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C56	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C59	ECEA1HU010	**ECEA1HU010**	CAPACITOR, 1µF	1	*1			
C60	ECEA1HU010	**ECEA1HU010**	CAPACITOR, 1µF	1	*1			
C61	ECEA1HU010	**ECEA1HU010**	CAPACITOR, 1µF	1	*1			
C62	ECEA1HU010	**ECEA1HU010**	CAPACITOR, 1µF	1	*1			
C63	ECEA1HU010	**ECEA1HU010**	CAPACITOR, 1µF	1	*1			
C64	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C66	ECEA1AU101	**ECEA1AU101**	CAPACITOR, 100µF	1	*1			
C67	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C68	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C70	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C71	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C72	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C80	PQCUV1H200JC	**ECUV1H200JCV**	CAPACITOR, 20pF	1		1	Y	R
C81	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C82	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C83	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C84	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C85	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C86	PQCUV1H104ZF	**ECUV1C104KBV**	CAPACITOR, 1µF	1		1	Y	R
C87	ECEA1VU330	**ECEA1VU330**	CAPACITOR, 33µF	1	*1			
C88	ECEA1HN2R2S	**ECEA1HN2R2S**	CAPACITOR, 2.2µF	1	*1			
C89	PQCUV1H104ZF	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	R
C90	ECEA1VU330	**ECEA1VU330**	CAPACITOR, 33µF	1	*1			
C91	ECEA1HN2R2S	**ECEA1HN2R2S**	CAPACITOR, 2.2µF	1	*1			
C92	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	R
C93	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	R
C94	PQCUV1H470JC	**ECUV1H470JCV**	CAPACITOR, 47pF	1		1	Y	R
C95	PQCUV1H470JC	**ECUV1H470JCV**	CAPACITOR, 47pF	1		1	Y	R
C96	PQCUV1H470JC	**ECUV1H470JCV**	CAPACITOR, 47pF	1		1	Y	R
C97	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C98	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C99	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C100,101	PQCUV1H220JC	**ECUV1H220JCV**	CAPACITOR, 22pF	2		1	Y	R
C102	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C705	----------	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		5		R
T1	ETA14Y180AY	**ETA14Y180AY**	TRANSFORMER	1	*1			
T2~5	PQLT2D6A	**PQLT2D6A**	TRANSFORMER	4	*1			
L7~14	PQLE106	**PQLE106**	COIL	8	*1			
L21~23	PQVFTU50MT	**PQVFTU50MT**	CERAMIC FILTER	3	*1			
L24~27	PQVFCM04RC01	**PQVFCM04RC01**	CERAMIC FILTER	4	*1			
L30	PQLE106	**PQLE106**	COIL	1	*1			
JAC1,2	PQJJ1G1Z	**PQJJ1G1Z**	JACK, PAGING	2	*1			
JAC3,4	PQJJ1D3Z	**PQJJ1D3Z**	JACK, EP	2	*1			
CN1	PQJS64R15Z	**PQJS64R15Z**	CONNECTOR, 64P	1	*1			
CN4	PQJP2D70Z	**PQJP2D70Z**	CONNECTOR, 2P	1	*1			
CN5~CN8	PSJS20A25Z	**PSJS20A25Z**	CONNECTOR, 20P	4	*1			
CN9	PQJP20A08Z	**PQJP20A08Z**	CONNECTOR, 20P	1	*1			
CN12	PQJP6D70Z	**PQJP6D70Z**	CONNECTOR, 6P	1	*1			
CN13	PQJS6H30Z	**PQJS6H30Z**	CONNECTOR, 6P	1	*1			
CN14	PQJS4H30Z	**PQJS4H30Z**	CONNECTOR, 4P	1	*1			
BAT	CR23541GUF	**CR23541GUF**	LITHIUM BATTERY	1	*1			
SW1	EVQ21409K	**EVQ21409K**	SWITCH	1	*1			
SW2	PQSS2A24Z	**PQSS2A24Z**	SWITCH	1	*1			
SW3	ESD11V120	**ESD11V120**	SWITCH	1	*1			
X1	PQVCJ12000N8	**PQVCJ12000N8**	CRYSTAL OSCILLATOR	1	*1			
X2	PQVCL3276N6Z	**PQVCL3276N6Z**	CRYSTAL OSCILLATOR	1	*1			
X3	PQVCJ8192N8Z	**PQVCJ8192N8Z**	CRYSTAL OSCILLATOR	1	*1			
Z1,2,4~6	PQRSLD8X103J	**PQRSLD8X103J**	RESISTOR ARRAY	5	*1			

2 PRINTED CIRCUIT BOARD (CPU BOARD)

2.1. Change from Supplement-1 page 5.

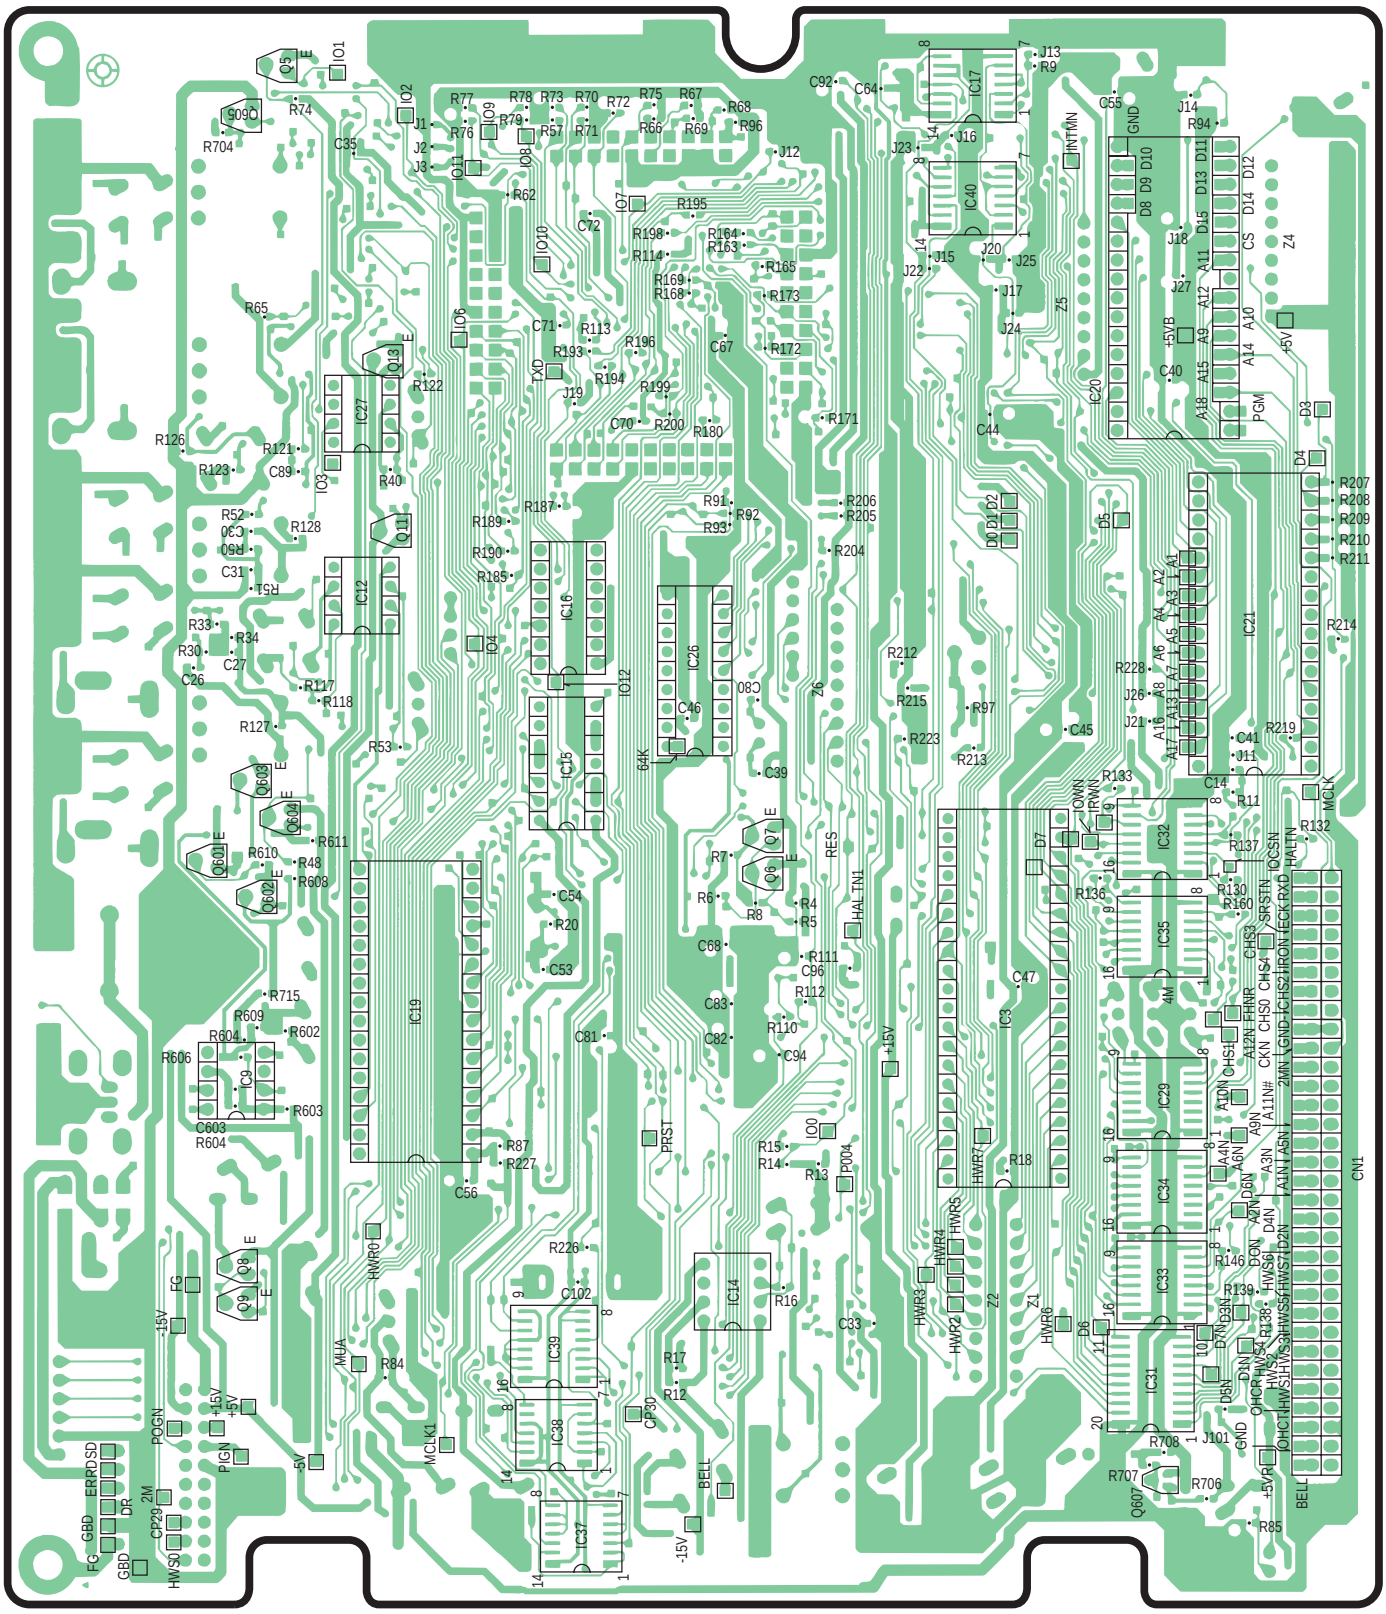

Bottom View

2.2. Change from Supplement-1 page 6.

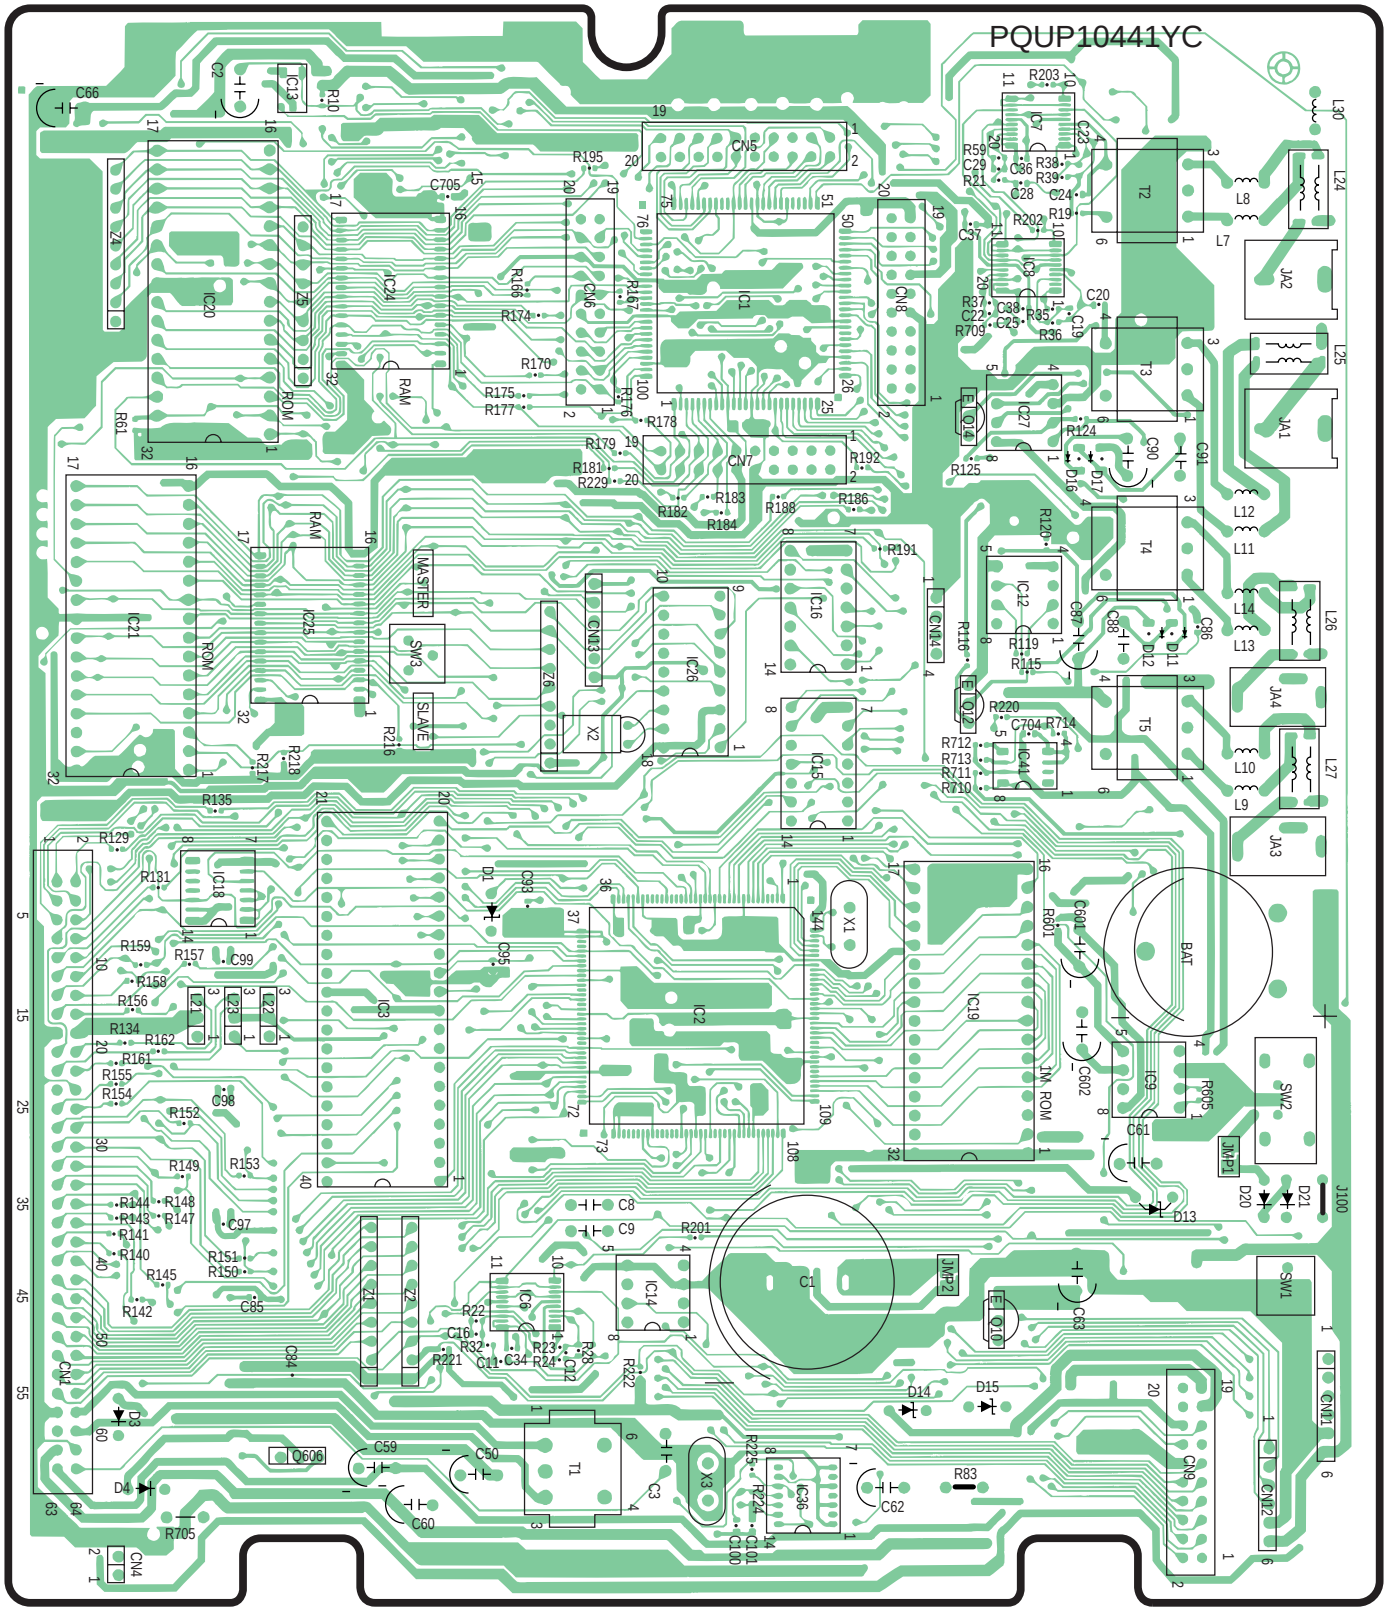

Component View

3 SCHEMATIC DIAGRAM (CPU CIRCUIT)

3.1. Change from Supplement-1 page 7.

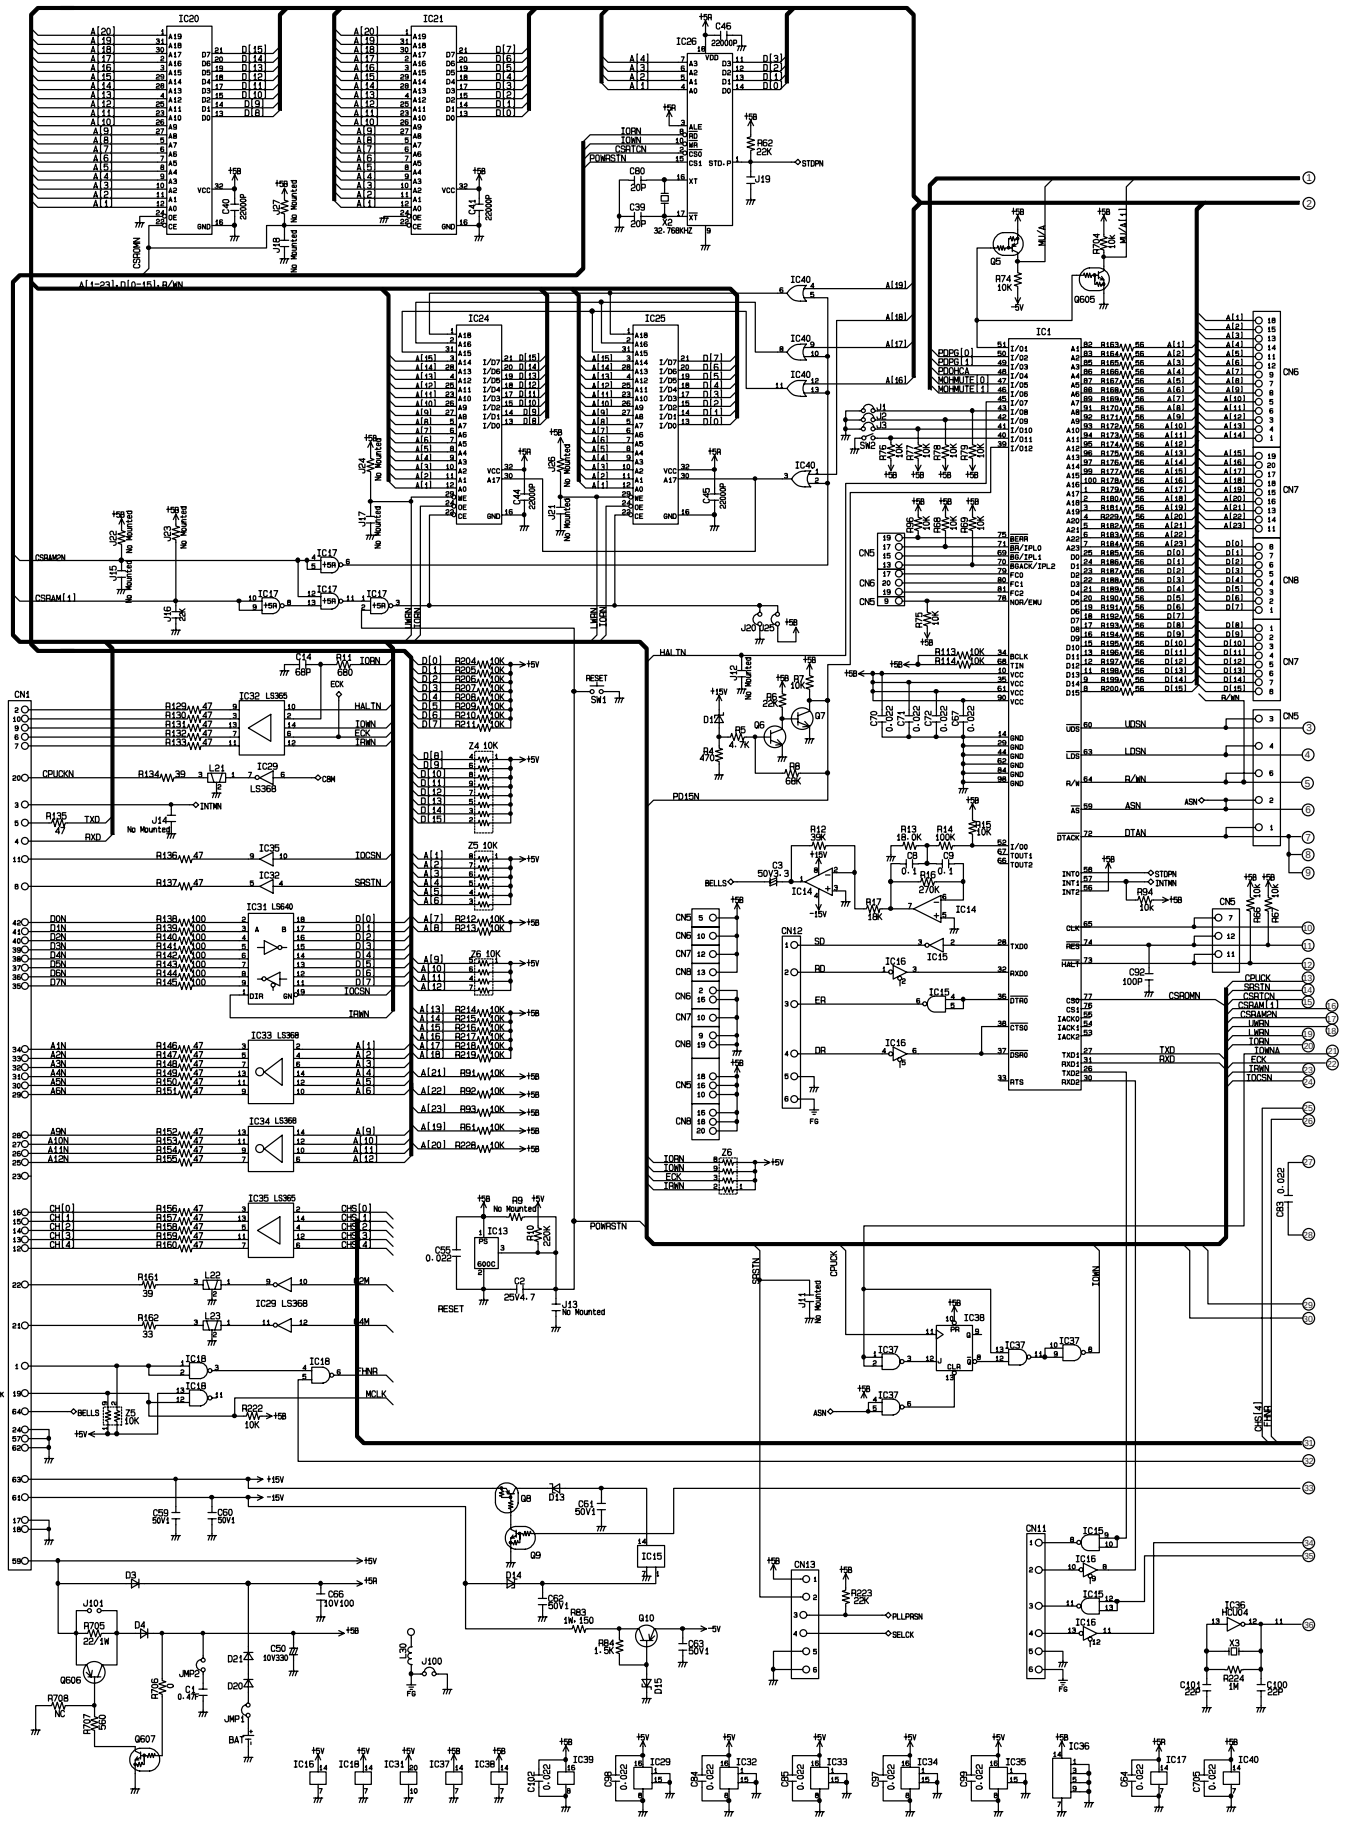

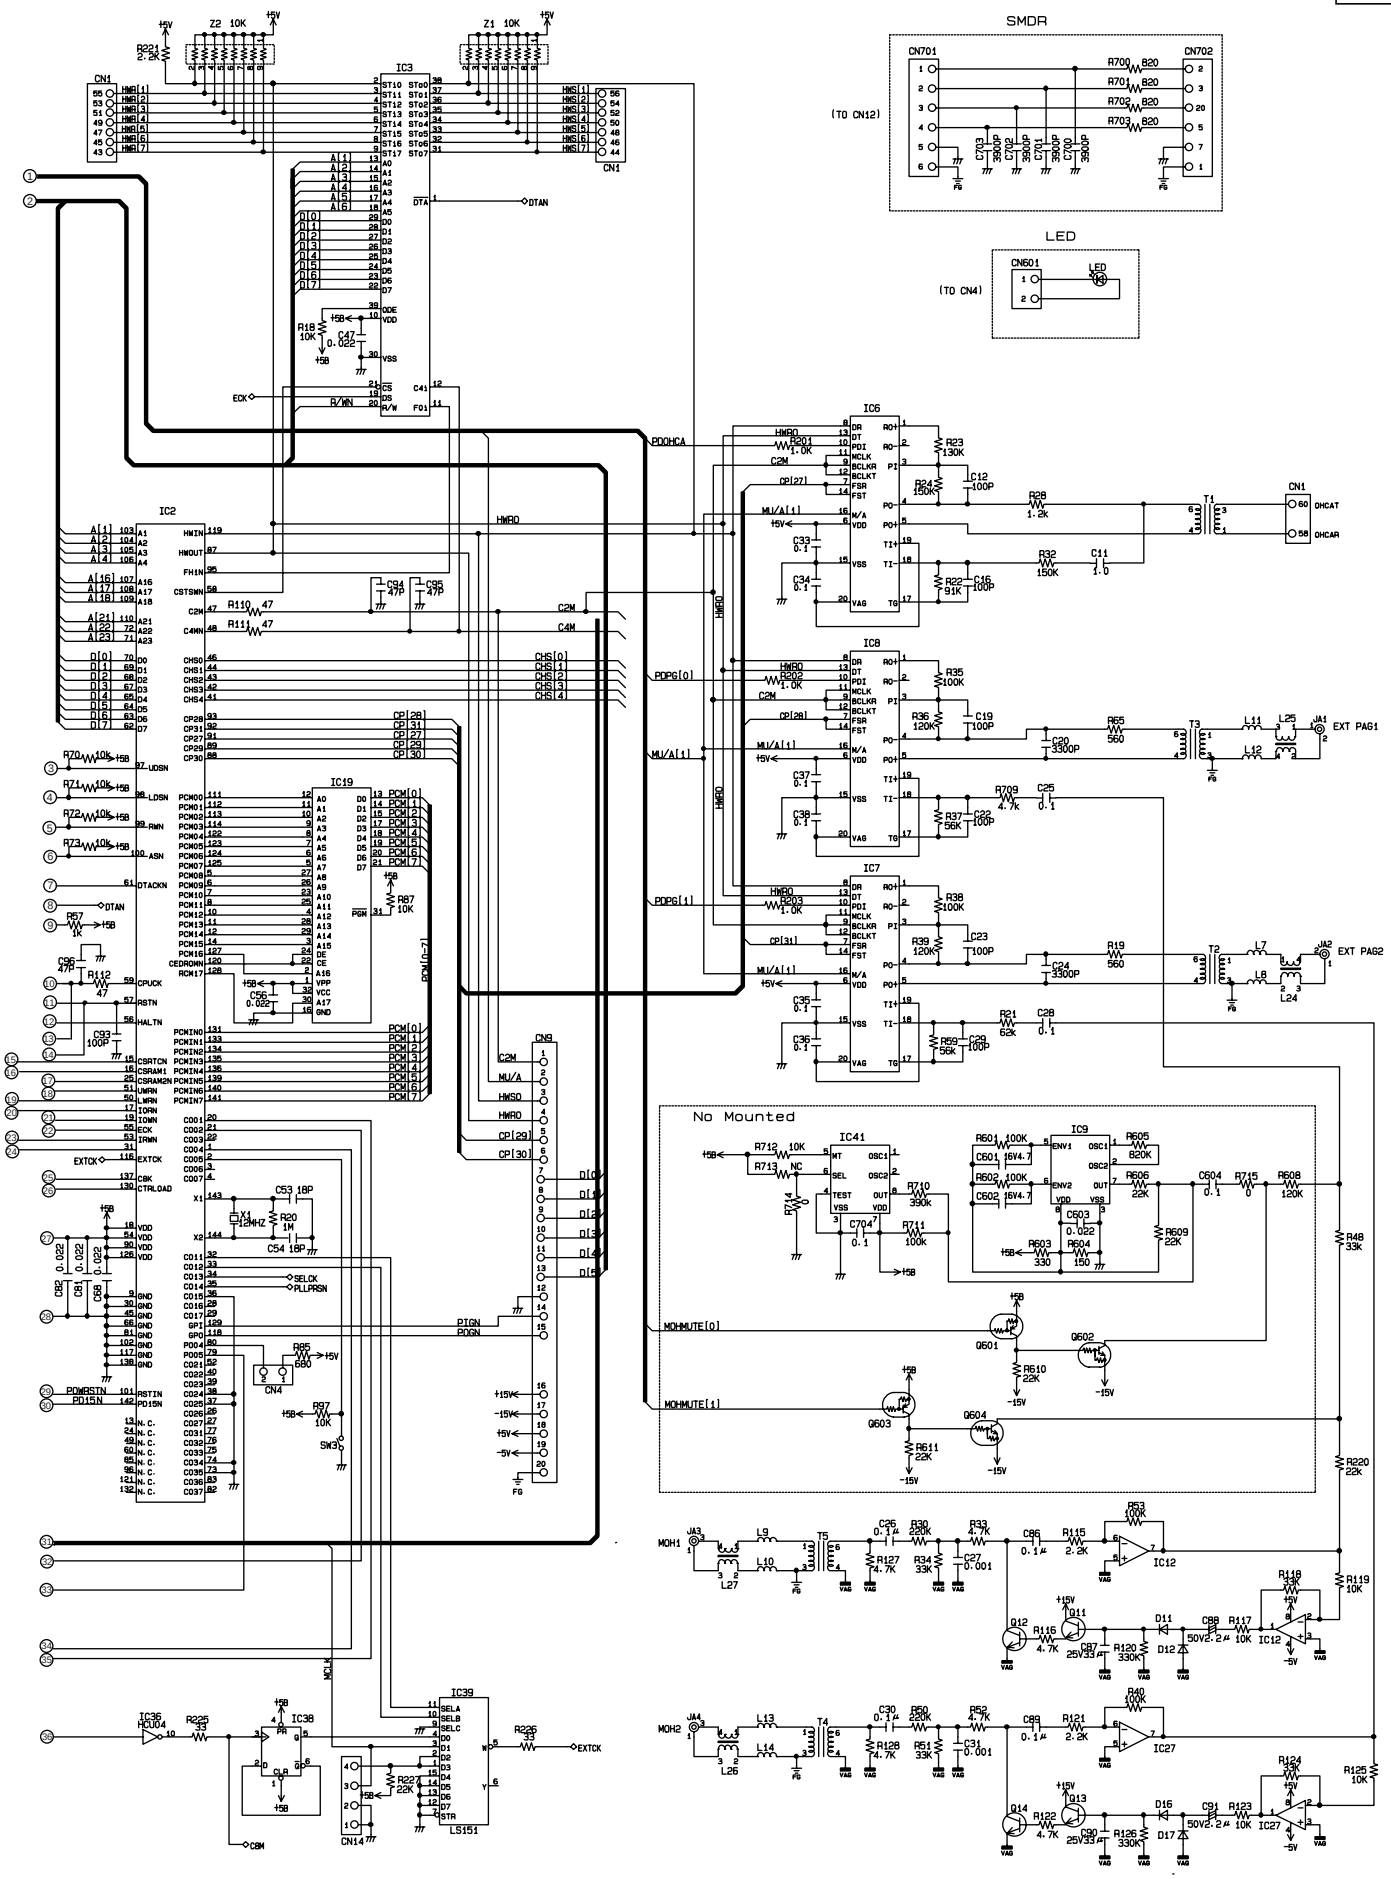

N.T.(Q)
KXTD1232C-1
Printed in Japan

ORDER NO. KMS0110297S1
F5

Service Manual

DIGITAL SUPER HYBRID SYSTEM

KX-TD1232C-1

(for Canada)

Please file and use this supplement manual together with the service manual for model KX-TD1232C-1 Order No. KMS9704238A1.

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public.
It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product.
Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

Note:Supplement-1~5 have already supplied with printed matter. So please refer to that.

Panasonic

© 2001 Kyushu Matsushita Electric Co., Ltd. All rights reserved. Unauthorized copying and distribution is a violation of law.

1 CHANGES

1.1. Subject

Suffix	Reason for suffix change
R→S	Change of the software. (IC20/IC21:ROM Ver. P211H/P212H→P211K/P212K)

1.2. Suffix location



1.3. REPLACEMENT PARTS LIST

Reason for Change (Symbol:A) Following 1-8 reasons are indicated on the Notes in the bottom column.	
1. Improve performance	
2. Change of material or dimension	
3. To meet approved specification	
4. Standardization	
5. Addition	
6. Deletion	
7. Correction	
8. Other	

Interchangeability Code (Symbol:B) Following V-Z interchange abilities are indicated on the Notes in the bottom column.		
Parts	Set Production	
V Original New	Early (before change) Late (after change)	Original or new parts may be used in early or late production sets. Use original parts until exhausted, then stock new parts.
W Original New	Early (before change) Late (after change)	Original parts may be used in early production sets only. New parts may be used in early or late production sets. Use original parts where possible, then stock new parts.
X Original New	Early (before change) Late (after change)	New parts only may be used in early or late production sets. Stock new parts.
Y Original New	Early (before change) Late (after change)	Original parts may be used in early production sets only. New parts may be used in late production sets only. Stock both original and new parts.
Z Other		

Ref. No.	Part No.		Part Name & Description	Pcs	Remarks	Notes		Time of change (Suffix)
	Original Part	**New Part**						
MAIN BOARD PARTS								
IC20/IC21	PSWI11232M20	**PSWI11232M21**	IC (ROM KIT)	1		1	X	S
POWER SUPPLY UNIT								
93	PQHR477Z	**PQHR447Z**	SPACER-A	1		7		
R30	ERG1SJ100	**ERG1SJ100E**	RESISTOR, 10Ω	1		7		
R35	ERG1SJ100	**ERG1SJ100E**	RESISTOR, 10Ω	1		7		
R37	ERG1SJ100	**ERG1SJ100E**	RESISTOR, 10Ω	1		7		
R39	ERG1SJ100	**ERG1SJ100E**	RESISTOR, 10Ω	1		7		
C3	PSSCEMU2D471	**PSCCEMU2D471**	CAPACITOR, 470µF	1		7		
C5	PSCCELT1H101	**PSCCELT1H010**	CAPACITOR, 1µF	1		7		

2 CABINET AND ELECTRICAL PARTS LOCATION

2.1. Power Supply Section.....Change from Service Manual Supplement-5 page 21. (KX-TD1232C-1:Order No.KMS0005677S1)

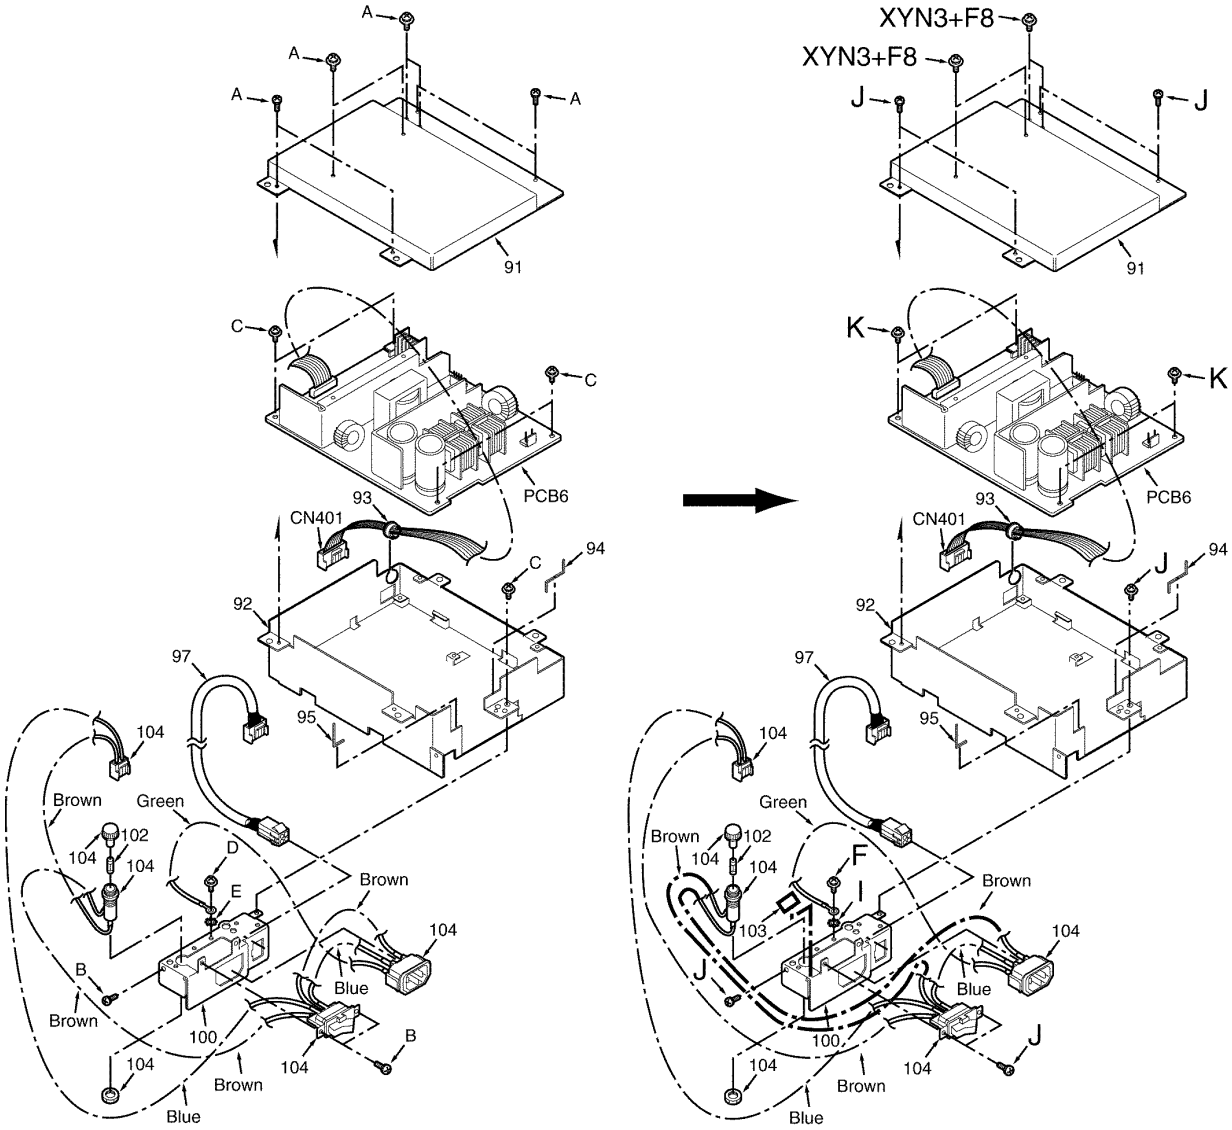

Addition: 103

[OLD] [CORRECTED]

ORDER NO. KMS0011995S1

Service Manual

DIGITAL SUPER HYBRID SYSTEM

KX-TD1232C-1

(for Canada)

Please file and use this supplement manual together with the service manual for Model KX-TD1232C-1, Order No.KMS9704238A1.

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public.
It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product.
Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

Note:Supplement-1~5 have already supplied with printed matter. So please refer to that.

Panasonic

© 2000 Kyushu Matsushita Electric Co., Ltd. All rights reserved. Unauthorized copying and distribution is a violation of law.

1 CHANGES

1.1. Subject

Suffix	Reason for suffix change
Q→R	Change of the cpu Board. (PQUP10441YB→PQUP10441YC)
	Change of the software. (IC20/IC21 ROM Ver. P211D/P212D→P211H/P212H)

1.2. Suffix location



1.3. REPLACEMENT PARTS LIST

Reason for Change (Symbol:A) Following 1-8 reasons are indicated on the Notes in the bottom column.

1. Improve performance	Remark: 1. Part with mark *1 has not changed on the Supplement-7.
2. Change of material or dimension	
3. To meet approved specification	
4. Standardization	
5. Addition	
6. Deletion	
7. Correction	
8. Other	

Interchangeability code (Symbol:B) Following V-Z interchangeabilities are indicated on the Notes in the bottom column.

Parts	Set Production	Description
V	Original → Early (before change) New → Late (after change)	Original or new parts may be used in early or late production sets. Use original parts until exhausted, then stock new parts.
W	Original → Early (before change) New → Late (after change)	Original parts may be used in early production sets only. New parts may be used in early or late production sets. Use original parts where possible, then stock new parts.
X	Original → Early (before change) New → Late (after change)	New parts only may be used in early or late production sets. Stock new parts.
Y	Original → Early (before change) New → Late (after change)	Original parts may be used in early production sets only. New parts may be used in late production sets only. Stock both original and new parts.
Z	Other	

Ref. No.	Parts No.		Part Name & description	Pcs	Remarks	Notes		Time of change (Suffix)
	Original Part	**New part**						
NEW POWER SUPPLY UNIT PARTS								
PCB6	PSWP6D1232BX	**PSWP6TD1232C**	POWER SUPPLY BOARD ASS'Y (RTL) ⚠	1		7		
CPU BOARD PARTS (All parts are shown bellow.)								
PCB1	PSWP1D1232C3	**PSWP1D1232C4**	CPU BOARD ASS'Y (RTL)	1		1	V	R
IC1	PQVI68301FCG	**PQVI68301FCG**	IC	1	*1			
IC2	PQVI620890F	**PQVI620890F**	IC	1	*1			
IC3	PQVIMT8980DE	**PQVIMT8980DE**	IC	1	*1			
IC6~8	PQVIMC45503P	**PSVIMC14548V**	IC	3		1	Y	R
IC10,IC11	PQVINJM4558D	----------	IC	0		6		R
IC12,IC14	PQVINJM4558D	**PQVINJM4558D**	IC	2	*1			
IC13	PQVIPS520C	**PSVIPS600CMT**	IC	1		1	Y	R
IC15	PQVIHD75188P	**PQVIHD75188P**	IC	1	*1			
IC16	PQVIHD75189P	**PQVIHD75189P**	IC	1	*1			
IC17	PSVITC7HT00A	**PSVITC7HT00A**	IC	1	*1			
IC18	PQVISN7L00S	**PQVISN7L00S**	IC	1	*1			
IC19	PQWI2TD816C	**PQWI2TD816C**	IC (ROM)	1	*1			
IC20,IC21	PSWI1D1232C4	**PSWI11232M19**	IC (ROM KIT)	1		7		
	PSWI11232M19	**PSWI11232M20**	IC (ROM KIT)	1		1	X	R
IC22,IC23	PSWI11232M19	**PSVILHP832DD**	IC	2		7		
	PSVILHP832DD	----------	IC	0		6		R

IC24	PSWI11232M19	**PSVICX582MD**	IC	1		7		
	PSVICX582MD	**PSVITC5401AE**	IC	1		1	Y	R
IC25	PSVICX582MD	**PSVITC5401AE**	IC	1		1	Y	R
IC26	PQVIMS6242BS	**PQVIMS6242BS**	IC	1	*1			
IC27	PQVINJM4558D	**PQVINJM4558D**	IC	1	*1			
IC29	PQVISN7L368M	**PQVISN7L368M**	IC	1	*1			
IC31	PQVISN7L640M	**PQVISN7L640M**	IC	1	*1			
IC32	PQVISN7L365S	**PQVISN7L365S**	IC	1	*1			
IC33,IC34	PQVISN7L368M	**PQVISN7L368M**	IC	2	*1			
IC35	PQVISN7L365S	**PQVISN7L365S**	IC	1	*1			
IC36	PQVIMB7HU04F	**PQVIMB7HU04F**	IC	1	*1			
IC37	PQVISN7H00S	**PQVISN7H00S**	IC	1	*1			
IC38	PQVISN7H74S	**PQVISN7H74S**	IC	1	*1			
IC39	PQVISN7L151M	**PQVISN7L151M**	IC	1	*1			
IC40	----------	**PQVISN7L32S**	IC	1		5	Y	R
Q5	PQVTDTA144EK	**PQVTDTA144EK**	TRANSISTOR (SI)	1	*1			
Q6	2SC2412K	**2SC2412K**	TRANSISTOR (SI)	1	*1			
Q7	2SC2412K	**2SC2412K**	TRANSISTOR (SI)	1	*1			
Q8	PQVTDTA143E	**PQVTDTA143E**	TRANSISTOR (SI)	1	*1			
Q9	PQVTDTC144E	**PQVTDTC144E**	TRANSISTOR (SI)	1	*1			
Q10	2SA933	**2SA933**	TRANSISTOR (SI) (or 2SA1317)	1	*1			
Q11	2SC2412K	**2SC2412K**	TRANSISTOR (SI)	1	*1			
Q12	2SC2878	**2SC2878**	TRANSISTOR (SI)	1	*1			
Q13	2SC2412K	**2SC2412K**	TRANSISTOR (SI)	1	*1			
Q14	2SC2878	**2SC2878**	TRANSISTOR (SI)	1	*1			
Q605	----------	**PQVTDTC144E**	TRANSISTOR (SI)	1		5		R
Q606	----------	**2SB1237R**	TRANSISTOR (SI)	1		5		R
Q607	----------	**PQVTDTC143E**	TRANSISTOR (SI)	1		5		R
D1	MA4091	**MA4091**	DIODE (SI)	1	*1			
D4	PQVDAK03	**PQVDAK03**	DIODE (SI)	1	*1			
D7~10	MA4068	**----------**	DIODE (SI)	0		6		R
D11,12	RLS71	**RLS71**	DIODE (SI)	2	*1			
D13,14	MA4030	**MA4030**	DIODE (SI)	2	*1			
D15	MA4056	**MA4056**	DIODE (SI)	1	*1			
D16,17	RLS71	**RLS71**	DIODE (SI)	2	*1			
D3,20,21	MA723	**MA723**	DIODE (SI)	3	*1			
R4	PQ4R10XJ471	**ERJ3GEYJ471**	RESISTOR, 470Ω	1		1	Y	R
R5	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	R
R6	PQ4R10XJ223	**ERJ3GEYJ223**	RESISTOR, 22kΩ	1		1	Y	R
R7	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R8	PQ4R10XJ683	**ERJ3GEYJ683**	RESISTOR, 68kΩ	1		1	Y	R
R10	PQ4R10XJ224	**ERJ3GEYJ224**	RESISTOR, 220kΩ	1		1	Y	R
R11	PQ4R10XJ681	**ERJ3GEYJ681**	RESISTOR, 680Ω	1		1	Y	R
R12	PQ4R10XJ393	**ERJ3GEYJ393**	RESISTOR, 39kΩ	1		1	Y	R
R13	PQ4R10XF1782	**ERJ3GEYJ183**	RESISTOR, 18kΩ	1		1	Y	R
R14	PQ4R10XJ104	**ERJ3GEYJ104**	RESISTOR, 100kΩ	1		1	Y	R
R15	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R16	PQ4R10XJ274	**ERJ3GEYJ274**	RESISTOR, 270kΩ	1		1	Y	R
R17	PQ4R10XJ183	**ERJ3GEYJ183**	RESISTOR, 18kΩ	1		1	Y	R
R18	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R19	PQ4R10XJ561	**ERJ3GEYJ561**	RESISTOR, 560Ω	1		1	Y	R
R20	PQ4R10XJ105	**ERJ3GEYJ105**	RESISTOR, 1MΩ	1		1	Y	R
R21	PQ4R10XJ563	**ERJ3GEYJ623**	RESISTOR, 62kΩ	1		1	Y	R
R22	PQ4R10XJ104	**ERJ3GEYJ913**	RESISTOR, 91kΩ	1		1	Y	R
R23	PQ4R10XJ104	**ERJ3GEYJ134**	RESISTOR, 130kΩ	1		1	Y	R
R24	PQ4R10XJ124	**ERJ3GEYJ154**	RESISTOR, 150kΩ	1		1	Y	R
R25	PQ4R10XJ823	**----------**	RESISTOR, 82kΩ	0		6		R
R26	PQ4R10XJ104	**----------**	RESISTOR, 100kΩ	0		6		R
R27	PQ4R10XJ104	**----------**	RESISTOR, 100kΩ	0		6		R
R28	PQ4R10XF1211	**ERJ3GEYF122**	RESISTOR, 1.2kΩ	1		1	Y	R
R29	PQ4R10XF1211	**----------**	RESISTOR, 1.21kΩ	0		6		R
R30	PQ4R10XJ224	**ERJ3GEYJ224**	RESISTOR, 220kΩ	1		1	Y	R
R31	PQ4R10XF1401	**----------**	RESISTOR, 1.4kΩ	1		6		R
R32	PQ4R10XJ823	**ERJ3GEYJ154**	RESISTOR, 150Ω	1		1	Y	R
R33	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	R
R34	PQ4R10XJ333	**ERJ3GEYJ333**	RESISTOR, 33kΩ	1		1	Y	R
R35	PQ4R10XJ104	**ERJ3GEYJ104**	RESISTOR, 100kΩ	1		1	Y	R
R36	PQ4R10XJ124	**ERJ3GEYJ124**	RESISTOR, 120kΩ	1		1	Y	R

R37	PQ4R10XJ104	**ERJ3GEYJ563**	RESISTOR, 56kΩ	1		1	Y	R
R38	PQ4R10XJ104	**ERJ3GEYJ104**	RESISTOR, 100kΩ	1		1	Y	R
R39	PQ4R10XJ124	**ERJ3GEYJ124**	RESISTOR, 120kΩ	1		1	Y	R
R40	PQ4R10XJ104	**ERJ3GEYJ104**	RESISTOR, 100kΩ	1		1	Y	R
R48	PQ4R10XJ333	**ERJ3GEYJ333**	RESISTOR, 33kΩ	1		1	Y	R
R50	PQ4R10XJ224	**ERJ3GEYJ224**	RESISTOR, 220kΩ	1		1	Y	R
R51	PQ4R10XJ333	**ERJ3GEYJ333**	RESISTOR, 33kΩ	1		1	Y	R
R52	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	R
R53	PQ4R10XJ104	**ERJ3GEYJ104**	RESISTOR, 100kΩ	1		1	Y	R
R57	PQ4R10XJ102	**ERJ3GEYJ102**	RESISTOR, 1kΩ	1		1	Y	R
R59	PQ4R10XJ104	**ERJ3GEYJ563**	RESISTOR, 56kΩ	1		1	Y	R
R61	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R62	PQ4R10XJ223	**ERJ3GEYJ223**	RESISTOR, 22kΩ	1		1	Y	R
R65	PQ4R10XJ561	**ERJ3GEYJ561**	RESISTOR, 560Ω	1		1	Y	R
R66	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R67	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R68	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R69	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R70	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R71	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R72	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R73	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R74	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R75	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R76	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R77	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R78	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R79	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R83	ERDS1TJ151	**ERDS1TJ151**	RESISTOR, 150Ω	1	*1			
R84	PQ4R10XJ152	**ERJ3GEYJ152**	RESISTOR, 1.5kΩ	1		1	Y	R
R85	PQ4R10XJ681	**ERJ3GEYJ681**	RESISTOR, 680Ω	1		1	Y	R
R87	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R91	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R92	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R93	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R94	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R96	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R97	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R110	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R111	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R112	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R113	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R114	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R115	PQ4R10XJ222	**ERJ3GEYJ222**	RESISTOR, 2.2kΩ	1		1	Y	R
R116	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	R
R117	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R118	PQ4R10XJ333	**ERJ3GEYJ333**	RESISTOR, 33kΩ	1		1	Y	R
R119	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R120	PQ4R10XJ334	**ERJ3GEYJ334**	RESISTOR, 330kΩ	1		1	Y	R
R121	PQ4R10XJ222	**ERJ3GEYJ222**	RESISTOR, 2.2kΩ	1		1	Y	R
R122	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	R
R123	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R124	PQ4R10XJ333	**ERJ3GEYJ333**	RESISTOR, 33kΩ	1		1	Y	R
R125	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R126	PQ4R10XJ334	**ERJ3GEYJ334**	RESISTOR, 330kΩ	1		1	Y	R
R127	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kKΩ	1		1	Y	R
R128	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	R
R129	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R130	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R131	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R132	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R133	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R134	PQ4R10XJ390	**ERJ3GEYJ390**	RESISTOR, 39Ω	1		1	Y	R
R135	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R136	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R137	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R138	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	R
R139	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	R

R140	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	R
R141	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	R
R142	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	R
R143	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	R
R144	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	R
R145	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	R
R146	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R147	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R148	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R149	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R150	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R151	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R152	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R153	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R154	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R155	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R156	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R157	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R158	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R159	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R160	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R161	PQ4R10XJ390	**ERJ3GEYJ390**	RESISTOR, 39Ω	1		1	Y	R
R162	PQ4R10XJ330	**ERJ3GEYJ330**	RESISTOR, 33Ω	1		1	Y	R
R163	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R164	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R165	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R166	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R167	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R168	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R169	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R170	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R171	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R172	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R173	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R174	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R175	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R176	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R177	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R178	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R179	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R180	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R181	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R182	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R183	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R184	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R185	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R186	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R187	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R188	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R189	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R190	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R191	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R192	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R193	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R194	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R195	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R196	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R197	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R198	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R199	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R200	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R201	PQ4R10XJ102	**ERJ3GEYJ102**	RESISTOR, 1kΩ	1		1	Y	R
R202	PQ4R10XJ102	**ERJ3GEYJ102**	RESISTOR, 1kΩ	1		1	Y	R
R203	PQ4R10XJ102	**ERJ3GEYJ102**	RESISTOR, 1kΩ	1		1	Y	R
R204	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R205	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R206	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R207	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R

R208	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R209	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R210	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R211	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R212	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R213	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R214	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R215	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R216	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R217	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R218	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R219	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R220	PQ4R10XJ223	**ERJ3GEYJ223**	RESISTOR, 22kΩ	1		1	Y	R
R221	PQ4R10XJ222	**ERJ3GEYJ222**	RESISTOR, 2.2kΩ	1		1	Y	R
R222	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R223	PQ4R10XJ223	**ERJ3GEYJ223**	RESISTOR, 22kΩ	1		1	Y	R
R224	PQ4R10XJ105	**ERJ3GEYJ105**	RESISTOR, 1MΩ	1		1	Y	R
R225,226	PQ4R10XJ330	**ERJ3GEYJ330**	RESISTOR, 33Ω	2		1	Y	R
R227	PQ4R10XJ223	**ERJ3GEYJ223**	RESISTOR, 22kΩ	1		1	Y	R
R228	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R229	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R704	----------	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		5		R
R705	----------	**PQRD1VJ220**	RESISTOR, 22Ω	1		5		R
R706	----------	**ERJ3GEY0R00**	RESISTOR, 0Ω	1		5		R
R707	----------	**ERJ3GEYJ561**	RESISTOR, 560Ω	1		5		R
R709	----------	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		5		R
J6	PQ4R10XJ000	**----------**	RESISTOR, 0Ω	0		6		R
J16	PQ4R10XJ223	**ERJ3GEYJ223**	RESISTOR, 22kΩ	1		1	Y	R
C1	EECFE5R5474	**EECFE5R5474**	CAPACITOR, 0.47µF	1	*1			
C2	ECEA1EU4R7	**ECEA1EU4R7**	CAPACITOR, 4.7µF	1	*1			
C3	ECEA1HN3R3S	**ECEA1HN3R3S**	CAPACITOR, 3.3µF	1	*1			
C8	ECQV1H104JZ	**ECQV1H104JZ**	CAPACITOR, 0.1µF	1	*1			
C9	ECQV1H104JZ	**ECQV1H104JZ**	CAPACITOR, 0.1µF	1	*1			
C11	PQCUV1H104ZF	**PQCUV1H105JC**	CAPACITOR, 1µF	1		1	Y	R
C12	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	R
C13	PQCUV1H682KB	**----------**	CAPACITOR, 0.0068µF	0		6		R
C14	PQCUV1H680JC	**ECUV1H680JCV**	CAPACITOR, 68pF	1		1	Y	R
C16	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	R
C17	PQCUV1H104ZF	**----------**	CAPACITOR, 0.1µF	0		6		R
C19	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	R
C20	PQCUV1H332KB	**ECUV1H332KBV**	CAPACITOR, 0.0033µF	1		1	Y	R
C21	PQCUV1H104ZF	**----------**	CAPACITOR, 0.1µF	0		6		R
C22	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	R
C23	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	R
C24	PQCUV1H332KB	**ECUV1H332KBV**	CAPACITOR, 0.0033µF	1		1	Y	R
C25	PQCUV1H104ZF	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	R
C26	PQCUV1H104ZF	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	R
C27	PQCUV1H102J	**ECUV1H102KBV**	CAPACITOR, 0.001µF	1		1	Y	R
C28	PQCUV1H104ZF	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	R
C29	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	R
C30	PQCUV1H104ZF	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	R
C31	PQCUV1H102J	**ECUV1H102KBV**	CAPACITOR, 0.001µF	1		1	Y	R
C33	PQCUV1H223KB	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	R
C34	PQCUV1H223KB	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	R
C35	PQCUV1H223KB	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	R
C36	PQCUV1H223KB	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	R
C37	PQCUV1H223KB	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	R
C38	PQCUV1H223KB	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	R
C39	PQCUV1H200JC	**ECUV1H200JCV**	CAPACITOR, 20pF	1		1	Y	R
C40	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C41	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C44	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C45	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C46	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C47	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C50	ECEA1EU331	**ECEA1EU331**	CAPACITOR, 330	1	*1			
C53	PQCUV1H180JC	**ECUV1H180JCV**	CAPACITOR, 18pF	1		1	Y	R
C54	PQCUV1H180JC	**ECUV1H180JCV**	CAPACITOR, 18pF	1		1	Y	R

C55	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C56	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C59	ECEA1HU010	**ECEA1HU010**	CAPACITOR, 1µF	1	*1			
C60	ECEA1HU010	**ECEA1HU010**	CAPACITOR, 1µF	1	*1			
C61	ECEA1HU010	**ECEA1HU010**	CAPACITOR, 1µF	1	*1			
C62	ECEA1HU010	**ECEA1HU010**	CAPACITOR, 1µF	1	*1			
C63	ECEA1HU010	**ECEA1HU010**	CAPACITOR, 1µF	1	*1			
C64	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C66	ECEA1AU101	**ECEA1AU101**	CAPACITOR, 100µF	1	*1			
C67	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C68	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C70	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C71	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C72	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C80	PQCUV1H200JC	**ECUV1H200JCV**	CAPACITOR, 20pF	1		1	Y	R
C81	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C82	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C83	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C84	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C85	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C86	PQCUV1H104ZF	**ECUV1C104KBV**	CAPACITOR, 1µF	1		1	Y	R
C87	ECEA1VU330	**ECEA1VU330**	CAPACITOR, 33µF	1	*1			
C88	ECEA1HN2R2S	**ECEA1HN2R2S**	CAPACITOR, 2.2µF	1	*1			
C89	PQCUV1H104ZF	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	R
C90	ECEA1VU330	**ECEA1VU330**	CAPACITOR, 33µF	1	*1			
C91	ECEA1HN2R2S	**ECEA1HN2R2S**	CAPACITOR, 2.2µF	1	*1			
C92	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	R
C93	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	R
C94	PQCUV1H470JC	**ECUV1H470JCV**	CAPACITOR, 47pF	1		1	Y	R
C95	PQCUV1H470JC	**ECUV1H470JCV**	CAPACITOR, 47pF	1		1	Y	R
C96	PQCUV1H470JC	**ECUV1H470JCV**	CAPACITOR, 47pF	1		1	Y	R
C97	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C98	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C99	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C100,101	PQCUV1H220JC	**ECUV1H220JCV**	CAPACITOR, 22pF	2		1	Y	R
C102	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C705	----------	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		5		R
T1	ETA14Y180AY	**ETA14Y180AY**	TRANSFORMER	1	*1			
T2~5	PQLT2D6A	**PQLT2D6A**	TRANSFORMER	4	*1			
L7~14	PQLE106	**PQLE106**	COIL	8	*1			
L21~23	PQVFTU50MT	**PQVFTU50MT**	CERAMIC FILTER	3	*1			
L24~27	PQVFCM04RC01	**PQVFCM04RC01**	CERAMIC FILTER	4	*1			
L30	PQLE106	**PQLE106**	COIL	1	*1			
JAC1,2	PQJJ1G1Z	**PQJJ1G1Z**	JACK, PAGING	2	*1			
JAC3,4	PQJJ1D3Z	**PQJJ1D3Z**	JACK, EP	2	*1			
CN1	PQJS64R15Z	**PQJS64R15Z**	CONNECTOR, 64P	1	*1			
CN4	PQJP2D70Z	**PQJP2D70Z**	CONNECTOR, 2P	1	*1			
CN5~CN8	PSJS20A25Z	**PSJS20A25Z**	CONNECTOR, 20P	4	*1			
CN9	PQJP20A08Z	**PQJP20A08Z**	CONNECTOR, 20P	1	*1			
CN12	PQJP6D70Z	**PQJP6D70Z**	CONNECTOR, 6P	1	*1			
CN13	PQJS6H30Z	**PQJS6H30Z**	CONNECTOR, 6P	1	*1			
CN14	PQJS4H30Z	**PQJS4H30Z**	CONNECTOR, 4P	1	*1			
BAT	CR23541GUF	**CR23541GUF**	LITHIUM BATTERY	1	*1			
SW1	EVQ21409K	**EVQ21409K**	SWITCH	1	*1			
SW2	PQSS2A24Z	**PQSS2A24Z**	SWITCH	1	*1			
SW3	ESD11V120	**ESD11V120**	SWITCH	1	*1			
X1	PQVCJ12000N8	**PQVCJ12000N8**	CRYSTAL OSCILLATOR	1	*1			
X2	PQVCL3276N6Z	**PQVCL3276N6Z**	CRYSTAL OSCILLATOR	1	*1			
X3	PQVCJ8192N8Z	**PQVCJ8192N8Z**	CRYSTAL OSCILLATOR	1	*1			
Z1,2,4~6	PQRSLD8X103J	**PQRSLD8X103J**	RESISTOR ARRAY	5	*1			

2 PRINTED CIRCUIT BOARD (CPU BOARD)

2.1. Change from Supplement-1 page 5.

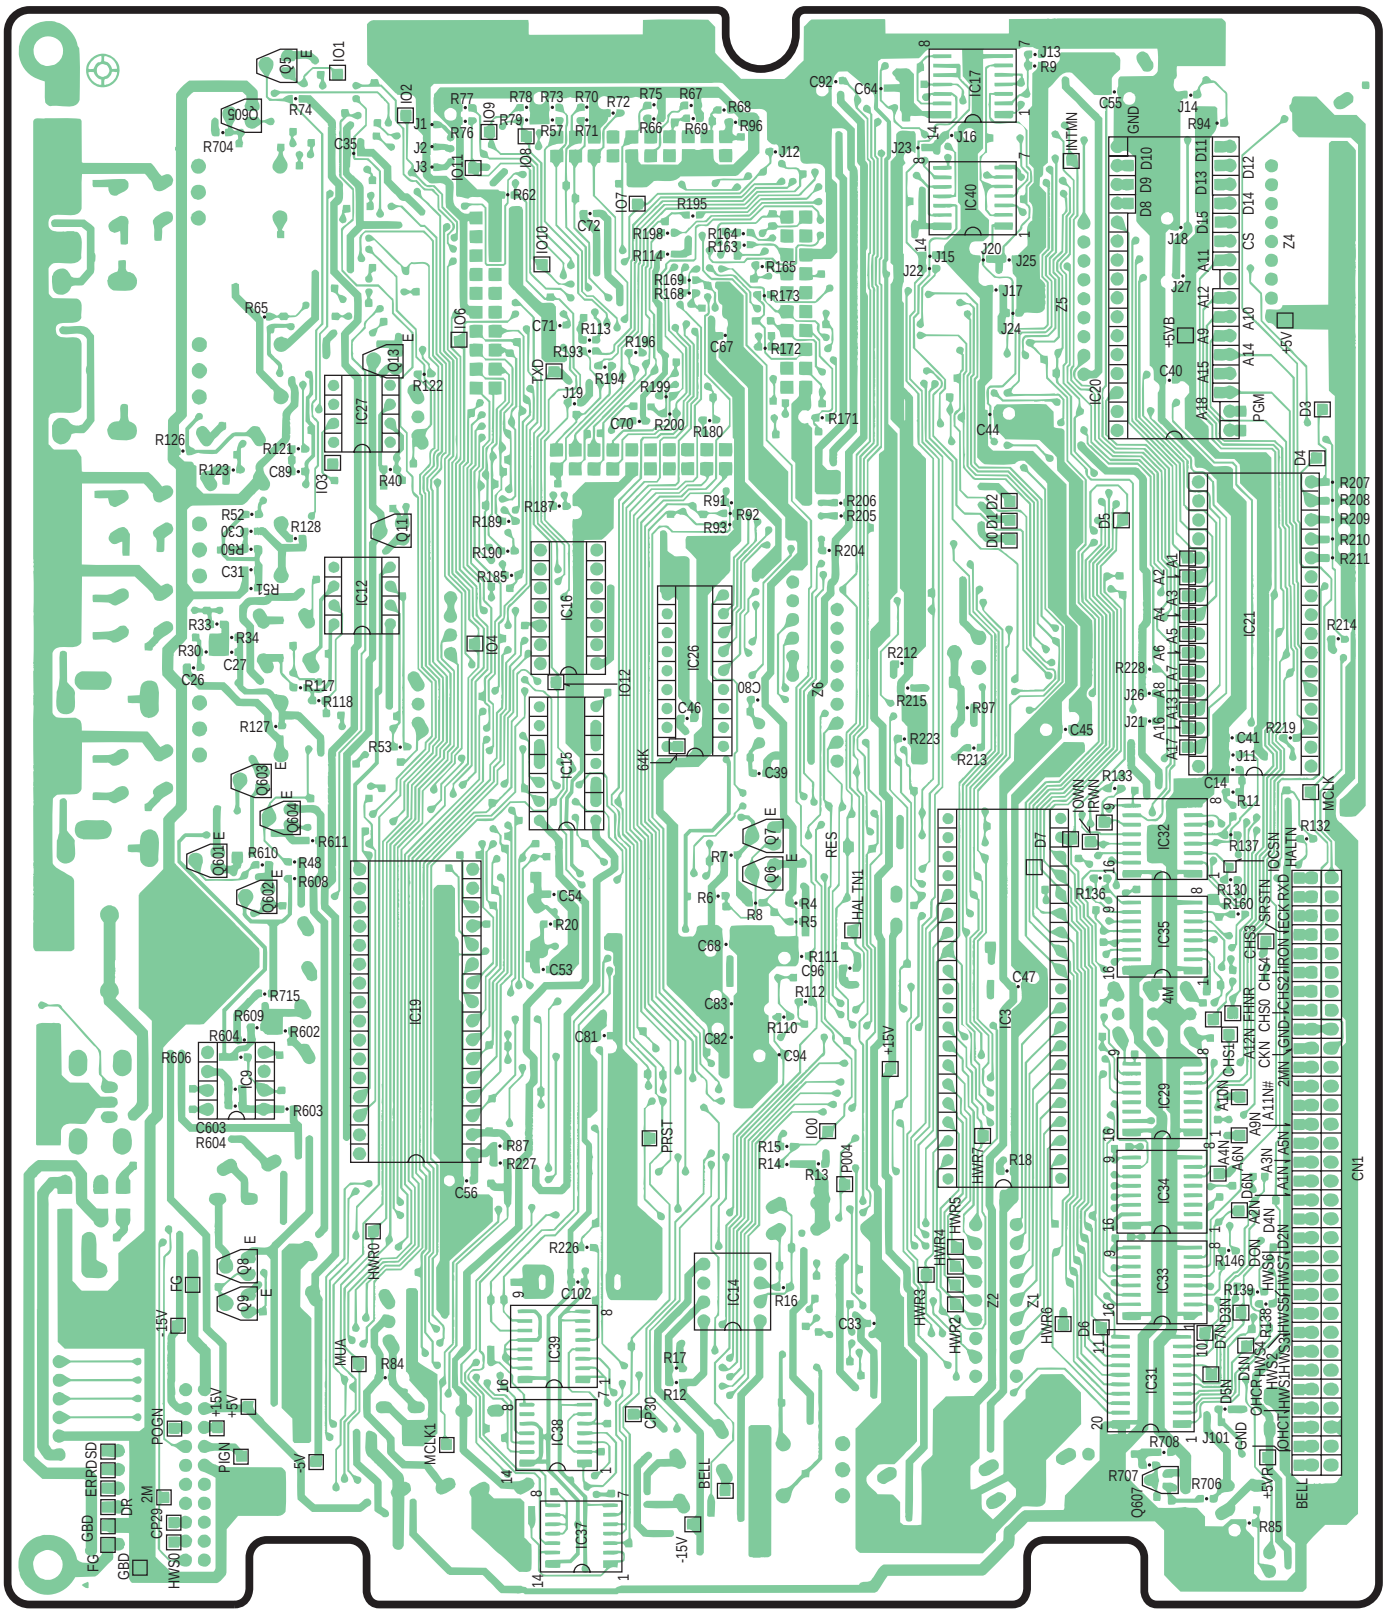

Bottom View

2.2. Change from Supplement-1 page 6.

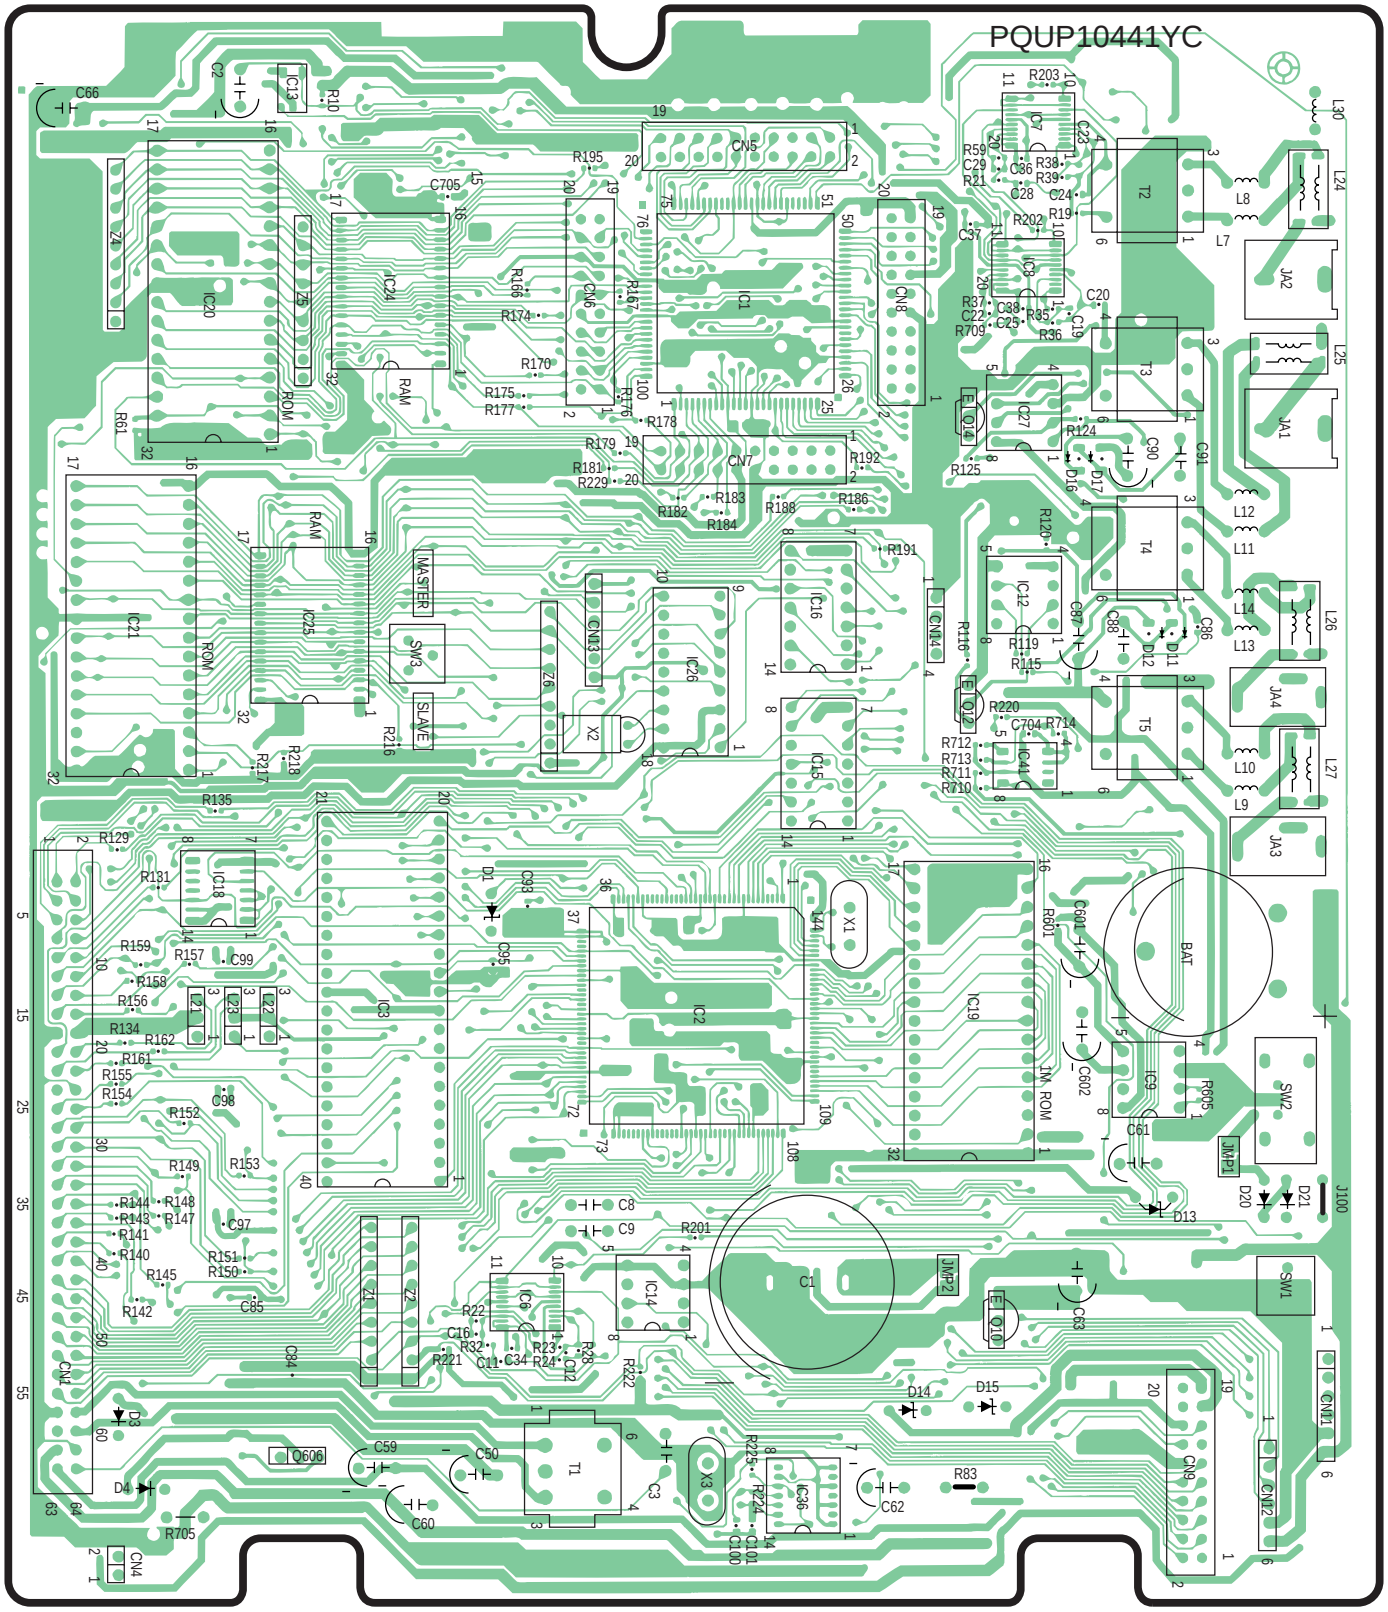

Component View

3 SCHEMATIC DIAGRAM (CPU CIRCUIT)

3.1. Change from Supplement-1 page 7.

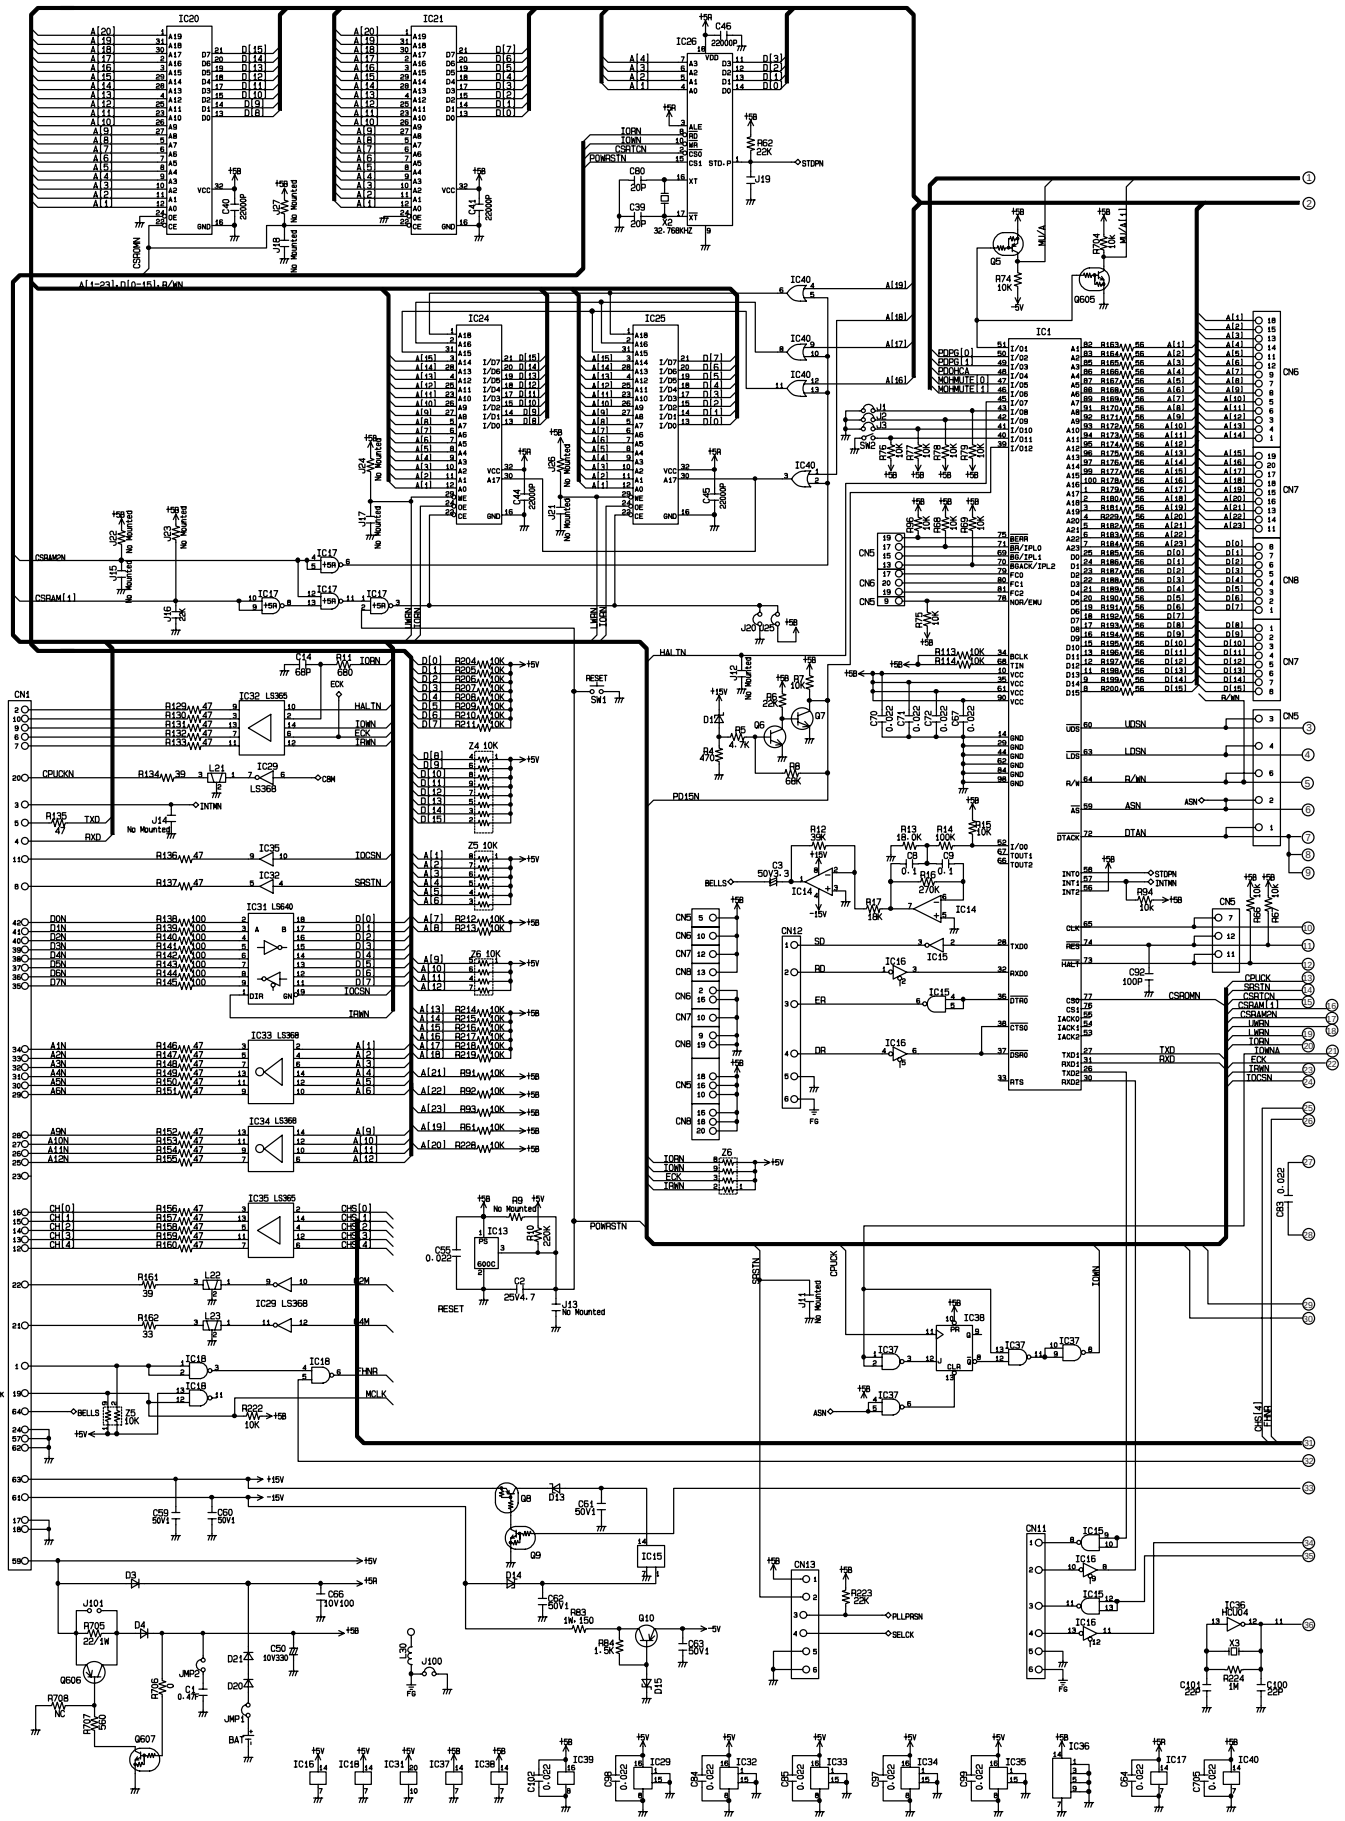

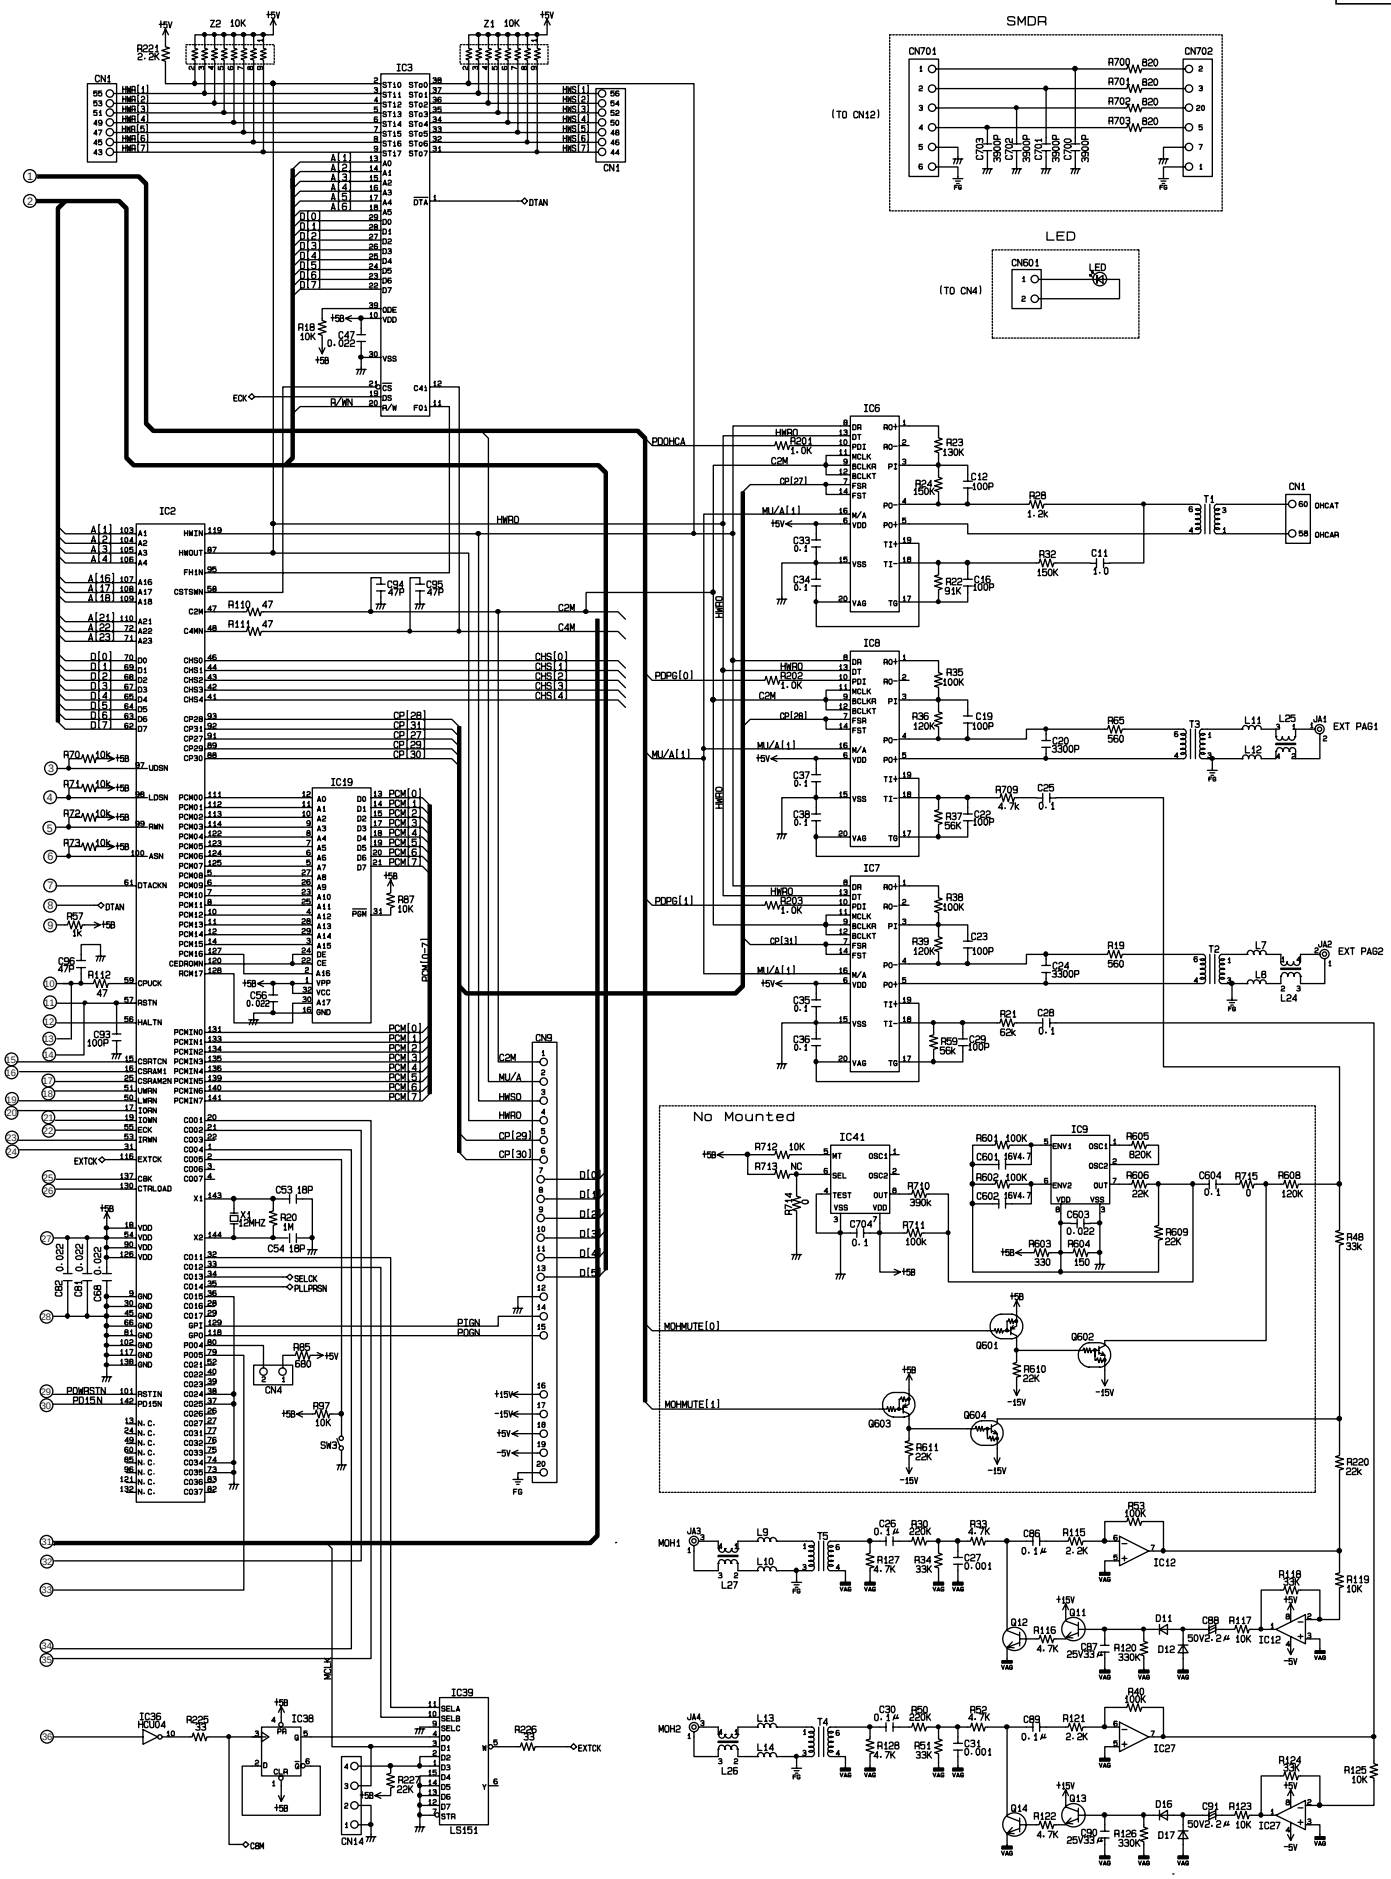

N.T.(Q)
KXTD1232C-1
Printed in Japan

ORDER NO. KMS0008864S1

Service Manual

DIGITAL SUPER HYBRID SYSTEM

KX-TD1232C-1

(for Canada)

Please file and use this supplement manual together with the service manual for Model KX-TD1232C-1, Order No. KMS9704238A1.

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public.
It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product.
Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

Note:Supplement-1~5 have already supplied with printed matter. So please refer to that.

Panasonic

© 2000 Kyushu Matsushita Electric Co., Ltd. All rights reserved. Unauthorized copying and distribution is a violation of law.

1 CHANGES

1.1. Subject

Suffix	Reason for suffix change
O→P	Change of the software (IC20/21:ROM Ver. P231S/P232S→P211D/P212D)
P→Q	Change of the Diode for performance improvement.

1.2. Suffix location



1.3. REPLACEMENT PARTS LIST

Reason for Change (Symbol:A) Following 1-8 reasons are indicated on the Notes in the bottom column.	
1. Improve performance	
2. Change of material or dimension	
3. To meet approved specification	
4. Standardization	
5. Addition	
6. Deletion	
7. Correction	
8. Other	

Interchangeability code (Symbol:B) Following V-Z interchangeabilities are indicated on the Notes in the bottom column.		
Parts	Set Production	Description
V Original / New	Early (before change) / Late (after change)	Original or new parts may be used in early or late production sets. Use original parts until exhausted, then stock new parts.
W Original / New	Early (before change) / Late (after change)	Original parts may be used in early production sets only. New parts may be used in early or late production sets. Use original parts where possible, then stock new parts.
X Original / New	Early (before change) / Late (after change)	New parts only may be used in early or late production sets. Stock new parts.
Y Original / New	Early (before change) / Late (after change)	Original parts may be used in early production sets only. New parts may be used in late production sets only. Stock both original and new parts.
Z Other		

Ref. No.	Part No.		Part Name & Description	Pcs	Remarks	Notes		Time of change (Suffix)
	Original Part	**New Part**						
CPU BOARD PARTS								
IC21~IC24	PSWI1D1232C4	**PSWI11232M19**	IC (ROM KIT)	1		1	X	P
CO LINE BOARD PARTS								
D102A-D102H	PQVDHZS2B1	**PSVDHZS2B3**	DIODE (SI)	8		1	X	Q
D103A-D103H	PQVDHZS2B1	**PSVDHZS2B3**	DIODE (SI)	8		1	X	Q
POWER SUPLLY UNIT PARTS								
ZD3	PSVDMZJ5R1B	**PQVDMZJ5R1B**	DIODE	1		7		
R38	ERDS1TJ100	**ERG1SJ201**	RESISTOR, 200Ω	1		1	X	
C5	PSCK105Z20Z	**PSCCELT1H101**	CAPACITOR, 1μF	1		1	X	

1.4. POWER SUPPLY CIRCUIT

1.4.1. Change from supplement-5 page 19. (Order No.KMS0005677S1)

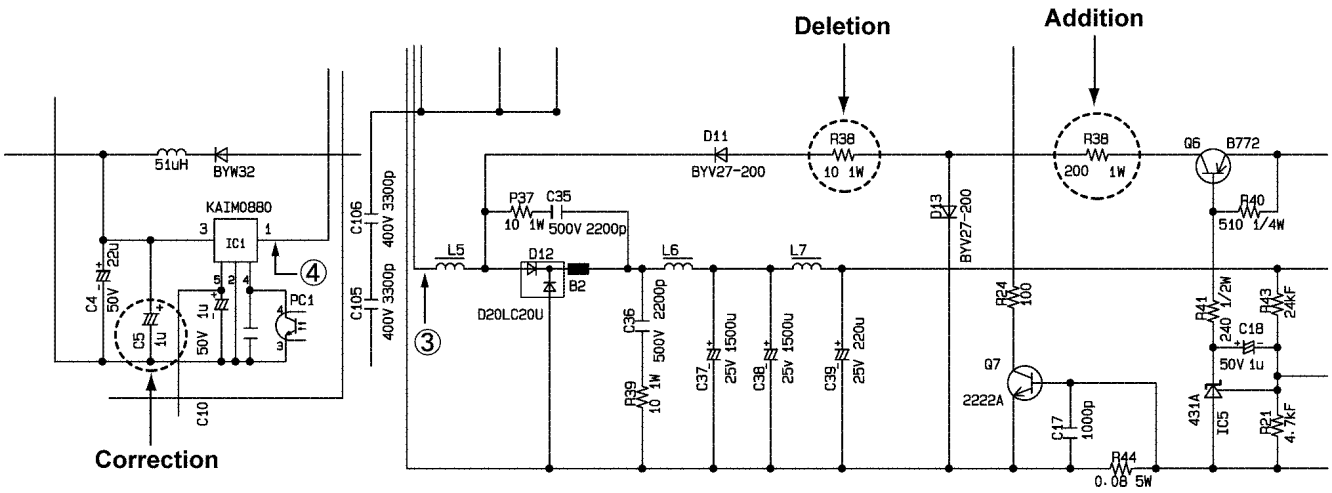

N.T.(Q)
KXTD1232C-1
Printed in Japan

ORDER NO. KMS0301648S1
F5

Service Manual

Digital Super Hybrid System

KX-TD1232C-1

(for Canada)

Please file and use this supplement manual together with the service manual for model KX-TD1232C-1 Order No. KMS9704238A1.

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public.
It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product.
Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

Note:Supplement-1~5 have already supplied with printed matter. So please refer to that.

Panasonic

© 2003 Panasonic Communications Co., Ltd. All rights reserved. Unauthorized copying and distribution is a violation of law.

1 CHANGES

1.1. SUBJECT

Suffix	Reason for suffix change
S→T	Change of the software. (IC20/IC21:ROM Ver. P211K/P212K→P211S/P212S)
T→U	Deletion of Approval number Label, addition of Approval Number to Name Plate. (There is no changed in the replacement parts list.)

1.2. SUFFIX LOCATION



1.3. REPLACEMENT PARTS LIST

Reason for Change (Symbol:A) Following 1-8 reasons are indicated on the Notes in the bottom column.	
1. Improve performance	
2. Change of material or dimension	
3. To meet approved specification	
4. Standardization	
5. Addition	
6. Deletion	
7. Correction	
8. Other	

Interchangeability Code (Symbol:B) Following V-Z interchange abilities are indicated on the Notes in the bottom column.		
Parts	Set Production	
V Original New	Early (before change) Late (after change)	Original or new parts may be used in early or late production sets. Use original parts until exhausted, then stock new parts.
W Original New	Early (before change) Late (after change)	Original parts may be used in early production sets only. New parts may be used in early or late production sets. Use original parts where possible, then stock new parts.
X Original New	Early (before change) Late (after change)	New parts only may be used in early or late production sets. Stock new parts.
Y Original New	Early (before change) Late (after change)	Original parts may be used in early production sets only. New parts may be used in late production sets only. Stock both original and new parts.
Z Other		

Ref. No.	Part No.		Part Name & Description	Pcs/ Set	Remarks	Notes		Time of change (Suffix)
	Original (Old)	**New**						
MAIN BOARD PARTS								
IC20/IC21	PSWI11232M21	**PSWI1D1232C5**	IC (ROM KIT)	1		1	X	T

ORDER NO. KMS0110297S1
F5

Service Manual

DIGITAL SUPER HYBRID SYSTEM

KX-TD1232C-1

(for Canada)

Please file and use this supplement manual together with the service manual for model KX-TD1232C-1 Order No. KMS9704238A1.

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public.
It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product.
Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

Note:Supplement-1~5 have already supplied with printed matter. So please refer to that.

Panasonic

© 2001 Kyushu Matsushita Electric Co., Ltd. All rights reserved. Unauthorized copying and distribution is a violation of law.

1 CHANGES

1.1. Subject

Suffix	Reason for suffix change
R→S	Change of the software. (IC20/IC21:ROM Ver. P211H/P212H→P211K/P212K)

1.2. Suffix location



1.3. REPLACEMENT PARTS LIST

Reason for Change (Symbol:A) Following 1-8 reasons are indicated on the Notes in the bottom column.	
1. Improve performance	
2. Change of material or dimension	
3. To meet approved specification	
4. Standardization	
5. Addition	
6. Deletion	
7. Correction	
8. Other	

Interchangeability Code (Symbol:B) Following V-Z interchange abilities are indicated on the Notes in the bottom column.		
Parts	Set Production	
V Original New	Early (before change) Late (after change)	Original or new parts may be used in early or late production sets. Use original parts until exhausted, then stock new parts.
W Original New	Early (before change) Late (after change)	Original parts may be used in early production sets only. New parts may be used in early or late production sets. Use original parts where possible, then stock new parts.
X Original New	Early (before change) Late (after change)	New parts only may be used in early or late production sets. Stock new parts.
Y Original New	Early (before change) Late (after change)	Original parts may be used in early production sets only. New parts may be used in late production sets only. Stock both original and new parts.
Z Other		

Ref. No.	Part No.		Part Name & Description	Pcs	Remarks	Notes		Time of change (Suffix)
	Original Part	**New Part**						
MAIN BOARD PARTS								
IC20/IC21	PSWI11232M20	**PSWI11232M21**	IC (ROM KIT)	1		1	X	S
POWER SUPPLY UNIT								
93	PQHR477Z	**PQHR447Z**	SPACER-A	1		7		
R30	ERG1SJ100	**ERG1SJ100E**	RESISTOR, 10Ω	1		7		
R35	ERG1SJ100	**ERG1SJ100E**	RESISTOR, 10Ω	1		7		
R37	ERG1SJ100	**ERG1SJ100E**	RESISTOR, 10Ω	1		7		
R39	ERG1SJ100	**ERG1SJ100E**	RESISTOR, 10Ω	1		7		
C3	PSSCEMU2D471	**PSCCEMU2D471**	CAPACITOR, 470µF	1		7		
C5	PSCCELT1H101	**PSCCELT1H010**	CAPACITOR, 1µF	1		7		

2 CABINET AND ELECTRICAL PARTS LOCATION

2.1. Power Supply Section.....Change from Service Manual Supplement-5 page 21. (KX-TD1232C-1:Order No.KMS0005677S1)

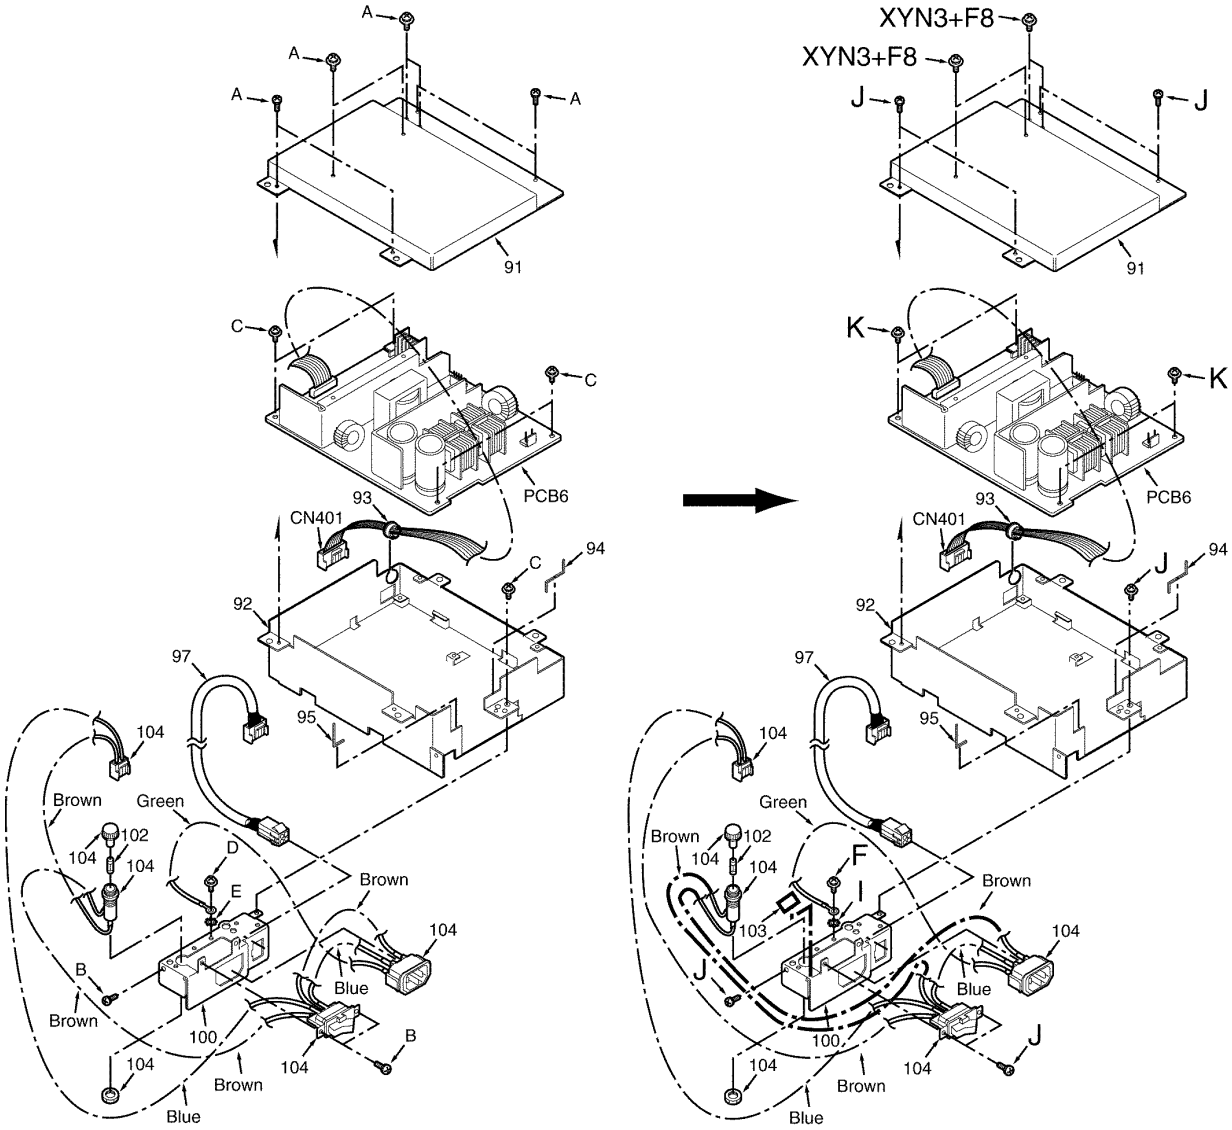

Addition: 103

[OLD] [CORRECTED]

ORDER NO. KMS0011995S1

Service Manual

DIGITAL SUPER HYBRID SYSTEM

KX-TD1232C-1

(for Canada)

Please file and use this supplement manual together with the service manual for Model KX-TD1232C-1, Order No.KMS9704238A1.

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public.
It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product.
Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

Note:Supplement-1~5 have already supplied with printed matter. So please refer to that.

Panasonic

© 2000 Kyushu Matsushita Electric Co., Ltd. All rights reserved. Unauthorized copying and distribution is a violation of law.

1 CHANGES

1.1. Subject

Suffix	Reason for suffix change
Q→R	Change of the cpu Board. (PQUP10441YB→PQUP10441YC)
	Change of the software. (IC20/IC21 ROM Ver. P211D/P212D→P211H/P212H)

1.2. Suffix location



1.3. REPLACEMENT PARTS LIST

Reason for Change (Symbol:A) Following 1-8 reasons are indicated on the Notes in the bottom column.

1. Improve performance	Remark: 1. Part with mark *1 has not changed on the Supplement-7.
2. Change of material or dimension	
3. To meet approved specification	
4. Standardization	
5. Addition	
6. Deletion	
7. Correction	
8. Other	

Interchangeability code (Symbol:B) Following V-Z interchangeabilities are indicated on the Notes in the bottom column.

Parts	Set Production	Description
V	Original → Early (before change) New → Late (after change)	Original or new parts may be used in early or late production sets. Use original parts until exhausted, then stock new parts.
W	Original → Early (before change) New → Late (after change)	Original parts may be used in early production sets only. New parts may be used in early or late production sets. Use original parts where possible, then stock new parts.
X	Original → Early (before change) New → Late (after change)	New parts only may be used in early or late production sets. Stock new parts.
Y	Original → Early (before change) New → Late (after change)	Original parts may be used in early production sets only. New parts may be used in late production sets only. Stock both original and new parts.
Z	Other	

Ref. No.	Parts No.		Part Name & description	Pcs	Remarks	Notes		Time of change (Suffix)
	Original Part	**New part**						
NEW POWER SUPPLY UNIT PARTS								
PCB6	PSWP6D1232BX	**PSWP6TD1232C**	POWER SUPPLY BOARD ASS'Y (RTL) ⚠	1		7		
CPU BOARD PARTS (All parts are shown bellow.)								
PCB1	PSWP1D1232C3	**PSWP1D1232C4**	CPU BOARD ASS'Y (RTL)	1		1	V	R
IC1	PQVI68301FCG	**PQVI68301FCG**	IC	1	*1			
IC2	PQVI620890F	**PQVI620890F**	IC	1	*1			
IC3	PQVIMT8980DE	**PQVIMT8980DE**	IC	1	*1			
IC6~8	PQVIMC45503P	**PSVIMC14548V**	IC	3		1	Y	R
IC10,IC11	PQVINJM4558D	----------	IC	0		6		R
IC12,IC14	PQVINJM4558D	**PQVINJM4558D**	IC	2	*1			
IC13	PQVIPS520C	**PSVIPS600CMT**	IC	1		1	Y	R
IC15	PQVIHD75188P	**PQVIHD75188P**	IC	1	*1			
IC16	PQVIHD75189P	**PQVIHD75189P**	IC	1	*1			
IC17	PSVITC7HT00A	**PSVITC7HT00A**	IC	1	*1			
IC18	PQVISN7L00S	**PQVISN7L00S**	IC	1	*1			
IC19	PQWI2TD816C	**PQWI2TD816C**	IC (ROM)	1	*1			
IC20,IC21	PSWI1D1232C4	**PSWI11232M19**	IC (ROM KIT)	1		7		
	PSWI11232M19	**PSWI11232M20**	IC (ROM KIT)	1		1	X	R
IC22,IC23	PSWI11232M19	**PSVILHP832DD**	IC	2		7		
	PSVILHP832DD	----------	IC	0		6		R

IC24	PSWI11232M19	**PSVICX582MD**	IC	1		7		
	PSVICX582MD	**PSVITC5401AE**	IC	1		1	Y	R
IC25	PSVICX582MD	**PSVITC5401AE**	IC	1		1	Y	R
IC26	PQVIMS6242BS	**PQVIMS6242BS**	IC	1	*1			
IC27	PQVINJM4558D	**PQVINJM4558D**	IC	1	*1			
IC29	PQVISN7L368M	**PQVISN7L368M**	IC	1	*1			
IC31	PQVISN7L640M	**PQVISN7L640M**	IC	1	*1			
IC32	PQVISN7L365S	**PQVISN7L365S**	IC	1	*1			
IC33,IC34	PQVISN7L368M	**PQVISN7L368M**	IC	2	*1			
IC35	PQVISN7L365S	**PQVISN7L365S**	IC	1	*1			
IC36	PQVIMB7HU04F	**PQVIMB7HU04F**	IC	1	*1			
IC37	PQVISN7H00S	**PQVISN7H00S**	IC	1	*1			
IC38	PQVISN7H74S	**PQVISN7H74S**	IC	1	*1			
IC39	PQVISN7L151M	**PQVISN7L151M**	IC	1	*1			
IC40	----------	**PQVISN7L32S**	IC	1		5	Y	R
Q5	PQVTDTA144EK	**PQVTDTA144EK**	TRANSISTOR (SI)	1	*1			
Q6	2SC2412K	**2SC2412K**	TRANSISTOR (SI)	1	*1			
Q7	2SC2412K	**2SC2412K**	TRANSISTOR (SI)	1	*1			
Q8	PQVTDTA143E	**PQVTDTA143E**	TRANSISTOR (SI)	1	*1			
Q9	PQVTDTC144E	**PQVTDTC144E**	TRANSISTOR (SI)	1	*1			
Q10	2SA933	**2SA933**	TRANSISTOR (SI) (or 2SA1317)	1	*1			
Q11	2SC2412K	**2SC2412K**	TRANSISTOR (SI)	1	*1			
Q12	2SC2878	**2SC2878**	TRANSISTOR (SI)	1	*1			
Q13	2SC2412K	**2SC2412K**	TRANSISTOR (SI)	1	*1			
Q14	2SC2878	**2SC2878**	TRANSISTOR (SI)	1	*1			
Q605	----------	**PQVTDTC144E**	TRANSISTOR (SI)	1		5		R
Q606	----------	**2SB1237R**	TRANSISTOR (SI)	1		5		R
Q607	----------	**PQVTDTC143E**	TRANSISTOR (SI)	1		5		R
D1	MA4091	**MA4091**	DIODE (SI)	1	*1			
D4	PQVDAK03	**PQVDAK03**	DIODE (SI)	1	*1			
D7~10	MA4068	**----------**	DIODE (SI)	0		6		R
D11,12	RLS71	**RLS71**	DIODE (SI)	2	*1			
D13,14	MA4030	**MA4030**	DIODE (SI)	2	*1			
D15	MA4056	**MA4056**	DIODE (SI)	1	*1			
D16,17	RLS71	**RLS71**	DIODE (SI)	2	*1			
D3,20,21	MA723	**MA723**	DIODE (SI)	3	*1			
R4	PQ4R10XJ471	**ERJ3GEYJ471**	RESISTOR, 470Ω	1		1	Y	R
R5	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	R
R6	PQ4R10XJ223	**ERJ3GEYJ223**	RESISTOR, 22kΩ	1		1	Y	R
R7	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R8	PQ4R10XJ683	**ERJ3GEYJ683**	RESISTOR, 68kΩ	1		1	Y	R
R10	PQ4R10XJ224	**ERJ3GEYJ224**	RESISTOR, 220kΩ	1		1	Y	R
R11	PQ4R10XJ681	**ERJ3GEYJ681**	RESISTOR, 680Ω	1		1	Y	R
R12	PQ4R10XJ393	**ERJ3GEYJ393**	RESISTOR, 39kΩ	1		1	Y	R
R13	PQ4R10XF1782	**ERJ3GEYJ183**	RESISTOR, 18kΩ	1		1	Y	R
R14	PQ4R10XJ104	**ERJ3GEYJ104**	RESISTOR, 100kΩ	1		1	Y	R
R15	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R16	PQ4R10XJ274	**ERJ3GEYJ274**	RESISTOR, 270kΩ	1		1	Y	R
R17	PQ4R10XJ183	**ERJ3GEYJ183**	RESISTOR, 18kΩ	1		1	Y	R
R18	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R19	PQ4R10XJ561	**ERJ3GEYJ561**	RESISTOR, 560Ω	1		1	Y	R
R20	PQ4R10XJ105	**ERJ3GEYJ105**	RESISTOR, 1MΩ	1		1	Y	R
R21	PQ4R10XJ563	**ERJ3GEYJ623**	RESISTOR, 62kΩ	1		1	Y	R
R22	PQ4R10XJ104	**ERJ3GEYJ913**	RESISTOR, 91kΩ	1		1	Y	R
R23	PQ4R10XJ104	**ERJ3GEYJ134**	RESISTOR, 130kΩ	1		1	Y	R
R24	PQ4R10XJ124	**ERJ3GEYJ154**	RESISTOR, 150kΩ	1		1	Y	R
R25	PQ4R10XJ823	**----------**	RESISTOR, 82kΩ	0		6		R
R26	PQ4R10XJ104	**----------**	RESISTOR, 100kΩ	0		6		R
R27	PQ4R10XJ104	**----------**	RESISTOR, 100kΩ	0		6		R
R28	PQ4R10XF1211	**ERJ3GEYF122**	RESISTOR, 1.2kΩ	1		1	Y	R
R29	PQ4R10XF1211	**----------**	RESISTOR, 1.21kΩ	0		6		R
R30	PQ4R10XJ224	**ERJ3GEYJ224**	RESISTOR, 220kΩ	1		1	Y	R
R31	PQ4R10XF1401	**----------**	RESISTOR, 1.4kΩ	1		6		R
R32	PQ4R10XJ823	**ERJ3GEYJ154**	RESISTOR, 150Ω	1		1	Y	R
R33	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	R
R34	PQ4R10XJ333	**ERJ3GEYJ333**	RESISTOR, 33kΩ	1		1	Y	R
R35	PQ4R10XJ104	**ERJ3GEYJ104**	RESISTOR, 100kΩ	1		1	Y	R
R36	PQ4R10XJ124	**ERJ3GEYJ124**	RESISTOR, 120kΩ	1		1	Y	R

R37	PQ4R10XJ104	**ERJ3GEYJ563**	RESISTOR, 56kΩ	1		1	Y	R
R38	PQ4R10XJ104	**ERJ3GEYJ104**	RESISTOR, 100kΩ	1		1	Y	R
R39	PQ4R10XJ124	**ERJ3GEYJ124**	RESISTOR, 120kΩ	1		1	Y	R
R40	PQ4R10XJ104	**ERJ3GEYJ104**	RESISTOR, 100kΩ	1		1	Y	R
R48	PQ4R10XJ333	**ERJ3GEYJ333**	RESISTOR, 33kΩ	1		1	Y	R
R50	PQ4R10XJ224	**ERJ3GEYJ224**	RESISTOR, 220kΩ	1		1	Y	R
R51	PQ4R10XJ333	**ERJ3GEYJ333**	RESISTOR, 33kΩ	1		1	Y	R
R52	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	R
R53	PQ4R10XJ104	**ERJ3GEYJ104**	RESISTOR, 100kΩ	1		1	Y	R
R57	PQ4R10XJ102	**ERJ3GEYJ102**	RESISTOR, 1kΩ	1		1	Y	R
R59	PQ4R10XJ104	**ERJ3GEYJ563**	RESISTOR, 56kΩ	1		1	Y	R
R61	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R62	PQ4R10XJ223	**ERJ3GEYJ223**	RESISTOR, 22kΩ	1		1	Y	R
R65	PQ4R10XJ561	**ERJ3GEYJ561**	RESISTOR, 560Ω	1		1	Y	R
R66	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R67	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R68	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R69	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R70	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R71	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R72	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R73	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R74	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R75	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R76	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R77	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R78	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R79	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R83	ERDS1TJ151	**ERDS1TJ151**	RESISTOR, 150Ω	1	*1			
R84	PQ4R10XJ152	**ERJ3GEYJ152**	RESISTOR, 1.5kΩ	1		1	Y	R
R85	PQ4R10XJ681	**ERJ3GEYJ681**	RESISTOR, 680Ω	1		1	Y	R
R87	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R91	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R92	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R93	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R94	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R96	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R97	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R110	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R111	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R112	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R113	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R114	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R115	PQ4R10XJ222	**ERJ3GEYJ222**	RESISTOR, 2.2kΩ	1		1	Y	R
R116	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	R
R117	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R118	PQ4R10XJ333	**ERJ3GEYJ333**	RESISTOR, 33kΩ	1		1	Y	R
R119	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R120	PQ4R10XJ334	**ERJ3GEYJ334**	RESISTOR, 330kΩ	1		1	Y	R
R121	PQ4R10XJ222	**ERJ3GEYJ222**	RESISTOR, 2.2kΩ	1		1	Y	R
R122	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	R
R123	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R124	PQ4R10XJ333	**ERJ3GEYJ333**	RESISTOR, 33kΩ	1		1	Y	R
R125	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R126	PQ4R10XJ334	**ERJ3GEYJ334**	RESISTOR, 330kΩ	1		1	Y	R
R127	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kKΩ	1		1	Y	R
R128	PQ4R10XJ472	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		1	Y	R
R129	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R130	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R131	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R132	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R133	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R134	PQ4R10XJ390	**ERJ3GEYJ390**	RESISTOR, 39Ω	1		1	Y	R
R135	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R136	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R137	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R138	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	R
R139	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	R

R140	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	R
R141	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	R
R142	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	R
R143	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	R
R144	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	R
R145	PQ4R10XJ101	**ERJ3GEYJ101**	RESISTOR, 100Ω	1		1	Y	R
R146	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R147	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R148	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R149	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R150	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R151	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R152	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R153	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R154	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R155	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R156	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R157	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R158	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R159	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R160	PQ4R10XJ470	**ERJ3GEYJ470**	RESISTOR, 47Ω	1		1	Y	R
R161	PQ4R10XJ390	**ERJ3GEYJ390**	RESISTOR, 39Ω	1		1	Y	R
R162	PQ4R10XJ330	**ERJ3GEYJ330**	RESISTOR, 33Ω	1		1	Y	R
R163	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R164	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R165	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R166	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R167	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R168	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R169	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R170	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R171	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R172	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R173	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R174	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R175	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R176	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R177	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R178	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R179	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R180	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R181	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R182	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R183	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R184	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R185	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R186	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R187	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R188	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R189	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R190	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R191	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R192	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R193	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R194	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R195	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R196	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R197	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R198	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R199	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R200	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R201	PQ4R10XJ102	**ERJ3GEYJ102**	RESISTOR, 1kΩ	1		1	Y	R
R202	PQ4R10XJ102	**ERJ3GEYJ102**	RESISTOR, 1kΩ	1		1	Y	R
R203	PQ4R10XJ102	**ERJ3GEYJ102**	RESISTOR, 1kΩ	1		1	Y	R
R204	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R205	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R206	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R207	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R

R208	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R209	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R210	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R211	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R212	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R213	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R214	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R215	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R216	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R217	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R218	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R219	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R220	PQ4R10XJ223	**ERJ3GEYJ223**	RESISTOR, 22kΩ	1		1	Y	R
R221	PQ4R10XJ222	**ERJ3GEYJ222**	RESISTOR, 2.2kΩ	1		1	Y	R
R222	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R223	PQ4R10XJ223	**ERJ3GEYJ223**	RESISTOR, 22kΩ	1		1	Y	R
R224	PQ4R10XJ105	**ERJ3GEYJ105**	RESISTOR, 1MΩ	1		1	Y	R
R225,226	PQ4R10XJ330	**ERJ3GEYJ330**	RESISTOR, 33Ω	2		1	Y	R
R227	PQ4R10XJ223	**ERJ3GEYJ223**	RESISTOR, 22kΩ	1		1	Y	R
R228	PQ4R10XJ103	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		1	Y	R
R229	PQ4R10XJ560	**ERJ3GEYJ560**	RESISTOR, 56Ω	1		1	Y	R
R704	----------	**ERJ3GEYJ103**	RESISTOR, 10kΩ	1		5		R
R705	----------	**PQRD1VJ220**	RESISTOR, 22Ω	1		5		R
R706	----------	**ERJ3GEY0R00**	RESISTOR, 0Ω	1		5		R
R707	----------	**ERJ3GEYJ561**	RESISTOR, 560Ω	1		5		R
R709	----------	**ERJ3GEYJ472**	RESISTOR, 4.7kΩ	1		5		R
J6	PQ4R10XJ000	**----------**	RESISTOR, 0Ω	0		6		R
J16	PQ4R10XJ223	**ERJ3GEYJ223**	RESISTOR, 22kΩ	1		1	Y	R
C1	EECFE5R5474	**EECFE5R5474**	CAPACITOR, 0.47µF	1	*1			
C2	ECEA1EU4R7	**ECEA1EU4R7**	CAPACITOR, 4.7µF	1	*1			
C3	ECEA1HN3R3S	**ECEA1HN3R3S**	CAPACITOR, 3.3µF	1	*1			
C8	ECQV1H104JZ	**ECQV1H104JZ**	CAPACITOR, 0.1µF	1	*1			
C9	ECQV1H104JZ	**ECQV1H104JZ**	CAPACITOR, 0.1µF	1	*1			
C11	PQCUV1H104ZF	**PQCUV1H105JC**	CAPACITOR, 1µF	1		1	Y	R
C12	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	R
C13	PQCUV1H682KB	**----------**	CAPACITOR, 0.0068µF	0		6		R
C14	PQCUV1H680JC	**ECUV1H680JCV**	CAPACITOR, 68pF	1		1	Y	R
C16	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	R
C17	PQCUV1H104ZF	**----------**	CAPACITOR, 0.1µF	0		6		R
C19	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	R
C20	PQCUV1H332KB	**ECUV1H332KBV**	CAPACITOR, 0.0033µF	1		1	Y	R
C21	PQCUV1H104ZF	**----------**	CAPACITOR, 0.1µF	0		6		R
C22	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	R
C23	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	R
C24	PQCUV1H332KB	**ECUV1H332KBV**	CAPACITOR, 0.0033µF	1		1	Y	R
C25	PQCUV1H104ZF	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	R
C26	PQCUV1H104ZF	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	R
C27	PQCUV1H102J	**ECUV1H102KBV**	CAPACITOR, 0.001µF	1		1	Y	R
C28	PQCUV1H104ZF	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	R
C29	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	R
C30	PQCUV1H104ZF	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	R
C31	PQCUV1H102J	**ECUV1H102KBV**	CAPACITOR, 0.001µF	1		1	Y	R
C33	PQCUV1H223KB	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	R
C34	PQCUV1H223KB	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	R
C35	PQCUV1H223KB	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	R
C36	PQCUV1H223KB	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	R
C37	PQCUV1H223KB	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	R
C38	PQCUV1H223KB	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	R
C39	PQCUV1H200JC	**ECUV1H200JCV**	CAPACITOR, 20pF	1		1	Y	R
C40	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C41	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C44	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C45	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C46	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C47	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C50	ECEA1EU331	**ECEA1EU331**	CAPACITOR, 330	1	*1			
C53	PQCUV1H180JC	**ECUV1H180JCV**	CAPACITOR, 18pF	1		1	Y	R
C54	PQCUV1H180JC	**ECUV1H180JCV**	CAPACITOR, 18pF	1		1	Y	R

C55	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C56	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C59	ECEA1HU010	**ECEA1HU010**	CAPACITOR, 1µF	1	*1			
C60	ECEA1HU010	**ECEA1HU010**	CAPACITOR, 1µF	1	*1			
C61	ECEA1HU010	**ECEA1HU010**	CAPACITOR, 1µF	1	*1			
C62	ECEA1HU010	**ECEA1HU010**	CAPACITOR, 1µF	1	*1			
C63	ECEA1HU010	**ECEA1HU010**	CAPACITOR, 1µF	1	*1			
C64	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C66	ECEA1AU101	**ECEA1AU101**	CAPACITOR, 100µF	1	*1			
C67	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C68	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C70	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C71	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C72	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C80	PQCUV1H200JC	**ECUV1H200JCV**	CAPACITOR, 20pF	1		1	Y	R
C81	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C82	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C83	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C84	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C85	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C86	PQCUV1H104ZF	**ECUV1C104KBV**	CAPACITOR, 1µF	1		1	Y	R
C87	ECEA1VU330	**ECEA1VU330**	CAPACITOR, 33µF	1	*1			
C88	ECEA1HN2R2S	**ECEA1HN2R2S**	CAPACITOR, 2.2µF	1	*1			
C89	PQCUV1H104ZF	**ECUV1C104KBV**	CAPACITOR, 0.1µF	1		1	Y	R
C90	ECEA1VU330	**ECEA1VU330**	CAPACITOR, 33µF	1	*1			
C91	ECEA1HN2R2S	**ECEA1HN2R2S**	CAPACITOR, 2.2µF	1	*1			
C92	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	R
C93	PQCUV1H101JC	**ECUV1H101JCV**	CAPACITOR, 100pF	1		1	Y	R
C94	PQCUV1H470JC	**ECUV1H470JCV**	CAPACITOR, 47pF	1		1	Y	R
C95	PQCUV1H470JC	**ECUV1H470JCV**	CAPACITOR, 47pF	1		1	Y	R
C96	PQCUV1H470JC	**ECUV1H470JCV**	CAPACITOR, 47pF	1		1	Y	R
C97	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C98	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C99	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C100,101	PQCUV1H220JC	**ECUV1H220JCV**	CAPACITOR, 22pF	2		1	Y	R
C102	PQCUV1H223KB	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		1	Y	R
C705	----------	**ECUV1H223KBV**	CAPACITOR, 0.022µF	1		5		R
T1	ETA14Y180AY	**ETA14Y180AY**	TRANSFORMER	1	*1			
T2~5	PQLT2D6A	**PQLT2D6A**	TRANSFORMER	4	*1			
L7~14	PQLE106	**PQLE106**	COIL	8	*1			
L21~23	PQVFTU50MT	**PQVFTU50MT**	CERAMIC FILTER	3	*1			
L24~27	PQVFCM04RC01	**PQVFCM04RC01**	CERAMIC FILTER	4	*1			
L30	PQLE106	**PQLE106**	COIL	1	*1			
JAC1,2	PQJJ1G1Z	**PQJJ1G1Z**	JACK, PAGING	2	*1			
JAC3,4	PQJJ1D3Z	**PQJJ1D3Z**	JACK, EP	2	*1			
CN1	PQJS64R15Z	**PQJS64R15Z**	CONNECTOR, 64P	1	*1			
CN4	PQJP2D70Z	**PQJP2D70Z**	CONNECTOR, 2P	1	*1			
CN5~CN8	PSJS20A25Z	**PSJS20A25Z**	CONNECTOR, 20P	4	*1			
CN9	PQJP20A08Z	**PQJP20A08Z**	CONNECTOR, 20P	1	*1			
CN12	PQJP6D70Z	**PQJP6D70Z**	CONNECTOR, 6P	1	*1			
CN13	PQJS6H30Z	**PQJS6H30Z**	CONNECTOR, 6P	1	*1			
CN14	PQJS4H30Z	**PQJS4H30Z**	CONNECTOR, 4P	1	*1			
BAT	CR23541GUF	**CR23541GUF**	LITHIUM BATTERY	1	*1			
SW1	EVQ21409K	**EVQ21409K**	SWITCH	1	*1			
SW2	PQSS2A24Z	**PQSS2A24Z**	SWITCH	1	*1			
SW3	ESD11V120	**ESD11V120**	SWITCH	1	*1			
X1	PQVCJ12000N8	**PQVCJ12000N8**	CRYSTAL OSCILLATOR	1	*1			
X2	PQVCL3276N6Z	**PQVCL3276N6Z**	CRYSTAL OSCILLATOR	1	*1			
X3	PQVCJ8192N8Z	**PQVCJ8192N8Z**	CRYSTAL OSCILLATOR	1	*1			
Z1,2,4~6	PQRSLD8X103J	**PQRSLD8X103J**	RESISTOR ARRAY	5	*1			

2 PRINTED CIRCUIT BOARD (CPU BOARD)

2.1. Change from Supplement-1 page 5.

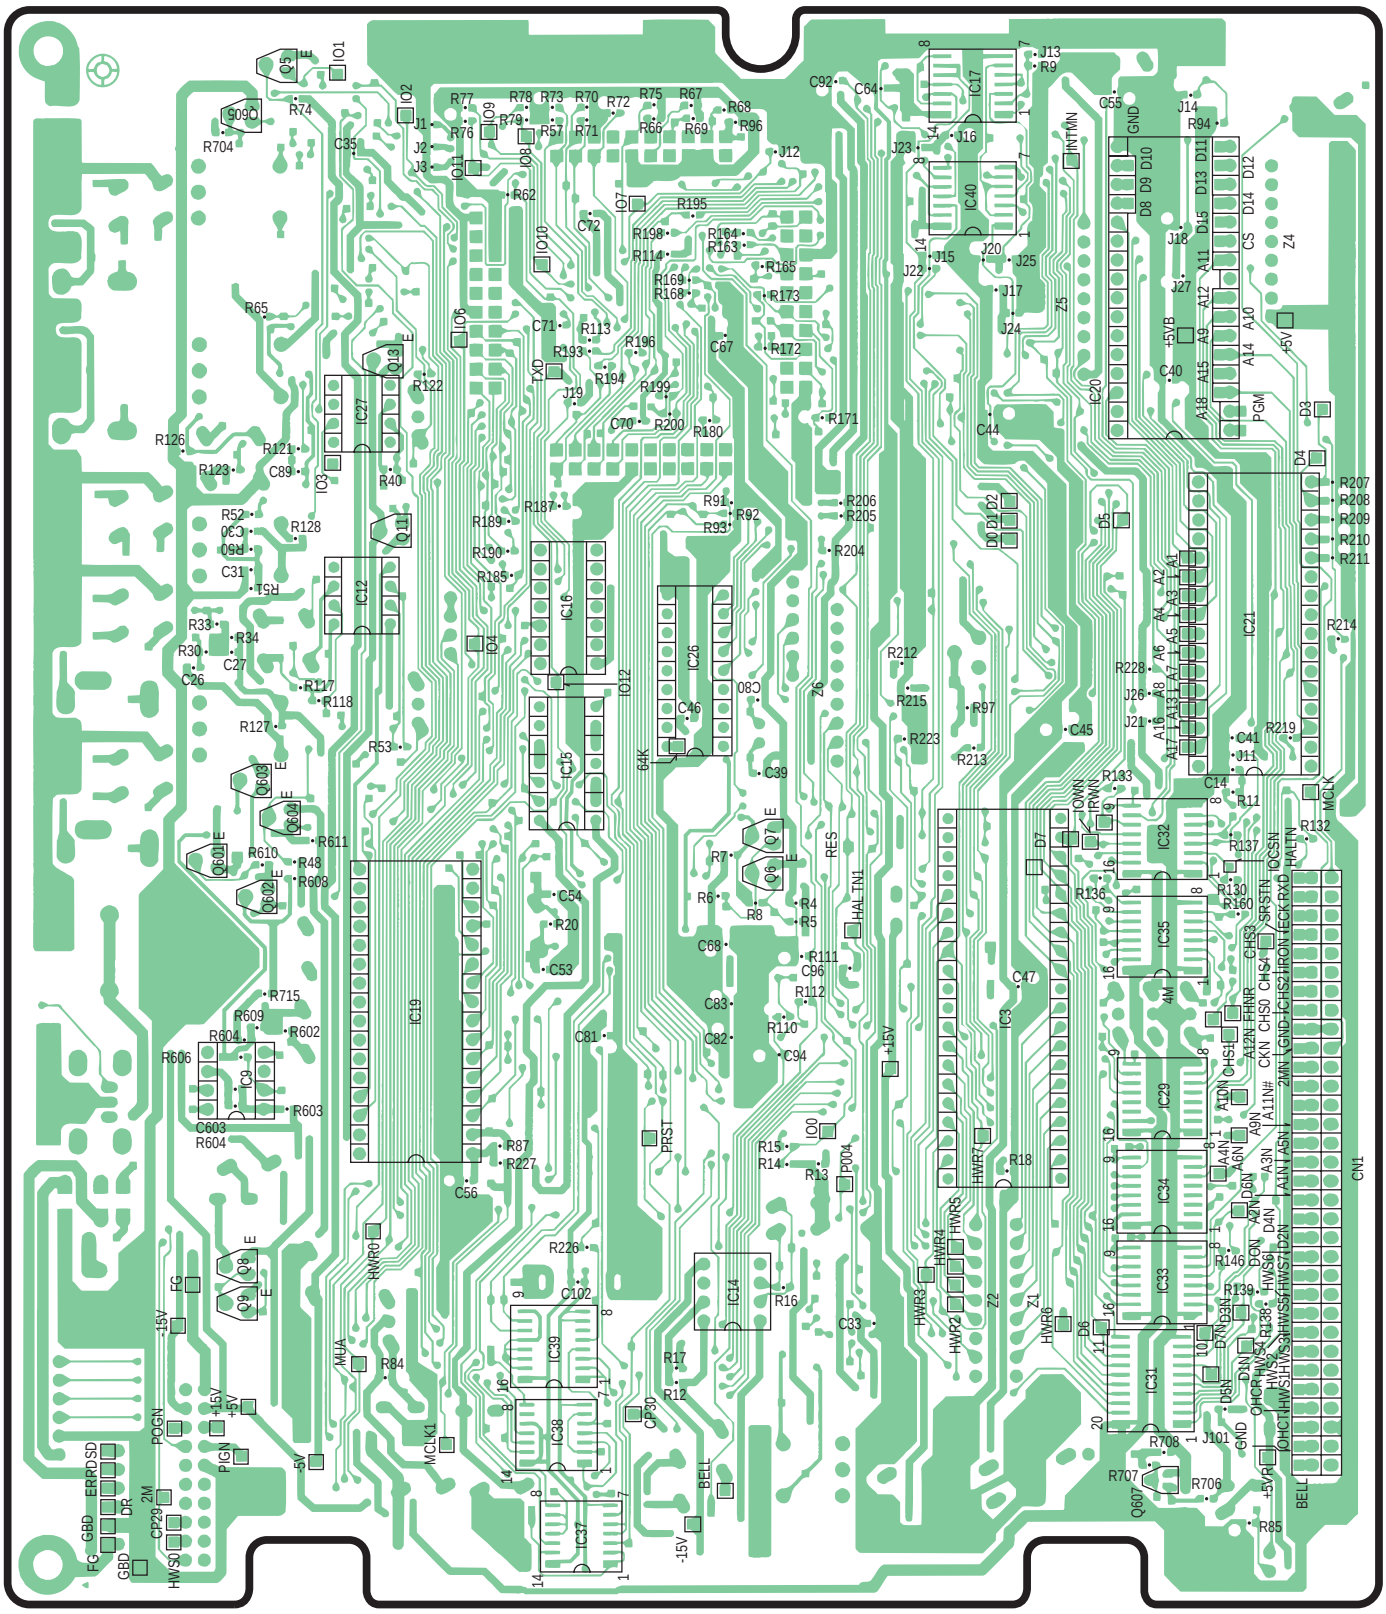

Bottom View

2.2. Change from Supplement-1 page 6.

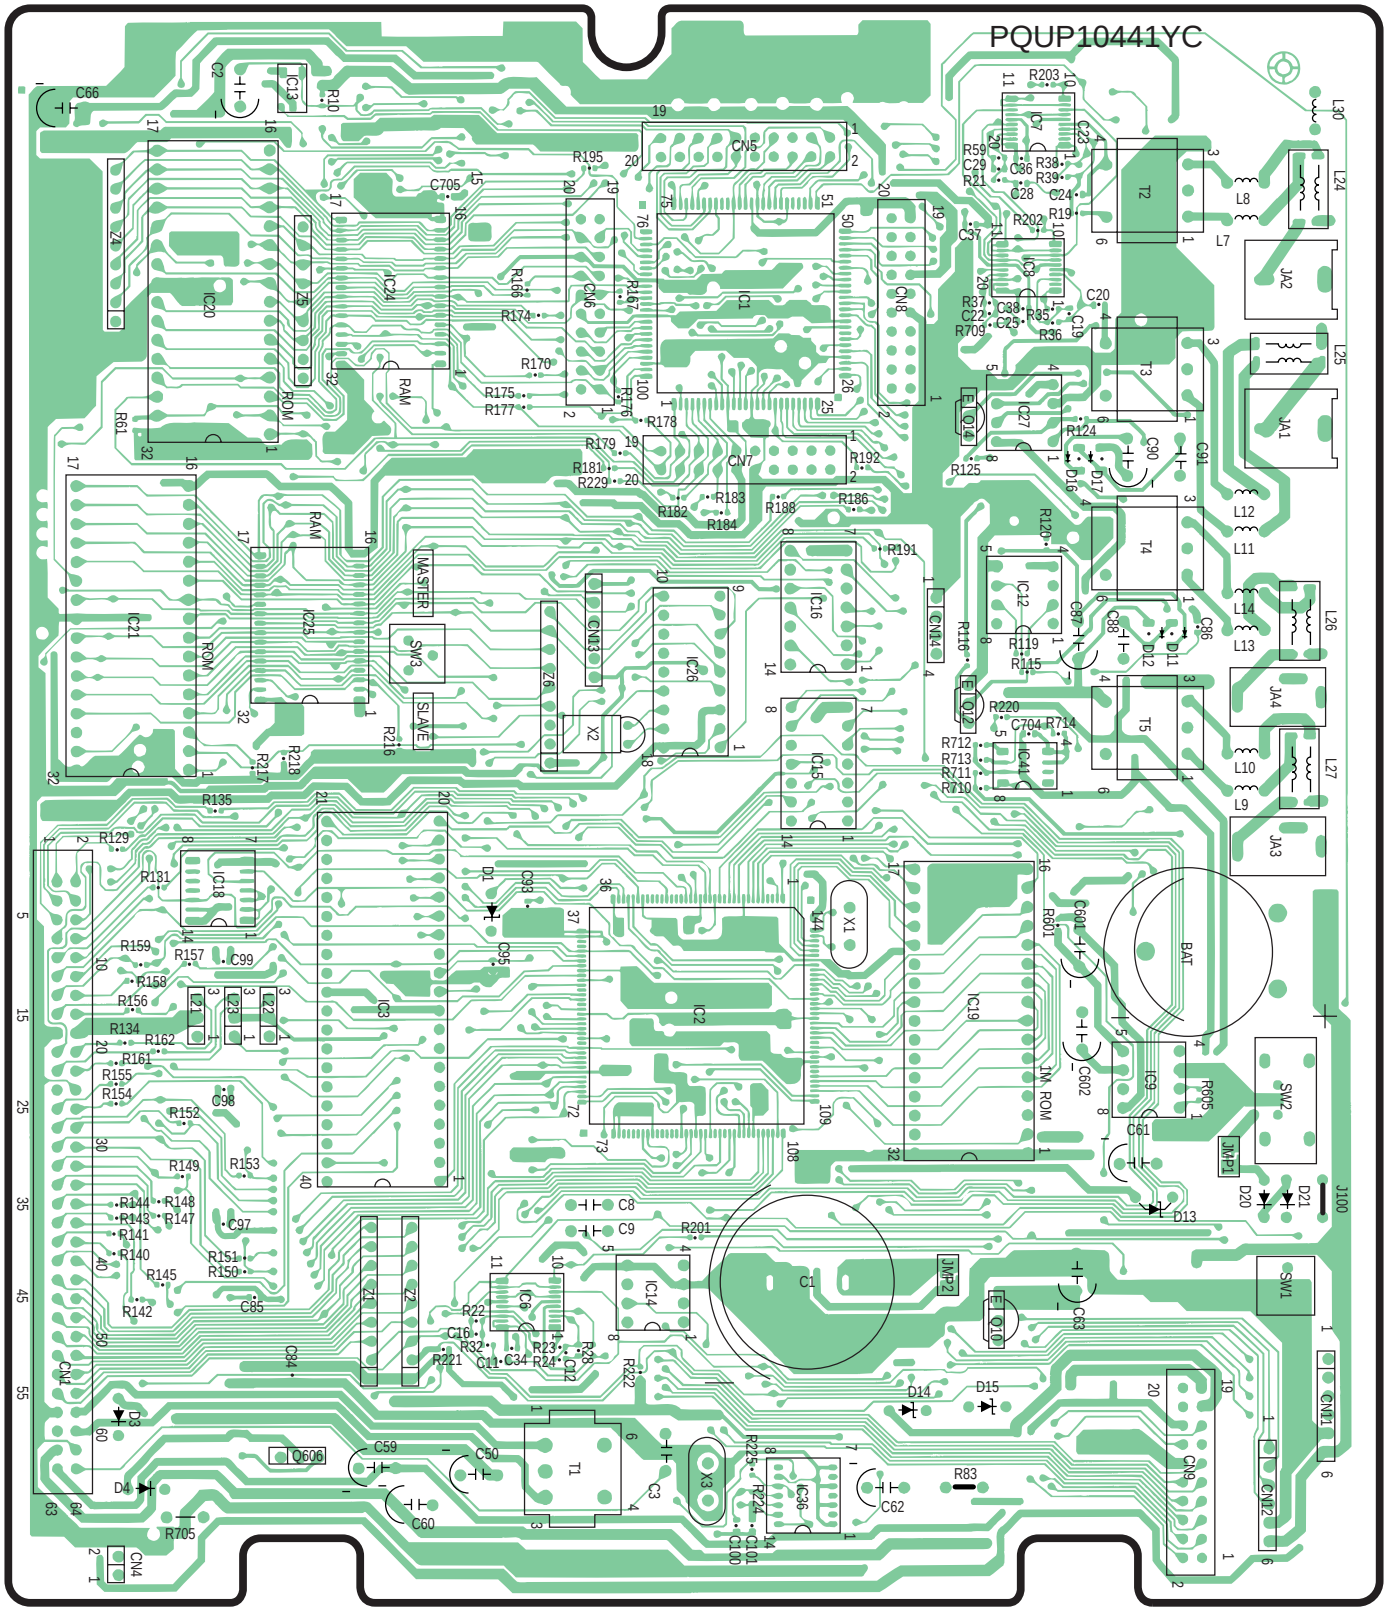

Component View

3 SCHEMATIC DIAGRAM (CPU CIRCUIT)

3.1. Change from Supplement-1 page 7.

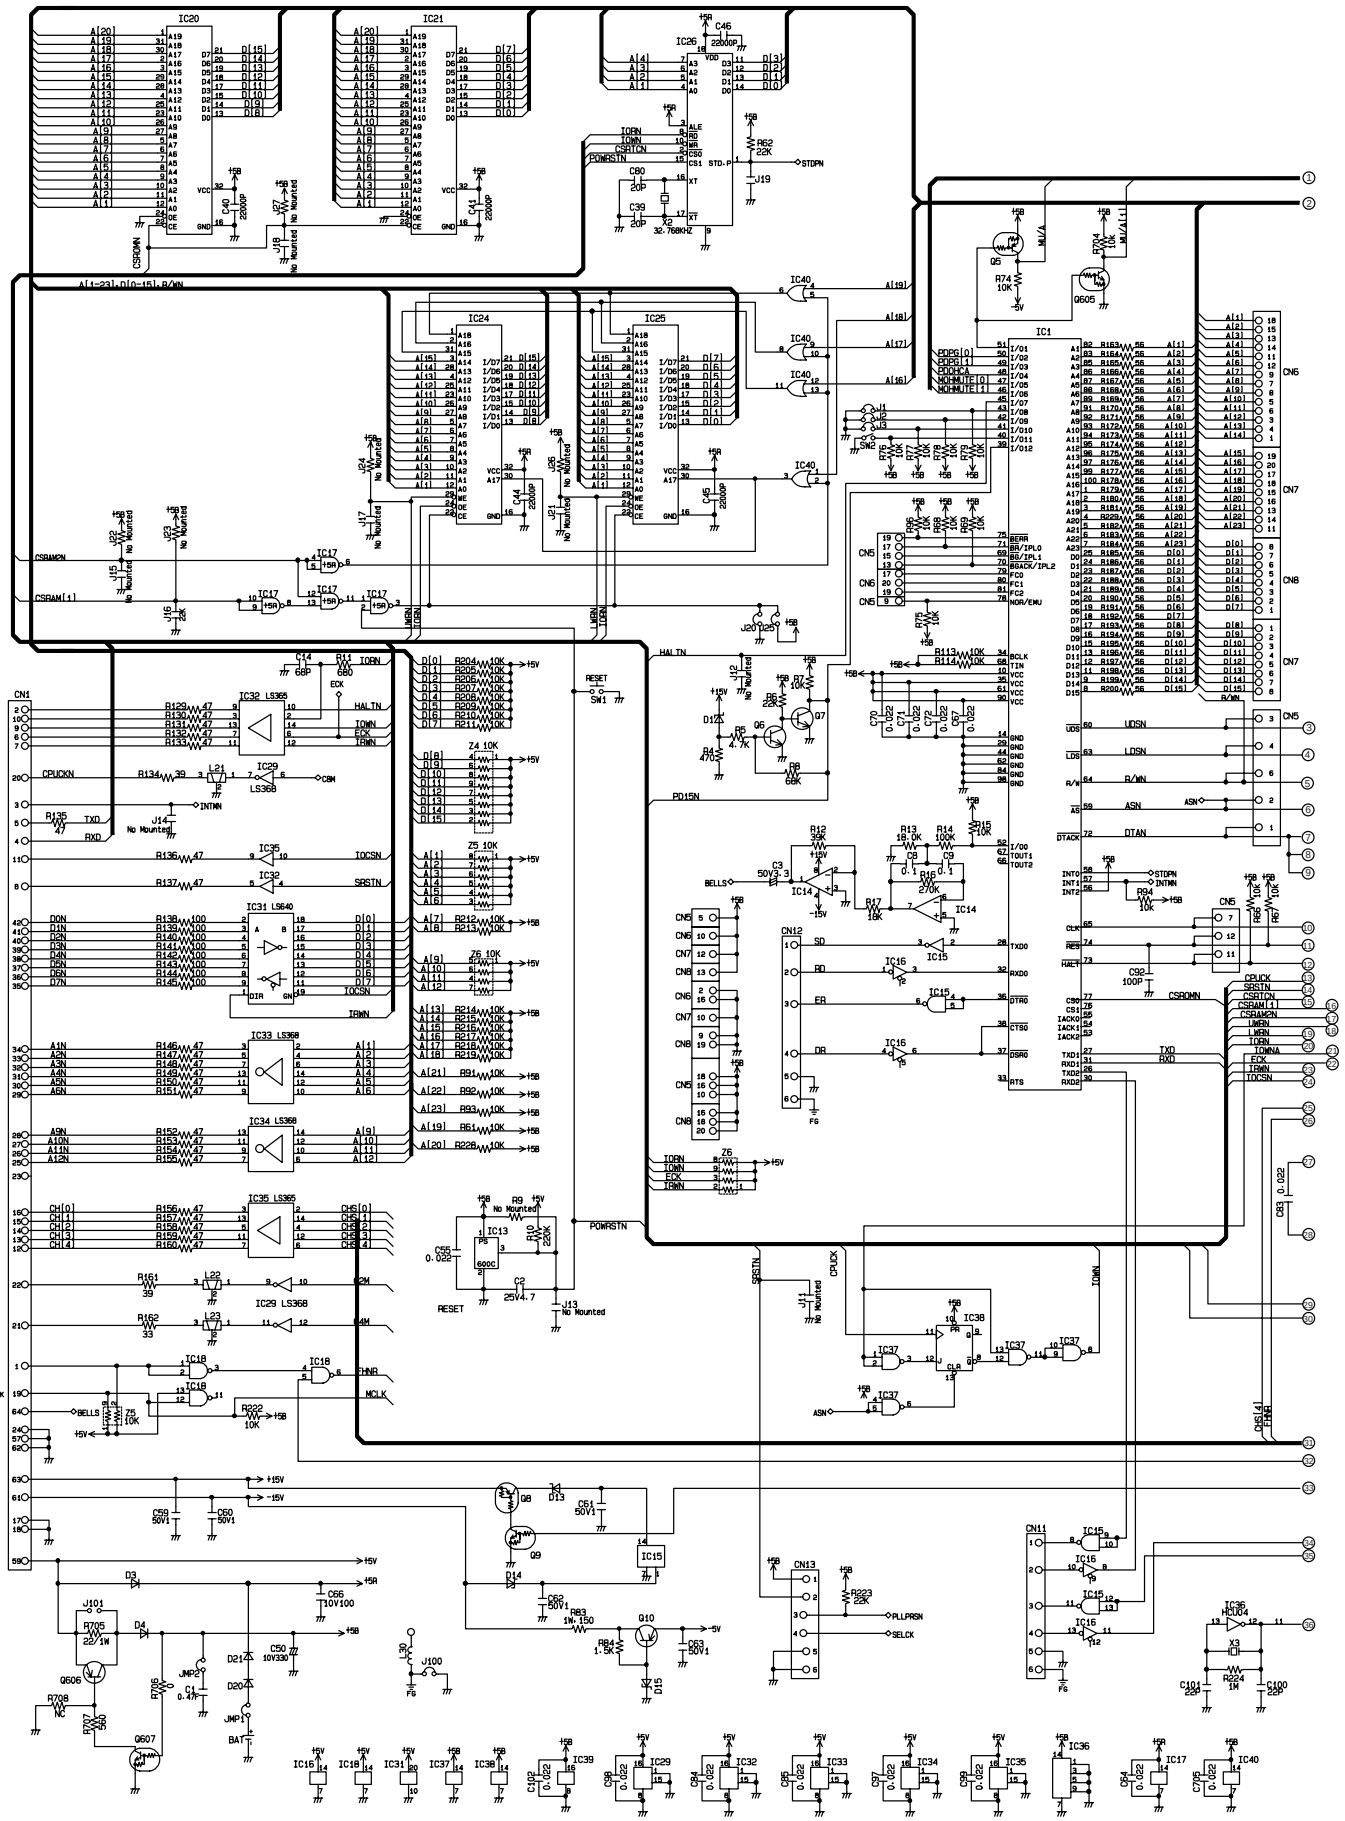

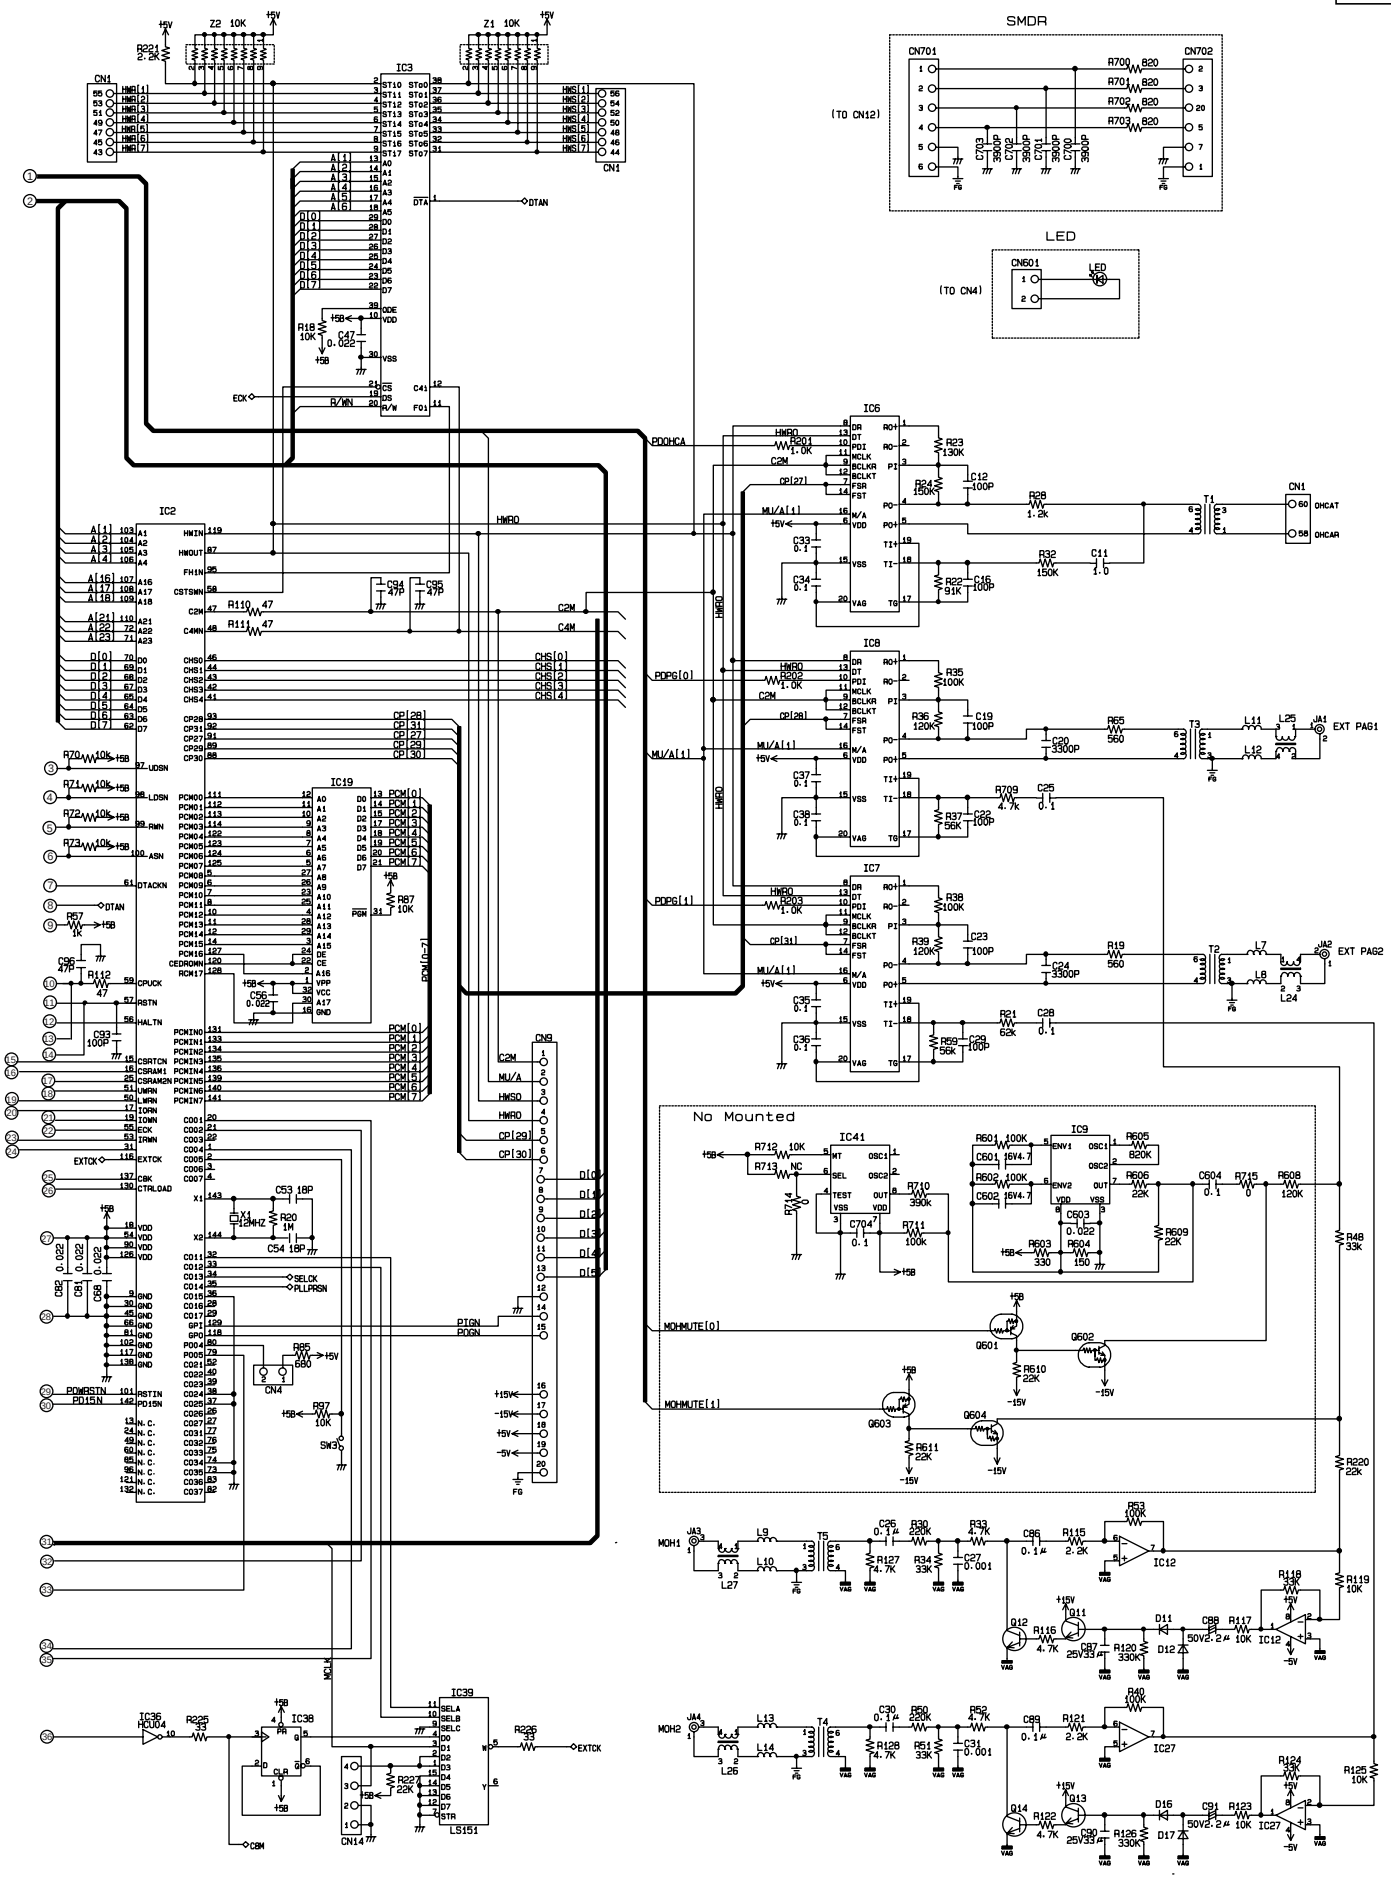

N.T.(Q)
KXTD1232C-1
Printed in Japan

ORDER NO. KMS0008864S1

Service Manual

DIGITAL SUPER HYBRID SYSTEM

KX-TD1232C-1

(for Canada)

Please file and use this supplement manual together with the service manual for Model KX-TD1232C-1, Order No. KMS9704238A1.

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public.
It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product.
Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

Note:Supplement-1~5 have already supplied with printed matter. So please refer to that.

Panasonic

© 2000 Kyushu Matsushita Electric Co., Ltd. All rights reserved. Unauthorized copying and distribution is a violation of law.

1 CHANGES

1.1. Subject

Suffix	Reason for suffix change
O→P	Change of the software (IC20/21:ROM Ver. P231S/P232S→P211D/P212D)
P→Q	Change of the Diode for performance improvement.

1.2. Suffix location



1.3. REPLACEMENT PARTS LIST

Reason for Change (Symbol:A) Following 1-8 reasons are indicated on the Notes in the bottom column.	
1. Improve performance	
2. Change of material or dimension	
3. To meet approved specification	
4. Standardization	
5. Addition	
6. Deletion	
7. Correction	
8. Other	

Interchangeability code (Symbol:B) Following V-Z interchangeabilities are indicated on the Notes in the bottom column.		
Parts	Set Production	Description
V Original / New	Early (before change) / Late (after change)	Original or new parts may be used in early or late production sets. Use original parts until exhausted, then stock new parts.
W Original / New	Early (before change) / Late (after change)	Original parts may be used in early production sets only. New parts may be used in early or late production sets. Use original parts where possible, then stock new parts.
X Original / New	Early (before change) / Late (after change)	New parts only may be used in early or late production sets. Stock new parts.
Y Original / New	Early (before change) / Late (after change)	Original parts may be used in early production sets only. New parts may be used in late production sets only. Stock both original and new parts.
Z Other		

Ref. No.	Part No.		Part Name & Description	Pcs	Remarks	Notes		Time of change (Suffix)
	Original Part	**New Part**						
CPU BOARD PARTS								
IC21~IC24	PSWI1D1232C4	**PSWI11232M19**	IC (ROM KIT)	1		1	X	P
CO LINE BOARD PARTS								
D102A-D102H	PQVDHZS2B1	**PSVDHZS2B3**	DIODE (SI)	8		1	X	Q
D103A-D103H	PQVDHZS2B1	**PSVDHZS2B3**	DIODE (SI)	8		1	X	Q
POWER SUPLLY UNIT PARTS								
ZD3	PSVDMZJ5R1B	**PQVDMZJ5R1B**	DIODE	1		7		
R38	ERDS1TJ100	**ERG1SJ201**	RESISTOR, 200Ω	1		1	X	
C5	PSCK105Z20Z	**PSCCELT1H101**	CAPACITOR, 1μF	1		1	X	

1.4. POWER SUPPLY CIRCUIT

1.4.1. Change from supplement-5 page 19. (Order No.KMS0005677S1)

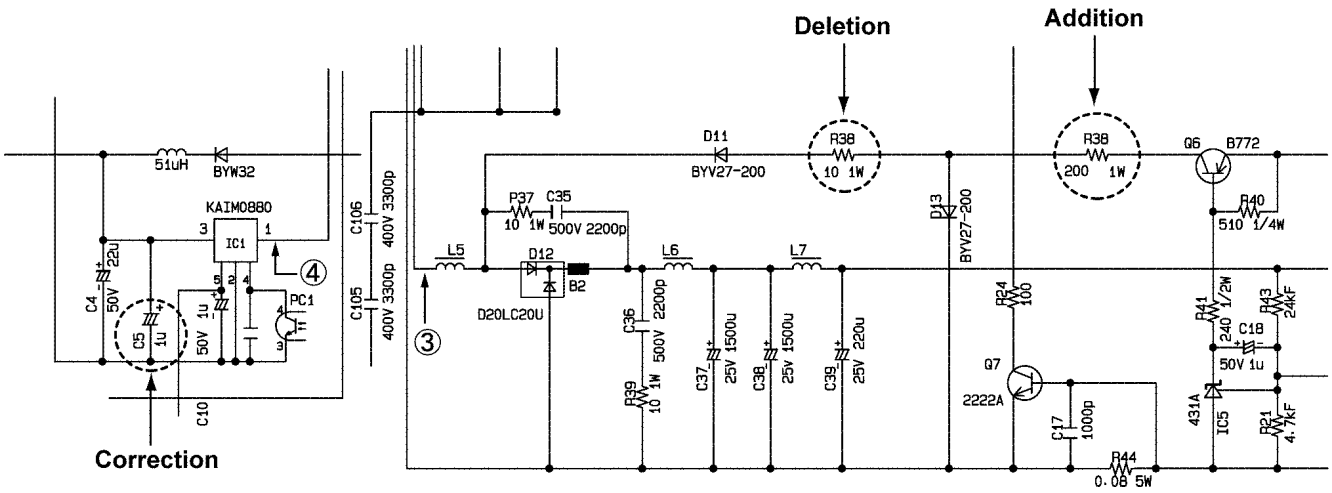

N.T.(Q)
KXTD1232C-1
Printed in Japan

ORDER NO. KMS0008864S1

Service Manual

DIGITAL SUPER HYBRID SYSTEM

KX-TD1232C-1

(for Canada)

Please file and use this supplement manual together with the service manual for Model KX-TD1232C-1, Order No. KMS9704238A1.

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public.
It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product.
Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

Note:Supplement-1~5 have already supplied with printed matter. So please refer to that.

Panasonic

© 2000 Kyushu Matsushita Electric Co., Ltd. All rights reserved. Unauthorized copying and distribution is a violation of law.

1 CHANGES

1.1. Subject

Suffix	Reason for suffix change
O→P	Change of the software (IC20/21:ROM Ver. P231S/P232S→P211D/P212D)
P→Q	Change of the Diode for performance improvement.

1.2. Suffix location



1.3. REPLACEMENT PARTS LIST

Reason for Change (Symbol:A) Following 1-8 reasons are indicated on the Notes in the bottom column.	
1. Improve performance	
2. Change of material or dimension	
3. To meet approved specification	
4. Standardization	
5. Addition	
6. Deletion	
7. Correction	
8. Other	

Interchangeability code (Symbol:B) Following V-Z interchangeabilities are indicated on the Notes in the bottom column.		
Parts	Set Production	Description
V Original / New	Early (before change) / Late (after change)	Original or new parts may be used in early or late production sets. Use original parts until exhausted, then stock new parts.
W Original / New	Early (before change) / Late (after change)	Original parts may be used in early production sets only. New parts may be used in early or late production sets. Use original parts where possible, then stock new parts.
X Original / New	Early (before change) / Late (after change)	New parts only may be used in early or late production sets. Stock new parts.
Y Original / New	Early (before change) / Late (after change)	Original parts may be used in early production sets only. New parts may be used in late production sets only. Stock both original and new parts.
Z Other		

Ref. No.	Part No.		Part Name & Description	Pcs	Remarks	Notes		Time of change (Suffix)
	Original Part	**New Part**						
CPU BOARD PARTS								
IC21~IC24	PSWI1D1232C4	**PSWI11232M19**	IC (ROM KIT)	1		1	X	P
CO LINE BOARD PARTS								
D102A-D102H	PQVDHZS2B1	**PSVDHZS2B3**	DIODE (SI)	8		1	X	Q
D103A-D103H	PQVDHZS2B1	**PSVDHZS2B3**	DIODE (SI)	8		1	X	Q
POWER SUPLLY UNIT PARTS								
ZD3	PSVDMZJ5R1B	**PQVDMZJ5R1B**	DIODE	1		7		
R38	ERDS1TJ100	**ERG1SJ201**	RESISTOR, 200Ω	1		1	X	
C5	PSCK105Z20Z	**PSCCELT1H101**	CAPACITOR, 1μF	1		1	X	

1.4. POWER SUPPLY CIRCUIT

1.4.1. Change from supplement-5 page 19. (Order No.KMS0005677S1)

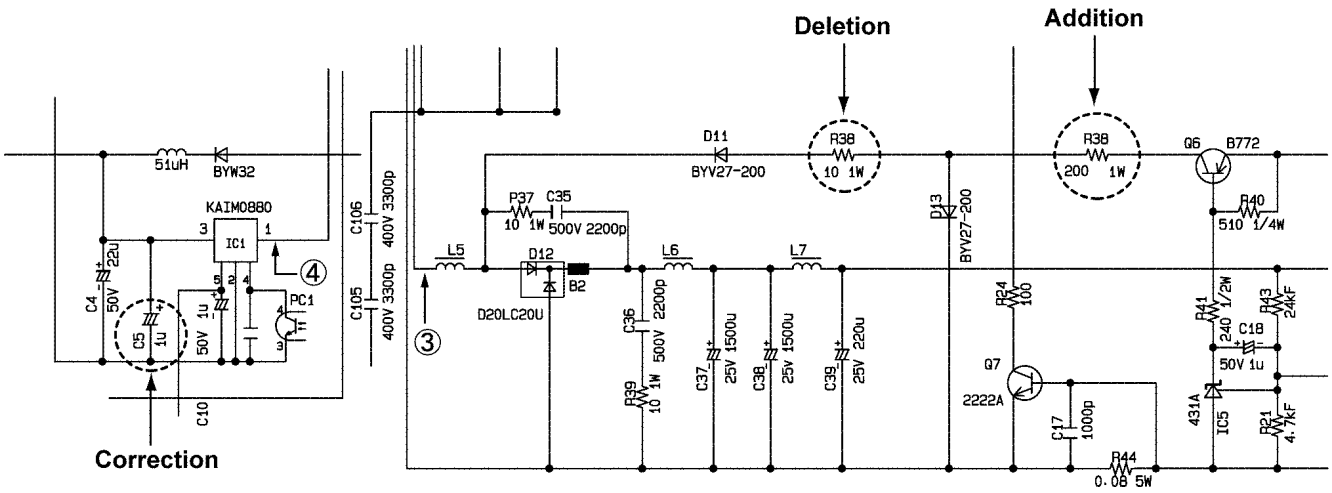

N.T.(Q)
KXTD1232C-1
Printed in Japan

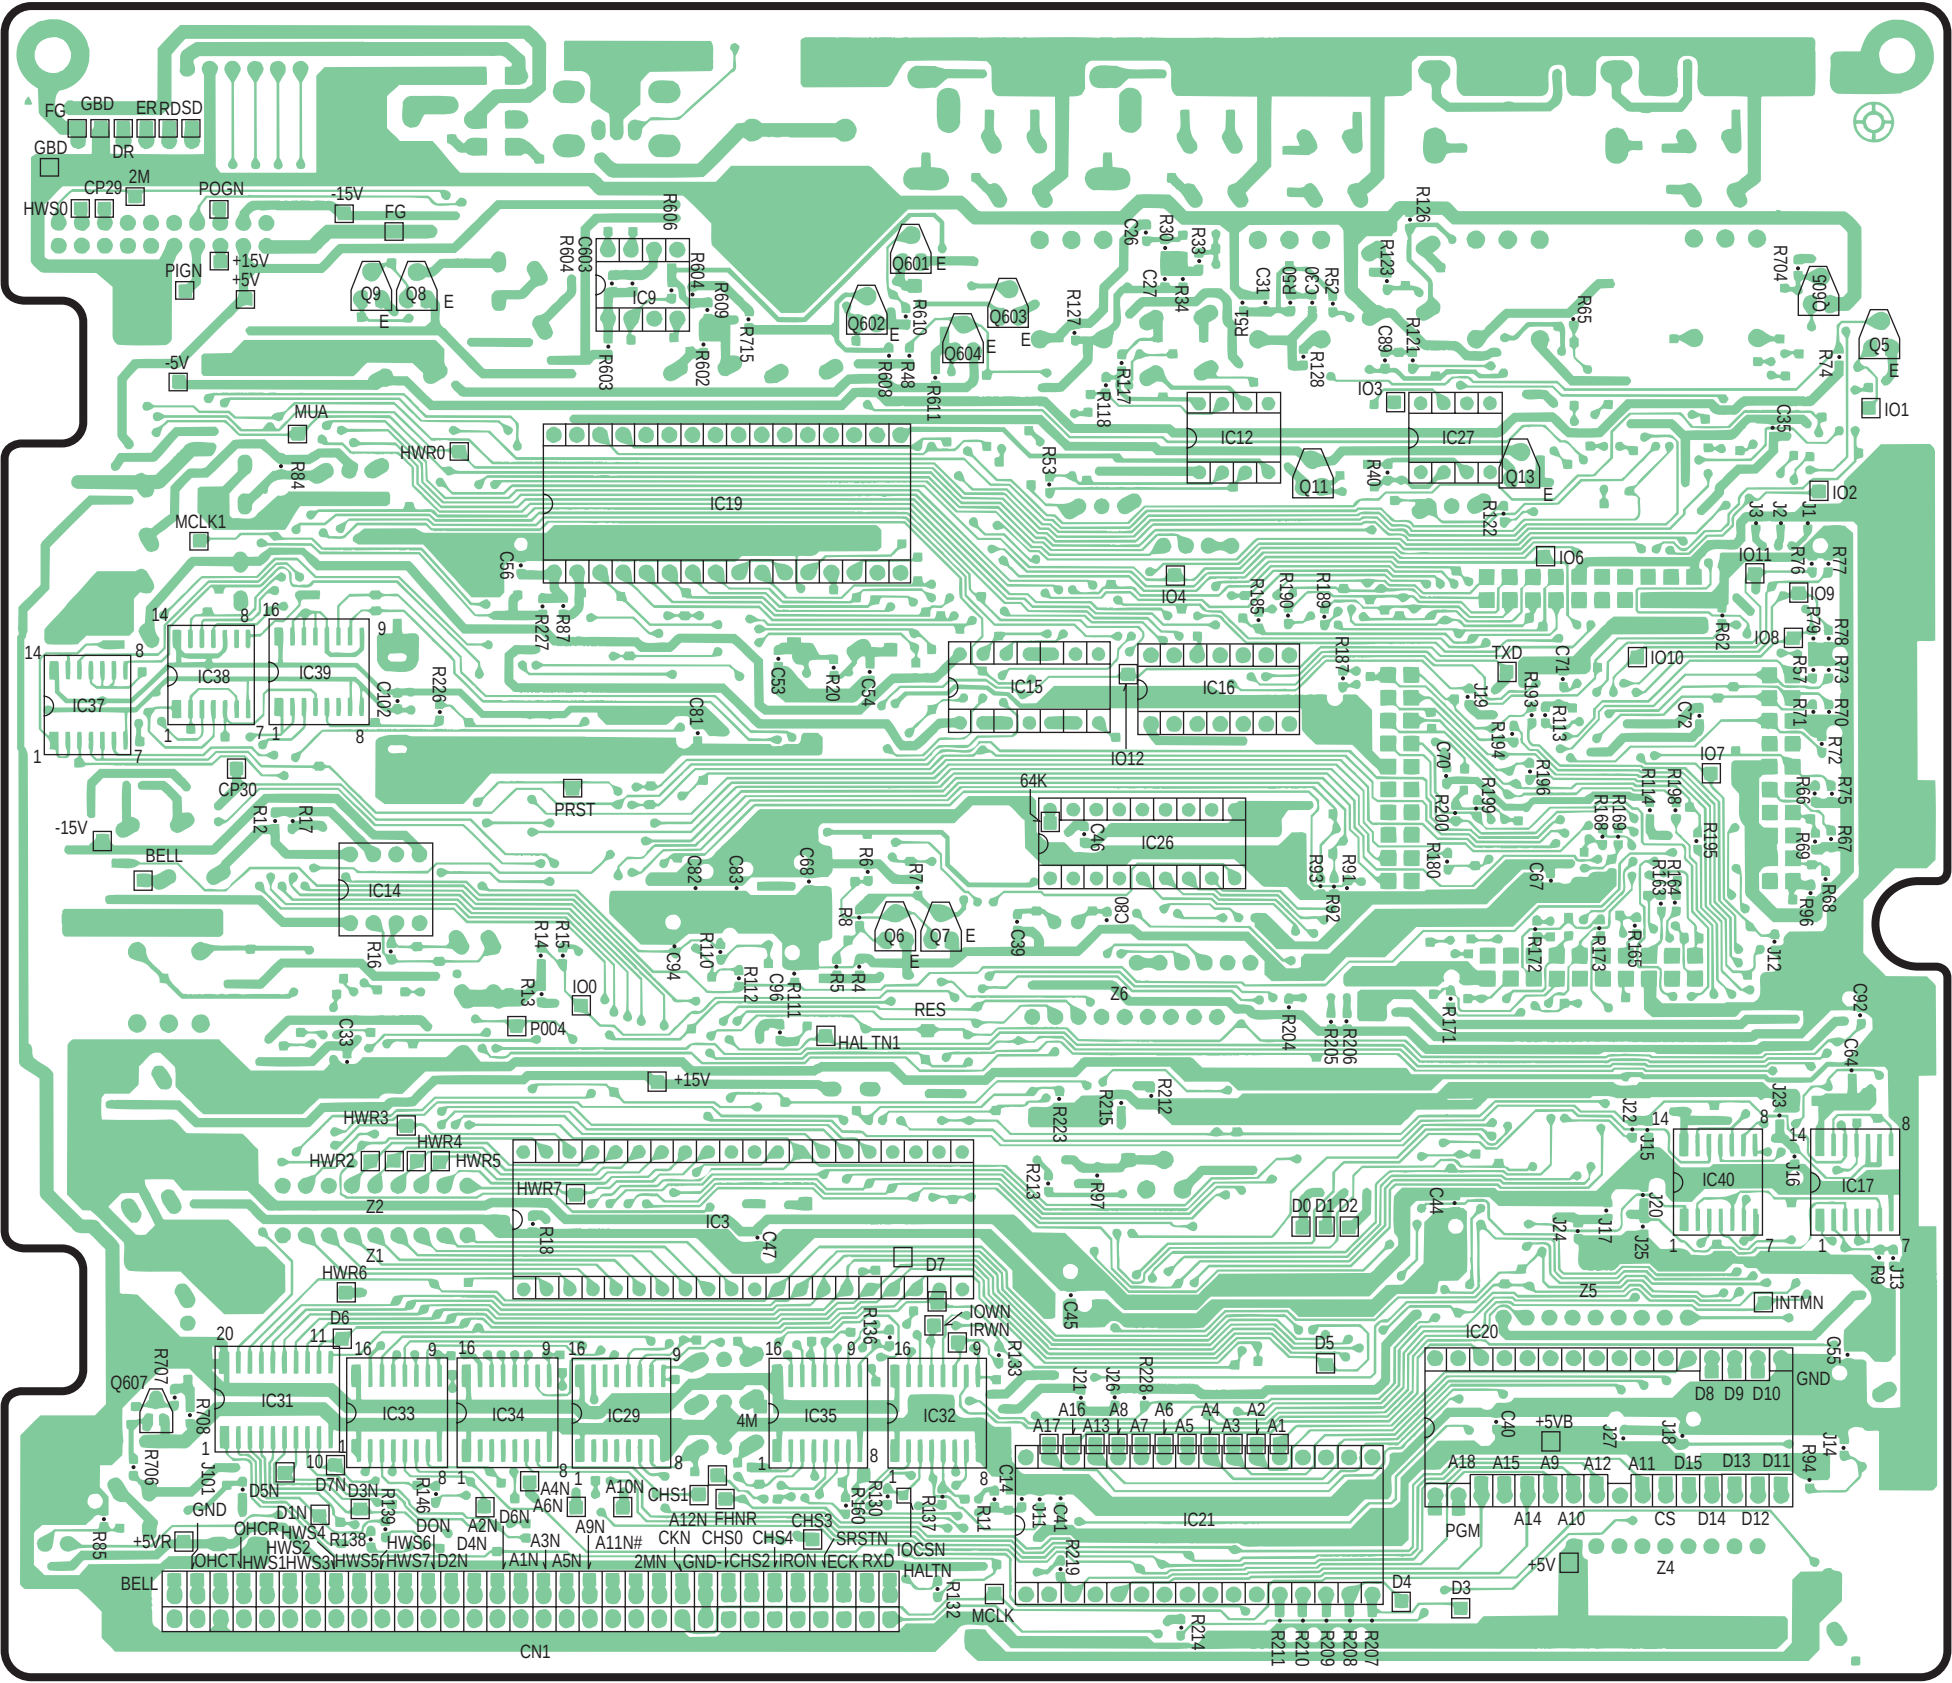
FG
GBD
ERR
RDSD
DR
CP29
2M
POGN
-15V
HWS0
PIGN
+15V
+5V
-5V
MUA
HWR0
MCLK1
IC19
IC38
IC39
IC37
IC14
IC15
IC16
IC12
IC27
IC26
IC9
IC3
IC31
IC33
IC34
IC29
IC35
IC32
IC40
IC17
IC20
IC21
Q601
Q602
Q603
Q604
Q5
Q6
Q7
Q8
Q9
Q11
Q13
Q607
IO0
IO1
IO2
IO3
IO4
IO6
IO7
IO8
IO9
IO10
IO11
IO12
PRST
CP30
BELL
64K
RES
HALTN1
P004
Z1
Z2
Z4
Z5
Z6
HWR2
HWR3
HWR4
HWR5
HWR6
HWR7
TXD
INTMN
IOWN
IRWN
IOCSN
HALTN
MCLK
PGM
CS
GND
CN1

ORDER NO. KM493075820
F5

Service Manual

and Technical Guide

DIGITAL SUPER HYBRID SYSTEM

KX-TD1232C

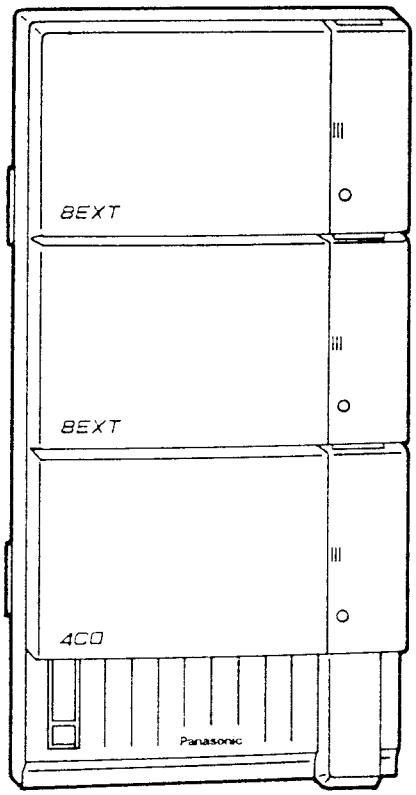

Panasonic

BX

TABLE OF CONTENTS (General)

FOR SERVICE TECHNICIANS....3
SAFETY PRECAUTIONS....3
INSTRUCTION RESISTANCE TEST....3
NOTE....3
SPECIFICATIONS....4
NAME AND LOCATION....5
CONNECTION....6, 7
DISASSEMBLY INSTRUCTIONS....8-11
CIRCUIT OPERATIONS....12-50
TROUBLE SHOOTING....51-62
DIAGNOSTIC METHOD....64, 65
HOW TO REPLACE FLAT PACKAGE IC....66
EXPLANATION OF CONNECTORS....67-72
PRINTED CIRCUIT BOARD....73-76, 83-86, 93-97, 99, 100-105, 106
SCHEMATIC DIAGRAM....77-82, 87-92, 97, 101-104
EXTENSION CABLE FOR SERVICING....109
CABINET AND ELECTRICAL PARTS LOCATION....110-112
ACCESSORIES AND PACKING MATERIALS....113
REPLACEMENT PARTS LIST....114-122

FOR SERVICE TECHNICIANS

ICs and LSIs are vulnerable to static electricity.
When repairing, the following precautions will help prevent recurring malfunctions.
- Cover plastic parts boxes with aluminum foil.
- Ground soldering irons.
- Use a conductive mat on worktable.
- Do not grasp IC or LSI pins with bare fingers.

SAFETY PRECAUTIONS

1. Before servicing, unplug the power cord to prevent an electric shock.
2. When replacing parts, use only manufacturer's recommended components of safety.
3. Check the condition of the power cord. Replace if wear or damage is evident.
4. After servicing, be sure to restore the lead dress, insulation barriers, insulation papers, shields, etc.
5. Before returning the serviced equipment to the customer, be sure to make the following insulation resistance test to prevent the customer from being exposed to a shock hazard.

INSULATION RESISTANCE TEST

1. Unplug the power cord and short the two prongs of the plug with a jumper wire.
2. Turn on the power switch.
3. Measure the resistance value with ohmmeter between the jumpered AC plug and each exposed metal cabinet part, such as screwheads, antenna, control shafts, handle brackets, etc. Equipment with antenna terminals should read between 3 MΩ and 5.2 MΩ to all exposed parts*. (Fig. 1) Equipment without antenna terminals should read approximately infinity to all exposed parts. (Fig. 2)
   ***Note:** Some exposed parts may be isolated from the chassis by design. These will read infinity.
4. If the measurement is outside the specified limits, there is a possibility of a shock hazard. The equipment should be repaired and rechecked before it is returned to the customer.

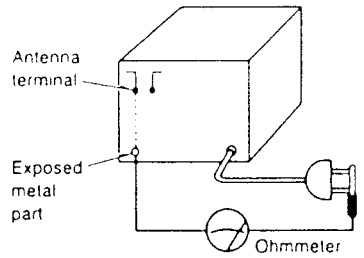

Fig. 1
Resistance = 3MΩ–5.2 MΩ

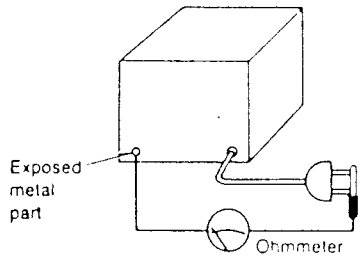

Fig. 2
Resistance = Approx ∞

NOTE

For details of installation, refer to the Installation Manual.

SPECIFICATIONS

This specifications is for CANADA version only.
Refer to this simplified manual (cover) for other areas.

General Description

1. Capacity	CO lines	12 max.
	Stations	32 max. (64 max. with XDP)
2. Control Method	Stored Program CPU: 16 bits CPU	
	Control ROM: 512 KB, Control RAM: 128 KB	
3. Switching	Non Blocking PCM Time Sharing Switch	
4. Power Supplies	Primary	120 V AC, 60 Hz
	Secondary	Station Supply Volt: 30 V, Circuit Volt: ±5 V, ±15 V
	Power Failure	
	•6 CO lines max. assigned to stations (Power Failure Transfer)	
	•System operation for several h urs by batteries (car batteries consisting of two 12 V DC) recommended	
5. Dialing	Outward	Dial Pulse 10PPS, 20PPS Tone (DTMF) Dialing
	Internal	Dial Pulse (DP) 10PPS, 20PPS Tone (DTMF) Dialing
	Mode Conversion	DP-DTMF, DTMF-DP
6. Intercom paths	4	
7. Connector	CO lines	Modular Jack (CA14A for KX-TD1232C)
	Station	Amphenol Connector
	Paging Output	Pin Jack (RCA JACK)
	External Music Input	Two-conductors Jack (MINI JACK 3.5 mm/9/64 inch diameter)
8. EXT Connection	Cable	1 pair wire (T, R) (Standard Telephones, KX-T7052) 2 pair wire (D1, D2 or T, R, D1, D2) (KX-T7220, KX-T7230, KX-T7235, KX-T7250, KX-T7240, KX-T7040) 2 pair wire (T, R, D1, D2) (KX-T7020, KX-T7030, KX-T7050, KX-T7055) 3 pair wire (T, R, D1, D2, P1, P2) (KX-T7130)
9. SMDR	Interface	EIA (RS-232C)
Station Message Detail Recording	Output Equipment	Printer
	Detail Recording	Date, Time, Ext. Number, CO Line Number, Dialed Number, Call Duration, Account Code
10. Dimensions	320 (W)×640 (H)×110 (D) mm	
11. Weight	7.8 kg	

Characteristics

1. Station Loop Limit	KX-T7220/KX-T7230/KX-T7235/ KX-T7250/KX-T7020/KX-T7030/ KX-T7050/KX-7055/KX-T7130	40 ohms
	Standard Telephone, KX-T7052	600 ohms including set
	Doorphone	20 ohms
2. Minimum Leak Resistance	15,000 ohms	
3. Maximum Number of Station Instruments per Line	1 (KX-T7220, KX-7230, KX-T7235, KX-T7250, KX-T7130, KX-T7020, KX-T7030, KX-T7050, KX-T7055, KX-T7052 or standard telephone) 2 (Parallelor Extra Device Port Connection of a proprietary telephone and a standard telephone)	
4. Ring Voltage	70 Vrms at 25 Hz depends on Ringing Load	
5. Primary Power	120 V AC, 60 Hz, 2 A maximum	
6. Central Office Loop Limit	1600 ohms maximum	
7. Environmental Requirements	0–40°C, 132–104°F, 10%–90%	
8. Hookswitch Hash Timing Range	204–1000 milliseconds	

Design and specifications are subject to change without notice.

NAME AND LOCATION

Overview of the Main Unit

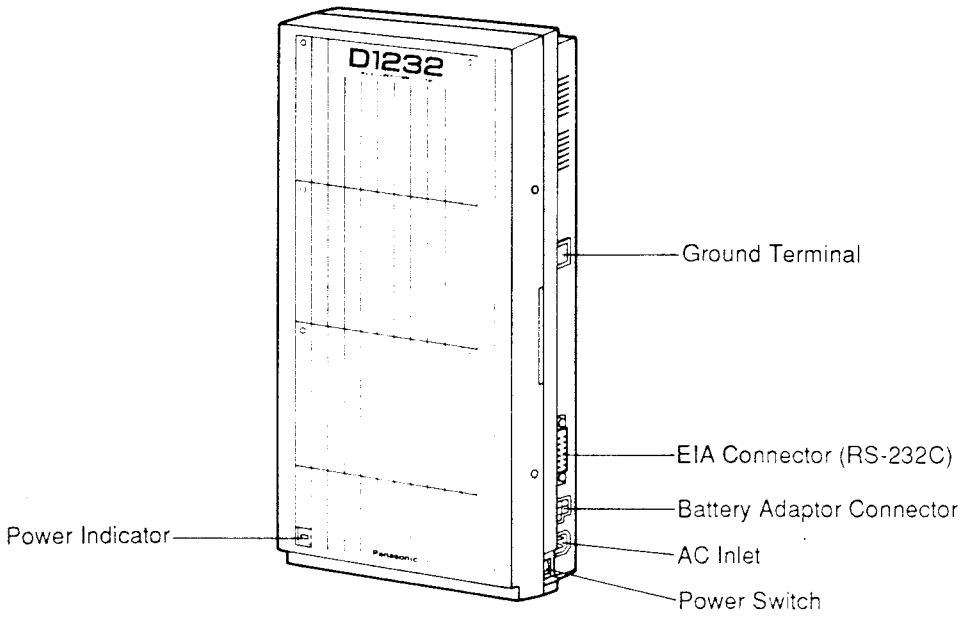

Inside View of the Main Unit

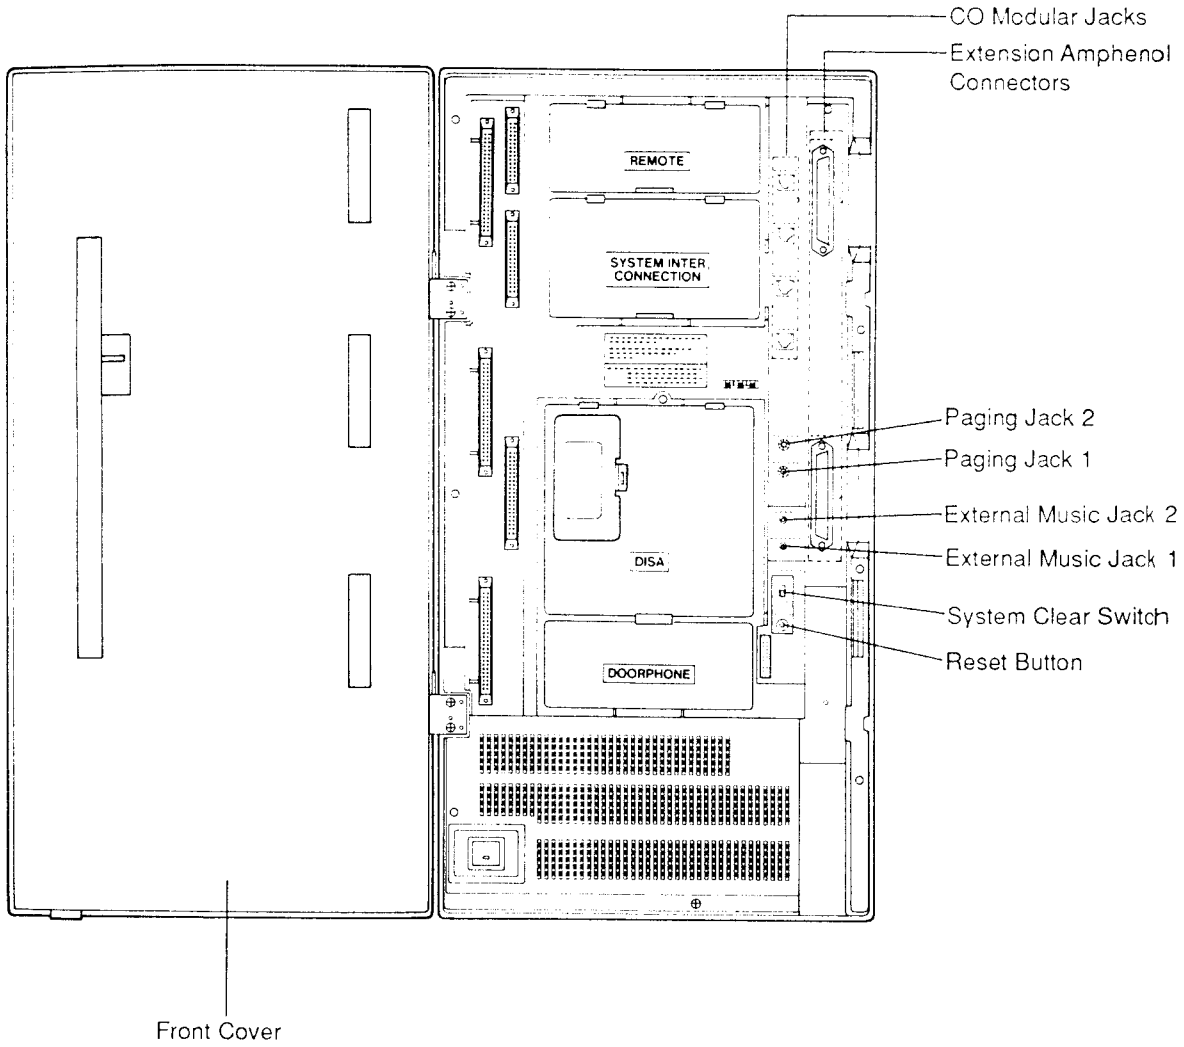

CONNECTION

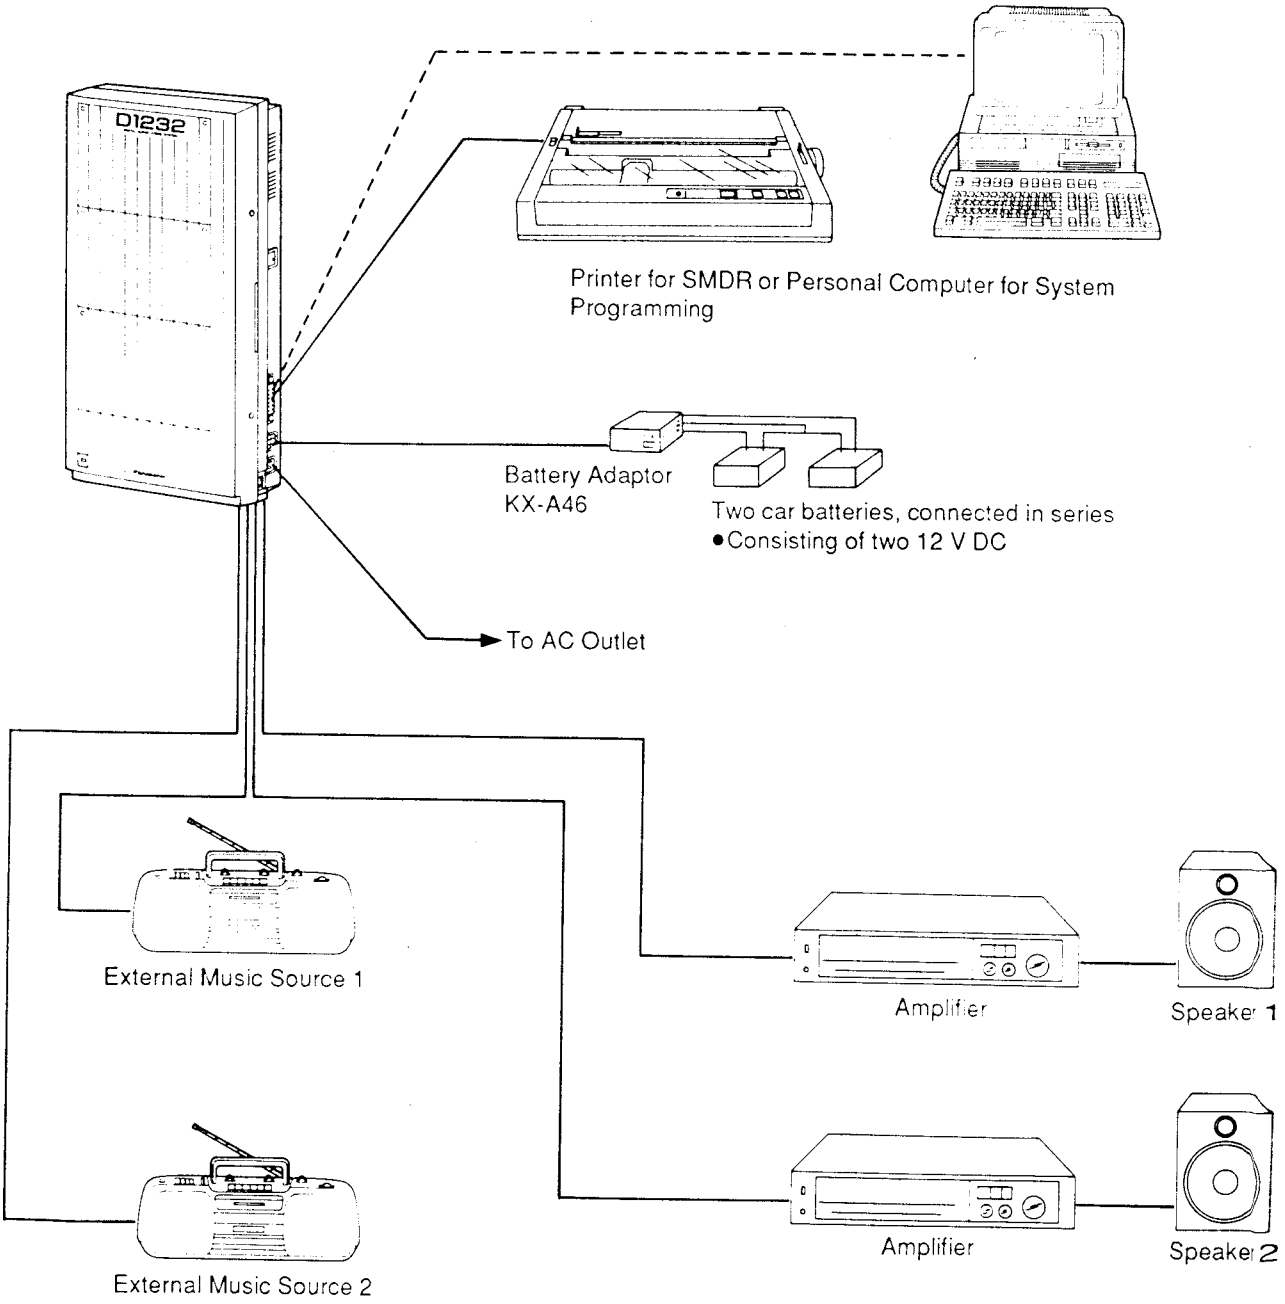
D1232
Printer for SMDR or Personal Computer for System Programming
Battery Adaptor
KX-A46
Two car batteries, connected in series
• Consisting of two 12 V DC
To AC Outlet
External Music Source 1
Amplifier
Speaker 1
External Music Source 2
Amplifier
Speaker 2

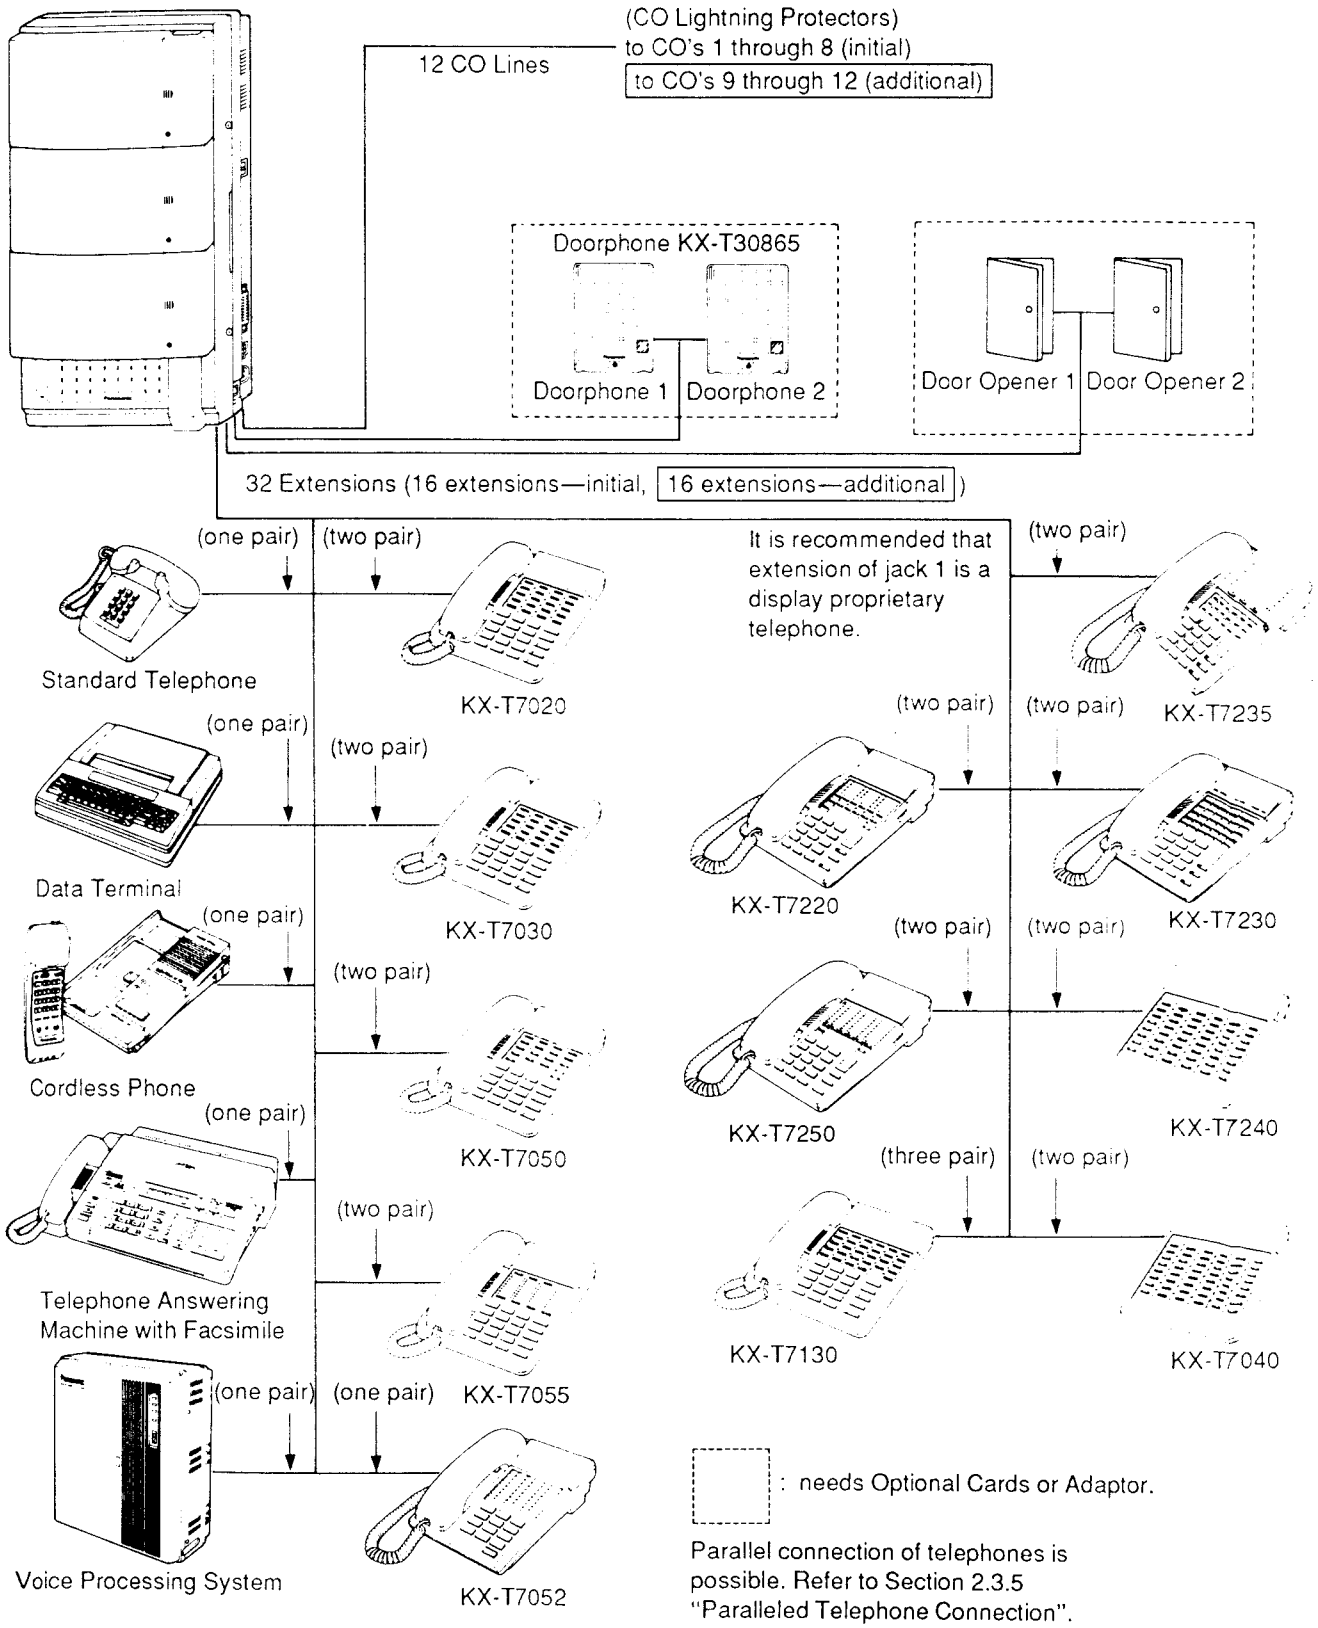
(CO Lightning Protectors)
to CO's 1 through 8 (initial)
to CO's 9 through 12 (additional)
12 CO Lines
Doorphone KX-T30865
Doorphone 1
Doorphone 2
Door Opener 1
Door Opener 2
32 Extensions (16 extensions—initial, 16 extensions—additional)
(one pair)
(two pair)
Standard Telephone
KX-T7020
Data Terminal
KX-T7030
Cordless Phone
KX-T7050
Telephone Answering Machine with Facsimile
KX-T7055
Voice Processing System
KX-T7052
It is recommended that extension of jack 1 is a display proprietary telephone.
KX-T7235
KX-T7220
KX-T7230
KX-T7250
KX-T7240
(three pair)
KX-T7130
KX-T7040
: needs Optional Cards or Adaptor.
Parallel connection of telephones is possible. Refer to Section 2.3.5 "Paralleled Telephone Connection".

DISASSEMBLY INSTRUCTIONS

Ref. No. 1	HOW TO REMOVE THE TOP COVER

Procedure 1

1. Loosen the two screws (A).
2. Open the top cover.
3. Slide the top cover in the direction of the arrow when removing it.

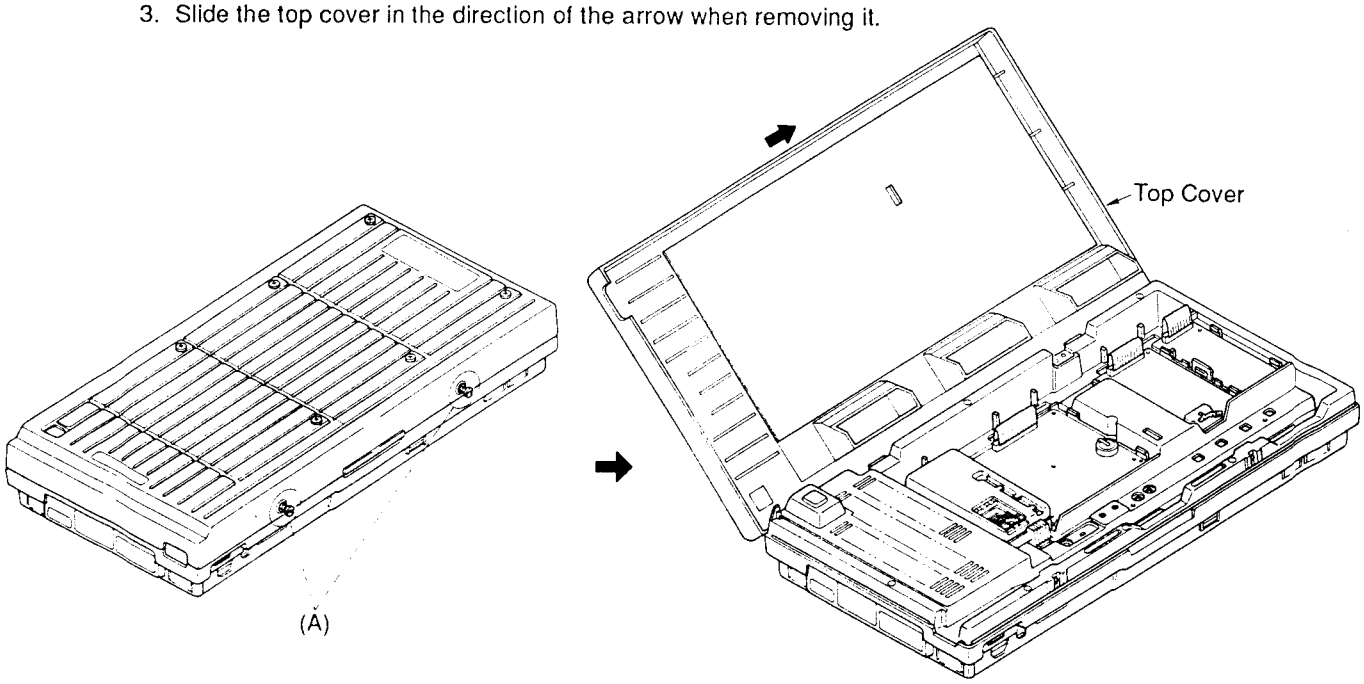

Ref. No. 2	HOW TO REMOVE THE INSIDE COVER

Procedure 1 → 2

1. Remove the option boards.
2. Remove the nine screws (A).
3. Remove the inside cover.

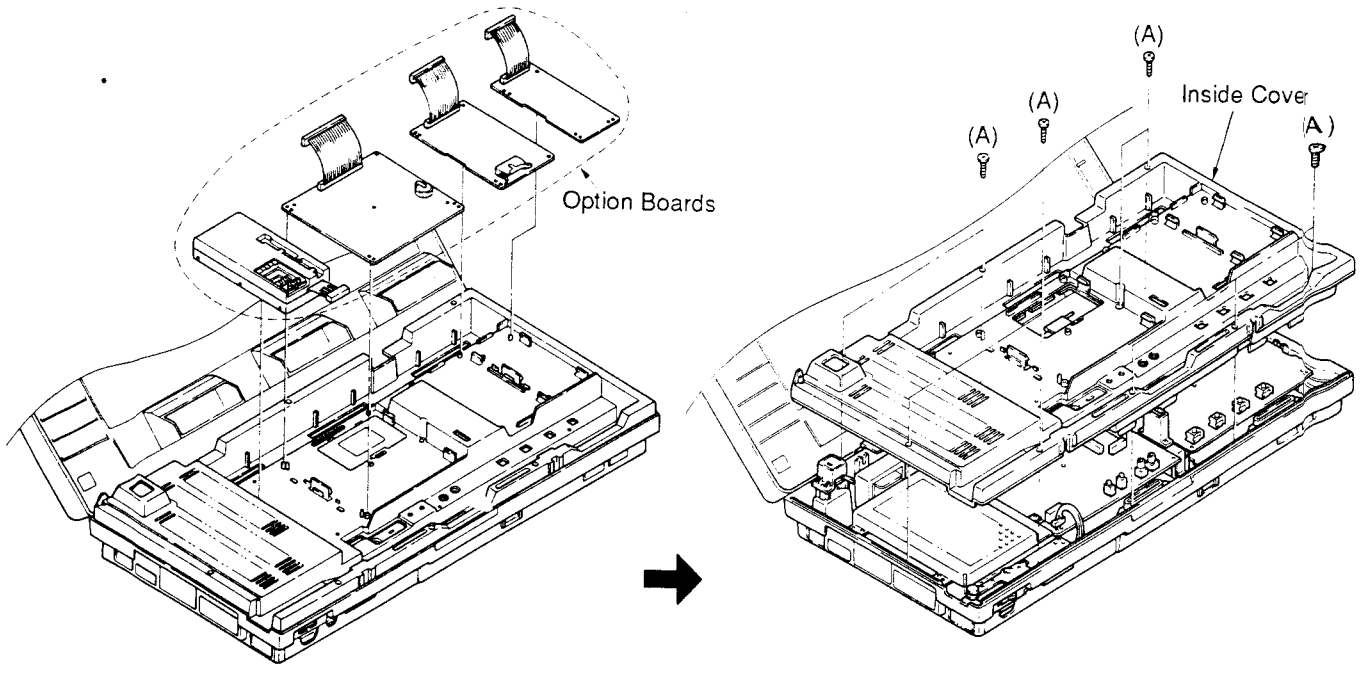

Ref. No. 3	HOW TO REMOVE THE CPU AND CO LINE BOARDS

Procedure
1 → 2 → 3

(CPU Board)

1. Remove the five screws (A).
2. Remove the three connectors.
3. Remove the CPU Board.

(CO LINE Board)

1. Remove the five screws (B).
2. Remove the one connector.
3. Remove the CO Line Board.

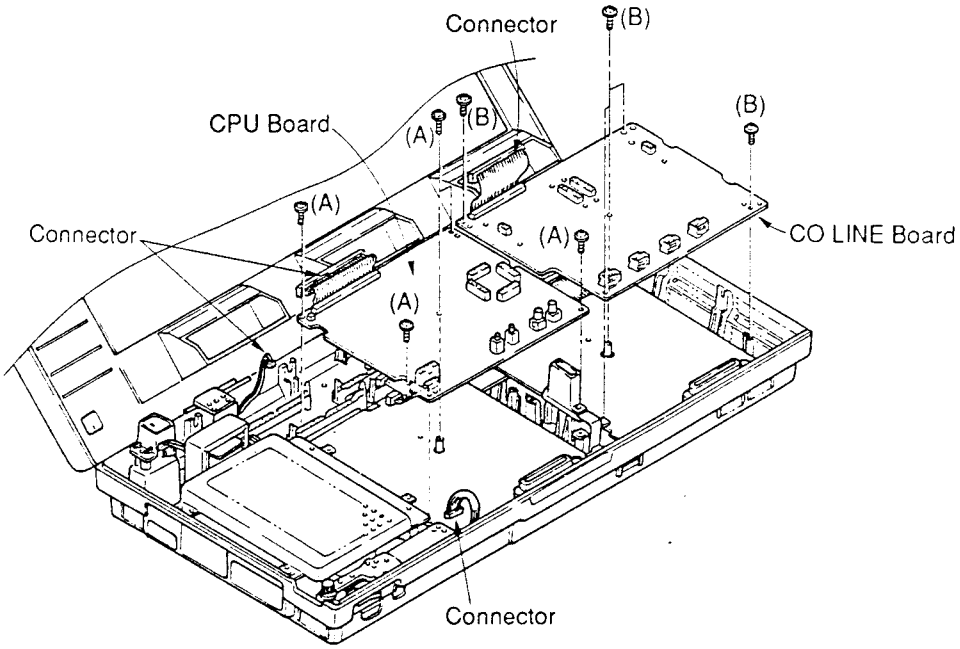

Ref. No. 4	HOW TO REMOVE THE EXTENSION BOARD

Procedure
1 → 2 → 3 → 4

1. Remove the five screws (A) or (B).
2. Remove the one connector (A) or (B).
3. Remove the Extension Board.

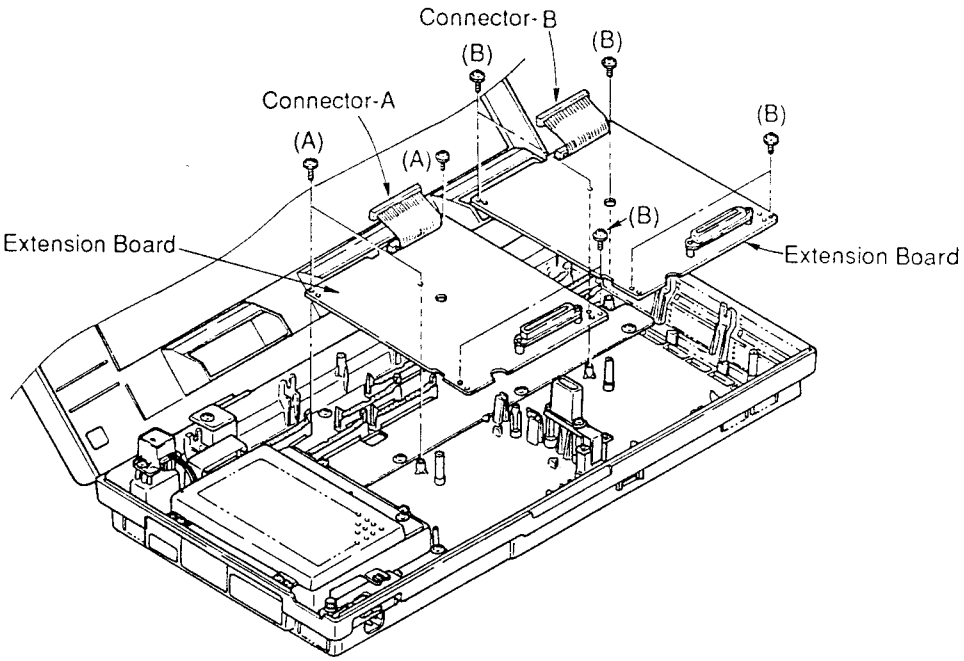

Ref. No. 5	HOW TO REMOVE THE **MOTHER BOARD**
Procedure 1 → 2 → 3 → 4 → 5	1. Remove the seven screws (A). 2. Remove the one connector. 3. Remove the mother board.

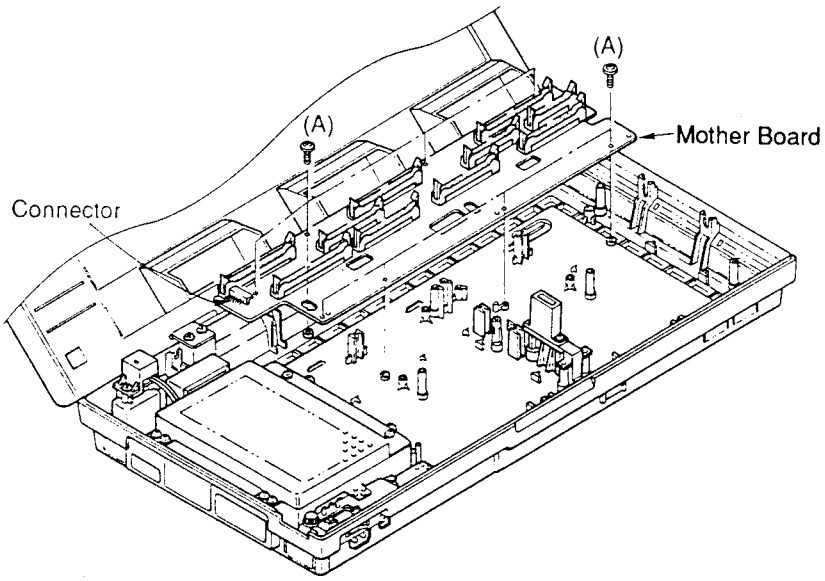

Ref. No. 6	HOW TO REMOVE THE POWER SUPPLY UNIT
Procedure 1 → 2 → 6	1. Remove the four screws (A). 2. Remove the three screws (B). 3. Remove the two connectors. 4. Remove the Power Supply Unit.

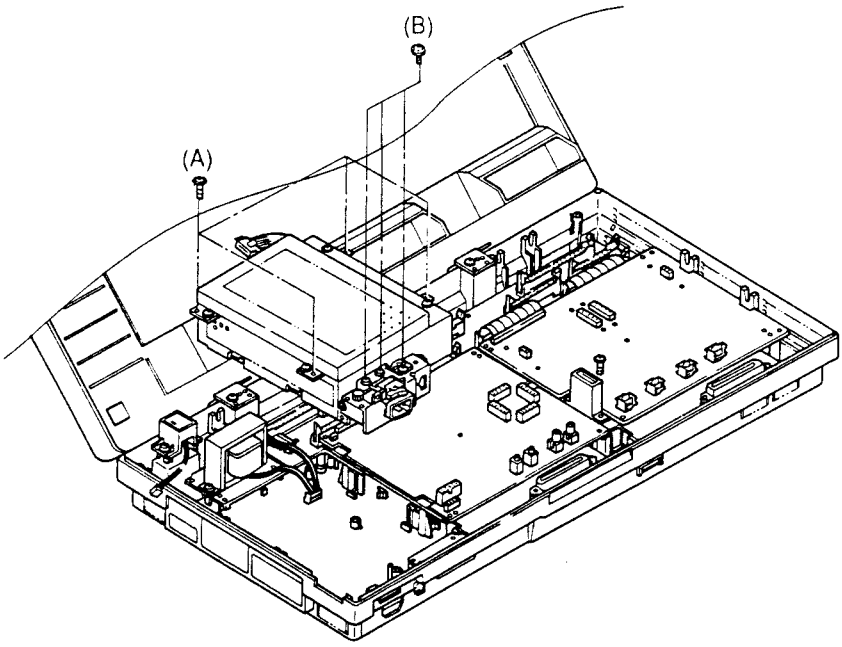

Ref. No. 7	HOW TO REMOVE THE POWER SUPPLY BOARD
Procedure 1 → 2 → 6 → 7	1. Remove the four screws (A). 2. Remove the shield cover. 3. Remove the four screws (B). 4. Remove the Power Supply Board.

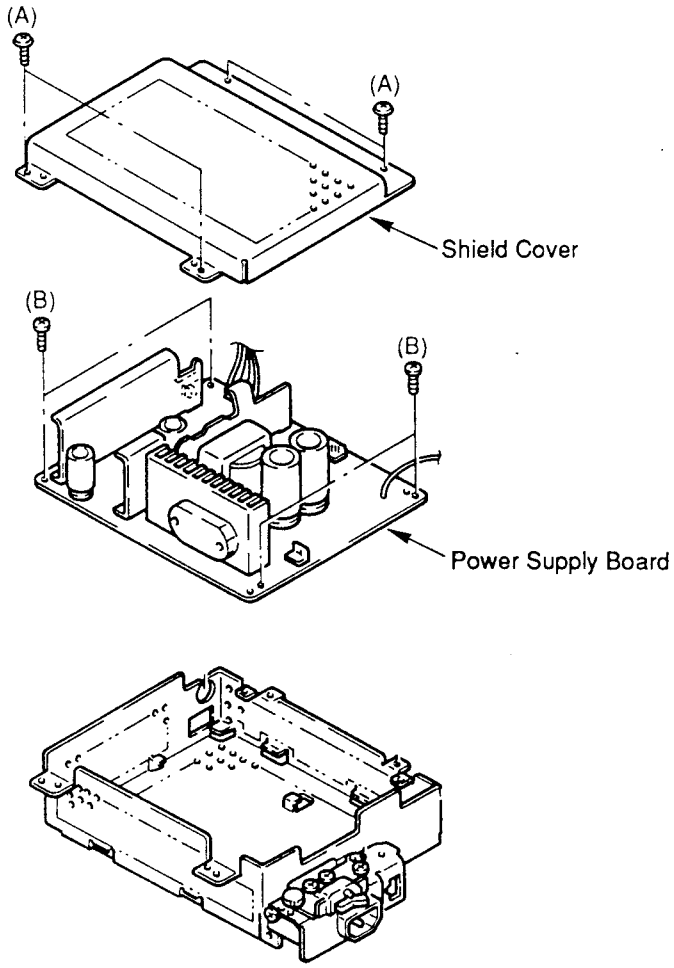

CIRCUIT OPERATIONS

1. GENERAL DESCRIPTION

1-1. OUTLINE 13
1-2. OUTLINE OF SPECIFICATIONS 14
1-3. ARTICLES 15, 16
1-4. BLOCK DIAGRAM ..... 17~24
1) GENERAL BLOCK DIAGRAM 17, 18
2) SYSTEM DIAGRAM OF PCM HIGHWAY 21
3) SYSTEM DIAGRAM OF PCM CLOCK 22
4) SYSTEM DIAGRAM OF ANALOGUE LINE 23
5) SYSTEM DIAGRAM OF POWER SUPPLY 24
1-5. CONTENTS 25, 26

2. FUNCTION OF EACH UNIT

2-1. BASIC ..... 27~29
1) POWER SUPPLY UNIT 27
2) CPU CARD 27
3) BASIC CO CARD 28
4) BASIC EXT CARD 28
5) MOTHER BOARD 29
6) LED BOARD 29
7) SMDR BOARD 29
2-2. RESOURCE OF OPTION 29, 30
1) EXPANSION CO CARD 29
2) EXPANSION EXT CARD 29
3) DOOR-PHONE CARD 29
4) REMOTE CARD 29
5) DISA (DIRECT INWARD SYSTEM ACCESS) CARD 30
6) SYSTEM INTERCONNECTION CARD 30
7) CALLER ID CARD 30
8) BATTERY BACKUP ADAPTER 30

3. EXPLANATION OF CIRCUIT OPERATION

3-1. BASIC ..... 31~40
1) POWER SUPPLY UNIT ..... 31~32
2) CPU CARD ..... 33~36
3) BASIC CO CARD 36, 37
4) BASIC EXT CARD ..... 38~40
3-2. RESOURCE OF OPTION ..... 41~50
1) EXTENSION CO CARD 41
2) EXTENSION EXT CARD 41
3) DOOR-PHONE CARD 41, 42
4) REMOTE CARD 42, 43
5) DISA CARD ..... 44~48
6) SYSTEM INTERCONNECTION CARD 49
7) CALLER ID CARD 50

1. GENERAL DESCRIPTION

1-1. OUTLINE

This equipment is a telephone exchange on the premise constructed with basic (KX-TD1232).
Basic contains controlling section and time-sharing switch section.

The features of this system are as follows;

(1) Super hybrid system

By one sort of a board, this system covers the single line telephones (SLT), the analogue type of the proprietary integrated telephone system (APITS) and the digital type of the proprietary integrated telephone system (DPITS) at the extnsion (EXT) ports.

(2) Parallel station

A SLT and a APITS can be connected parallely at each extension port. They can be used parallely as a mother phone and a daughter one.

(3) Extra Device Port (XDP)

A SLT and a DPITS can be connected parallely at each extension port. They can be used independently as individual phones.

(4) This system supports a new type of DPITS which is equipped a large LCD.

(5) Self-diagnostic function

It can find out the hardware trouble in the controllers and the circuit lines.

(6) Connection between another system

This system can be connected with another system by using an optional SIC CARD. They can be operated as a 2464 system.

1-2. OUTLINE OF SPECIFICATIONS

ITEMS	SPECIFICATIONS
Control systme	Stored program system
Call systme	Non blocking PCM TSS system
Exchange system	T1 (Time switch only)
Redundancy structure	Non multiplex, simplex
Modulation system	μ Law/A Law (both), PCM 8 bits 8 kHz sampling
CPU	CPU 68301 (8.192 MHz) No sub-processor on CO/EXT CARDs
Max. number of CO lines	12 lines (8 lines as standard)
Max. number of EXT lines	32 lines (16 lines as standard) XDP function allows to connect 64 terminals.
Max. number of connectable DSS console	4 units connect at EXT ports
Max. number of connectable Door-phone	2 units use optional card
Max. number of connectable system	2 units, 30 call channels use optional card
DISA simultaneous functional lines	2 lines use optional card
MODEM ports	1 port use optional card
Conference lines	3 persons×6 conferences
External paging ports	2 ports
External holding sound sources ports	2 ports
Internal holding sound sources	1, no available for USA and Canada
RS-232C ports	1 port, asynchronous 300–9600 bps (full duplex)
Door-opener control outputs	2 channels, attached with a Door-phone card, optional
OHCA lines	1 path

ITEMS		SPECIFICATIONS	
DTMF generator		2 channels (System employs common resources)	
Back-up lines (Transfer lines when power fails)		4 lines for a basic system, 6 lines for a expansion system	
Type of terminal, wiring system and line impedance		•SLT	2 (T,R) 600Ω or less (inc. TEL impedance)
		•APITS	4 (T, R, H, L) 40Ω or less
		•APITS with OHCA	6 (T, R, H, L, 3P, 3P) 40Ω or less
		•A.DSS console	2 (H, L) 40Ω or less
		•DPITS	2 (H, L) 40Ω or less
Options	•4-CO line card (EXPANSION CO CARD)		1 unit/system
	•8-EXT line card (EXPANSION EXT CARD)		2 unit/system
	•Door-phone card (DOOR-PHONE CARD)	2 terminals 2 door-opener control	1 unit/system
	•System Interconnection Card (SIC card)		1 unit/system
	•Modem card (REMOTE CARD)	300/1200/2400 bps asynchronous	1 unit/system
	•DISA card (DISA CARD)	2 channels Message memory 32 sec.×2	1 unit/system
	•Caller ID card (CALLER ID CARD)	4 channels	3 unit/system
	BASIC CO CARD can be installed with 2 units. EXPANSION CO CARD can be installed another 1 unit.		

1-3. ARTICLES

Unit structure and function are outlined in this section.

CLASS	UNIT NAME	PRODUCT CODE	QTY	OTHERS
BASIC	POWER SUPPLY UNIT	KX-TD1232	1	
	MOTHER CARD	KX-TD1232	1	
	CPU CARD	KX-TD1232	1	CPU, TSW, CONF
	CO CARD (BASIC)	KX-TD1232	1	8 CO LINES/BOARD
	EXT CARD (BASIC)	KX-TD1232	2	8 EXT LINES/BOARD
	LED BOARD	KX-TD1232	1	
	SMDR BOARD	KX-TD1232	1	
OPTION	EXPANSION CO CARD	KX-TD180	1	4 CO LINES/BOARD
	EXPANSION EXT CARD	KX-TD170	2 Max.	8 EXT LINES/BOARD
	DOOR-PHONE CARD	KX-TD160	1	
	SIC CARD	KX-TD192	1	EXP I/F
	REMOTE CARD	KX-TD196	1	
	DISA CARD	KX-TD191	1	
	CALLER ID CARD	KX-TD193	3 Max.	ONLY FOR USA/CND MARKET
	BATTERY BACK-UP ADAPTER	KX-A46	1	

1-4. BLOCK DIAGRAM

1) GENERAL BLOCK DIAGRAM

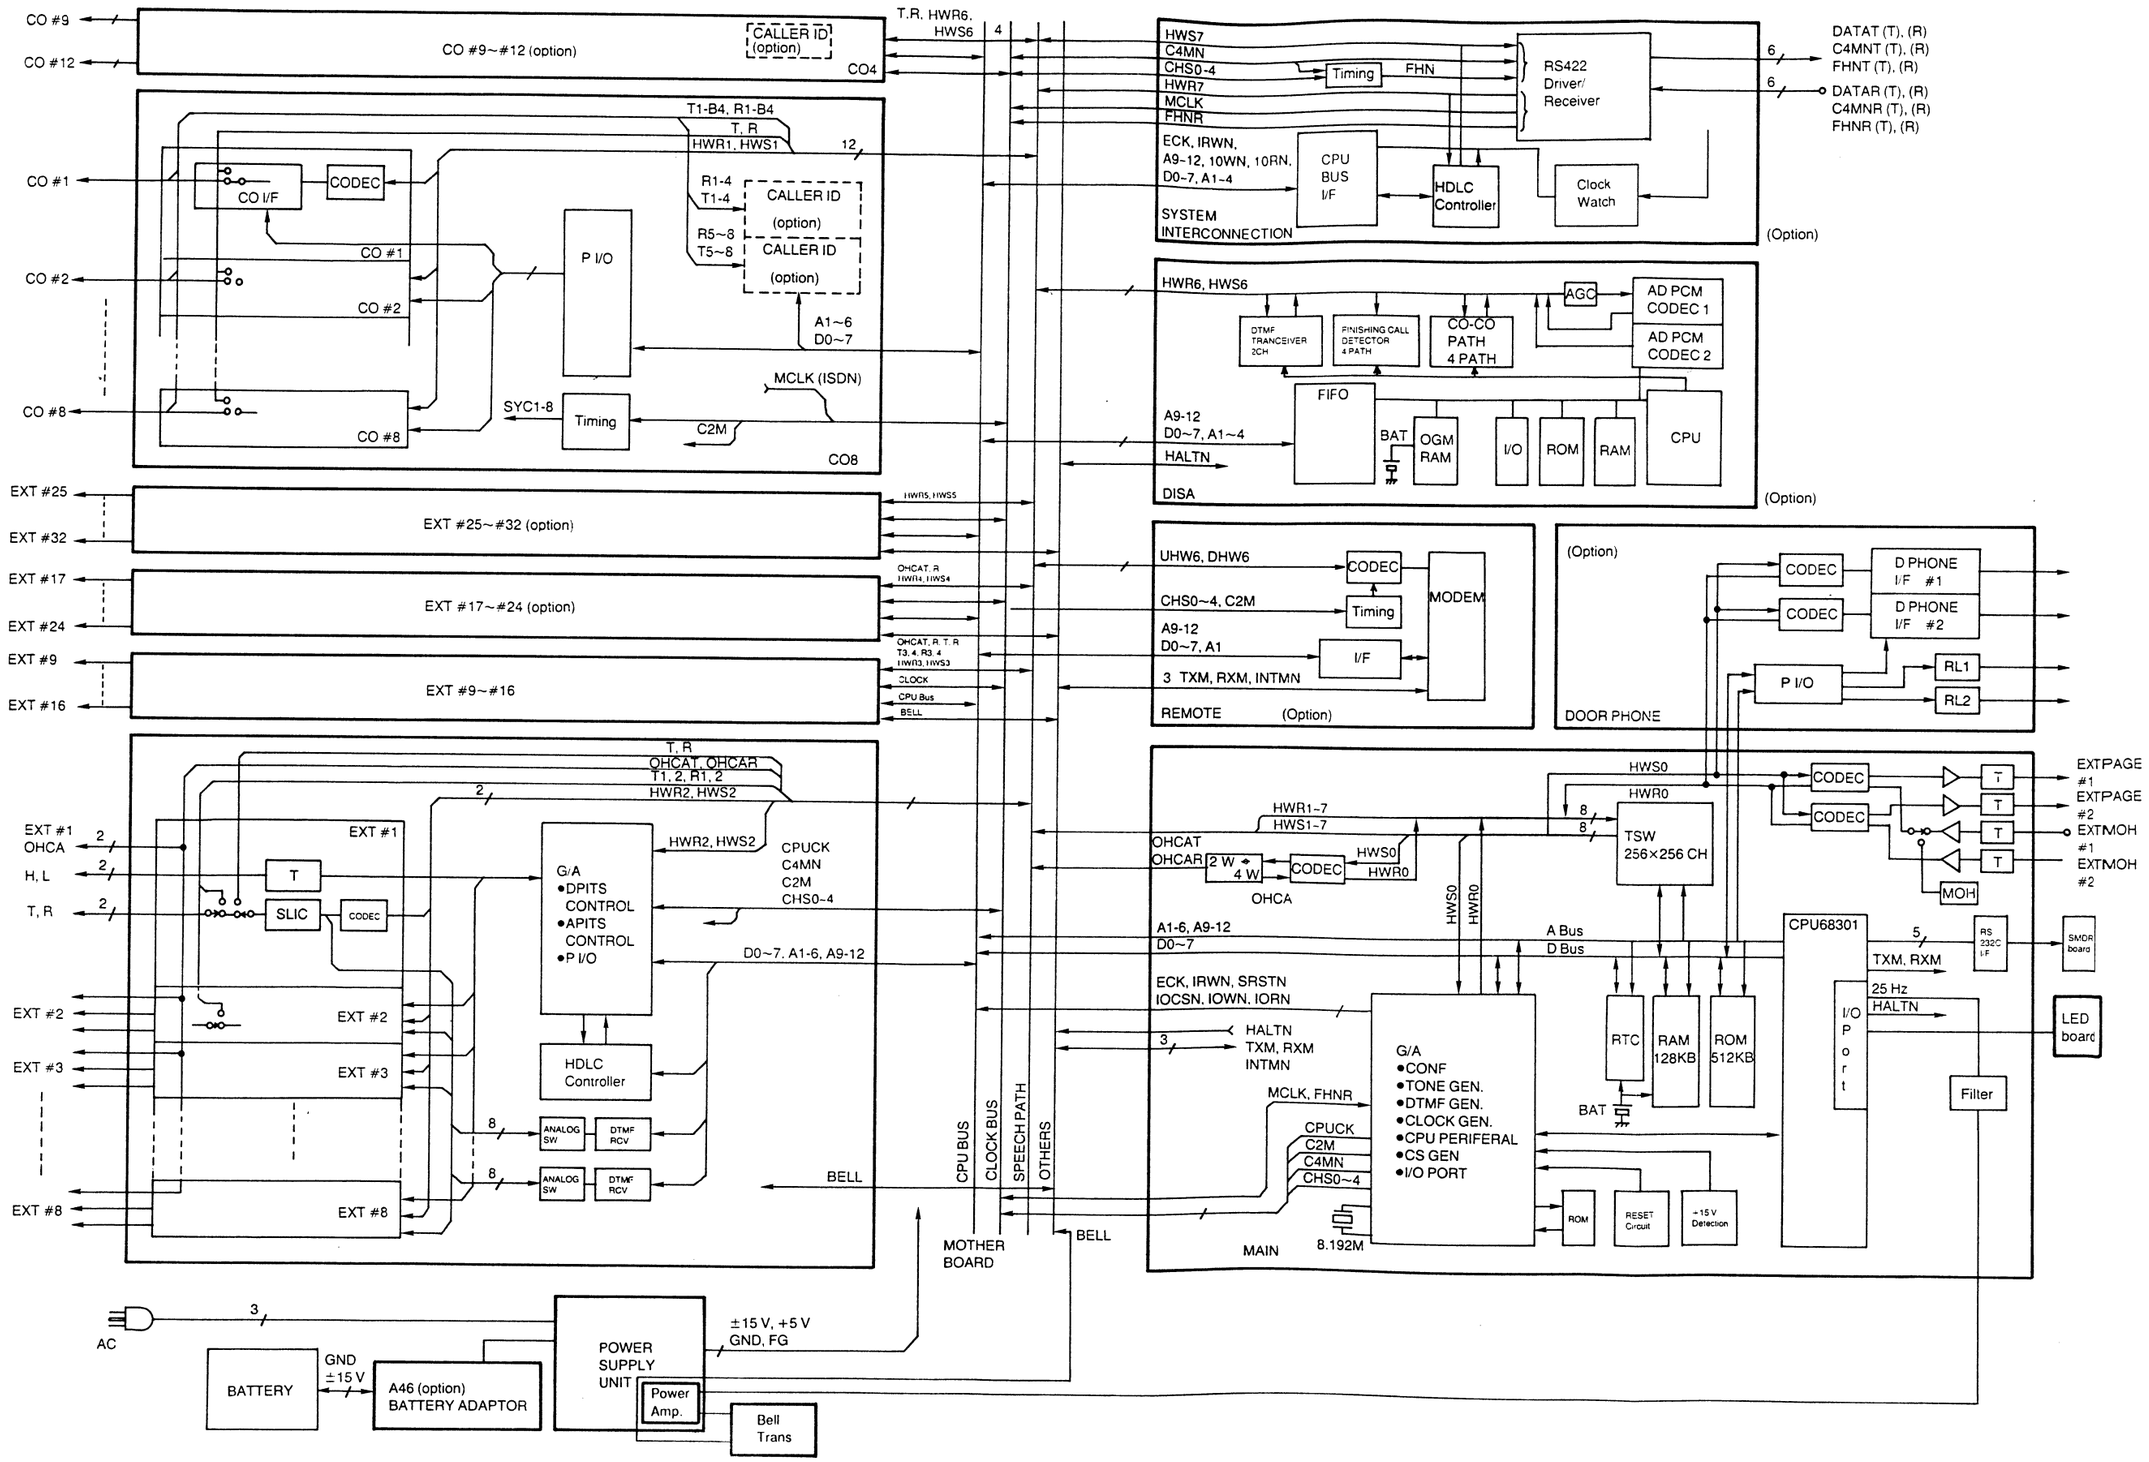

MEMO

MEMO

2) SYSTEM DIAGRAM OF PCM HIGHWAY

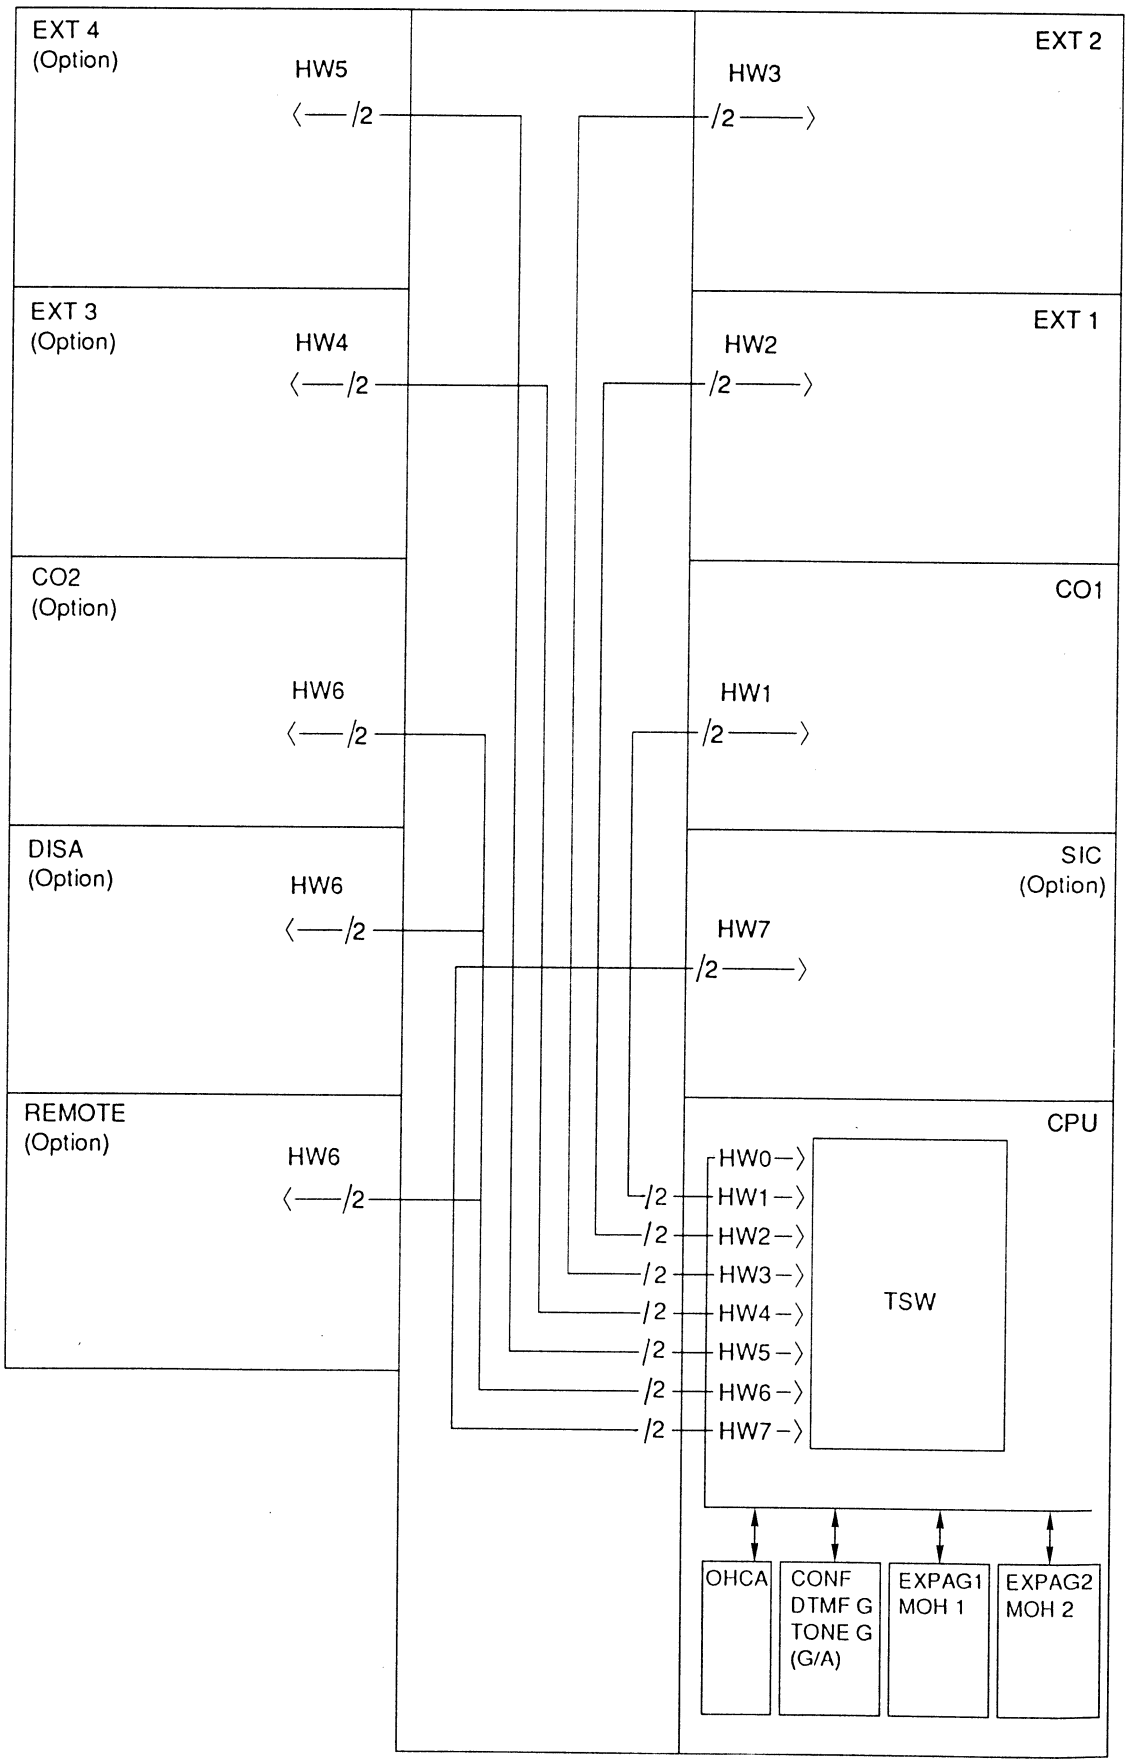

3) SYSTEM DIAGRAM OF PCM-CLOCK

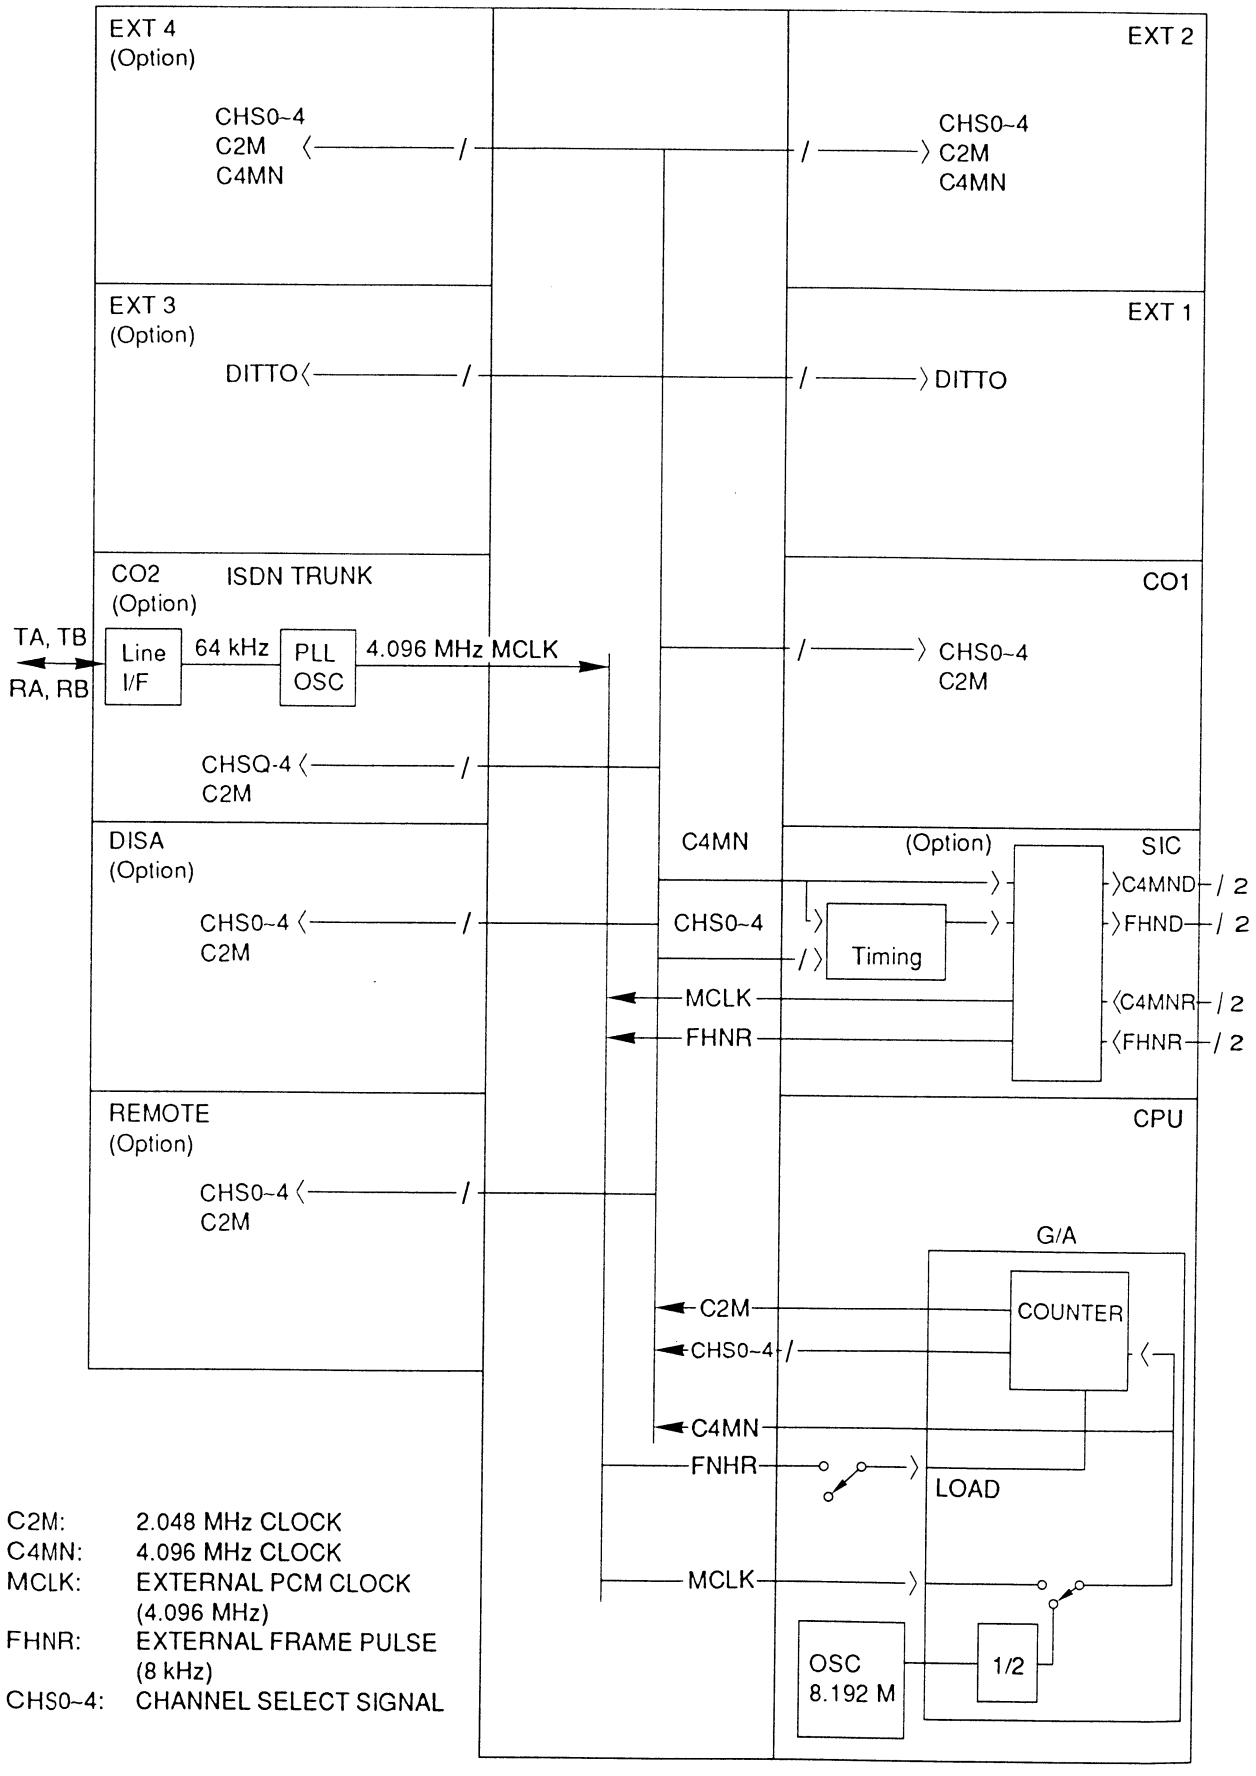

C2M: 2.048 MHz CLOCK
C4MN: 4.096 MHz CLOCK
MCLK: EXTERNAL PCM CLOCK (4.096 MHz)
FHNR: EXTERNAL FRAME PULSE (8 kHz)
CHS0~4: CHANNEL SELECT SIGNAL

4) SYSTEM DIAGRAM OF ANALOGUE LINE

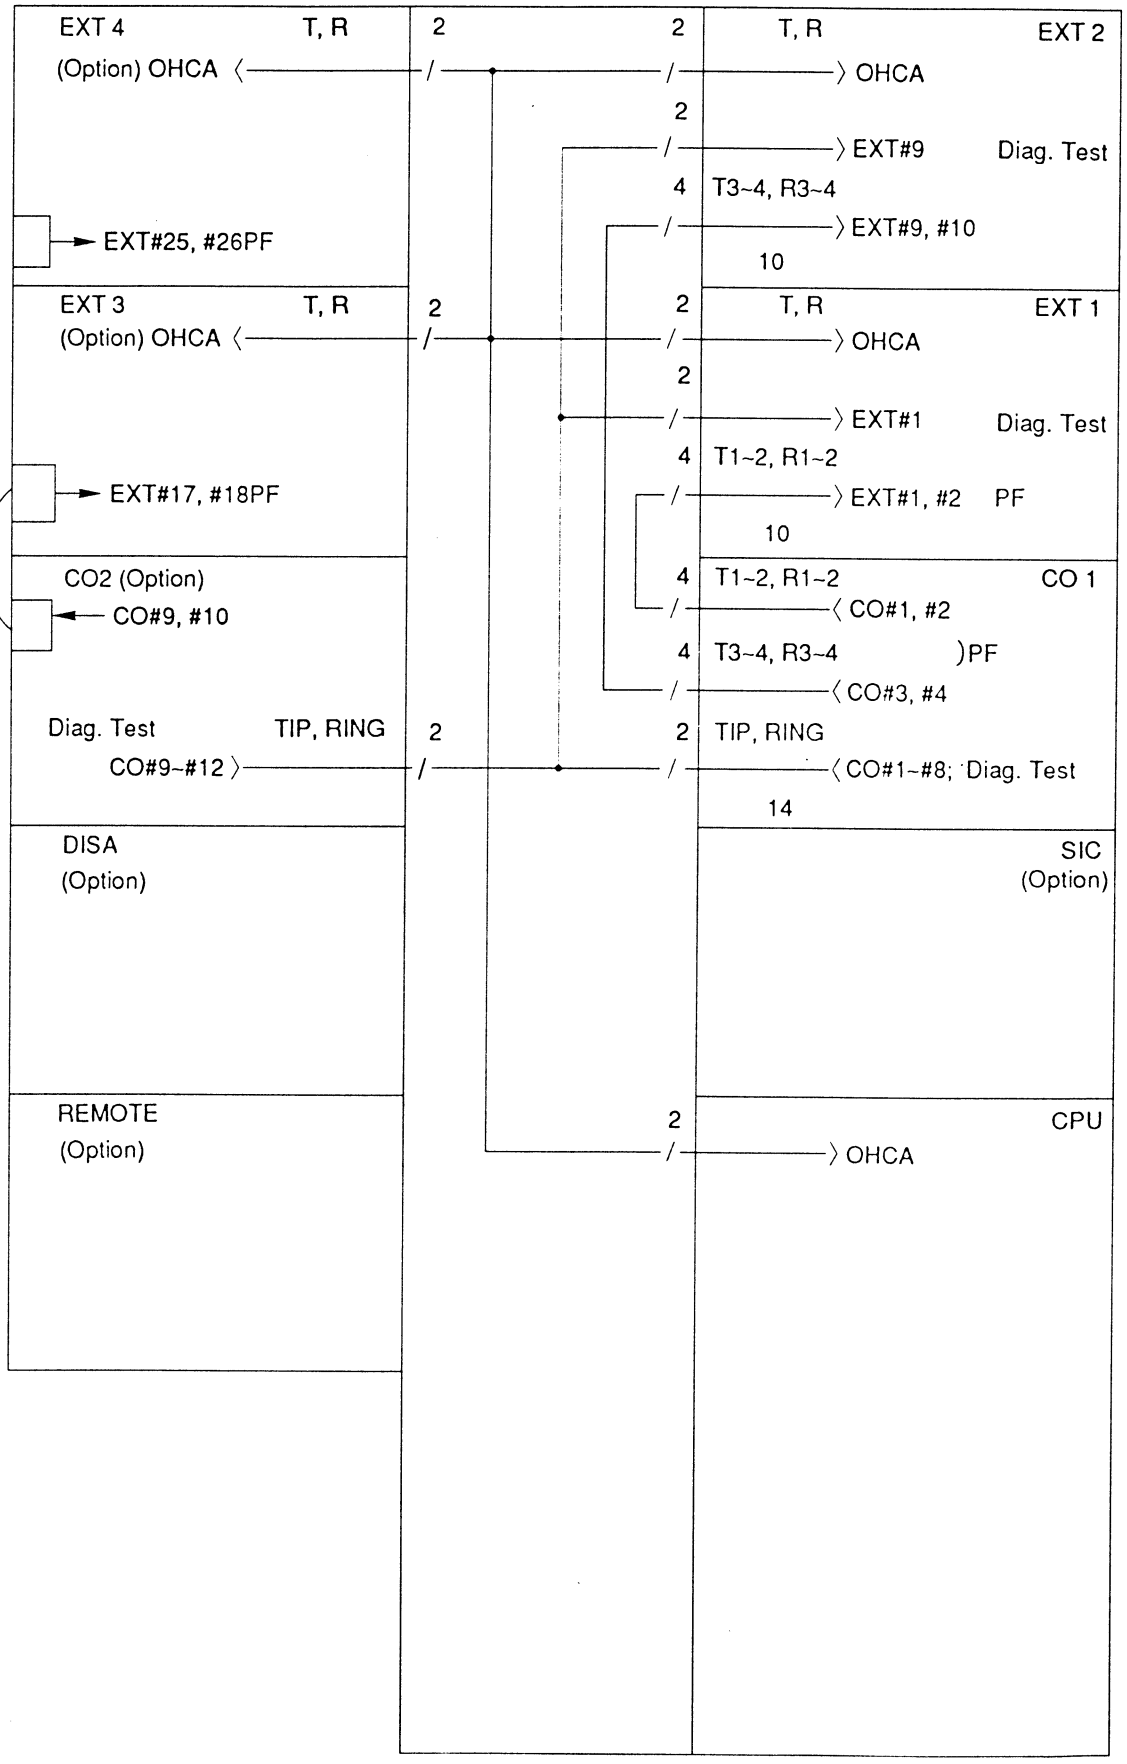

5) SYSTEM DIAGRAM OF POWER SUPPLY

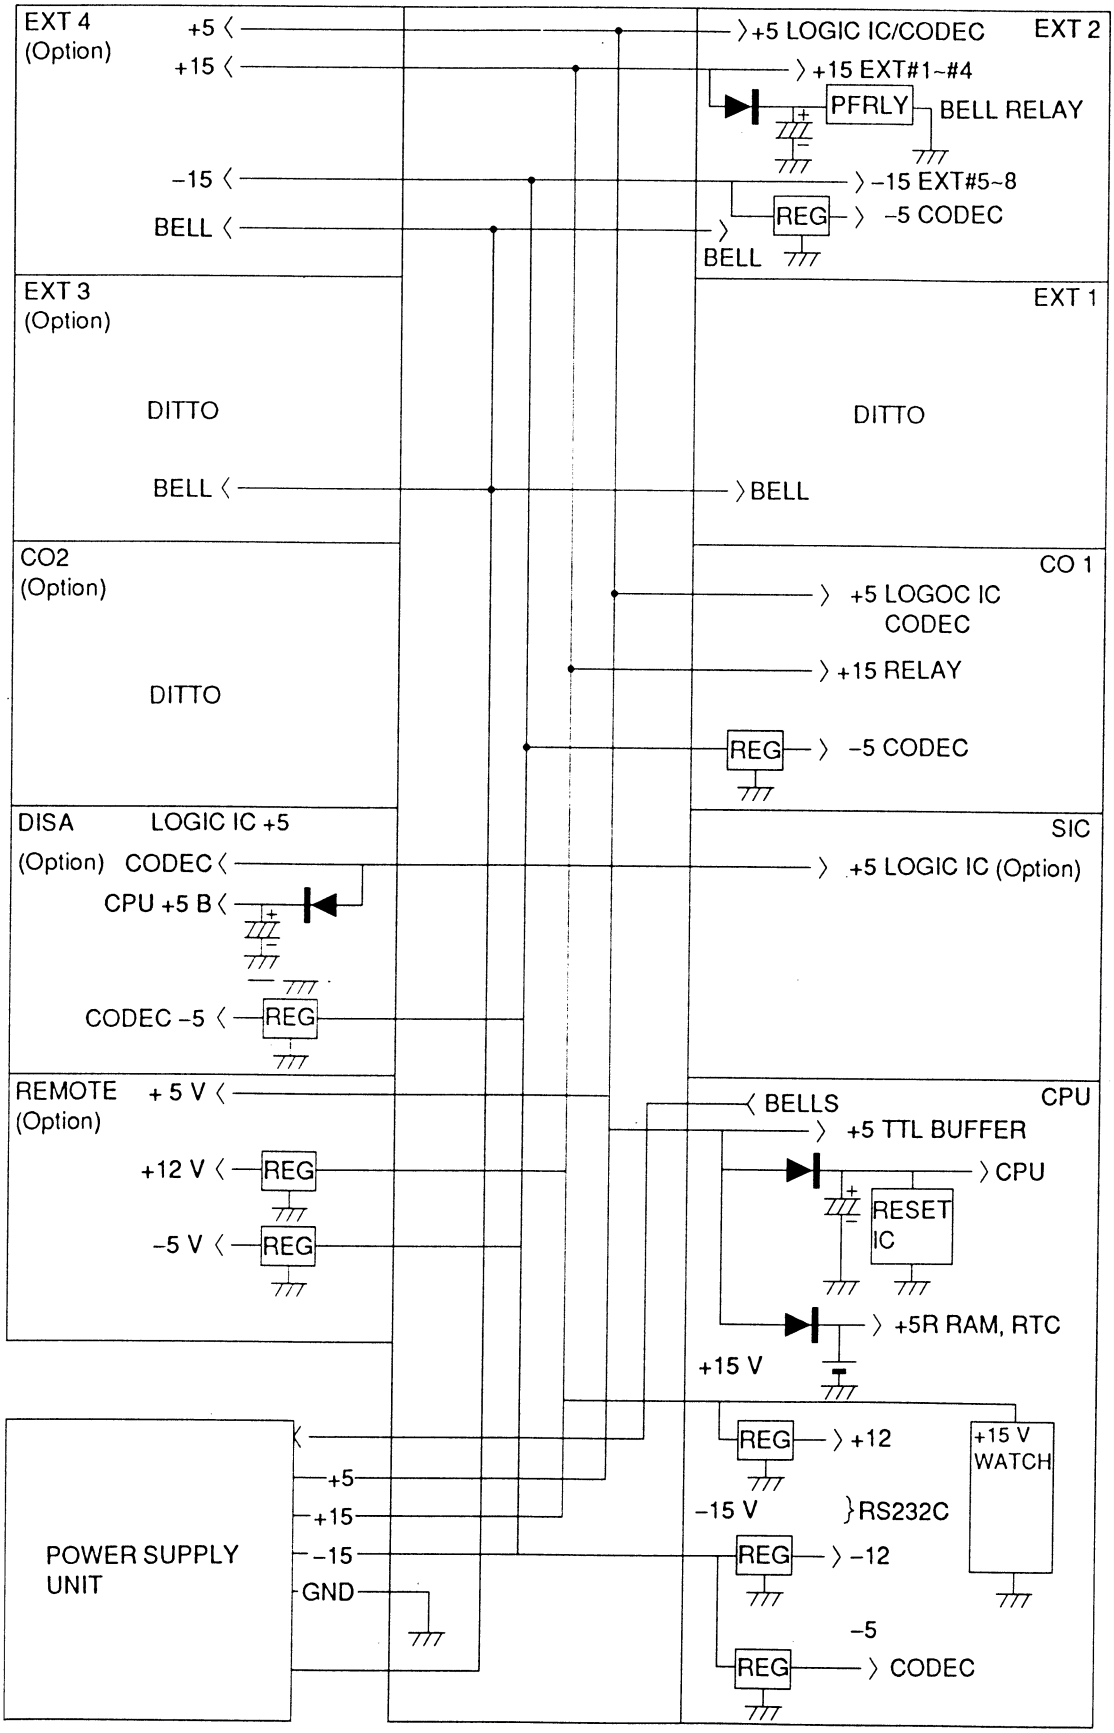

1-5. CONTENTS

This equipment has mainly 3 types of cabinets and 2 types of optional cabinets.

Each cabinet relates with each board about installation as follows.

■ **BASIC CABINET**
FRONT COVER

UPPER CABINET	REMOTE CARD	(Option)
	SIC CARD	(Option)
	DISA CARD	(Option)
	DOOR-PHONE CARD	(Option)
LOWER CABINET	CPU CARD	(Basic)
	BASIC CO CARD	(Basic)
	BASIC EXT CARD	(Basic)
	POWER SUPPLY UNIT	(Basic)
	MOTHER BOARD	(Basic)
	LED BOARD	(Basic)
	SMDR BOARD	(Basic)
	CALLER ID CARD	(Option)
	BATTERY BACKUP ADAPTER	(Option)

■ **OPTIONAL CABINET**
OPTIONAL UPPER CABINET

OPTIONAL LOWER CABINET	EXPANSION CO CARD	(Option)
	EXPANSION EXT CARD	(Option)
	CALLER ID CARD	(Option)

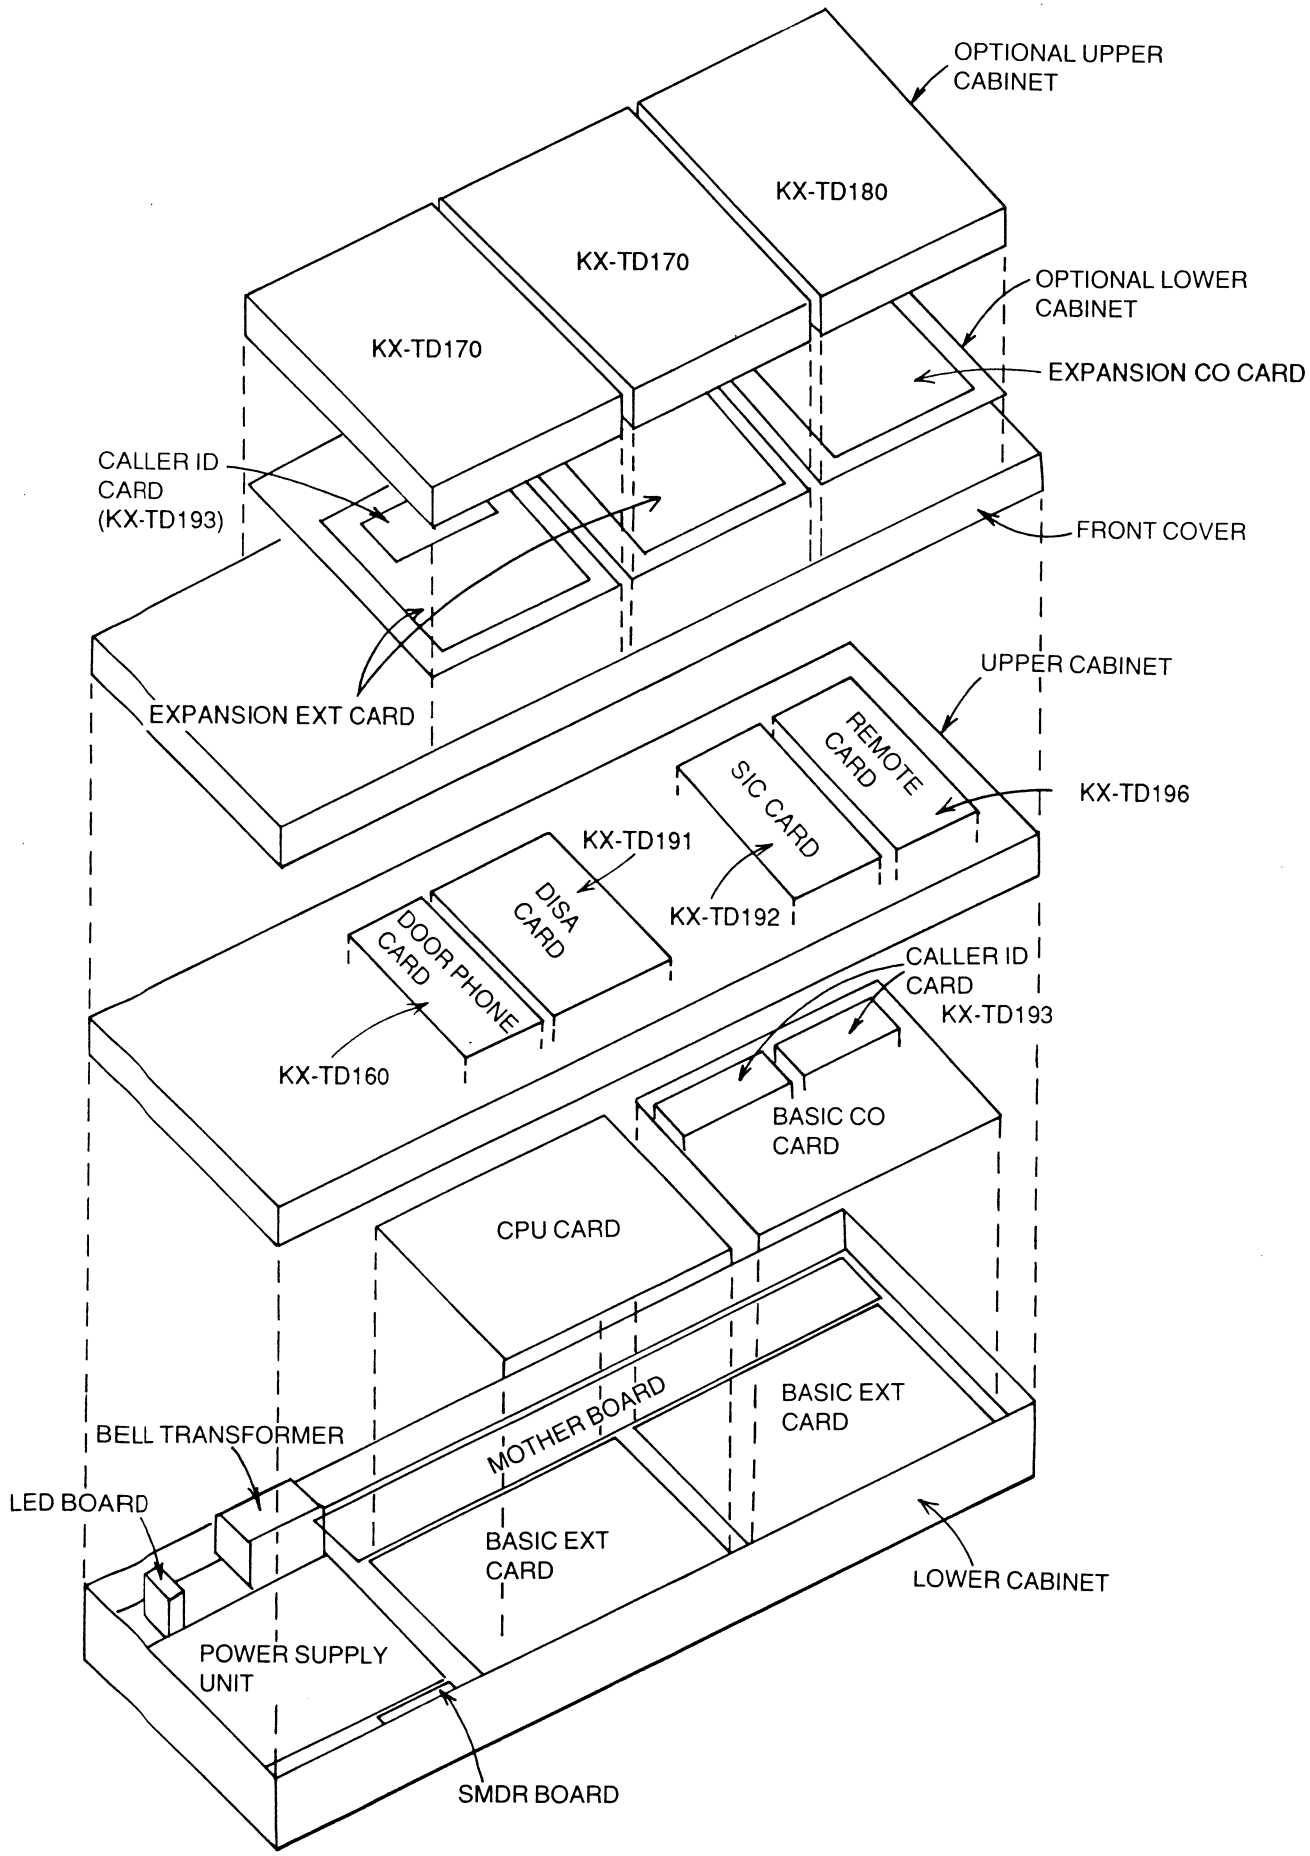
OPTIONAL UPPER CABINET
KX-TD180
KX-TD170
KX-TD170
OPTIONAL LOWER CABINET
EXPANSION CO CARD
CALLER ID CARD (KX-TD193)
FRONT COVER
EXPANSION EXT CARD
UPPER CABINET
REMOTE CARD
SIC CARD
KX-TD196
KX-TD191
DISA CARD
KX-TD192
DOOR PHONE CARD
CALLER ID CARD
KX-TD193
KX-TD160
BASIC CO CARD
CPU CARD
BELL TRANSFORMER
MOTHER BOARD
BASIC EXT CARD
LED BOARD
BASIC EXT CARD
LOWER CABINET
POWER SUPPLY UNIT
SMDR BOARD

2. FUNCTION OF EACH BOARD

2-1. BASIC

1) POWER SUPPLY UNIT

Power supply unit generates three DC voltage of +15, −15 and +5.3 V from AC power source, and supplies them to the system. To connect the option of BATTERY BACK-UP ADAPTER (KX-A46) allows the system to be connected with the back-up batteries as measure to the power failure.

Function	Description
Generating DC voltage	Generates +15, −15 and +5.3 V from AC power or the batteries. Capacities: +5.3 V, 3.0 A +15 V, 4.7 A −15 V, 4.5 A
Connecting batteries (by using KX-A46)	It recharges the batteries when AC power turns on. When AC power turns off, it is powered from the batteries, and if the voltage at the battery terminals are derated under the specified voltage, it cuts the batteries off to prevent the over discharge.
Bell Amp	It increases the bell signal from CPU CARD, and sends to the EXT CARD.

2) CPU CARD

CPU CARD covers the CPU function which controls the system and TSW (time sw.) function which exchanges the PCM lines as the main functions. In addition, it is equipped with the common resources such as the conference function, the clock function, and the clock generator function.

Function	Description
CPU function	Controls the general system according to the programs.
TSW function	Exchanges the PCM lines following the control from CPU.
Conference function	Allows the conference call of 3-person×6-conference.
Clock function	The clock LSI backed up by batteries realizes the clock function in the system.
Tone generator	Generates 4 types of the call progress tones and 2 channels of the DTMF tones.
Holding tone source	Internal holding tone source (optional for the derivative models) External holding tone source: 2 channels
External paging function	Out-put function for 2 channels of the external pagings
Serial I/F function	RS232C port: 1 port I/F for communication with MODEM IC on the REMOTE CARD: 1 port
Clock generator function	Generates the clock for PCM highway system and supplies to the system.
Voltage watching	Watches the voltages of +5 V and +15 V, resets the system if +5 V is derated.
Back-up function	Back up the CPU peripherals (+53 V) for 1 second or more during the power failing. Back up the system data in RAM and the clock IC for 7 years by the lithium battery.
OHCA function	Circuit for converting 2–4 w. signals. CODEC realizing OHCA (Off hook call announcement) function.
Bell signal generator function	25 Hz signals are generated by the CPU and the filter circuit.

3) BASIC CO CARD

BASIC CO CARD functions the interface between the system and the lines. 8 lines per one CO card are covered.

Function	Description
Ring detection function	Detecting the bell signals from the stations.
Catch of CO lines function	Catching the CO lines by making the DC current loop.
End of call function	CPC detection
Dial pulse transmission function	Out-put the dial pulse to the lines by switching the DC loop on and off.
2–4 wires convert	2 w. signals from the stations are converted in 4 w.
A/D, D/A convert	Converting between 4 w. analogue signals and PCM digital signals.
Transfer during power failure	Having 4 direct paths to the extensions for transferring when the power fails.
Diagnostic function	Interface in each line has the mode to connect with an extension line through a test path instead of a line.

4) BASIC EXT CARD

BASIC EXT CARDS are installed into the system as standards, and play a roll of the interface between the system and the terminals. The terminals which are connectable with this board are SLT, APITS and DPITS (including the Voice mail). 8 lines per one card are covered and they allow a parallel connection of SLT and APITS (mother and daughter operation) as well as the parallel connection of SLT and DPITS (independent operation).

Terminal	Function	Description
SLT	Power supply	Supplying the power to SLT for calling.
	Hook detection	Detection of On-hook and Off-hook when the bell signal is not presented.
	Ring trip detection	Detection of Off-hook when the bell signal is presented.
	Dial pulse detection	Detection of pulse dial
	DTMF tone detection	Detection of DTMF tone
	Switching in power failure	Connecting directly between the CO line and the terminal when power fails. 2 lines
SLT APITS	2–4 w. convert	Converting 2 w. from the terminals into 4 w.
	A/D, D/A convert	Converting between 4 w.-analogue signals and PCM digital signals by CODEC.
APITS	Data transmission	Communication with the APITS about the control data such as the key information, the ramp information.
	OHCA function	Having the paths connecting the APITS with the OHCA section in the main board
APITS DPITS	Current supply	Supplying the current necessary to operate the APITS and the DPITS through the data line.
DPITS	Data Transmission	Communicating with the DPITS about the voice (2 B) and the control data.
Common	Diagnostic function	Diagnosis of the CO card and the DTMF receiver. Diagnosis of the PCM highway by the loop back.

5) MOTHER BOARD
Each card of CPU, CO CARD, EXT CARD etc. is powered through the MOTHER BOARD, and also transmits the signals through it.

6) LED BOARD
LED BOARD is for installing LED which shows the operating status.

7) SMDR BOARD
SMDR BOARD leads signal of RS-232C out with DIN 25 pin connector.

2-2. RESOURCE OF OPTION

1) EXPANSION CO CARD (KX-TD180)
EXPANSION CO CARD is an optional card for extending the CO lines from 8 up to 12 lines. The differences between this card and the basic one are as follows;
- The number of lines are 4. (8 for basic one)
- 2 lines for the transfer function when the power fails

2) EXPANSION EXT CARD (KX-TD170)
EXPANSION EXT CARD is an optional card for extending the EXT lines from 16 up to 24 or 32 lines. The differences between this board and the basic one are as follows;
- No diagnostic function for the CO card

3) DOOR-PHONE CARD (KX-TD160)
DOOR-PHONE CARD is an optional card for connecting the door-phone and the door-opener with the system. The system can be installed with one card, and one of this card can cover 2 units of the door-phone and 2 units of the door-opener.

Function	Description
Current supply	Supplying the current to the door-phone.
2–4 w. convert	Converting 2 w. signals from the door-phone into 4 w.
A/D, D/A convert	Converting between the 4 w. analogue signals and the PCM digital signals by CODEC.
Detect connection of Door-phone	Detect if this board is connected with the door-phone.
Door-opener control	2 channels of the relay contact out-put for the door-opener control.

4) REMOTE CARD (KX-TD196)
REMOTE CARD is an optional card for the maintenance through the telephone line such as the change, the up-load and down of the system data, the diagnostic of the system and etc.

Function	Description
A/D, D/A convert	Performing A/D and D/A between the PCM highway and MODEM by CODEC.
MODEM function	MODEM function at 300 and 1200 bps. Connected with the CPU through the serial interface.

5) DISA CARD (KX-TD191)

DISA CARD is an optional card that automatically responds to the incoming signals on the CO lines without through operator, and by receiving the secondary dial (DTMF signals) that calls the specific extension, connects with the MODEM and between the CO lines. The number of channels is 2.

Function	Description
Sending OGM	Sending OGM (Out Going Message) stored in RAM to the CO line. 2 types of OGM for 32 sec. each are stored.
DTMF signal detection	After sending OGM to CO line, detecting the in-coming signal of DTMF.
Call between CO lines	Two call paths for call between CO lines.
DTMF repeat	When calling between the CO lines, resending the received DTMF to maintain the certain level of the DTMF signals.
End of call detection	When calling between the CO lines, detecting the no tone, the cyclic tone and the continuous tone. 2 channels/1 path, total 4 channels.
OGM record	Recording the OGM from the specific extension into RAM. Controlling the level by AGC circuit. Only one channel is available as the recording channel.
FIFO communication	Communicating between CPU on this card and main CPU through FIFO memory.

6) SYSTEM INTERCONNECTION CARD (KX-TD192)

SYSTEM INTERCONNECTION CARD is an optional card for connecting two systems together to be operated as one system. It plays the interface for 30 channels of the call lines and 1 control channel. Signal types are three types; the PCM highway, the highway clock and the frame pulse.

Function	Description
Driver/receiver	Sending the PCM highway, the highway clock and the frame pulse in the system to another system. Three signals fore-mentioned are received from another system.
HDLC control	Converting the control data into the HDLC protocol, and sending it to another system through the PCM highway. The data of HDLC protocol from another system are converted into the normal data.
Clock watch function	Watching the PCM highway clock and the frame pulse from another system.

7) CALLER ID CARD (KX-TD193)

CALLER ID CARD is an optional card corresponding to "caller ID service" available in the north American market. This board is added on the CO card and detects the 300 bps modem signals transmitted during recesses between the bell signals from the station, and converts them into the parallel data.

One card is corresponded to the 4 lines. Two cards can be installed on the BASIC CO CARD (8 lines) and one card can be installed on the EXPANSION EXT CARD (4 lines).

8) BATTERY BACKUP ADAPTER (KX-A46)

BATTERY BACKUP ADAPTER is an interface option to connect the batteries. Using this option, when AC power turns off, it is powered from the batteries, and if the voltage at the battery terminals are derated under the specified voltage, it cuts the batteries off to prevent the over discharges.

3. EXPLANATION OF CIRCUIT OPERATION

3-1. BASIC

1) POWER SUPPLY UNIT

POWER SUPPLY UNIT consists of the following.

Line Filter Section
Rectifier and Smoothing Section
Switching Section
Control Section
+15 V Circuit
−15 V Circuit
+5.3 V Circuit
Bell Amp Circuit

POWER UNIT

■ **Line Filter Section**

Common mode noise is removed by C401, C402 and C405 to C406, and normal mode noise by L400 and L401. Lightening surges are absorbed by CR400, CR401 and SA400.

■ **Rectifier and Smoothing Section**

The input signal is full-wave rectified by bridge diode D400, and smoothed by C408, C409, resulting in a DC current. TH401 and TH402 are power thermisters.

■ **Switching Section**

The switching section is a basic RCC type which uses the IC400 included power MOS.FET. D401, R403 and C412 are for resetting the excitation energy stored in T400 while T400 is OFF. C410 and R408 are used as a snuffer for FET in IC400.

■ **Control Section**

IC400 is a RCC type switching regulator adopted power MOS.FET. The external circuit of IC400 has the following roles.

R401, R402, C111: For starting
R400: For detecting an electric current
C417: For adjusting over current detector level
R404, C414: For compensating phase
R407, C415: For compensating over current protector circuit parts temperature dependence
PC400: For feed back

BLOCK DIAGRAM

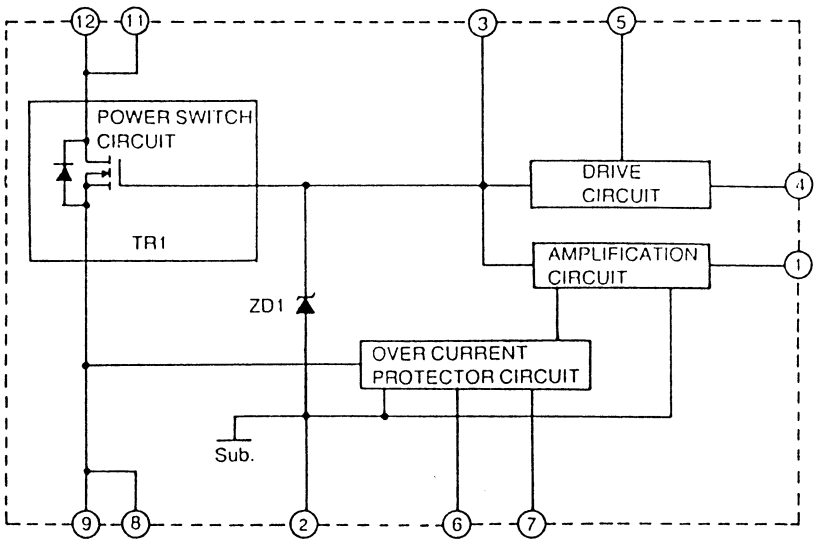

■ +15 V Circuit

There are 2 output of switching transformer, T400 and +15 V is generated from the circuit connected to pin 12, 13-11. +15 V cannot be stabilized by oscillation controll of the primary side since feed back is not done on the primary side from +15 V line. So, the chopper regulator, IC450 and the circuit around it stabilize +15 V. The following is the roles of main surrounding circuit.

D452, C454, C455: Rectifier and smoothing circuit
L450: For preventing resonance
R456, C459: For compensating phase
R457: For detecting an electric current
L451, C460: Filter
L454, C467: Filter

■ −15 V Circuit

The circuit connected pin 8, 9-10 of switch transformer T400 generates −15 V. With feed back on the primary side from −15 V line, −15 V is stabilized by the oscillation control of the primary side. The following is the roles of main surrounding circuit.

D451, C450: Rectifier and smoothing circuit
D450, Q450, C452: Feed back circuit
PC400, R451, R454, VR450, R453, L453, C468: Filter

■ +5.3 V Circuit

+5.3 V is generated from the chopper regulator, IC451 connected to the +15 V output. It has an over voltage protection circuit to prevent abnormal output voltage. The following is the roles of main surrounding circuit.

L452: Filter
R460: Electric current detection resistor
F401, SCR401: Over voltage chopper circuit
D453, R466: Over voltage detection circuit
R467, C465

■ Bell Amp Circuit

It increases bell signals sent from CPU board in Power Op. Amp, IC452 and sends them into the bell amp. Then, they are sent to the extension boards.

CIRCUIT DIAGRAM

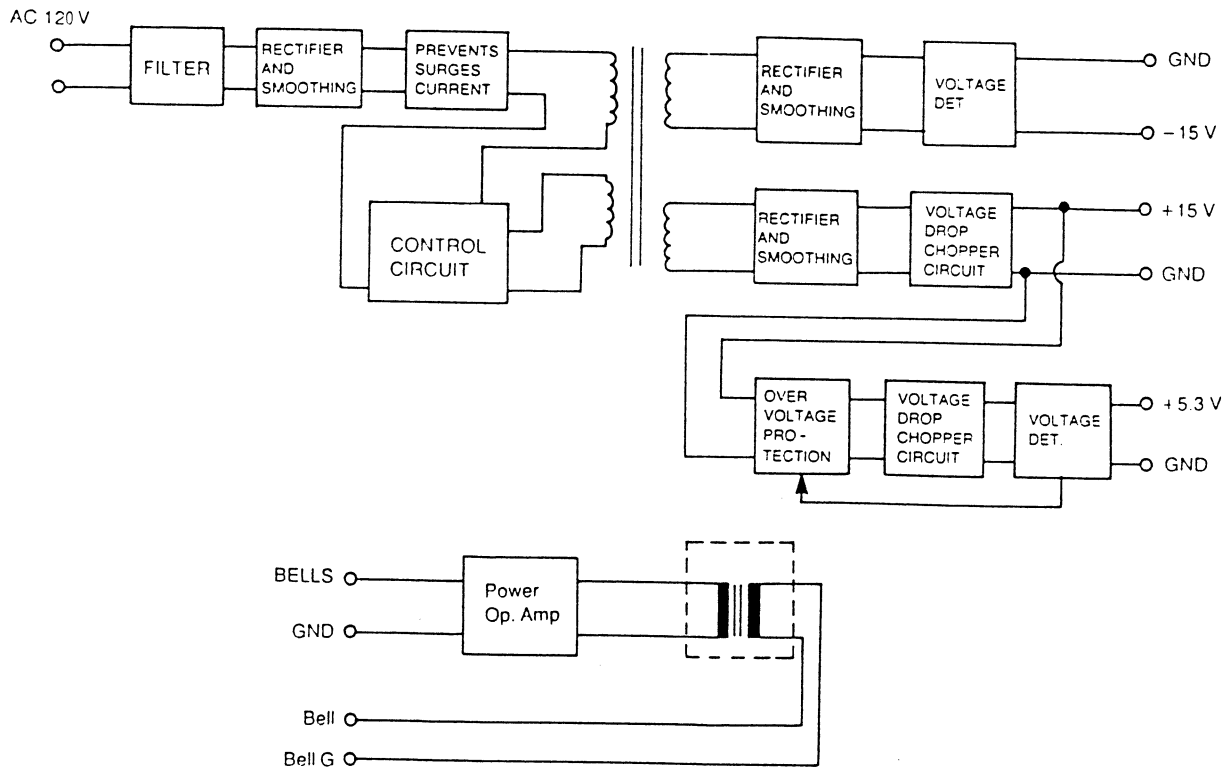

2) CPU CARD

CPU CARD consists of the following:

- CPU Circuit
- TSW Circuit
- Conference Circuit
- Tone Generator Circuit
- Clock Generator Circuit
- Clock Circuit
- OHCA Circuit
- Hold Tone Circuit
- Battery Back-Up Circuit
- Voltage Watching Circuit
- RS-232C inteface Circuit
- Level Signal Generator Circuit

■ CPU Circuit

Circuit Operation:

16 bit CPU (system clock=8.192 MHz) (IC1)
- with 68HC000 core CPU
- 3 Serial I/O ports
- 16 bit Paralleled I/O ports
- 3 level Interrupt Controller
- 16 bit Timer 3 ch.
- Address Decoder
- DTACK Contoroller

512 Kbyte EPROM (Program)	(IC20, 21)
64 Kbyte SRAM	(IC24, 25)
64 Kbyte Pseudo SRAM	(IC22, 23)
Address Buffer	(IC33, 34)
Data Buffer	(IC31)
Control Signal Buffer	(IC32, 35)
Gate Array	(IC2)

- with Address Decoder
- Peripheral Controller
- 2 Paralleled Out Ports

X'tal (8.192 MHz) (X1)

Composition:

The CPU (IC1) controls the system according to the programs stored in the ROM (IC20, 21). Part of the RAM (IC24, 25) area is backed up by batteries and stored the system data.

CPU CARD

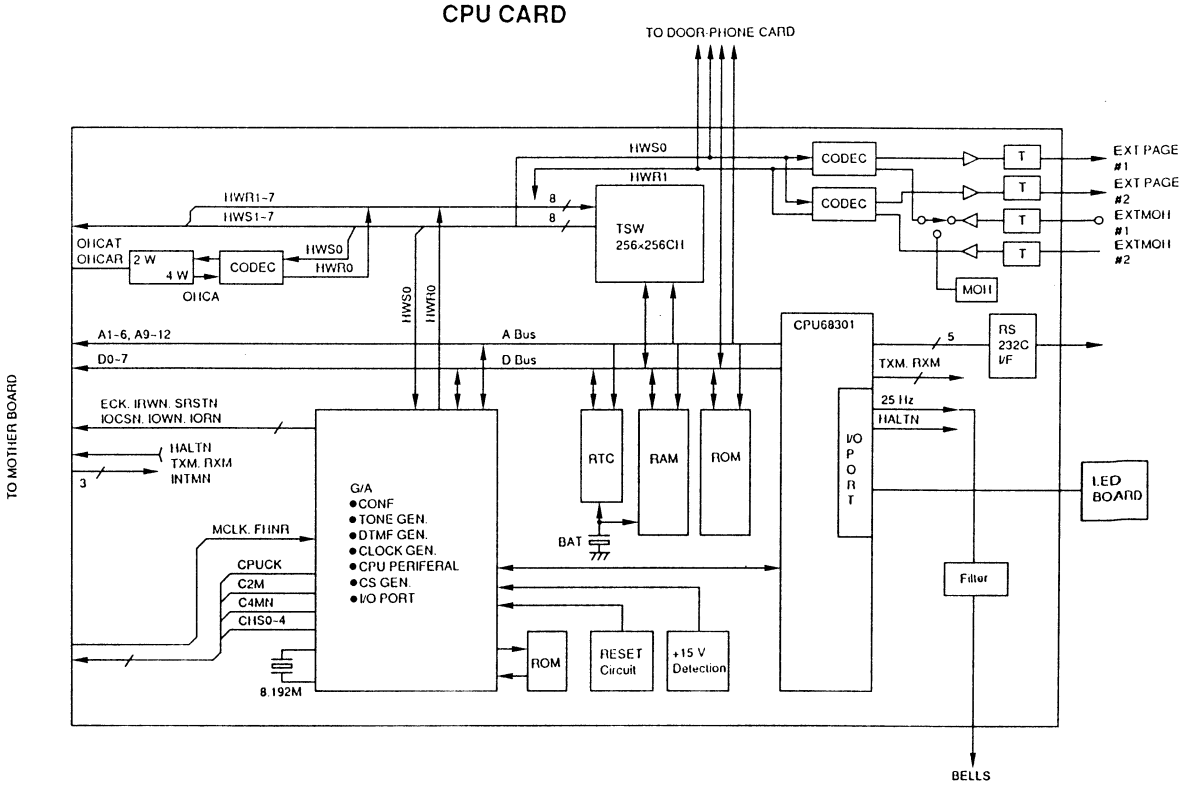

■ TSW Circuit

Composition:

Time Switch IC (IC3)

Circuit Operation:

TSW (Time division Switch) Circuit exchanges totally 256 call channels, which is organized into the PCM highways of 8 lines, and one of the lines is composed of 32 channels. This circuit is integrated into one chip of LSI (IC3), and is controlled by the CPU (IC1) to present the data on the up highways of HWR0 through 7 to the down highways of HWS0 through 7.

The uses of each highways are shown below.

HW 0	Conference Circuit, Tone-DTMF Generator, External paging, Music ON HOLD, OHCA, Door-phone
HW 1	CO #1~#8
HW 2	EXT #1~#8
HW 3	EXT #9~#16
HW 4	EXT #17~#24
HW 5	EXT #25~#32
HW 6	CO #9~#12 DISA, REMOTE
HW 7	System Interconnection (SIC)

■ Conference Circuit

Composition:

Gate Array (IC2)

3 personsx6 conferences controller

128 Kbyte EPROM (Summation Table, Wave Data) (IC19)

Circuit Operation:

Conference Circuit is for enabling the three person's conference. This circuit is connected with HWS0 of the down highway and HWR0 of the up highway. After the voice data which are transferred to HWS0 at TSW are processed with the summation in this circuit, and are presented to HWR0 and transferred at TSW (IC13) again. This circuit consists of the Gate Array (IC2) and ROM (IC19). Gate Array (IC2) picks up the voice data, multiplies, makes ROM address, and sends to ROM. Conference operation is added by ROM table. The summation table of the PCM data is stored in ROM. ROM output is sent to Gate Array. Gate Array sets the data on the highway. This circuit covers 3-personx6-conference. This circuit function to reduce 6 dB of 2-persons' level out of 3-person to realize the conference call of 2-CO-person and 1-EXT-person.

■ Tone Generator Circuit

Composition:

same as Conference Circuit

Circuit Operation:

Tone Generator Circuit presents 4 kinds of the call progress tone and 2 channels of the DTMF tone to DHW0 of the down highway. This circuit consists of the Gate Array (IC2) and ROM (IC19) which are common to the conference circuit. ROM (IC19) are stored inthe PCM data of the tone. Gate Array makes ROM address, gets tone data from ROM and sets the data on the highway.

■ Clock Generator Circuit:

Composition:

same as Conference Circuit

Circuit Operation:

Clock Generator Circuit is a circuit to generate PCM clock from X'tal (X1) and Gate Array (IC2).

The generated clocks are shown below.

C4MN:	4,096 MHz	Highway clock
C2M:	2.048 MHz	Highway clock
FH1N:	8 kHz	Frame pulse
CHS0~4:	128, 64, 32, 16, 8 kHz	Channel select signal
CP27~31:	8 kHz	Synchronous signal for CODEC

The sources of these clocks are the local OSC of 8,192 MHz crystal (X1) and 4,096 MHz from SIC. 4,096 MHz from SIC is used only in the slave mode when this system is connected with the another one as the inter-system connection. Switching the clock sources is controlled by CPU (IC1).

■ **Clock circuit**

Composition:

Real Time Clock IC (IC26)

Circuit Operation:

Clock Circuit is a circuit which gives the clock function for this system, and consists of the clock IC (IC26) backed up by the batteries. This circuit presents one second interruption to CPU (IC1).

■ **Hold tone circuit**

Composition:

CODEC IC (IC7, 8)
IC12, T4, T5, etc.

Circuit Operation:

The hold tone circuit is a circuit which presents the hold tone for the system. The tone sources are one system of the internal hold tone (as a local option) and two systems of the external hold tone. The internal hold tone and one of the external hold tone are switchable alternatively to be used (as a local option). The analogue signals from the tone sources are changed to the digital ones by CODEC IC (IC6) and presented to HWR0 of the up highway. The external hold tone circuit has AGC function.

■ **External Paging Circuit**

Composition:

CODEC IC (IC7, 8)
IC10, T2, T3, etc.

Circuit Operation:

External Paging Circuit is a circuit which presents the voice to the external amplifier. This circuit converts the digital voice data on the HWS0 of the down highway to the analogue signals by CODEC, and presents the external paging port. This circuit consists of two systems.

■ **OHCA Circuit**

Composition:

CODEC IC (IC6)
IC11, T1, etc.

Circuit Operation:

OHCA Circuit is a circuit which works as OHCA (Off Hook Call Announcement) function. This circuit converts 2 lines of OHCA path from the internal circuit to 4 lines, and carries out A/D and D/A conversion between HWR0 of the up highway and HWS0 of the down highway by CODEC (IC6).

■ **Back Up Circuit**

Composition:

BAT, C1 etc.
Back Up Circuit is a circuit which has two functions as follows;
- Back up the CPU (IC1) peripherals for one second when AC power momentarily fails.
- Back up the Clock IC (IC26) and the part of RAM for 7 years.

Circuit Operation:

Back-up is done by the super capacitor (C1) at the momentary AC power failure, and the clock IC and RAM are backed up by the lithium of secondary battery (BAT).

■ **Voltage Watching Circuit**

Composition:

Reset IC (IC13)
Q6, 7 etc.

Circuit Operation:

Voltage Watching Circuit is a security circuit which detects the deration of +5 V and +15. If +5 V is derated, this circuit resets the system. If +15 V is derated, this circuit presents "L" to I/O port in CPU.
The deration of +15 V means AC power off.

■ RS-232C Interface Circuit

Composition:

Receiver/Driver IC (IC15, 16)
16 bit CPU (IC1)

Circuit Operation:

RS-232C Circuit is a circuit for realizing the data transmission between CPU 68301 (IC1) and a personal computer/printer etc. This circuit consists of a serial interface built in CPU and the level conversion circuit. When the power turns on, the power supply for the RS-232C driver (IC15, 16) is controlled by CPU to prevent the indefinite data presentation.

■ Level Signal Generator Circuit

Composition:

16 bit CPU (IC1)
IC14, etc.

Level Signal Generator Circuit is a circuit which generates the bell signal to the SLT of EXT. This circuit is composed of the out-put port in CPU (IC16), the filter and the power amplifier (IC14), and generates the bell signal.

3) BASIC CO CARD

BASIC CO CARD consists of the following:
Call Interface
Parallel I/O Circuit
Timing Signal Generation Circuit

■ Call Interface Circuit

Call Interface Circuit is a circuit which works as the interface between the call line and the PCM highway, and is classifies as following circuits.

Composition:

(a) Bell Signal Detection Circuit
(b) DC loop formation Circuit
(c) Pulse Dial Transmission Circuit
(d) 2 W-4 W Lines Conversion Circuit
(e) A/D, D/A Conversion Circuit
(f) Diagnostic Circuit

Call Interface Circuit consists eight lines corresponding to each call line.
(Transfer Circuit at Power Failure are four lines.)

Circuit Operation:

(a) Bell signal Detection Circuit

When CO line is idle, EXRLY pin of IC111 is low and RLY101 is OFF, photocoupler PC101, PC102, are OFF. BELL pin of IC111 is high. When there is an incoming signal at the CO line, the call signal is rectified by zener diode D102 and D103 and photocoupler PC101, current flows to the photocoupler PC101, and PC101 turns ON. This causes BELL pins of IC111 to change from a high to low. This change is detected as incoming call thus processing are executed.

Call Signal Path:

Tip–L102–L104–RLY101 (6–7)–PC101 (1–2)–R101–C102–RLY101 (2–3)–L103–L101–SA103 (4–2)–Ring

(b) DC Loop Formation Circuit

In the off-hook mode, EXRLY of IC111 is low, and RLY101 is OFF.

DC Loop Path:

Tip–L102–L104–RLY101 (6–7)–R118–D101 (—+)–PC102 (4–3)–Q101
D101 (——)–F100–RLY101–L103–L101–SA103 (4–2)–Ring

(c) Pulse Dial Transmission Circuit

When off-hook, pulse dial transmission is executed by alternating on-hook and off-hook.
On-hook and off-hook is controlled by PC102. During the make position, dial pin of IC111 is low level and PC102 is ON. During the break position, dial pin of IC111 is high level and PC102 is OFF.
At this time, BELL pin of IC111 become a low. Afterwards, BELL pin of IC111 monitors for a change (low to high) for more than 400 ms. If more than 400 ms has been detected it assumes that an on-hook state has occurred and the CO line circuit is restored to the idle state. The voice signal is transmitted into the system via the transformer T101.

(d) **2 W–4 W Lines Conversion Circuit**
This circuit converts 2-line analogue signals from CO line to 4-line signals. The voice analog signal from the line is outputted from T101 to the 2–4 Line Conversion Circuit, and the circuit flow is
T101 (4–6)–R116–5 pin of IC102
IC102 is a CODEC. The voice analog signal is converted to PCM signal by this CODEC. PCM signal from TSW is converted to voice analog signal by the CODEC. And the circuit flow is as following.
2 pin of IC102–C108 R112–2 pin of IC101–R107–T101

(e) **A/D, D/A Conversion Circuit**
This circuit is for conversion between 4-line analogue signals and the PCM digital signals. CODEC (IC102) has a power down function at no operation and a μ/A law switching over function, and are controlled through the parallel I/O port.

(f) **Diagnostic Circuit**
This circuit is a circuit which checks the function of CO cards. This circuit is composed of the relays (RLY101) which connect the path for the interface circuit of #1 (or #9) line in EXT card. The function check of the DTMF receiver circuit on EXT card. The function check of the DTMF receiver circuit on EXT card can be done by presenting the DTMF signals from CO card.
When EXRLY pin of IC111 becomes high, RLY101 turns ON and make the path.

■ **Parallel I/O Circuit**
Composition:
Gate Array
IC114, 116, 117, 121, 123

Circuit Operation:
Parallel I/O Circuit is a I/O port for controlling the Call Interface Circuit, and is composed of one gate array (IC111).

■ **Timing Signal Generation Circuit**
Composition:
IC112, 120, 121, 122

Circuit Operation:
Timing Signal Generation Circuit is a circuit which generates the synchronous signals for CODEC. It generates eight kinds of signals from the channel select signals (CH0–4) presented by the CPU CARD and from the highway clock (C2M).

BASIC CO CARD

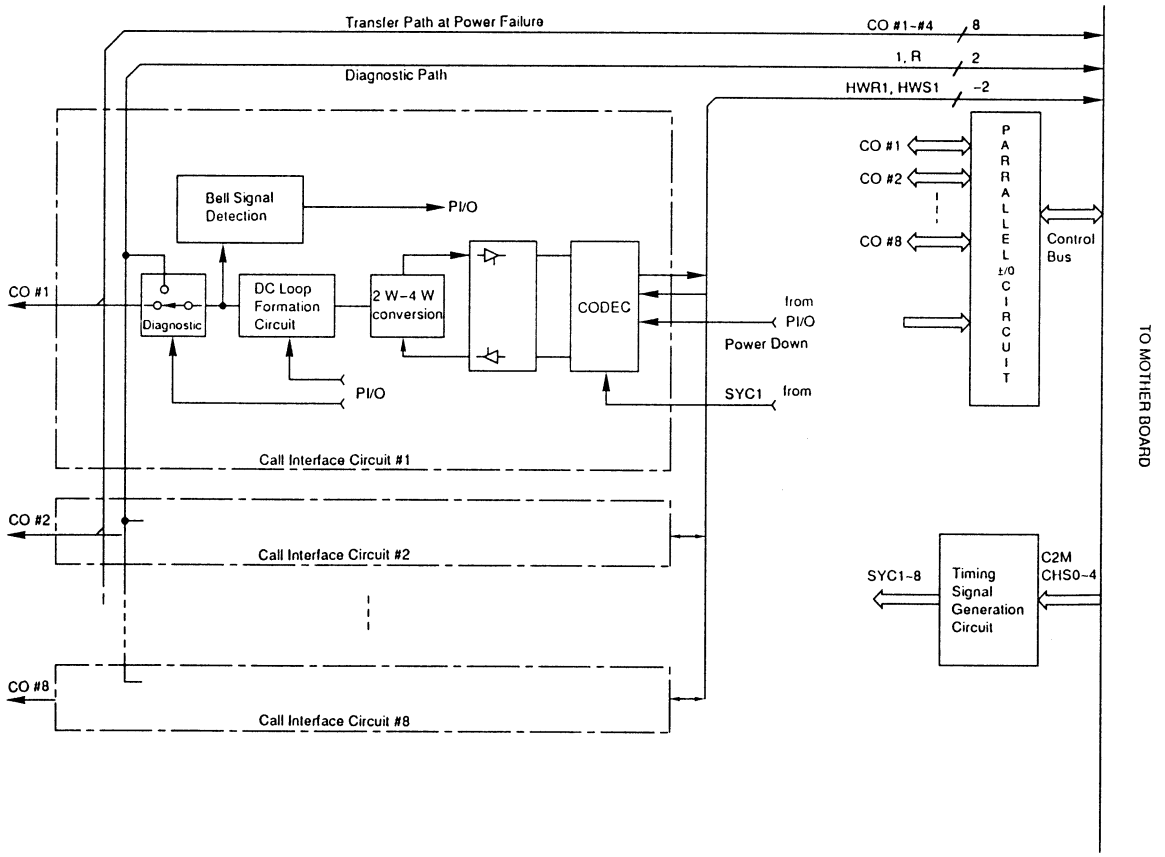

4) BASIC EXT CARD

BASIC EXT CARD consists of the following:
Analogue Telephone Circuit
DTMF Receiver Circuit
APITS Data Communication Circuit
DPITS Data Communication Circuit
HDLC Controller
APITS/DPITS Data Transmission And Reception Circuit
Parallel I/O Port
Timing Signal Generation Circuit

■ Analogue Telephone Circuit

Analogue Telephone Circuit is composed of the following circuit, this consists of eight circuit corresponding to each extension line.

Composition:

(a) Current Supply Circuit
(b) Hook Detection Circuit
(c) Ring Trip Detection Circuit
(d) 2–4 Lines Conversion Circuit
(e) A/D and D/A Conversion Circuit
(f) Transfer Circuit At Power Failure
(g) Diagnostic Circuit

Circuit Operation:

(a) Current Supply Circuit

Current Supply Circuit is constant-current circuit which supplies the call current to SLT. Its voltage is ±15 V.
With the telephone off-hook, a DC loop is formed, and current is supplied to the telephone. This Current is limited to about 30 mA by D204, D205, R205, D206, D207 and R208 respectively.
(+15 V)–R206–R205–Q203–RLY202 (b–c)–RLY201 (c–b)–L204–RLY200 (m–c)–Telephone–RLY200 (c–m)–L205–RLY201 (b–c)–RLY202 (c–b)–Q204–R208–R209–(–15 V)

(b) Hook Detection Circuit

Hook Detection Circuit is a circuit which detects On-hook or OFF-hook of SLT when the bell signals are not presented, and detects the dial pulse as well.
When the telephone handset is taken off the hook, a DC loop is formed and current flows to Q205. Because of this, the corrector of Q205 changes from high to low, thus HOOK pin of IC211 becomes low, and the CPU detects an off-hook condition. When the handset is replaced back on hook, the DC loop is interrupted and current no longer flows to Q205 and the corrector of Q205 goes high and the CPU assumes an on-hook condition.

(c) Ring Trip Circuit

This circuit is for detecting Off-hook of SLT when the bell signals are presented.
Normally Q206 is OFF during transmission of the bell signal. When answering the telephone, the DC loop of the call signal circuit is established, Q206 then turns ON, and base of Q207 becomes low. Because of this, the corrector of Q207 becomes high and RLY202 is reset. With resetting of RLY202, the loop of bell signal circuit is interrupted and the DC loop of the call circuit is established.

(d) 2 W–4 W Lines Conversion Circuit

This circuit converts 2-line analogue signals from SLT and APITS to 4-line signals.
The voice analog signal from the line is outputted from C205 to the 2–4 Line Conversion Circuit, and the circuit flow is
C205–R219–6 Pin of IC202–R217–5 Pin of IC201
IC201 is a CODEC. The voice analog signal is converted to PCM signal by the CODEC. PCM signal from TSW is converted to voice analog signal by the CODEC. And the circuit flow is as following.
2 Pin of IC201–C208–R215–2 Pin of IC202–R211–C205–RLY202 (B–C)–RLY201 (C–B)–L204–RLY200 (M–C)–Telephone

(e) A/D and D/A Conversion Circuit

This circuit is for conversion between 4-line analogue signals and the PCM digital signals. CODEC (IC201) has a power down function at no operation and a μ/A law switching over function, and is controlled through the parallel I/O port.

(f) Transfer Circuit at Power Failure

This circuit is a circuit for connecting directly between CO line and SLT when the power fails. The call line is automatically changed to the direct call mode when the voltage of +15 V is derated (Power down). It is controllable through I/O port as well. This circuit exists only in the extension of #1~#2, and CO #3~#4 are connected with EXT #9~#19. This circuit maintains the current mode for over one second when AC power fails momentarily.
When power fails or 117 pin of IC211 becomes low, corrector of Q221 is high, RLY200 turns OFF and make the path.

(g) **Diagnostic Circuit**
This circuit is a circuit which checks the function of CO cards. This circuit exists only in the extension of #1 (or #9), and is composed of the relay (IC211) which connects the paths for the interface circuit of each line in CO card in stead of telephone terminals. The function check of the DTMF receiver circuit on this card can be done by presenting the DTMF signals from CO card.
When EXRLY pin of IC211 becomes high, RLY201 turns ON and makes the path.

■ **DTMF Receiver Circuit**
Composition:
DTMF Receiver IC (IC215, IC216)
8→1 Analogue Switches (IC217, IC218)

Circuit Operation:
DTMF Receiver Circuit is a circuit for receiving the DTMF dials presented by SLT and APITS. This circuit is composed of the 8→1 Analogue Switches (IC217, 218) and the DTMF Receiver IC (IC215, 216). This circuit is incorporated two lines on one card, each line is connected through the eight extensions and the analogue switches (IC217, 218) to the DTMF receiver IC (IC215, 216). The received data of DTMF receiver are read through the data bus by the main CPU (IC1).

■ **APITS Data Communication Circuit**
Composition:
Gate Array (IC211)

Circuit Operation:
APITS Data Communication Circuit is a circuit which performs the serial/parallel conversion of the control data between APITS comm. paths and the main CPU (IC1). This circuit covers 8 lines corresponding to each extension, and 8 lines are integrated into on Gate Array (IC211).

■ **DPITS Data Communication Circuit**
Composition:
Gate Array (IC211)

Circuit Operation:
DPITS Data Communication Circuit is a circuit which has the following functions. This circuit covers 8 lines corresponding to each extension, and 8 lines are integrated into one Gate Array (IC211).
•B channel communication
The B channel data are transferred between the DPITS comm. path and the PCM highway. The transmitting capability is 64 kbps×2.
Note) B channel stands for "Barer Channel", normally transmitting the voice data.
•D channel communication
The data are transferred between the DPITS comm. path and the HDLC controller, serial bus.
The transmitting capability is 16 kbps. Because the communication between HDLC controller and this circuit is done as 1 vs. 1, the HDLC controller switches the communicating extension every for 8 ms. Therefore, the communication per one extension is done only for 8 ms at 64 ms cycles, the actual transmitting capability is 2 kbps.
Note) D channel stands for "Data Channel", transmitting CPU control data.
•C channel communication
The serial/parallel data conversion are done between the DPITS comm. path and the main CPU data bus. The level (H or L) transmission is only possible through the C channel.
Note) C channel stands for "Control Channel".

■ **HDLC Controller**
Composition:
HDLC Controller IC (IC213)

Circuit Operation:
HDLC Controller is a circuit which functions the data format conversion of the D channel between the DPITS comm. line installed with a Gate Array (IC211) and the CPU data bus by following the HDLC protocol. The serial/parallel conversion is done at the same time. Though this circuit communicates with 8 channel of the DPITS comm. circuit, since it can communicate only with one channel at a time, as before mentioned it, switches the communicating extension every for 8 ms.
This circuit is composed of one IC (IC213).

■ **APITS/DPITS Data Transmission and Reception Circuit**
Composition:
Q201, Q208, IC203, T201 etc.

Circuit Operation:
The circuit functions the wave shaping and the level conversion between the date line from the telephone terminal and the Gate Array (IC211), and supplies the current to the terminal through the data line. The data communication is done through this circuit with any kinds of the terminal whichever APITS of DPITS.
This circuit consists of the drive circuit (Q201, Q208, etc.), the receive circuit (IC203) and the transformer (T201).

■ **Parallel I/O Port**

Composition:

Gate Array (IC211)

Circuit Operation:

This circuit is a circuit which controls the analogue telephone circuit, and integrated into the Gate Array (IC211).

■ **Timing Signal Generation Circuit**

Composition:

Gate Array (IC211)

Circuit Operation:

This circuit is a circuit which generates the synchronous signal for CODEC (IC201) and the frame pulse for the HDLC controller (IC213). These signals are generated from the channel select signals (CHS0~4) and the highway clock (C4MN) presented by the CPU Card and integrated into the Gate Array (IC211).

BASIC EXT CARD

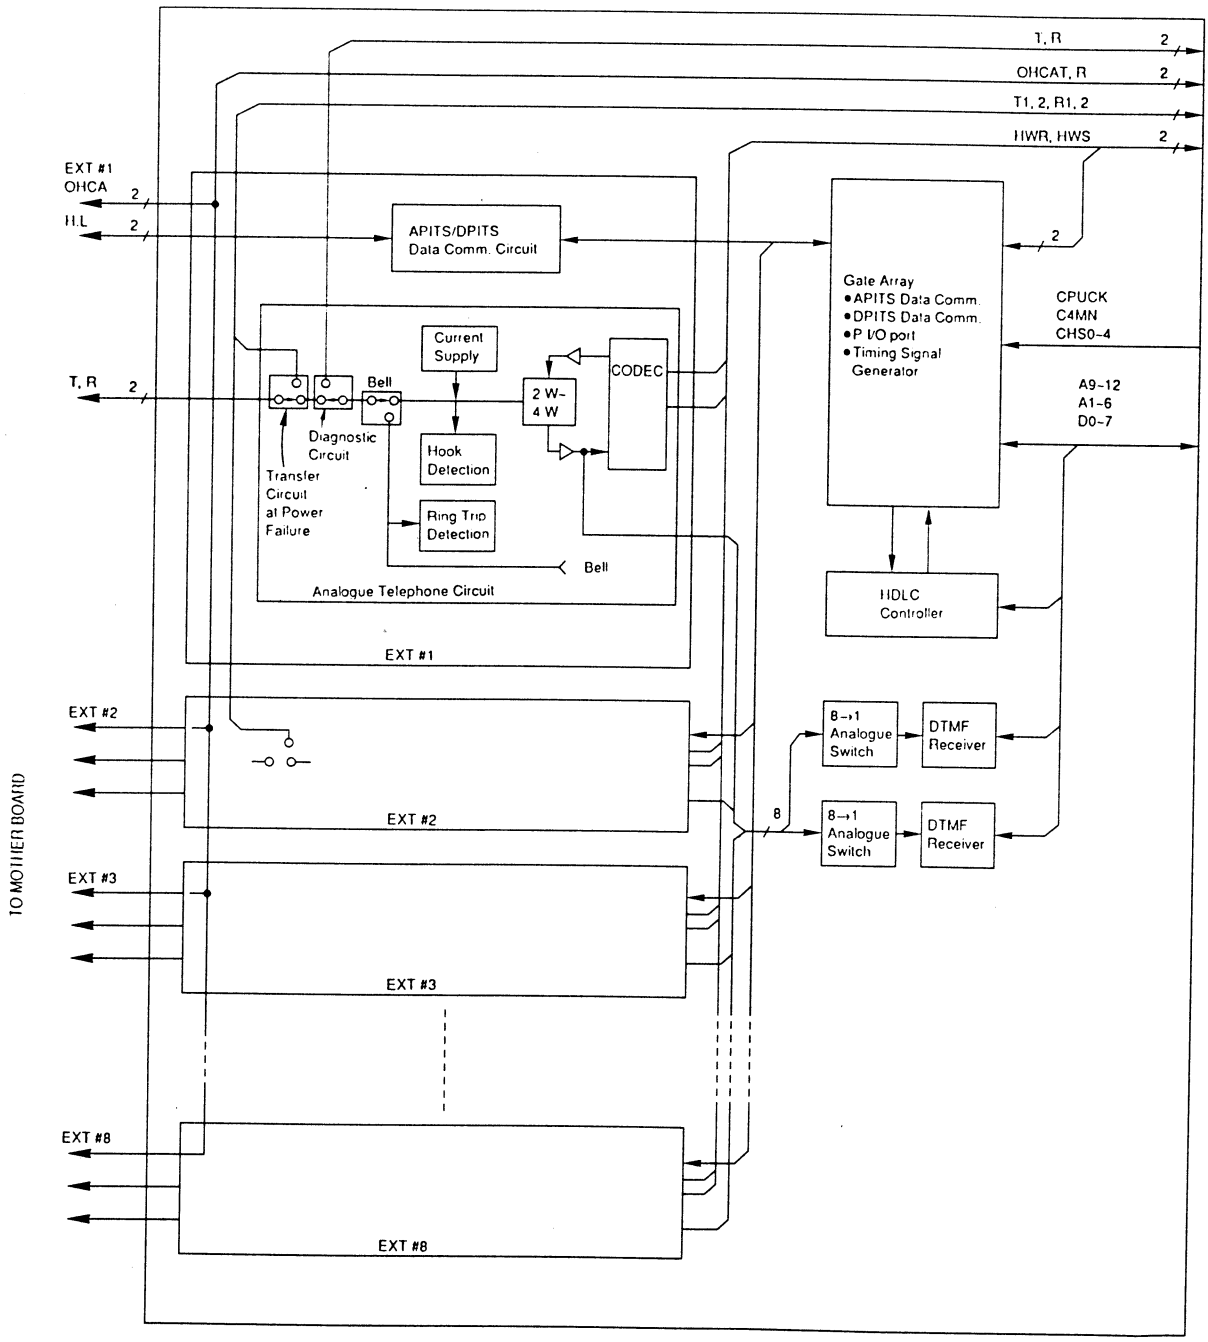

3-2. RESOURCE OF OPTION

1) EXPANSION CO CARD (KX-TD180)

The circuit on this card has the following differences from the BASIC CO CARD. Others are the same as the basic one.
- Number of CO lines are four.
- Two lines paths for the transfer at power failure.

2) EXPANSION EXT CARD (KX-TD170)

The circuit on this card has the following differences from the BASIC EXT CARD. Others are the same as the basic one.
- No diagnostic circuit for CO CARD
- Two lines paths for the transfer at power failure

3) DOOR-PHONE CARD (KX-TD160)

DOOR-PHONE CARD consists of the following:
Door-Phone Interface Circuit
Door Opener Circuit

■ Door-Phone Interface Circuit

Door-Phone Interface Circuit is a circuit which functions the interface between the door-phone and the PCM highway, and is composed of the following circuits.

Composition:

(a) Circuit for detection whether the door-phone is connected or not.
(b) Current supply circuit
(c) Hook detection circuit
(d) 2–4 lines conversion circuit
(e) A/D and D/A conversion circuit (CODEC) IC2

Circuit Operation:

(a) Circuit for detection whether the Door-Phone is connected or not.

When the Door-Phone is not connected, base of Q2 is high. When corrector of Q2 is low, input pin of IC5 is low. When the Door-Phone is connected, base of Q2 is low. When corrector of Q2 is high, input pin of IC5 is high. CPU (IC1) on CPU CARD gets information through IC5 whether the Door-Phone is connected or not.

(b) Current Supply Circuit

Q3 supplies current to the Door-Phone line through the transformer (T1).

(c) Hook Detection Circuit

When the call button of Door-Phone isn't pushed, base of Q1 is high. When corrector of Q1 is low, input pin of Q1 is low. When the call button of Door-Phone is pushed, base of Q1 is low. When corrector of Q1 is high, input pin of IC5 is high. CPU (IC1) on CPU CARD gets information through IC5 whether the call button is pushed or not.

(d) 2–4 Lines Conversion Circuit

This circuit converts 2-line analogue signals to 4-line signals.

(e) A/D, D/A Conversion Circuit

This circuit is for converting the analogue signals from Door-Phone to the PCM digital signals to present to the PCM highway, and also converting the data on the PCM highway into the analogue signals to the Door-Phone. This circuit has the power down function and the μ/A conversion function.

■ **Door Opener Circuit**
This is the relay circuit which controls the Door Opener connected externally. The control is made through the parallel I/O port (IC4). Two of this circuit are installed on a card.

Composition:
IC4, Q7, RLY1, etc.

Circuit Operation:
When CPU (IC1) on CPU CARD make I/O port (IC4) high, transistor (Q7) controls the relay (RLY1) ON. When CPU (IC1) on CPU CARD make I/O port low, transistor controls the relay OFF.

DOOR-PHONE CARD

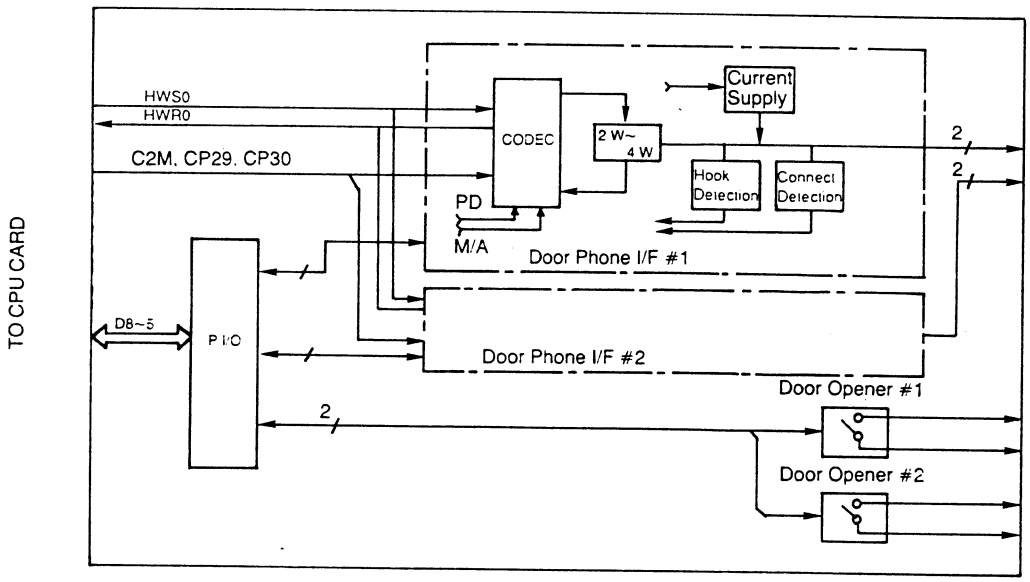

4) REMOTE CARD (KX-TD196)

REMOTE CARD consists of the following:
MODEM Circuit
A/D and D/A Conversion Circuit
Timing Signal Generation Circuit
CPU Interface Circuit

■ **MODEM Circuit**
Composition:
IC8, IC14, X1, etc.

Circuit Operation:
MODEM Circuit is connected with the CPU (IC1) on CPU CARD and the serial data bus, and converts the serial data from CPU into the MODEM signal to present for CODEC (IC13), also converts the MODEM signal from CODEC into the serial data to transmit for the CPU. MODEM function is executed by one IC (IC14).

■ **A/D and D/A Conversion Circuit**

Composition:

CODEC IC (IC13)

Circuit Operation:

This circuit is for converting the analogue signals from MODEM circuit to the PCM digital signals to present to the PCM highway, and also converting the data on the PCM highway into the analogue signals to the MODEM circuit. This circuit has the power down function and the μ/A conversion function.

A/D and D/A Conversion Circuit is composed of one IC (IC13).

■ **Timing Signal Generation Circuit**

Composition:

IC1, IC4, IC10, IC11

Circuit Operation:

This circuit is a circuit which generates the synchronous signals for CODEC (IC13). The signals are generated from the channel select signals (CHS 0~4) and the highway clock (C2M) presented by the CPU CARD.

■ **CPU Interface Circuit**

Composition:

IC1, IC2, IC3, IC4, IC5, IC7, IC9, IC10, IC12

Circuit Operation:

As the address bus and the data bus are multiplied in the MODEM IC, this circuit makes the address bus and the data bus to be multiplied.

REMOTE CARD

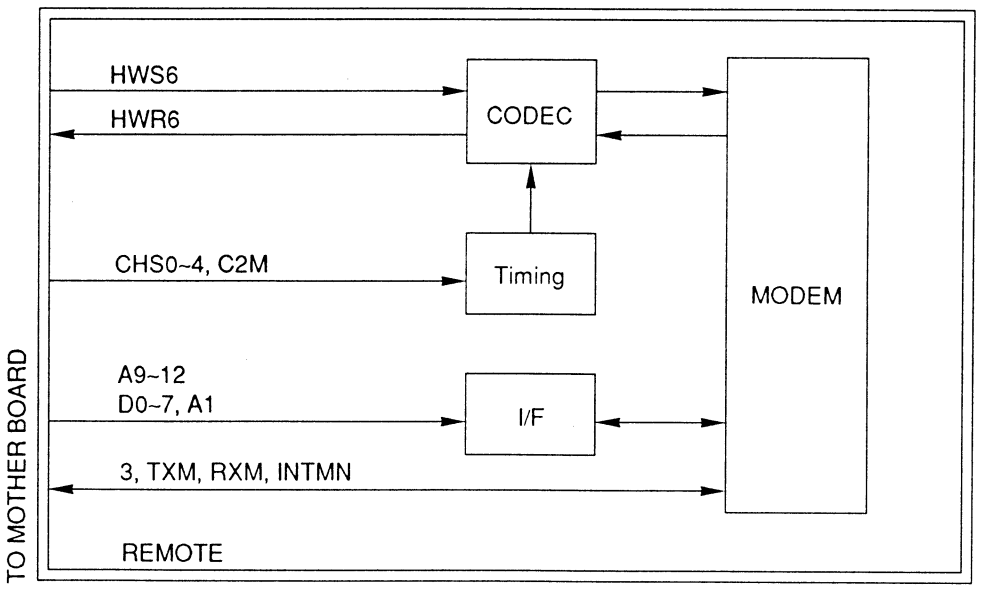

5) DISA CARD (KX-TD191)

DISA CARD consists of the following.
CPU Circuit
Parallel FIFO (First In First Out) Memory Circuit
ADPCM CODEC Circuit
OGM (Out Going Message) Memory Circuit
DTMF Repeat Circuit
End of Call Detection Circuit
Highway Control Circuit
Timing Signal Generator Circuit

■ CPU Circuit

Composition:

68C03	8 bit CPU (IC1)
ROM	32 kbite (IC2)
SRAM	8 kbit (IC3)

IC7, IC25, IC27, IC32, IC36, IC46

Circuit Operation:

This circuit is a circuit which controls the DISA CARD according to the program in the ROM (IC2) by the CPU (IC1). It is connected with main CPU on CPU CARD through the Parallel FIFO Circuit, and controls this card by following the commands from the main CPU.

■ Parallel FIFO Memory Circuit

Composition:

Gate Array (IC5)
IC6, IC37, IC38, IC39, IC40, IC41

Circuit Operation:

Parallel FIFO Memory Circuit is a circuit which functions the data communication interface between the DISA-CPU and the main CPU on CPU CARD. This circuit has each 16 bite buffer in the up and down directions.
This FIFO memory is functioned by Gate Array (IC5).

■ ADPCM CODEC Circuit

Composition:

ADPCM IC	(IC53, IC54)
CODEC IC	(IC57, IC58, IC61)
AGC Circuit	(IC70, Q7, Q8, etc.)
Path Selector	(IC37, IC38, IC42, IC43, IC)

Circuit Operation:

This circuit is a circuit which converts the ADPCM data of OGM (Out Going Message) stored in RAM (IC48, IC49) into the PCM CODEC data, and presents to UHW 0 of the up highway.
Two of this circuit are installed on one card, and one of them has the OGM recording function as well. In another words, it takes in the PCM CODEC data on DHW 6 of the down highway through the AGC circuit and converts to the ADPCM codes.
The data transmission between this circuit and RAM (IC48, IC49) is done by CPU (IC1). The transmitting rate is 1 Bite/250 μS. This circuit is composed of the ADPCM IC with serial/parallel converter and parallel/serial converter (IC53, IC54), CODEC IC (IC57, IC58, IC61) and the AGC Circuit (only one circuit).
The coding rate of ADPCM is 32 Kbps.

■ **OGM Memory Circuit**

Composition:

SRAM 2 Mbit (IC48, IC49)
Battery (BAT), etc.

Circuit Operation:

This circuit is RAM (IC48, IC49) which is stored the ADPCM data of OGM by CPU (IC1). With 2 Mbit capacity, two messages each for 32 seconds can be recorded. This circuit is backed up by battery (BAT).

■ **DTMF Repeat Circuit**

Composition:

CODEC IC (IC20, IC21)
Filter IC (IC13, IC14)
DTMF Transceiver IC (IC9, IC10)

Circuit Operation:

This circuit is a circuit which receives the DTMF signal (IC9, 10) through the highway (IC20–IC13, IC21–IC14) once and resends (IC9, 10) to the highway (IC20, IC21) to cover the level reduction of the DTMF tone caused by the line loss during CO-CO call. Normaly, output of this circuit is open, and once it detects the DTMF signal (IC9, 10) at CO-CO call, the output connects with UHW 6 of the up highway and then resends the DTMF signal (IC9, 10).
Also this circuit is used as the DTMF receiver (IC9, 10), and receives the secondary dial when the DISA signal incoming.
Two of this circuit are installed on one card (TS16, TS18 of DHW6).

■ **End of Call Detection Circuit**

Composition:

PI0 (IC4)
IC24, IC26, IC28, IC30, etc.

Circuit Operation:

This circuit is a circuit which detects the end of call at CO-CO call.
It converts whether the voice exits or not into the logic level (IC24, 26, 28, 30), then presents it to CPU (IC1) through P10 (IC4). There are three methods for detecting the end of call as follows.

- No tone detection
- Cyclic tone detection
- Continuous tone detection

The four of this circuit are installed corresponding to each time slot of TS16~19.

■ **Highway Control Circuit**

Composition:

IC37, IC42, IC43, IC67, IC71

Circuit Operation:

This circuit is a circuit which transfers the data in the HWS 6 of the down highway onto HWR 6 of the up highway for calling between CO and CO. TS16~19 are controlled individually.
The CPU (IC1) controls the gate IC (IC34, 42, 43, 67, 71) through PI0 (IC4), connects DHW 6 and UHW 6.

■ **Timing Signal Generator Circuit**

Composition:

IC39, IC40, IC62, IC63, IC64, IC65

Circuit Operation:

This circuit is a circuit which generates the timing signals for using for ADPCM, CODEC Circuit and Highway Control Circuit. These signals are generated from the channel select signals (CH0~4) and the highway clock (C2M, C4MN) which are presented from the CPU CARD.

DISA BLOCK DIAGRAM

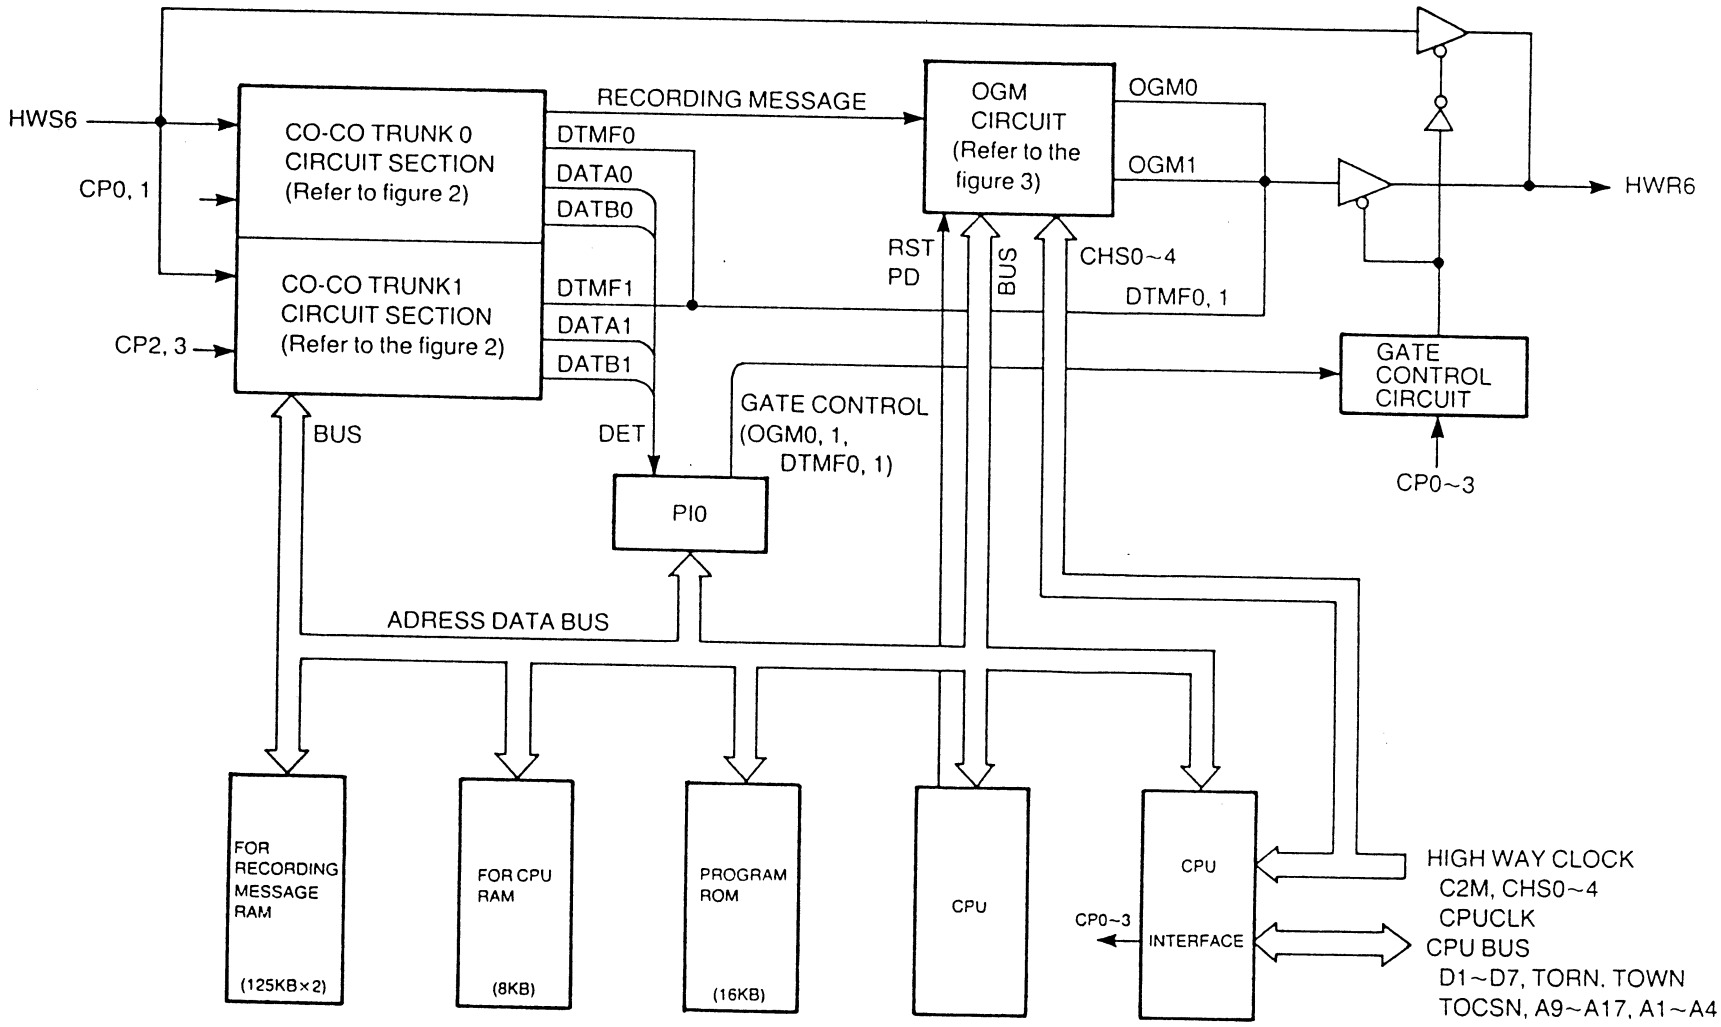

Figure 1

CO-CO TRUNK 0, 1 CIRCUIT

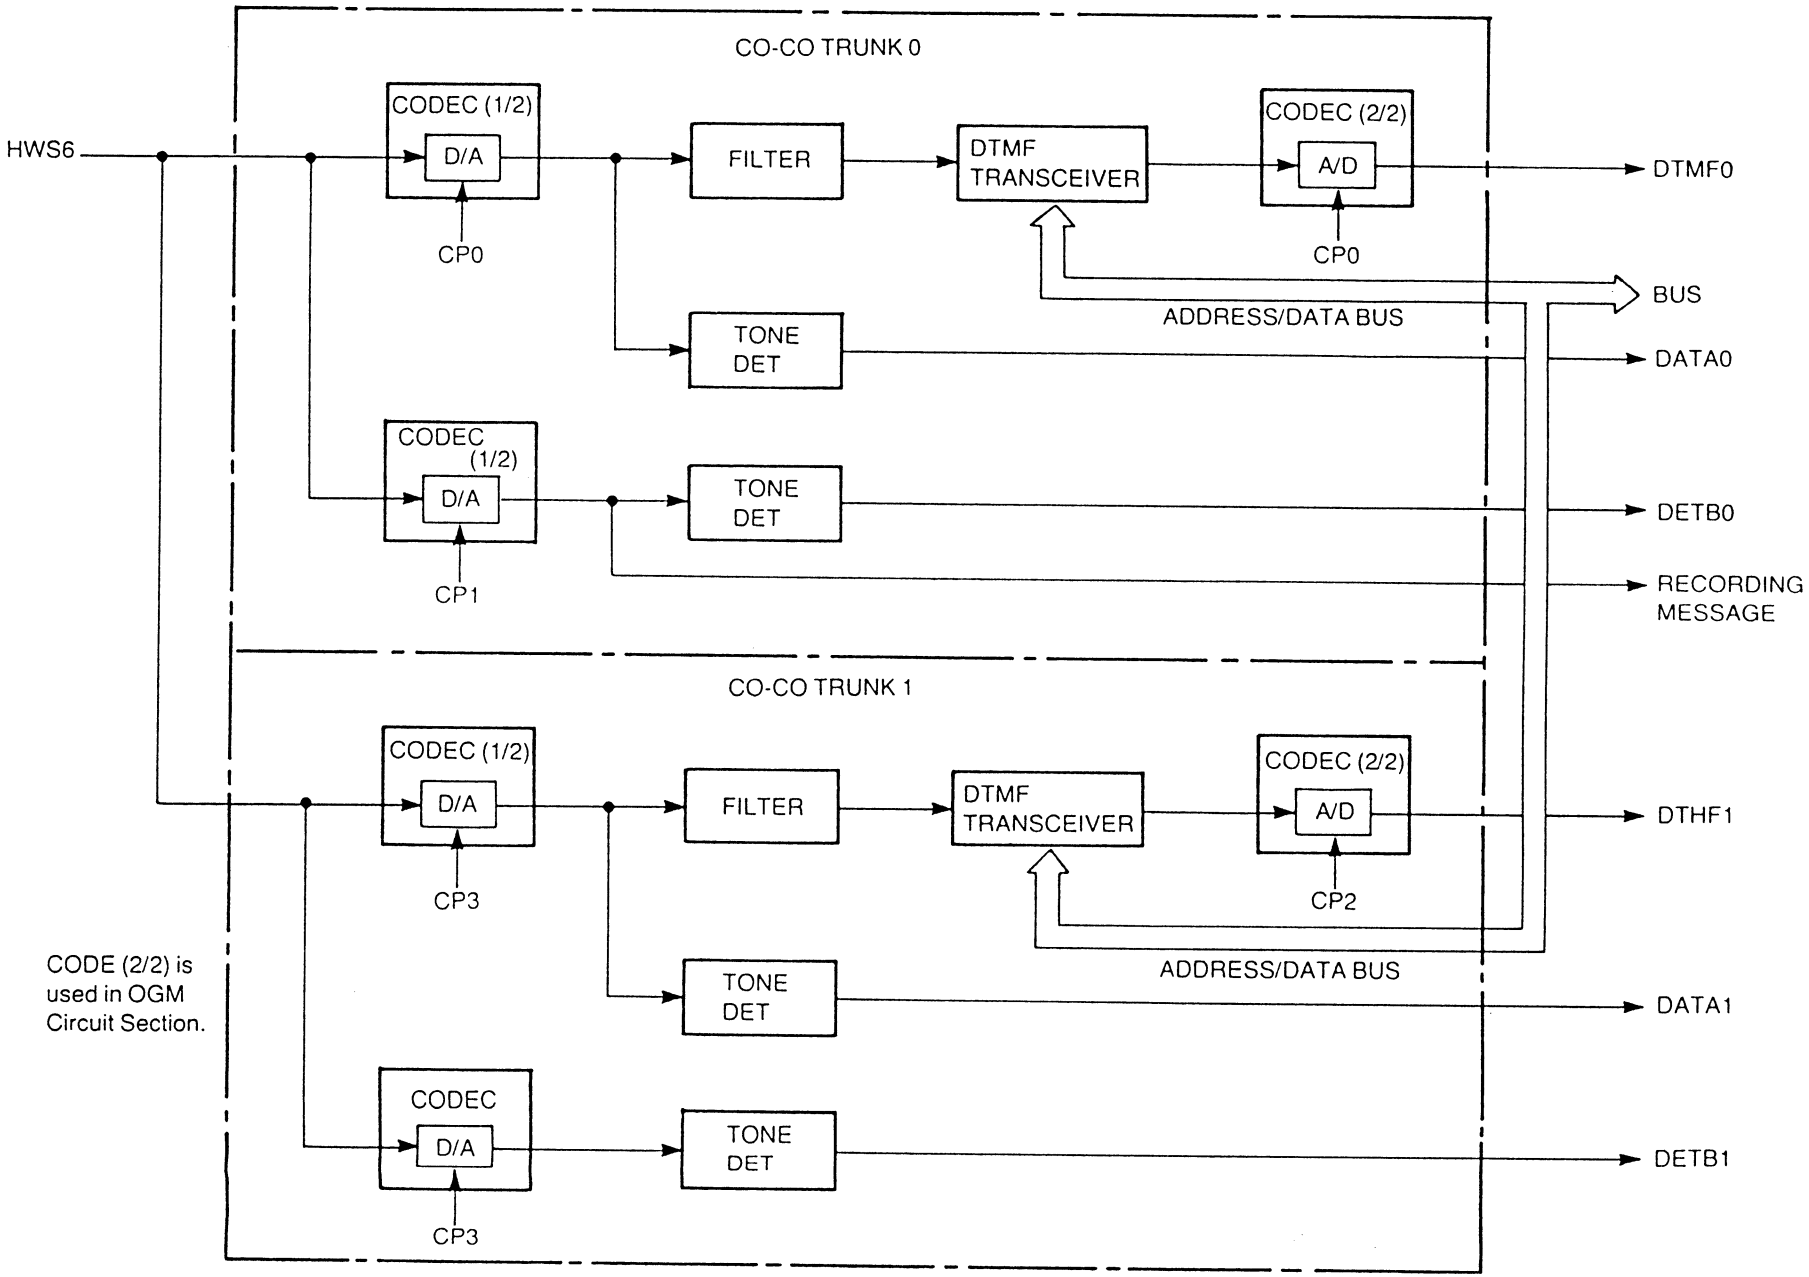

OGM CIRCUIT SECTION

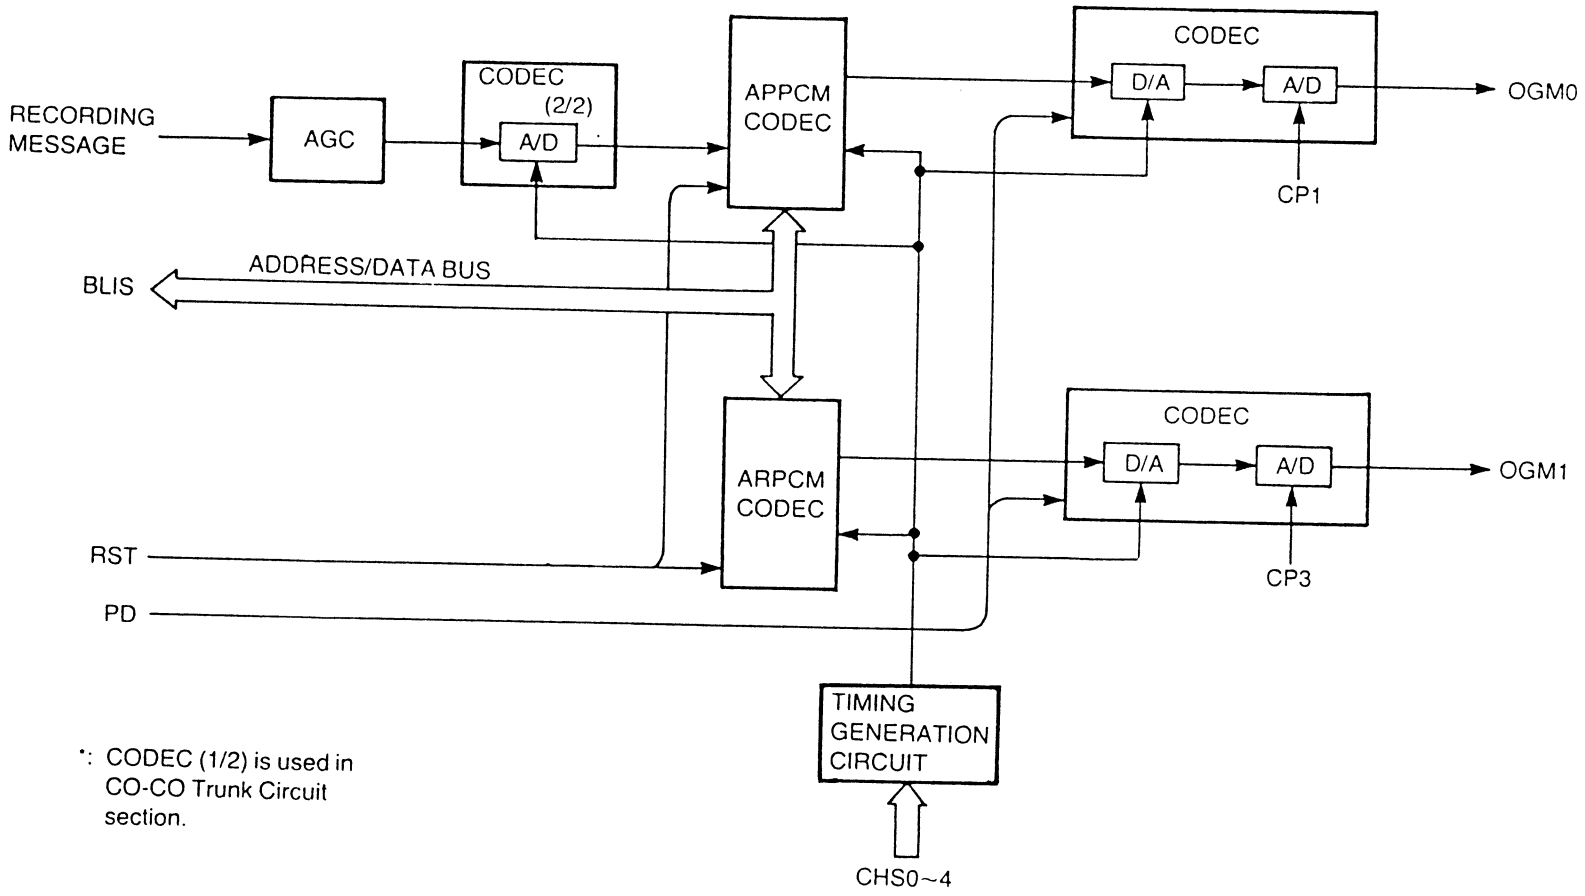

*: CODEC (1/2) is used in CO-CO Trunk Circuit section.

6) SYSTEM INTERCONNECTION CARD (KX-TD192)

SIC CARD consists of the following.
HDLC Controller
Timing Signal Generator Circuit
Sending and Receiving Circuit
Clock Guard Circuit

■ HDLC Controller

Composition:
HDLC Controller IC (IC115)

Circuit Operation:
HDLC Controller is a circuit which performs the conversion of the data format according to the HDLC protocol between main CPU on CPU CARD and the PCM highway connected with another system. It works as the serial/parallel converter at the same time.

■ Timing Signal Generator Circuit

Composition:
IC117, IC119

Circuit Operation:
This circuit generates the frame pulse which are presented to the another system, and also generates the signals for the data transmission between the HDLC controller and the PCM highway. These signals are generated from the channel select signals (CHS0-4) and the highway clock (C2M, C4MN) presented by the CPU CARD.

■ Sending and Receiving Circuit

Composition:
IC107, IC108, IC109, etc.

Circuit Operation:
This circuit sends the PCM highway, the highway clock and the frame pulse from the system to the another system (IC109), and receives those signals from the another system (IC108). Interface is RS-422.

■ Clock Guard Circuit

Composition:
IC121, IC122, etc.

Circuit Operation:
This circuit watches the PCM highway clock, the highway clock and the frame pulse from another system.

SYSTEM CONNECTION CARD

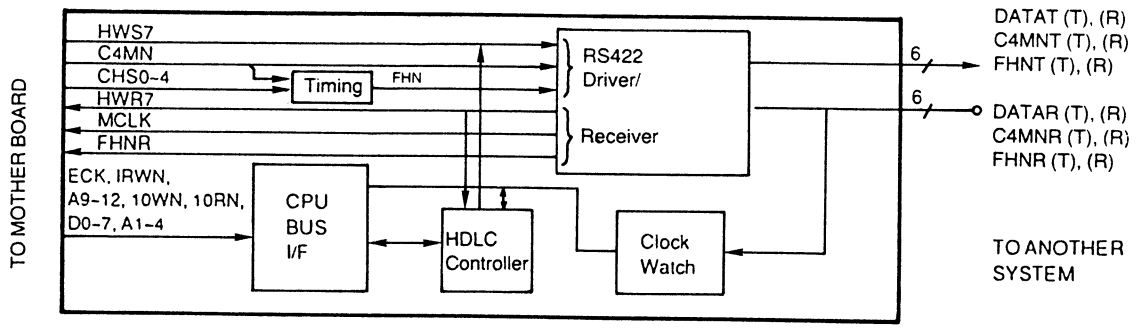

7) CALLER ID CARD (KX-TD193)

CALLER ID CARD consists of the following:
MODEM Signal Receiver Circuit
Serial/Parallel Converter Circuit
Over Voltage Protector Circuit

■ MODEM Signal Receiver Circuit

Composition:
IC301, IC302, IC303, IC304, etc.

Circuit Operation:
This circuit converts the MODEM signals sent between the bell signals into the serial signals. The baud rate of the MODEM signals is 300 bps. This circuit is composed of one IC (IC301, IC302, IC303, IC304), and four of this circuit are installed corresponding to each CO line.

■ Serial/Parallel Converter Circuit

Composition:
IC305, IC306, etc.

Circuit Operation:
This circuit converts the serial data presented from the MODEM signal demodulator into the parallel data for the main CPU to read them.
Four of this circuit are installed corresponding to each CO line. Two of this circuit are incorporated in one IC.

■ Over Voltage Protector Circuit

Composition:
D301~316 etc.

Circuit Operation:
This circuit protects the MODEM receiver from the bell signal on the CO line.

CALLER ID CARD

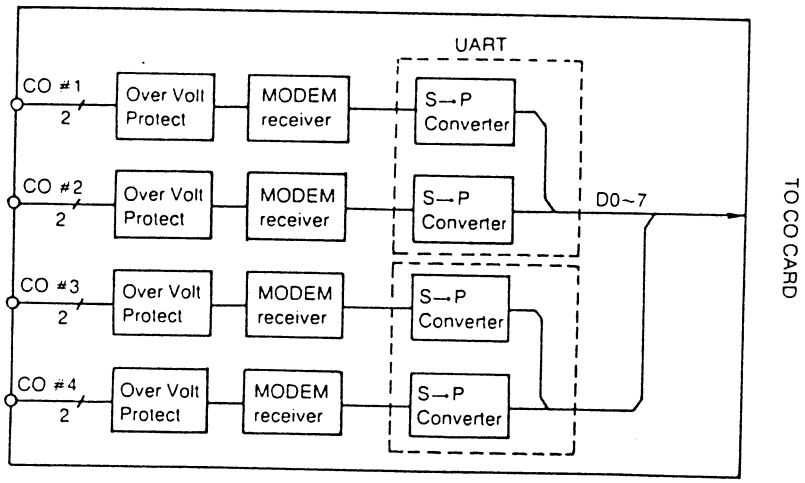

TROUBLESHOOTING GUIDE

1. NO OPERATION (Check Power Unit, CPU Board)

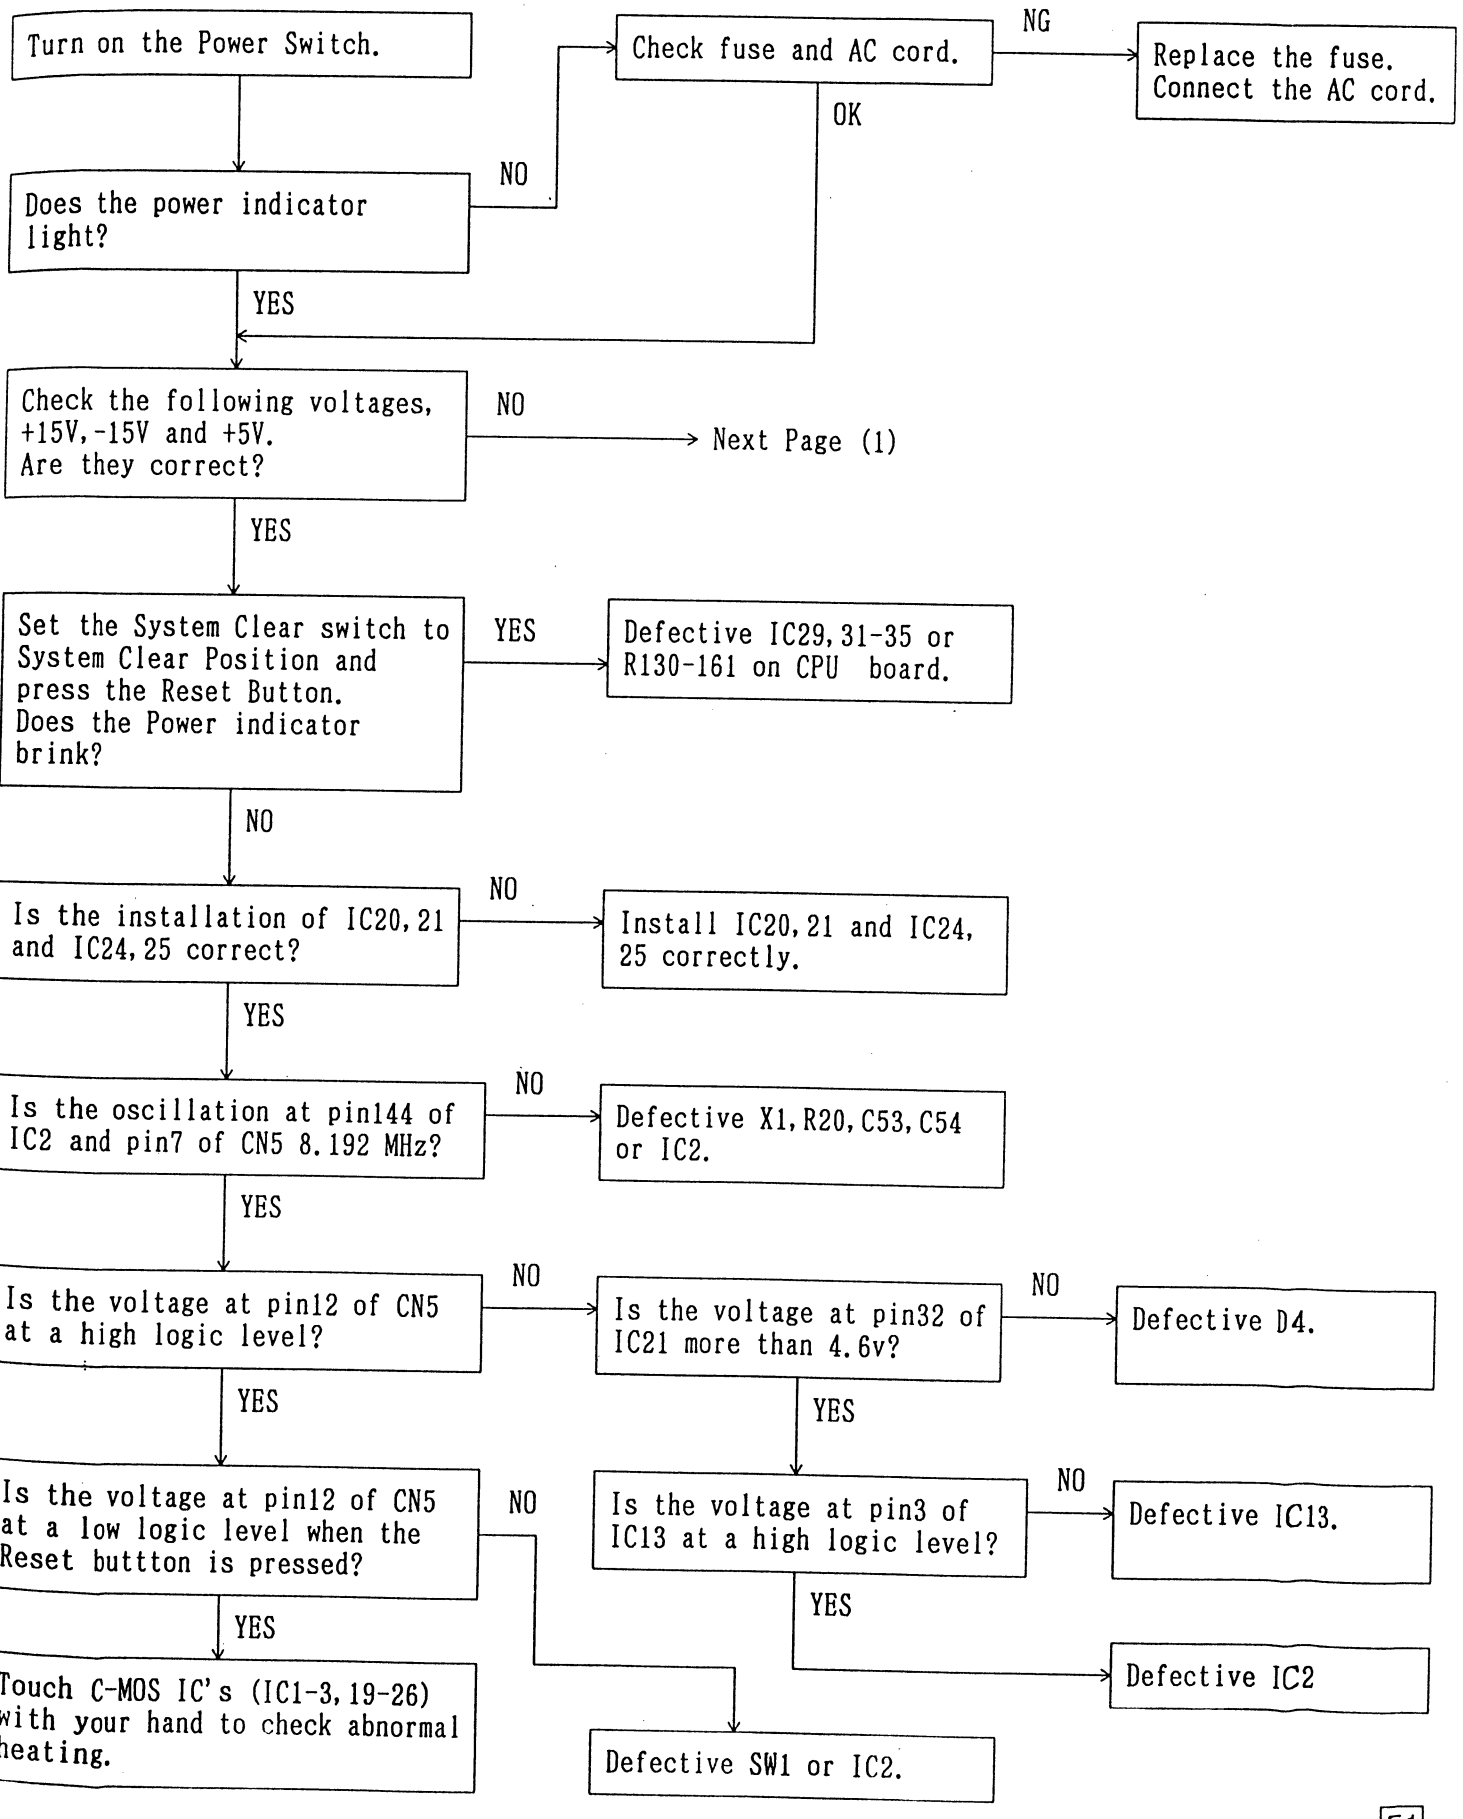

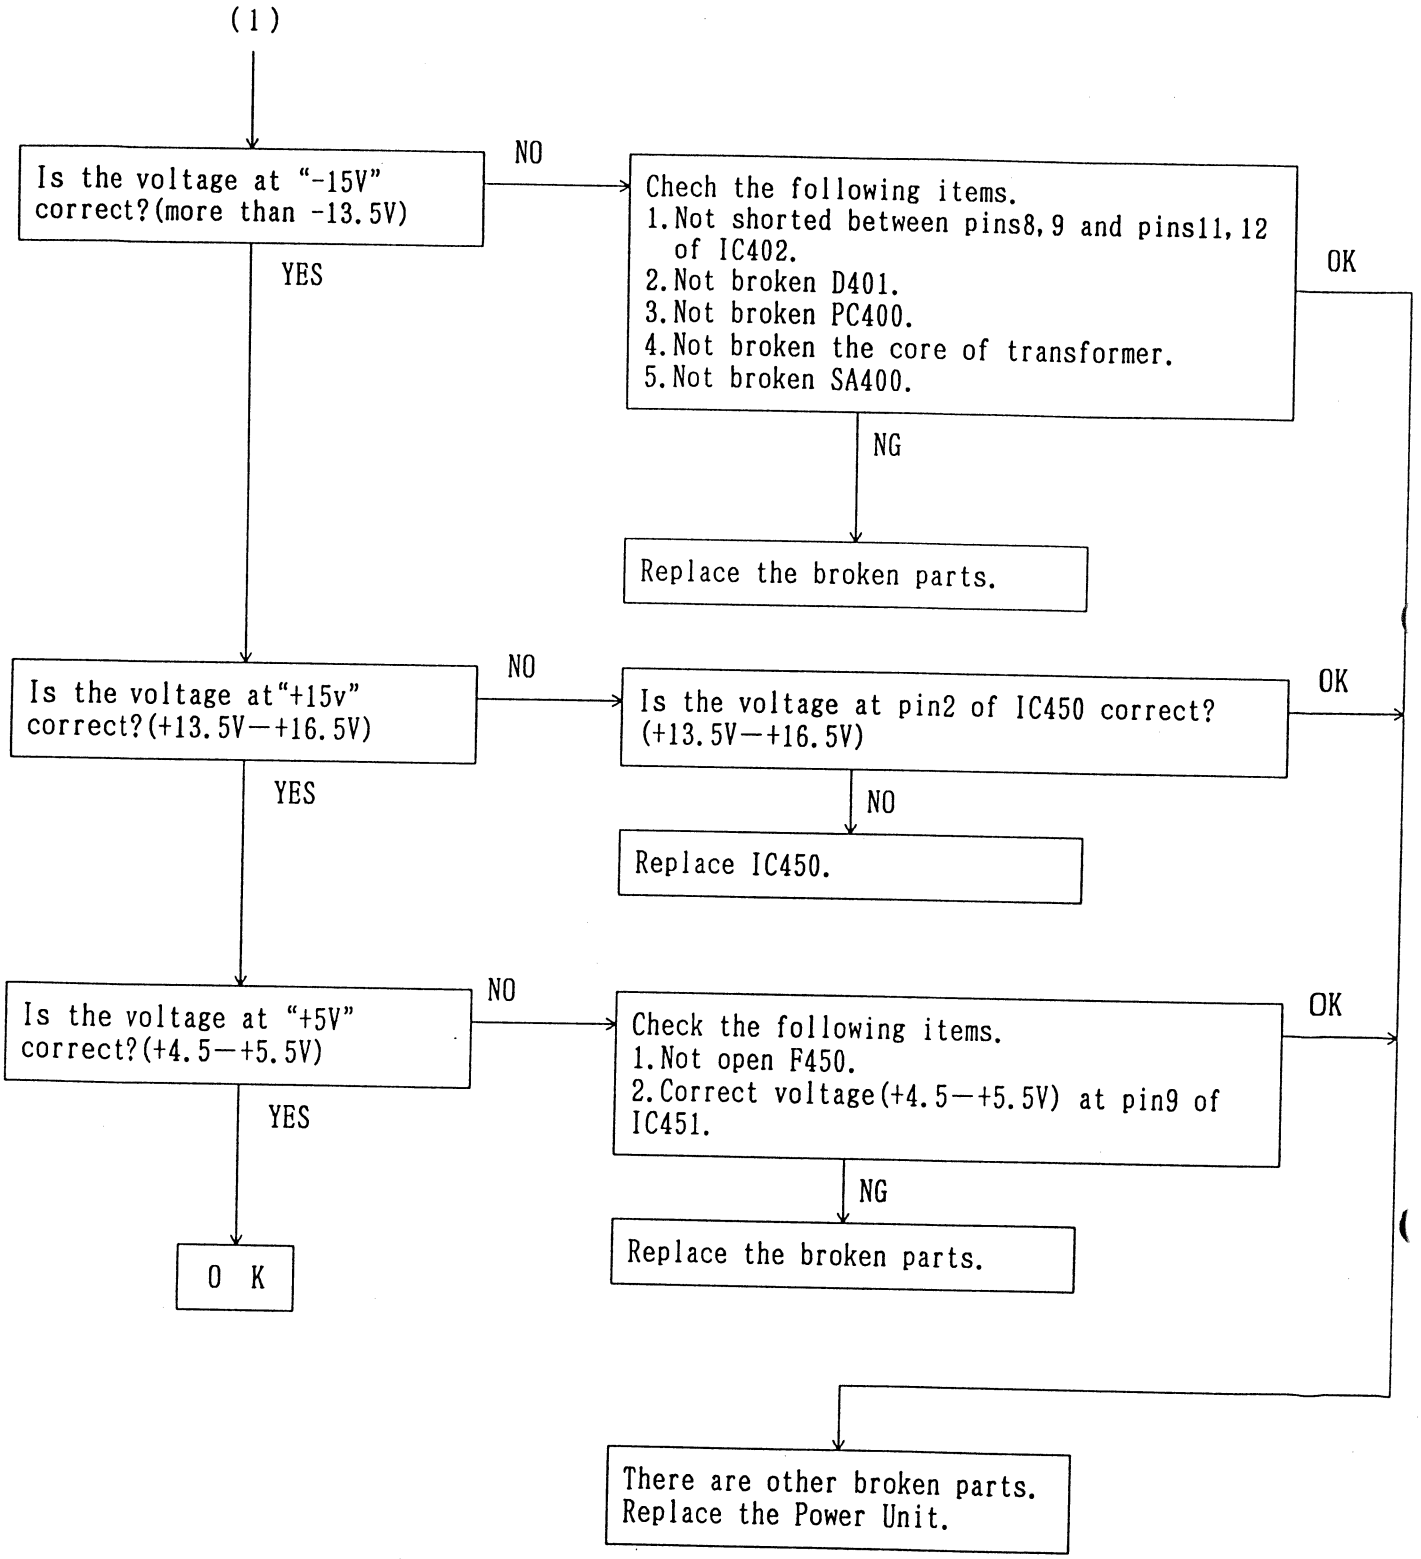
(1)
Is the voltage at "-15V" correct?(more than -13.5V)
NO
Chech the following items.
1.Not shorted between pins8,9 and pins11,12 of IC402.
2.Not broken D401.
3.Not broken PC400.
4.Not broken the core of transformer.
5.Not broken SA400.
OK
NG
Replace the broken parts.
YES
Is the voltage at"+15v" correct?(+13.5V—+16.5V)
NO
Is the voltage at pin2 of IC450 correct? (+13.5V—+16.5V)
OK
NO
Replace IC450.
YES
Is the voltage at "+5V" correct?(+4.5—+5.5V)
NO
Check the following items.
1.Not open F450.
2.Correct voltage(+4.5—+5.5V) at pin9 of IC451.
OK
NG
Replace the broken parts.
YES
O K
There are other broken parts.
Replace the Power Unit.

2. NO DIAL TONE (Check Extension Board)

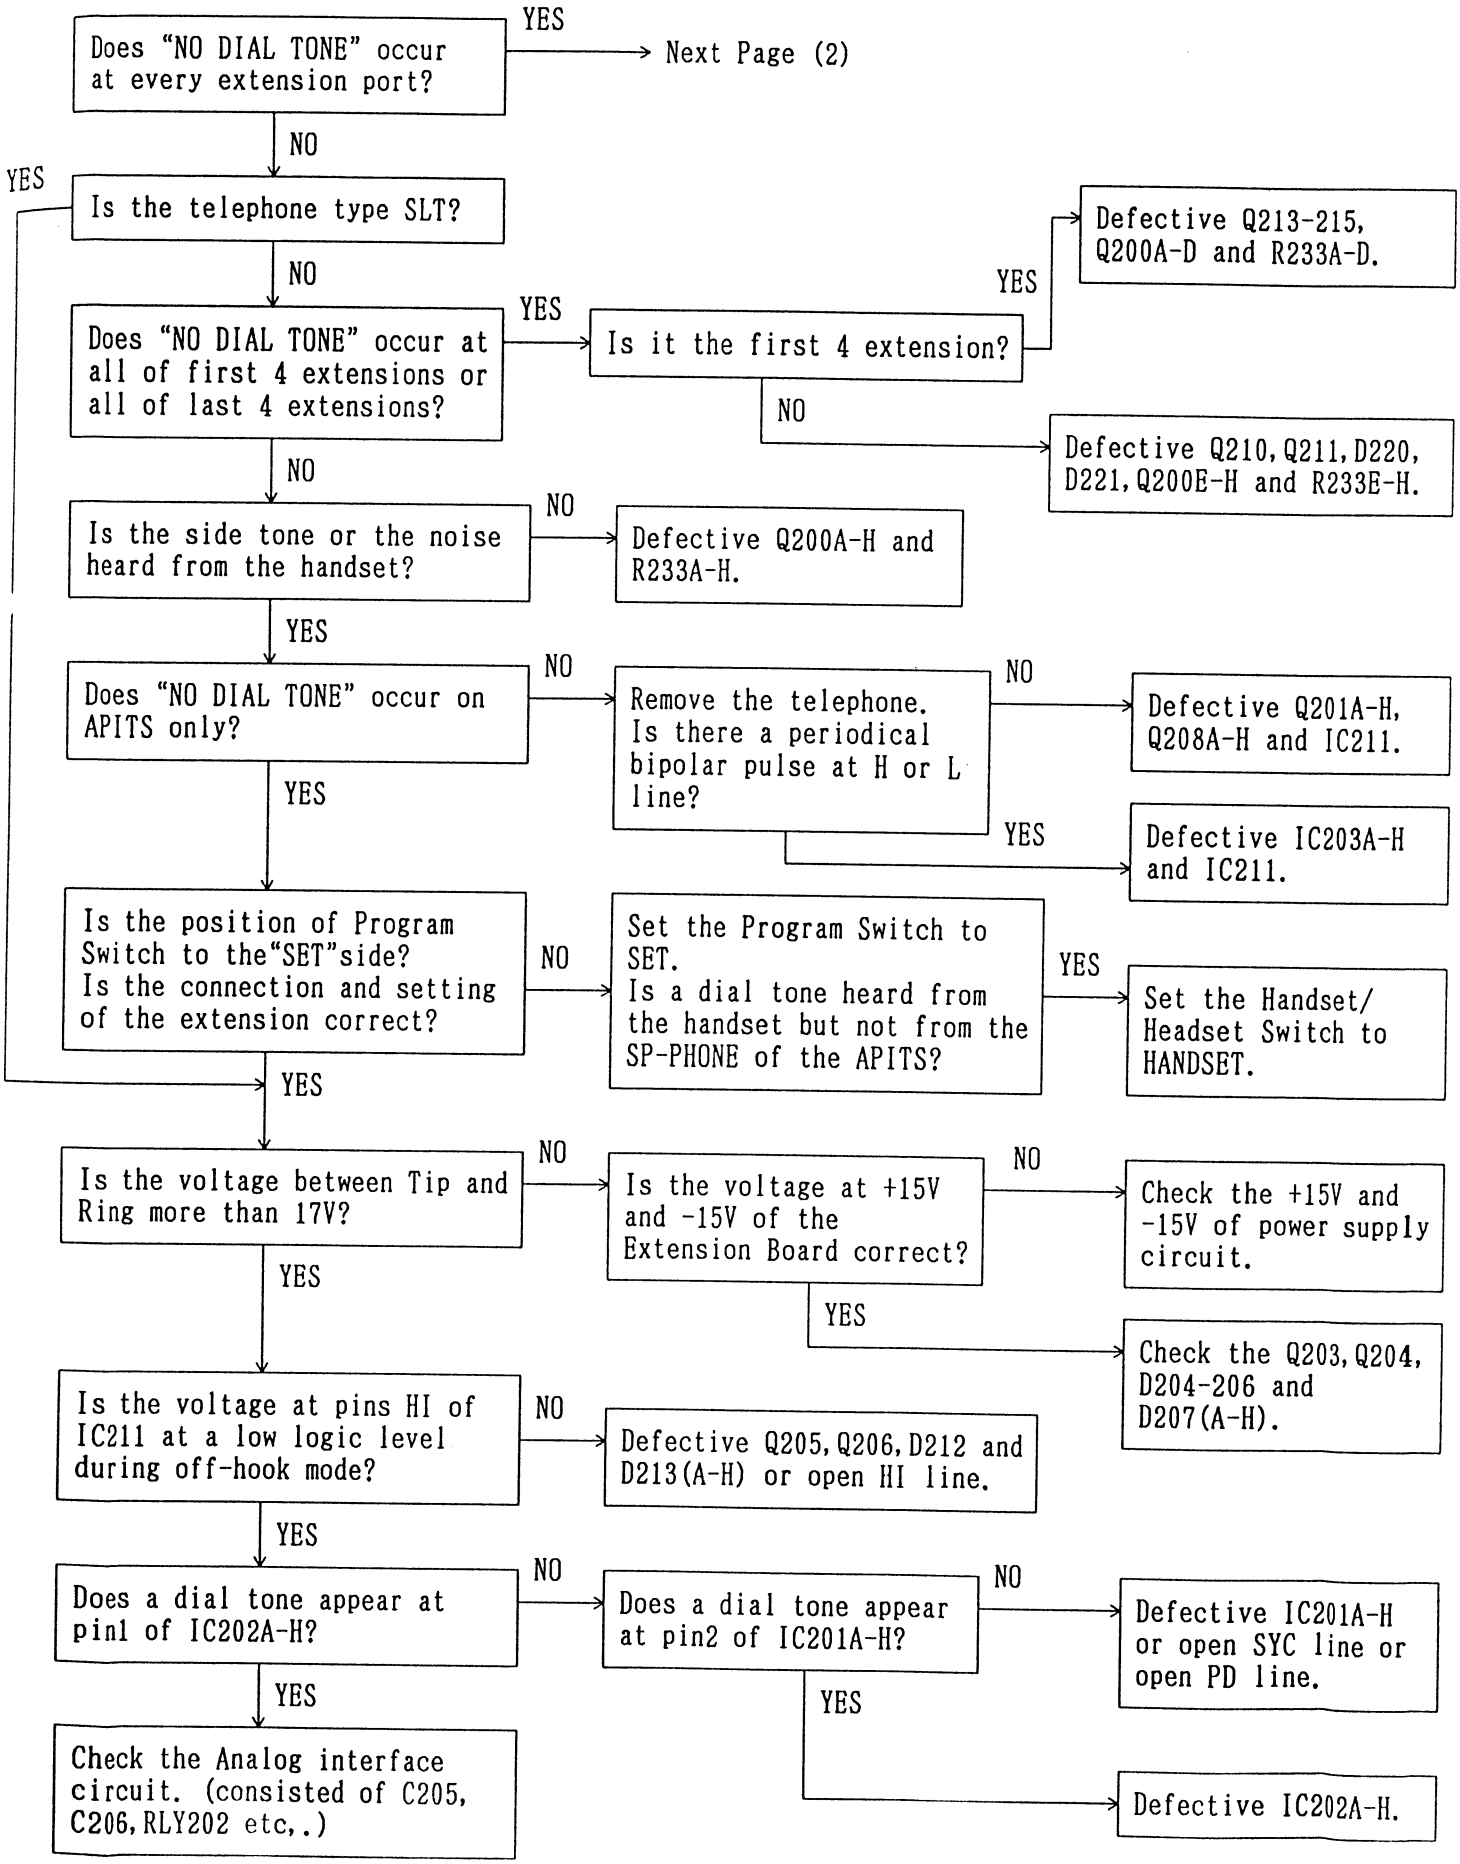

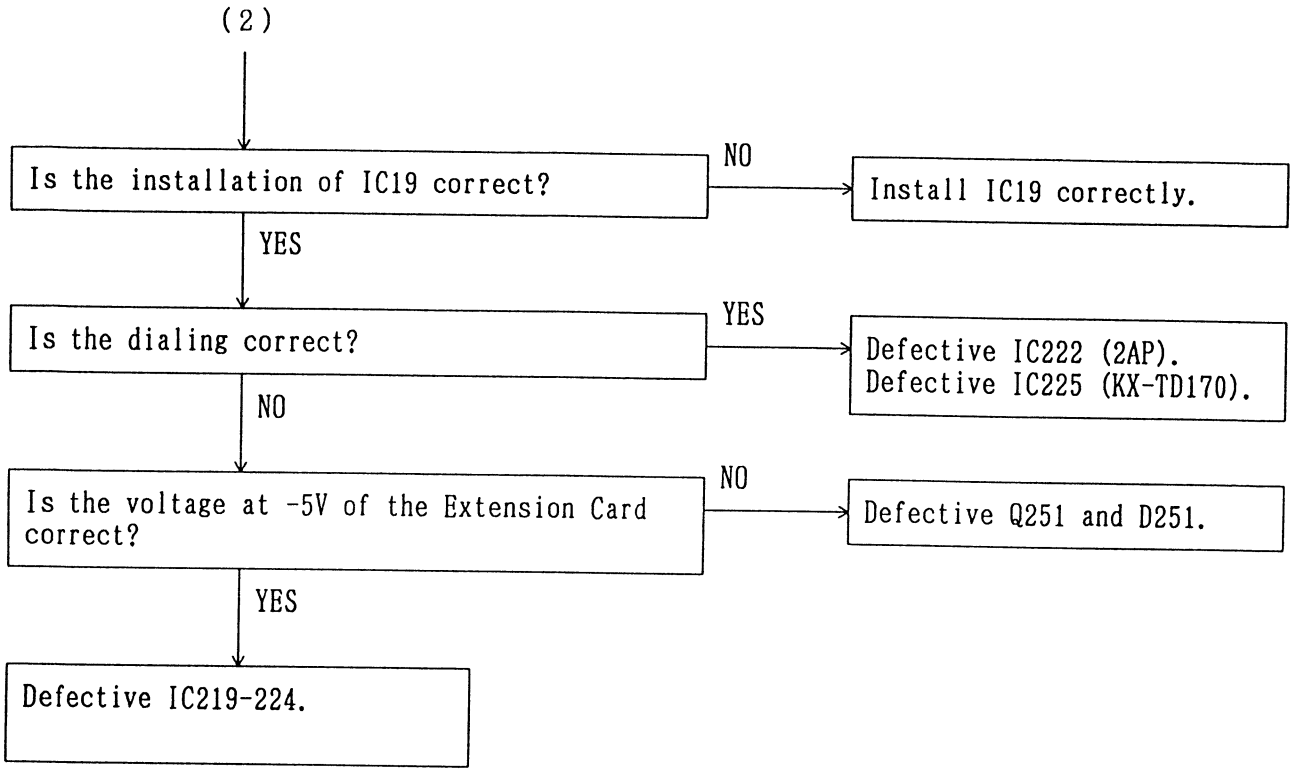
(2)
Is the installation of IC19 correct?
NO
Install IC19 correctly.
YES
Is the dialing correct?
YES
Defective IC222 (2AP).
Defective IC225 (KX-TD170).
NO
Is the voltage at -5V of the Extension Card correct?
NO
Defective Q251 and D251.
YES
Defective IC219-224.

3. CAN NOT DIAL (Check Extension Board)

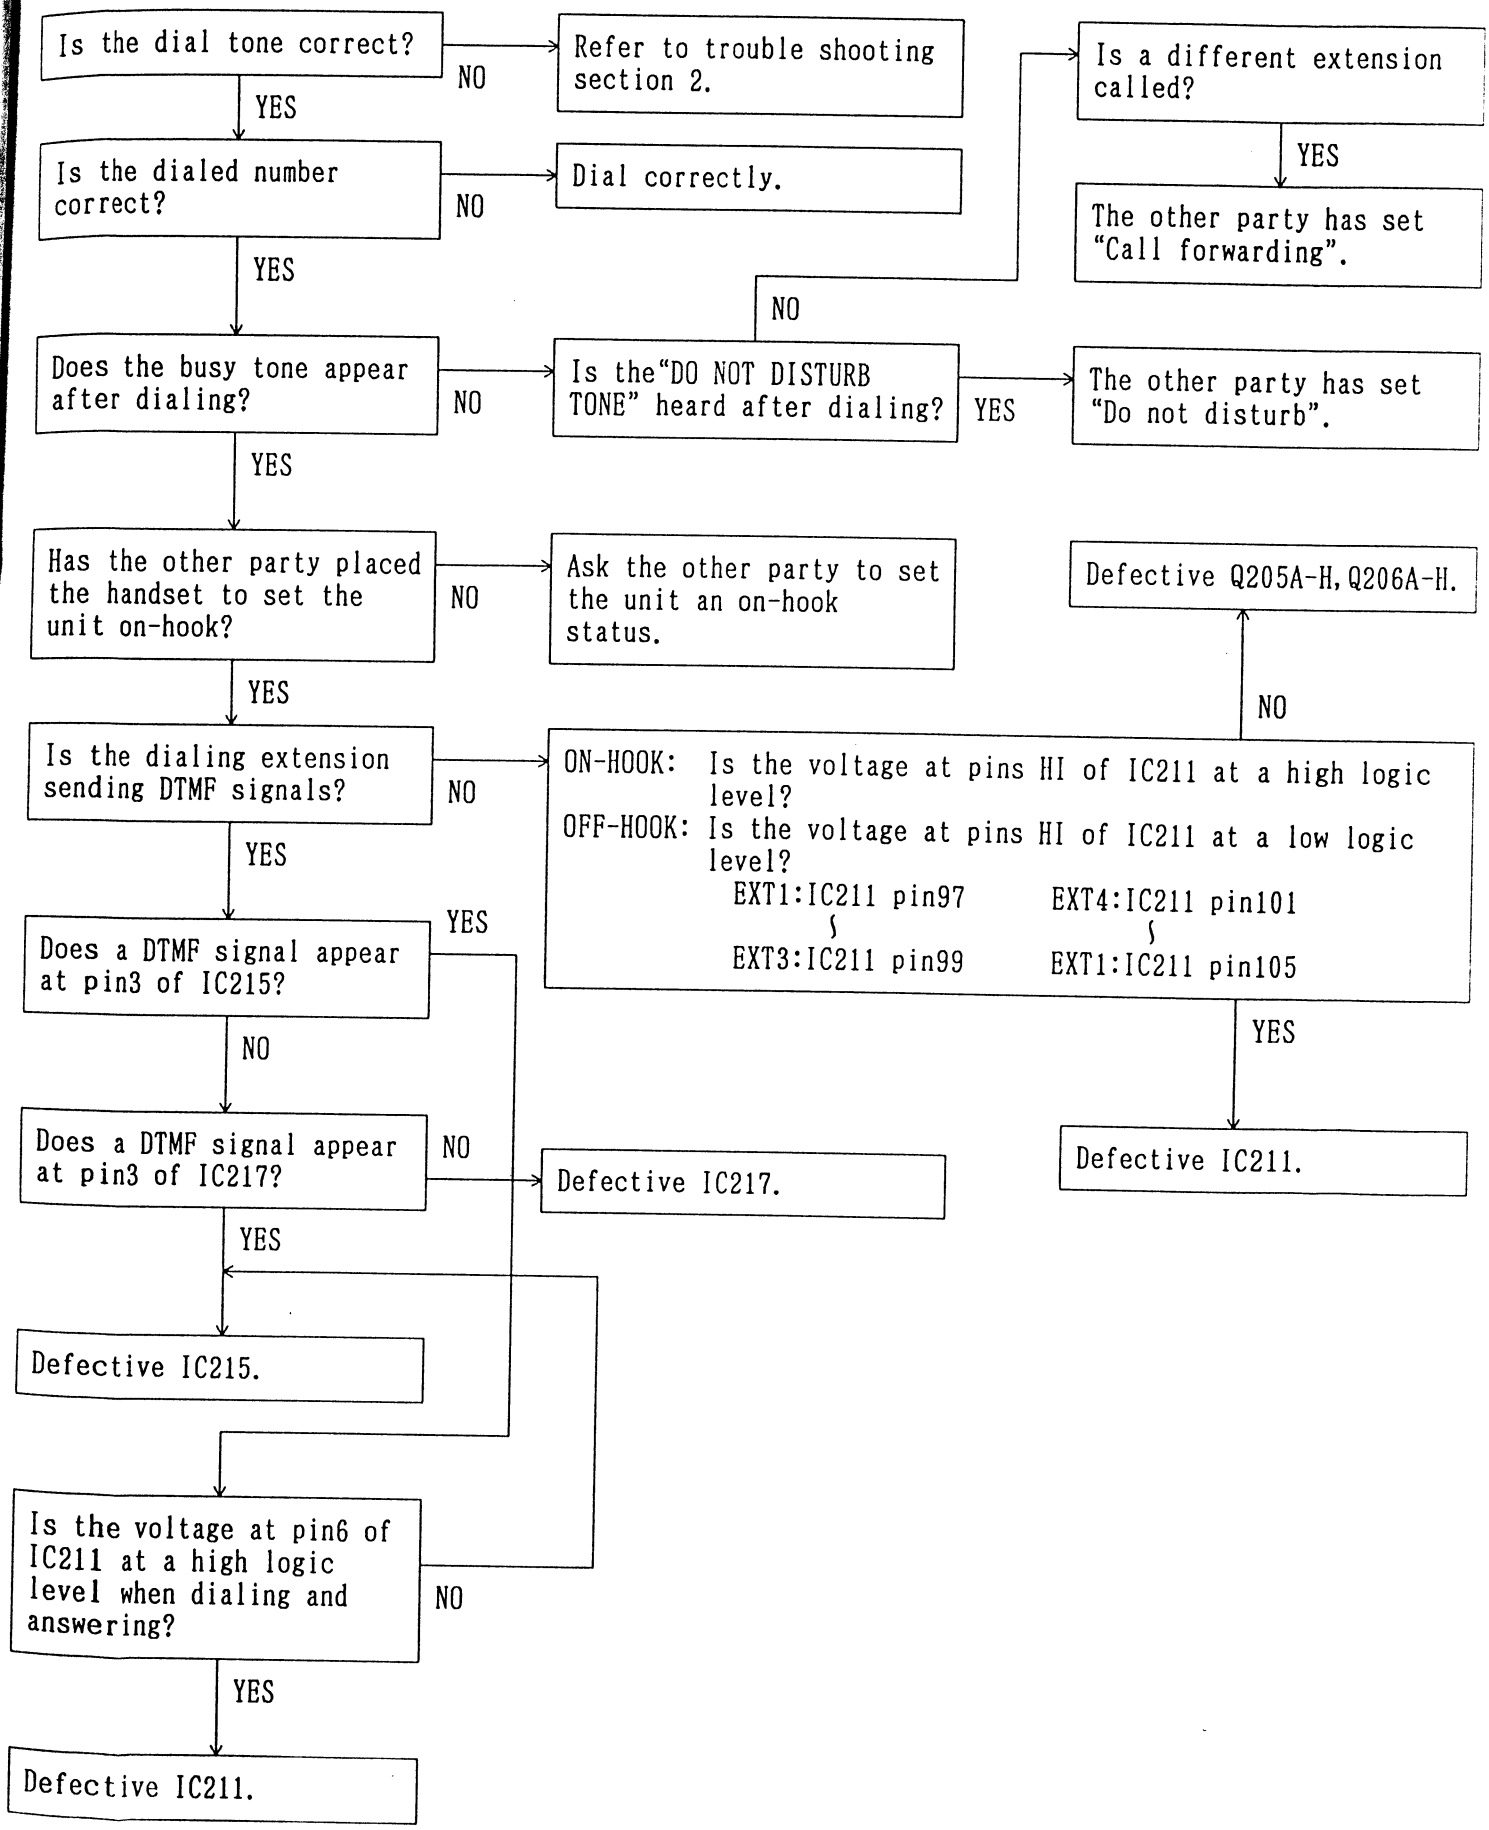

4. CAN NOT ACCESS AN EXTENSION (Check Extension Board, Power Unit and CPU Board)

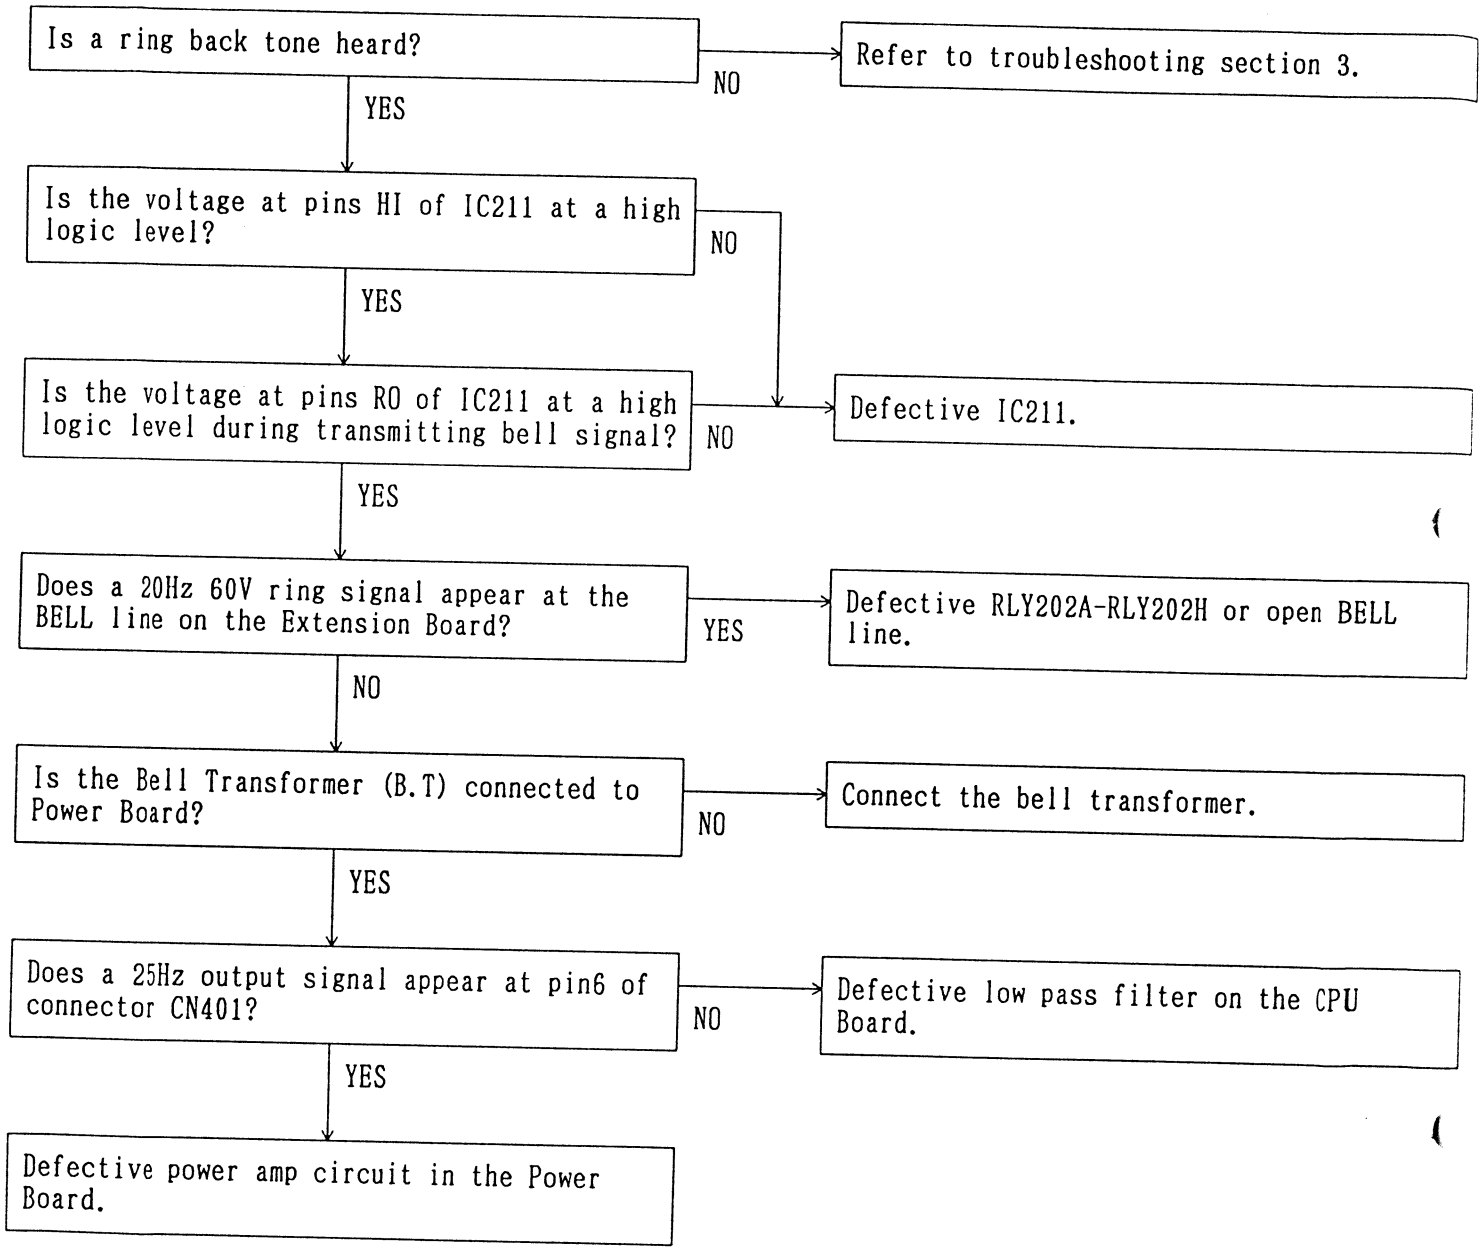

5. CAN NOT SEND A HOLD TONE (Check CPU Board)

5-1 Hold Tone to COL

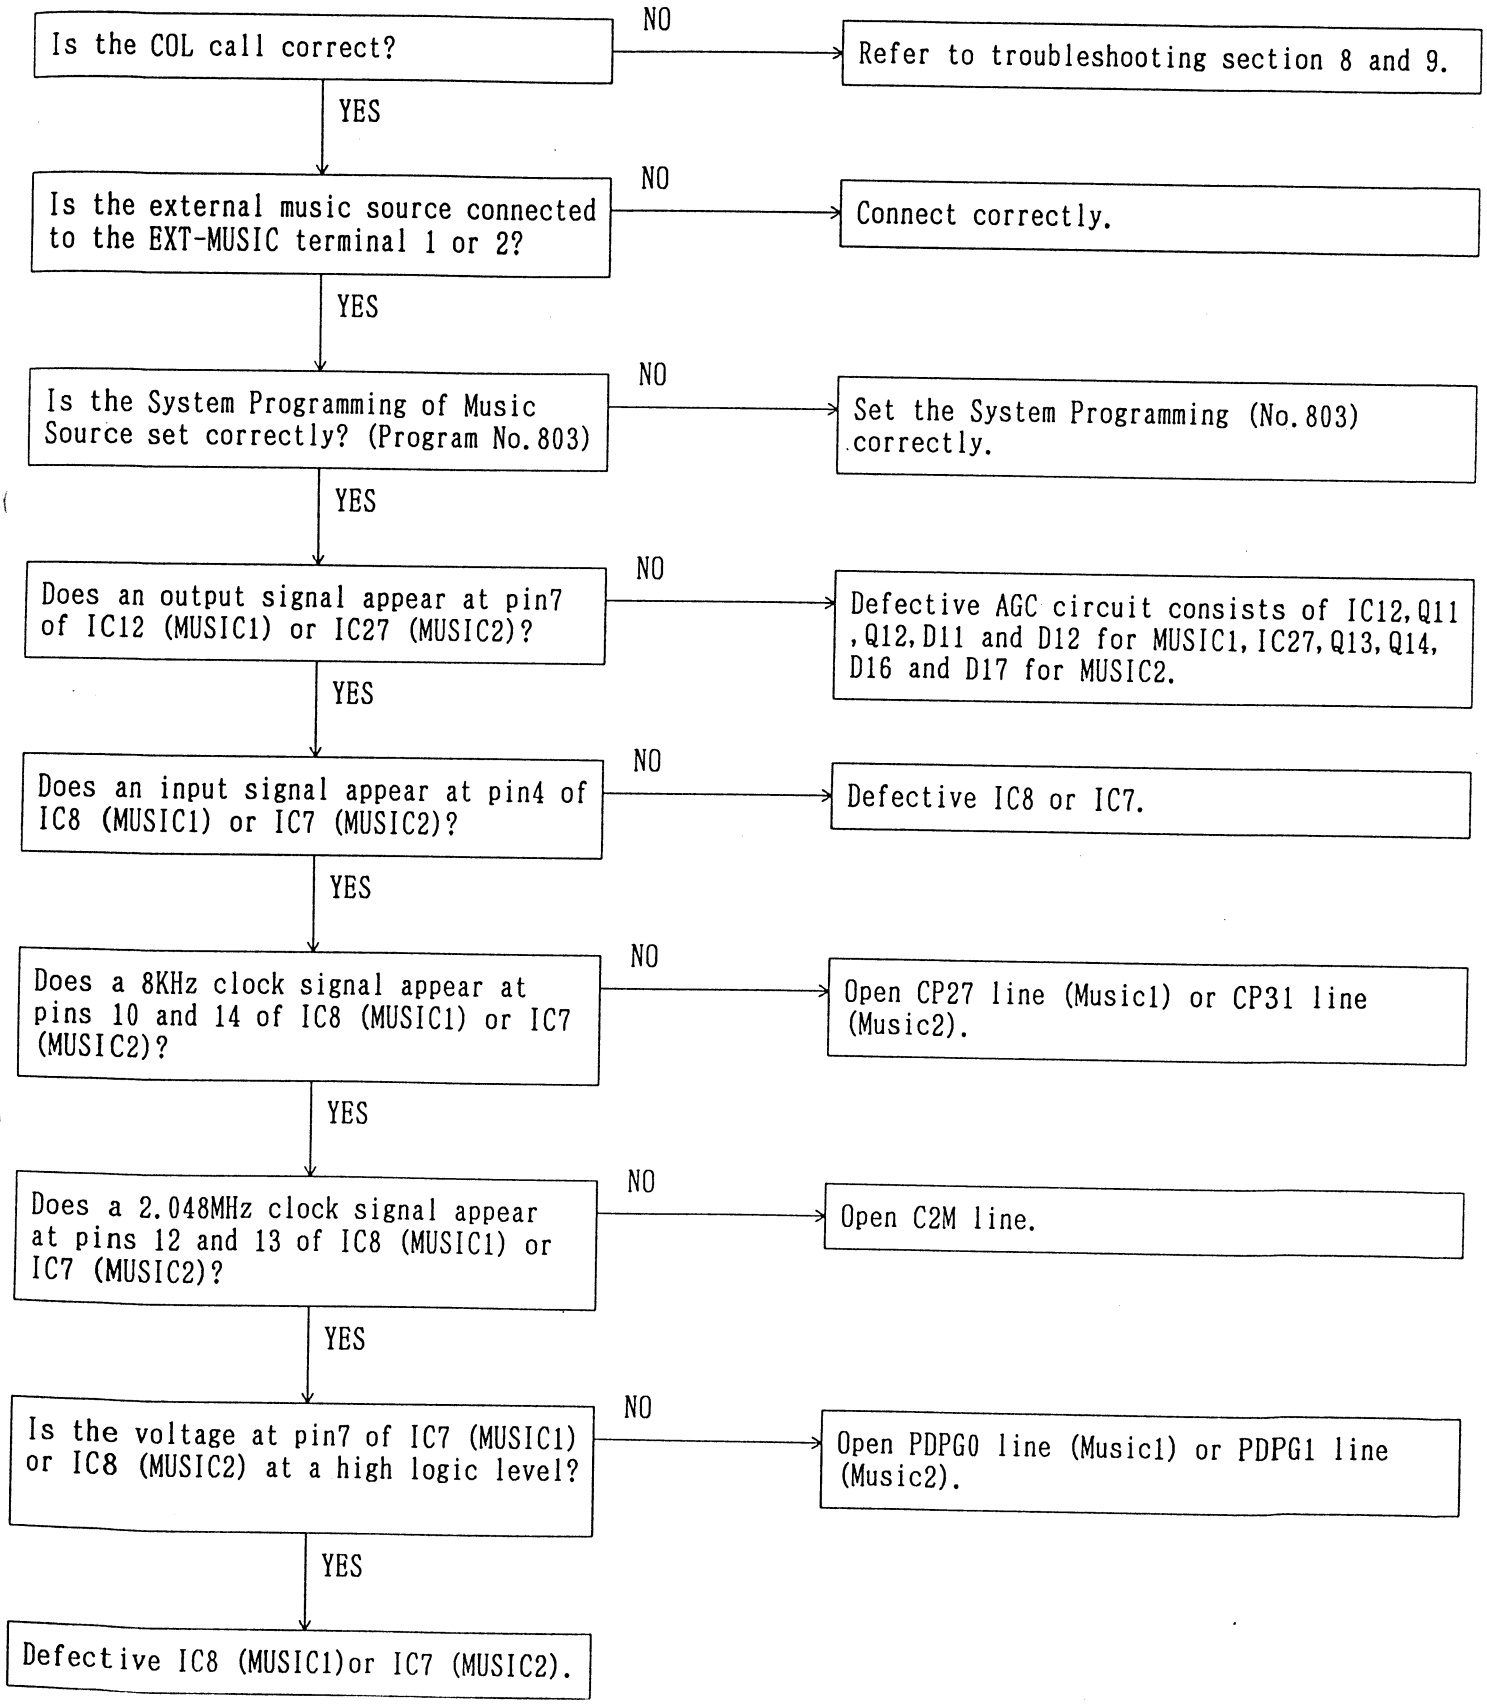

5-2 BGM (Back Ground Music)

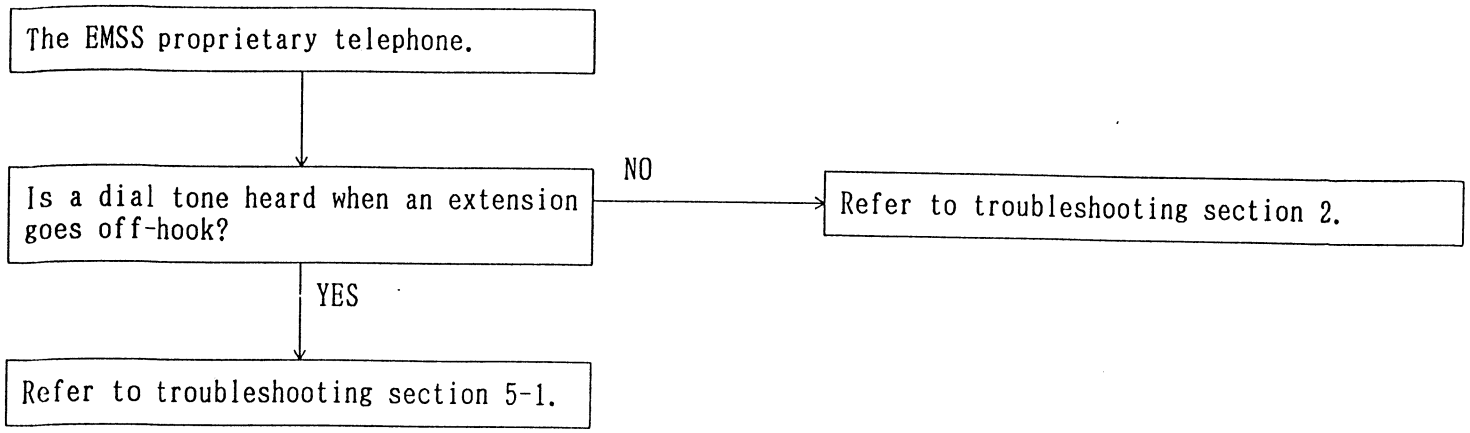

6. TOO MUCH NOISE LEBEL WITH INTERCOM (HUM)
(Check Power, Extension and CO Board)

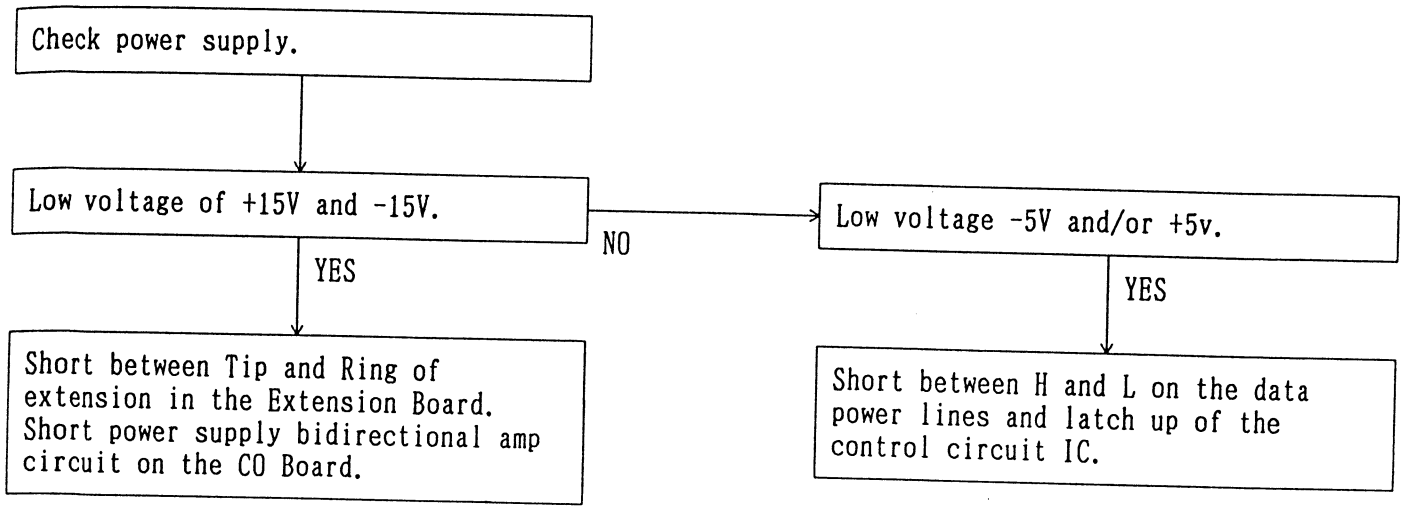

7. COL LINE'S RELEASED DURING A CALL (Check CO Board)

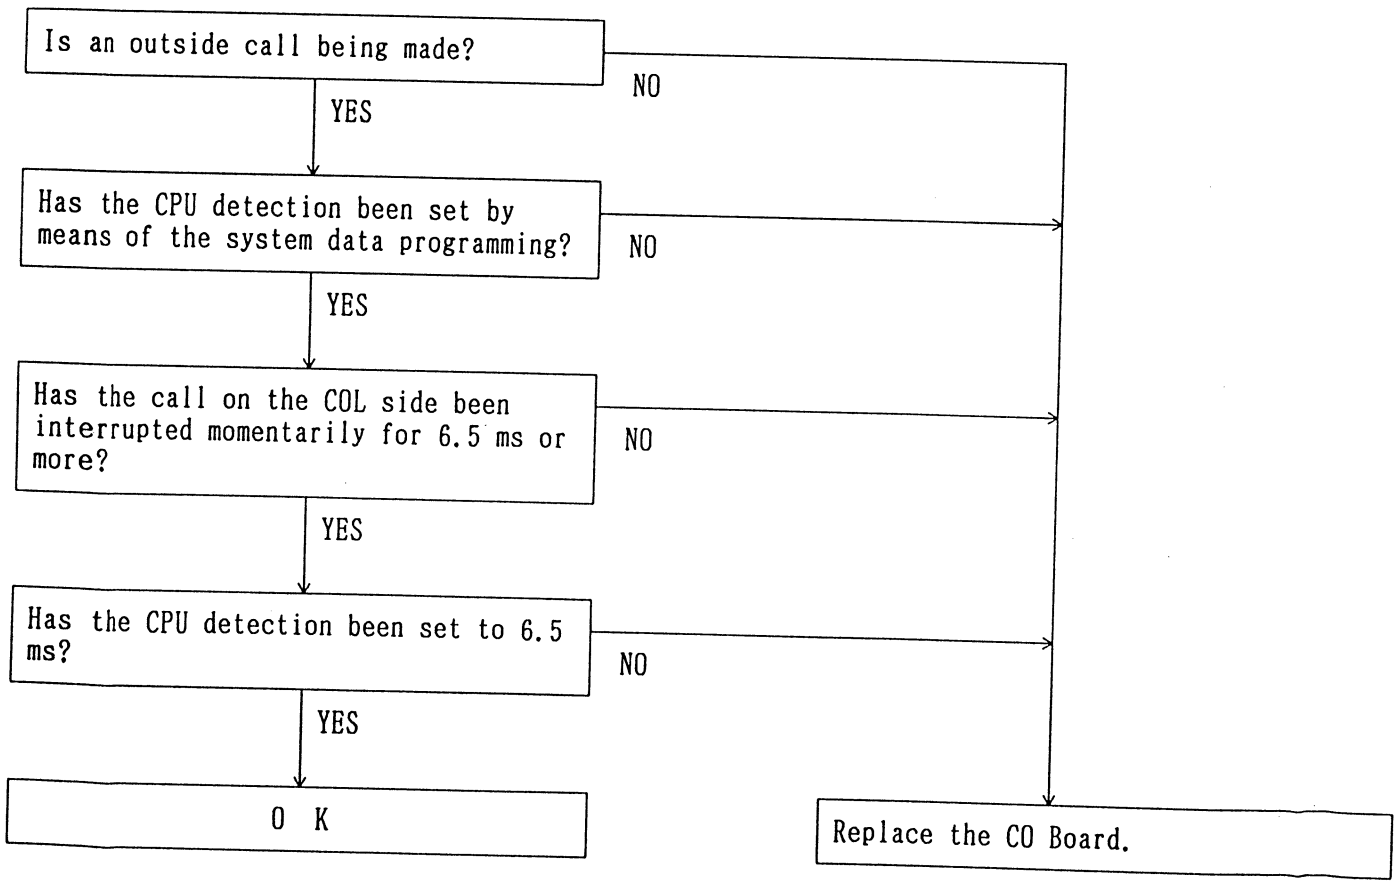

8. CAN NOT RECEIVE COL DIAL TONE (Check CO Board)

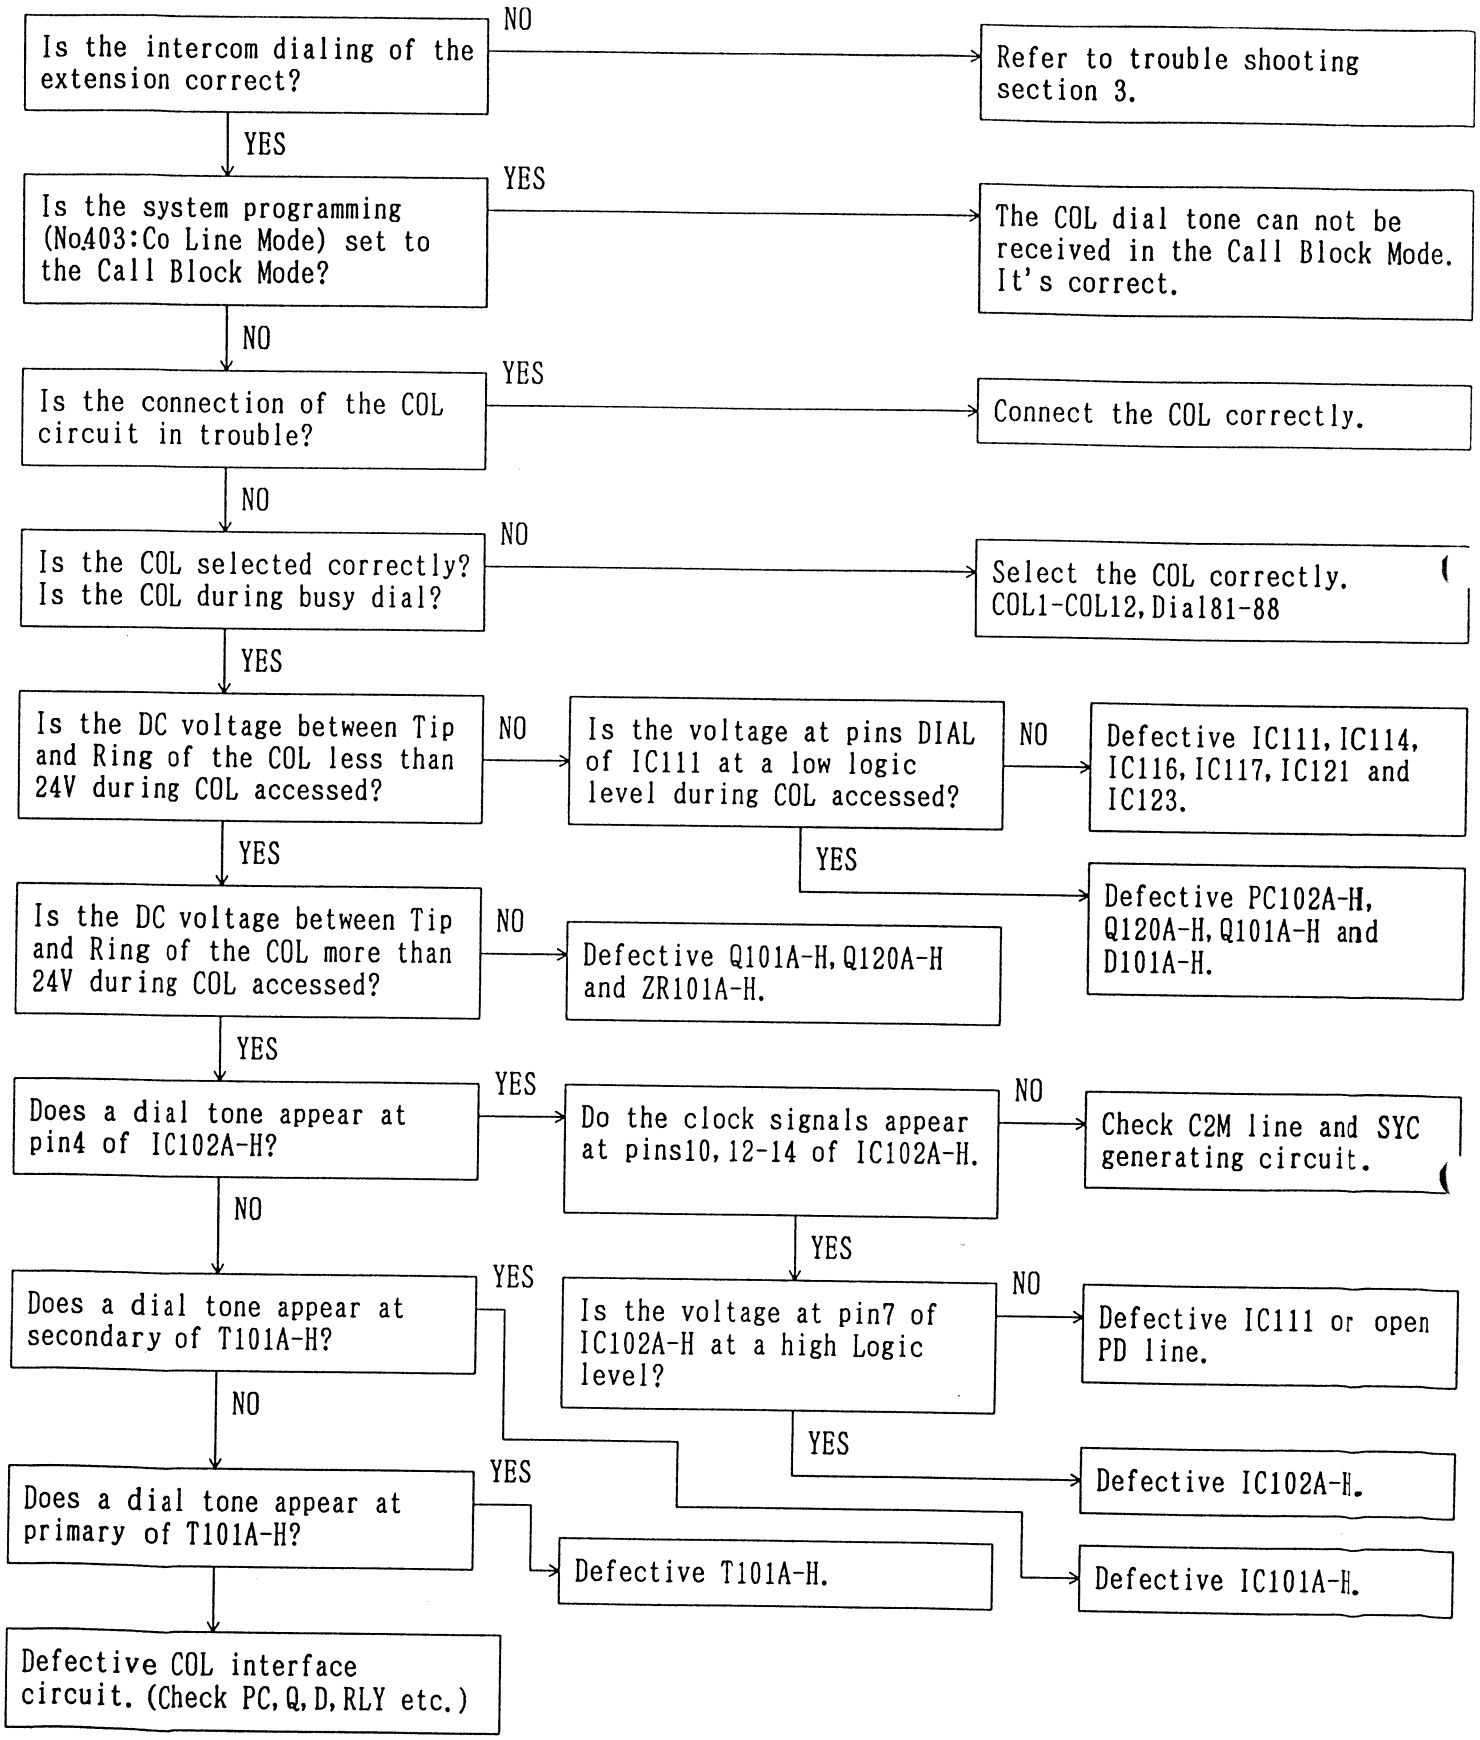

9. CAN NOT SEND DTMF TONES (Check CO Board)
(When Pulse/Tone conversion, Speed dial, One touch dial, Redial)

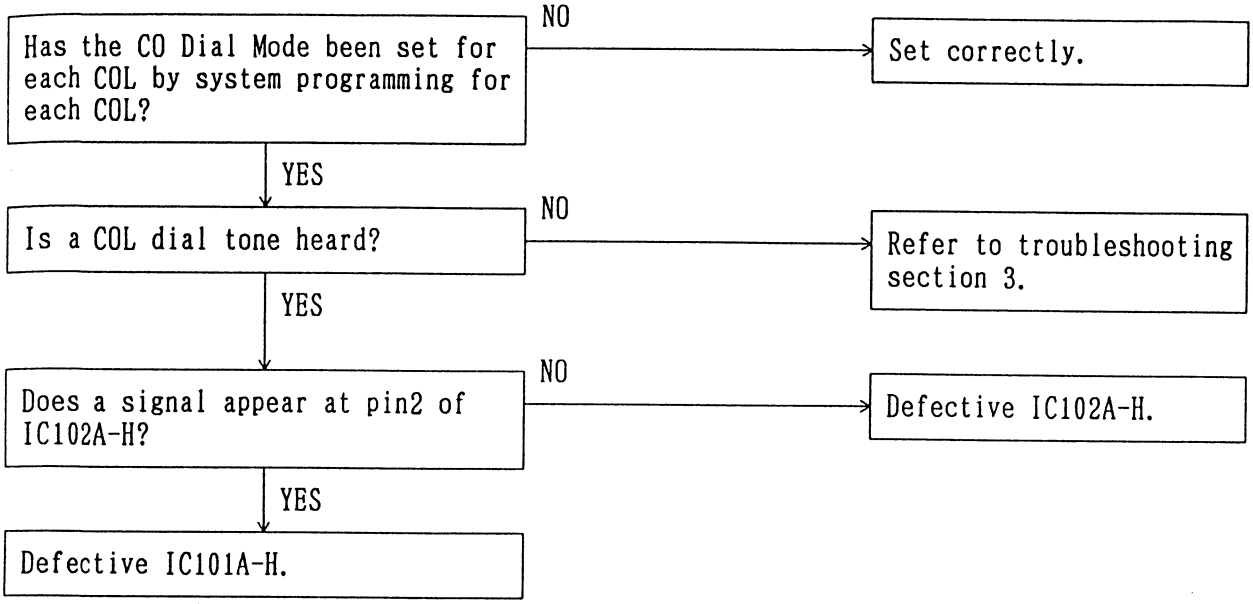

10. EXTENSION IS NOT RINGING WHILE BEING CALLED FROM A COL LINE (Check CO Board)

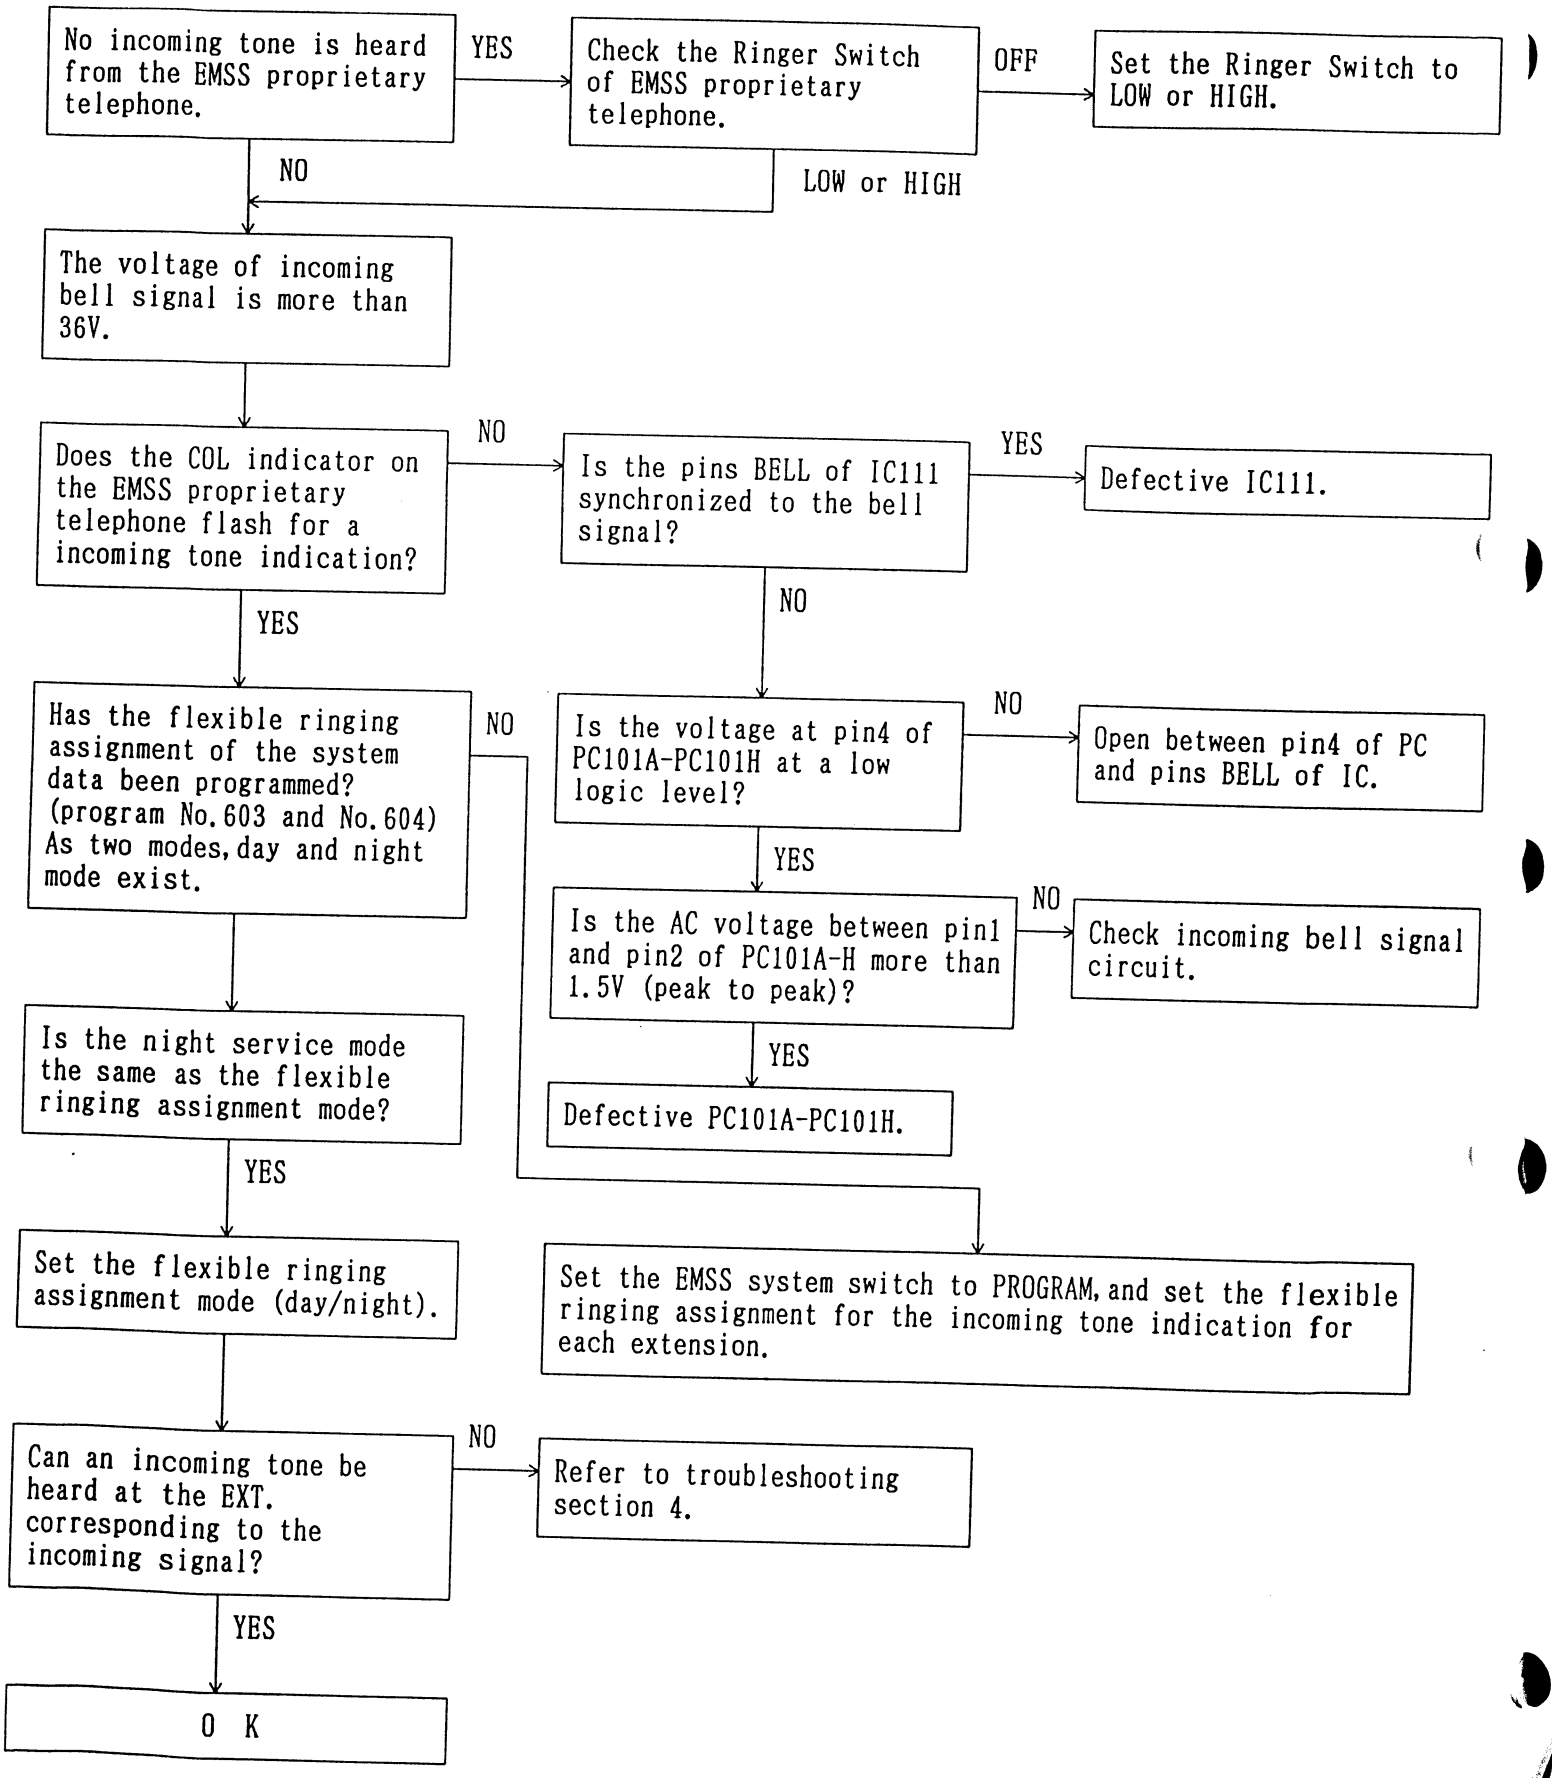

MEMO

DIAGNOSTIC METHOD

1. HOW TO GET INTO SELF-DIAGNOSTIC MODE

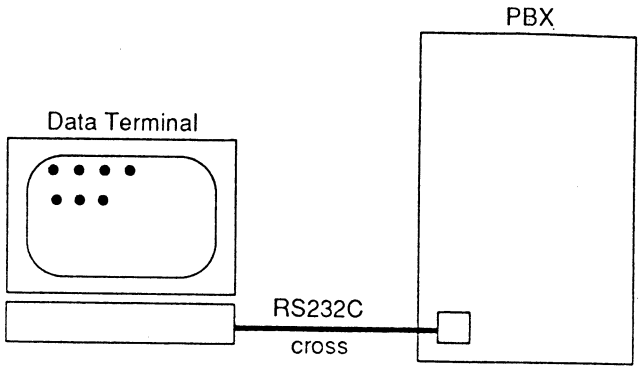

(1) Set the main power switch to ON. (PBX and Data Terminal)
(2) Connect the Data Terminal to the RS232C of PBX and press the return key of the Data Terminal in 10 seconds.
(3) After message is displayed, enter password and press the return key.

Ex.)

```
Welcome to KX-TD1232 Ver. 2.0 Panasonic CO., LTD
Enter Password
??????↓
```

(4) After response message is received, enter diagnostic mode shift command "DAG".

Ex.)

```
EIA Mode Start
DAG↓
```

(5) After response message is received, diagnostic command can be used.

Ex.)

```
DIAG Mode Start
```

* Setting of RS-232C communication parameter

Return Cord: CL+LF
Borate: 9600bps
Data : 8 bit
Parity Bit: None
Stop Bit: 1 bit

2. TEST ITEMS

No.	Test Items	Test Method	Check Items
1	DTMF G/R Test	1) Enter "M1 1" from the data terminal. 2) Enter "M1 2" from the data terminal.	1) Make sure response is "OK 00". 2) Make sure response is "OK 00".
2	Extension Card Test [Digital Channel Loop Back]	1) Enter "M3 1,0" from the data terminal 2) Enter "M3 2, 0" from the data terminal.	1) Make sure response is "OK 0000". 2) Make sure response is "OK 0000".
3	Extension Card Test [Digital Data Loop Back]	1) Enter "M4 1" from the data terminal. 2) Enter "M4 2" from the data terminal.	1) Make sure response is "OK 00". 2) Make sure response is "OK 00".
4	CO Line Card Test [Analogue Channel Loop Back]	1) Enter "M5 0" from the data terminal.	1) Make sure response is "OK 00".
5	CO Line Card Test [Diagnostic Relay turn]	1) Enter "M6 0" from the data terminal.	1) Make sure response is "OK 00 00 00 00 00".
6	Doorphone Card Test	1) Enter "M9" from the data terminal.	1) Make sure response is "OK 00".
7	Conference Trunk Test	1) Enter "MC" from the data terminal.	1) Make sure response is "OK 3F".

HOW TO REPLACE FLAT PACKAGE IC

■ PREPARATION

- SOLDER ..... Sparkle Solder 115A-1, 115B-1
  OR
  Almit Solder KR-19, KR-19RMA
- Soldering iron ..... Recomended power consumption will be between 30w to 40w.
  Temperature of Copper Rod 662 ±50° F (350 ±10° C)

  (An expert may handle 60~80w iron, but beginner might damage foil by overheating)
- Flux ..... HI115 Specific gravity 0.863

  (Original flux will be replaced daily.)

■ PROCEDURE

1. Temporary fix FLAT PACKAGE IC by Soldering on marked 2pins.



●.....Temporary soldering point.

*Most important matter is accurate setting of IC to the corresponding soldering foil.

2. Apply flux for all pins of FLAT PACKAGE IC.



.....Flux

3. Solder employing specified solder to direction arrow, as slide the soldering iron.

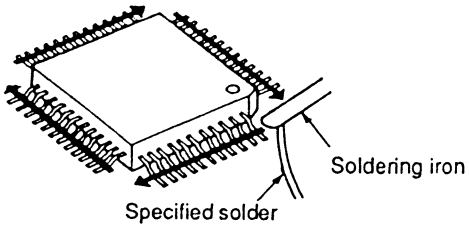

■ MODIFICATION PROCEDURE OF BRIDGE

1. Re-solder slightly on bridging portion.
2. Remove remained solder along pins employing soldering iron as shown in below Figure.





EXPLANATION OF CONNECTORS

CN402

Pin	Signal Name	I/O	ACT (H/L)
1	FHNR	I	L
2	HALTN	O	L
3	INTMN	I	L
4	RXD	I	H/L
5	TXD	O	H/L
6	ECK	O	H
7	IRWN	O	H/L
8	SRSTN	O	L
9	IOWN	O	L
10	IORN	O	L
11	IOCSN	O	L
12	CHS4	O	H/L
13	CHS3	O	H/L
14	CHS2	O	H/L
15	CHS1	O	H/L
16	CHS0	O	H/L
17	GND	---	---
18	GND	---	---
19	MCLK	I	H/L
20	CPUCKN	O	H/L
21	C4M	O	H/L
22	C2MN	O	H/L
23	---	---	Not Used
24	GND	---	---
25	A12N	O	H/L
26	A11N	O	H/L
27	A10N	O	H/L
28	A9N	O	H/L
29	A6N	O	H/L
30	A5N	O	H/L
31	A4N	O	H/L
32	A3N	O	H/L
33	A2N	O	H/L
34	A1N	O	H/L
35	D7N	B	H/L
36	D6N	B	H/L
37	D5N	B	H/L
38	D4N	B	H/L
39	D3N	B	H/L
40	D2N	B	H/L
41	D1N	B	H/L
42	D0N	B	H/L
43	HWR7	I	H/L
44	HWS7	O	H/L
45	HWR6	I	H/L
46	HWS6	O	H/L
47	HWR5	I	H/L
48	HWS5	O	H/L
49	HWR4	I	H/L
50	HWS4	O	H/L
51	HWR3	I	H/L
52	HWS3	O	H/L
53	HWR2	I	H/L
54	HWS2	O	H/L
55	HWR1	I	H/L
56	HWS1	O	H/L
57	GND	---	---
58	OHCAR	---	---
59	5	---	---
60	OHCAT	---	---
61	-15	---	---
62	GND	---	---
63	15	---	---
64	BELLS	O	---

CN401

Pin	Signal Name	I/O	ACT (H/L)
1	+15V	---	---
2	-15V	---	---
3	+5V	---	---
4	GND	---	---
5	GND	---	---
6	BELLS	---	---
7	BELL	---	---

CN9

Pin	Signal Name	I/O	ACT (H/L)
1	C2M	O	H/L
2	MU/A	O	H/L
3	HWS0	O	H/L
4	HWR0	I	H/L
5	CP29	O	H
6	CP30	O	H
7	D0	B	H/L
8	D1	B	H/L
9	D2	B	H/L
10	D3	B	H/L
11	D4	B	H/L
12	D5	B	H/L
13	GND	---	---
14	PIGN	O	L
15	POGN	O	L
16	+15V	---	---
17	-15V	---	---
18	5	---	---
19	-5	---	---
20	FG	---	---

CN11

Pin	Signal Name	I/O	ACT (H/L)
1	SD	O	12
2	RD	I	12
3	ER	O	12
4	DR	I	12
5	SG	---	---
6	FG	---	---

CN4

Pin	Signal Name	I/O	ACT (H/L)
1	LED1	---	---
2	LED2	O	L

CN411

Pin	Signal Name	I/O	ACT (H/L)
1	GND	---	---
2	GND	---	---
3	FHNR	O	L
4	ECK	I	H
5	SRSTN	I	L
6	IOWN	I	L
7	IRWN	I	H/L
8	IOCSN	I	L
9	CHS4	I	H/L
10	CHS3	I	H/L
11	CHS2	I	H/L
12	CHS1	I	H/L
13	CHS0	I	H/L
14	GND	---	---
15	MCLK	O	H/L
16	CPUCKN	I	H/L
17	C4M	I	H/L
18	C2MN	I	H/L
19	GND	---	---
20	A5N	I	H/L
21	A12N	I	H/L
22	A11N	I	H/L
23	A10N	I	H/L
24	A9N	I	H/L
25	A4N	I	H/L
26	A3N	I	H/L
27	A2N	I	H/L
28	A1N	I	H/L
29	D7N	B	H/L
30	D6N	B	H/L
31	D5N	B	H/L
32	D4N	B	H/L
33	D3N	B	H/L
34	D2N	B	H/L
35	D1N	B	H/L
36	D0N	B	H/L
37	HWR7	O	H/L
38	HWS7	I	H/L
39	GND	---	---
40	+5V	---	---

CN410

Pin	Signal Name	I/O	ACT (H/L)
1	INTMN	O	L
2	RXD	O	H/L
3	TXD	I	H/L
4	SRSTN	I	L
5	IOW	I	L
6	IORN	I	L
7	IOCSN	I	L
8	CHS4	I	H/L
9	CHS3	I	H/L
10	CHS2	I	H/L
11	CHS1	I	H/L
12	CHS0	I	H/L
13	A2N	I	H/L
14	C2MN	I	H/L
15	A12N	I	H/L
16	A11N	I	H/L
17	A10N	I	H/L
18	A9N	I	H/L
19	A1N	I	H/L
20	D7N	B	H/L
21	D6N	B	H/L
22	D5N	B	H/L
23	D4N	B	H/L
24	D3N	B	H/L
25	D2N	B	H/L
26	D1N	B	H/L
27	D0N	B	H/L
28	HWR6	O	H/L
29	HWS6	I	H/L
30	GND	---	---
31	5	---	---
32	GND	---	---
33	-15V	---	---
34	+15V	---	---

CN409

Pin	Signal Name	I/O	ACT (H/L)
1	GND	---	---
2	GND	---	---
3	GND	---	---
4	GND	---	---
5	HALTN	I	L

Pin	Signal Name	I/O	ACT (H/L)
6	SRSTN	I	L
7	IOWN	I	L
8	IORN	I	L
9	IOCSN	I	L
10	CHS4	I	H/L
11	CHS3	I	H/L
12	CHS2	I	H/L
13	CHS1	I	H/L
14	CHS0	I	H/L
15	GND	---	---
16	GND	---	---
17	CPUCKN	I	H/L
18	C4M	I	H/L
19	C2MN	I	H/L
20	GND	---	---
21	---	---	Not Used
22	---	---	Not Used
23	AN12N	I	H/L
24	AN11N	I	H/L
25	AN10N	I	H/L
26	A9N	I	H/L
27	A6N	I	H/L
28	A5N	I	H/L
29	A4N	I	H/L
30	A3N	I	H/L
31	A2N	I	H/L
32	A1N	I	H/L
33	D7N	B	H/L
34	D6N	B	H/L
35	D5N	B	H/L
36	D4N	B	H/L
37	D3N	B	H/L
38	D2N	B	H/L
39	D1N	B	H/L
40	D0N	B	H/L
41	HWR6	O	H/L
42	HWS6	I	H/L
43	GND	---	---
44	GND	---	---
45	+5V	---	---
46	+5V	---	---
47	-15V	---	---
48	-15V	---	---
49	+15V	---	---
50	+15V	---	---

CN405

Pin	Signal Name	I/O	ACT (H/L)
1	+15V	---	---
2	-15V	---	---
3	+5V	---	---
4	GND		---
5	IOCSN	I	L
6	SRSTN	I	L
7	CHS4	I	H/L
8	CHS3	I	H/L
9	CHS2	I	H/L
10	CHS1	I	H/L
11	CHS0	I	H/L
12	IOWN	I	L
13	IORN	I	L
14	C2MN	I	H/L
15	GND	---	---
16	A12N	I	H/L
17	A11N	I	H/L
18	A10N	I	H/L
19	A9N	I	H/L
20	A6N	I	H/L
21	A5N	I	H/L
22	A4N	I	H/L
23	A3N	I	H/L
24	A2N	I	H/L
25	A1N	I	H/L

Pin	Signal Name	I/O	ACT (H/L)
26	D7N	B	H/L
27	D6N	B	H/L
28	D5N	B	H/L
29	D4N	B	H/L
30	D3N	B	H/L
31	D2N	B	H/L
32	D1N	B	H/L
33	D0N	B	H/L
34	HWR1	O	H/L
35	HWS1	I	H/L
36	GND	---	---
37	GND	---	---
38	R4	---	---
39	GND	---	---
40	T4	---	---
41	GND	---	---
42	R3	---	---
43	GND	---	---
44	T3	---	---
45	RING	---	---
46	R2	---	---
47	TIP	---	---
48	T2	---	---
49	T1	---	---
50	R1	---	---

CN406/407/408

Pin	Signal Name	I/O	ACT (H/L)
1	GND	---	---
2	GND	---	---
3	FHNR	O	L
4	HALTN	I	L
5	ECK	I	H
6	IRWN	I	L
7	SRSTN	I	L
8	IOWN	I	L
9	IORN	I	L
10	IOCSN	I	L
11	CHS4	I	H/L
12	CHS3	I	H/L
13	CHS2	I	H/L
14	CHS1	I	H/L
15	CHS0	I	H/L
16	GND	---	---
17	MCLK	O	H/L
18	CPUCKN	I	H/L
19	C4M	I	H/L
20	C2MN	I	H/L
21	GND	---	---
22	GND	---	---
23	A12N	I	H/L
24	A11N	I	H/L
25	A10N	I	H/L
26	A9N	I	H/L
27	A6N	I	H/L
28	A5N	I	H/L
29	A4N	I	H/L
30	A3N	I	H/L

Pin	Signal Name	I/O	ACT (H/L)
31	A2N	I	H/L
32	A1N	I	H/L
33	D7N	B	H/L
34	D6N	B	H/L
35	D5N	B	H/L
36	D4N	B	H/L
37	D3N	B	H/L
38	D2N	B	H/L
39	D1N	B	H/L
40	D0N	B	H/L
41	HWR6	O	H/L
42	HWS6	I	H/L
43	HWR5	O	H/L
44	HWS5	I	H/L
45	HWR4	O	H/L
46	HWS4	I	H/L
47	TIP	---	---
48	RING	---	---
49	---	---	Not Used
50	GND	---	---
51	GND	---	---
52	CA0	I	H/L
53	CA1	I	H/L
54	OHCAR	---	---
55	+5V	---	---
56	OHCAT	---	---
57	-15V	---	---
58	GND	---	---
59	+15V	---	---
60	BELL	i	---

CN403/404

Pin	Signal Name	I/O	ACT (H/L)
1	ECK	I	H
2	IRWN	I	L
3	SRSTN	I	L
4	IOWN	I	L
5	IORN	I	L
6	IOCSN	I	L
7	CHS4	I	H/L
8	CHS3	I	H/L
9	CHS2	I	H/L
10	CHS1	I	H/L
11	CHS0	I	H/L
12	CPUCKN	I	H/L
13	C4M	I	H/L
14	C2MN	I	H/L
15	GND	---	---
16	GND	---	---
17	A12N	I	H/L
18	A11N	I	H/L
19	A10N	I	H/L
20	A9N	I	H/L
21	A6N	I	H/L
22	A5N	I	H/L
23	A4N	I	H/L
24	A3N	I	H/L
25	A2N	I	H/L

Pin	Signal Name	I/O	ACT (H/L)
26	A1N	I	H/L
27	D7N	B	H/L
28	D6N	B	H/L
29	D5N	B	H/L
30	D4N	B	H/L
31	D3N	B	H/L
32	D2N	B	H/L
33	D1N	B	H/L
34	D0N	B	H/L
35	HWR2/HWR3	O	H/L
36	HWS2/HWS3	I	H/L
37	RING	---	---
38	TIP	---	---
39	R2/R4	---	---
40	T2/T4	---	---
41	R1/R3	---	---
42	T1/T3	---	---
43	CA0	I	H/L
44	OHCAR	---	---
45	+5V	---	---
46	OHCAT	---	---
47	-15V	---	---
48	GND	---	---
49	+15V	---	---
50	BELL	---	---

PRINTED CIRCUIT BOARD (CPU BOARD)

6 7 8 9 10 11 12

(BOTTOM VIEW)

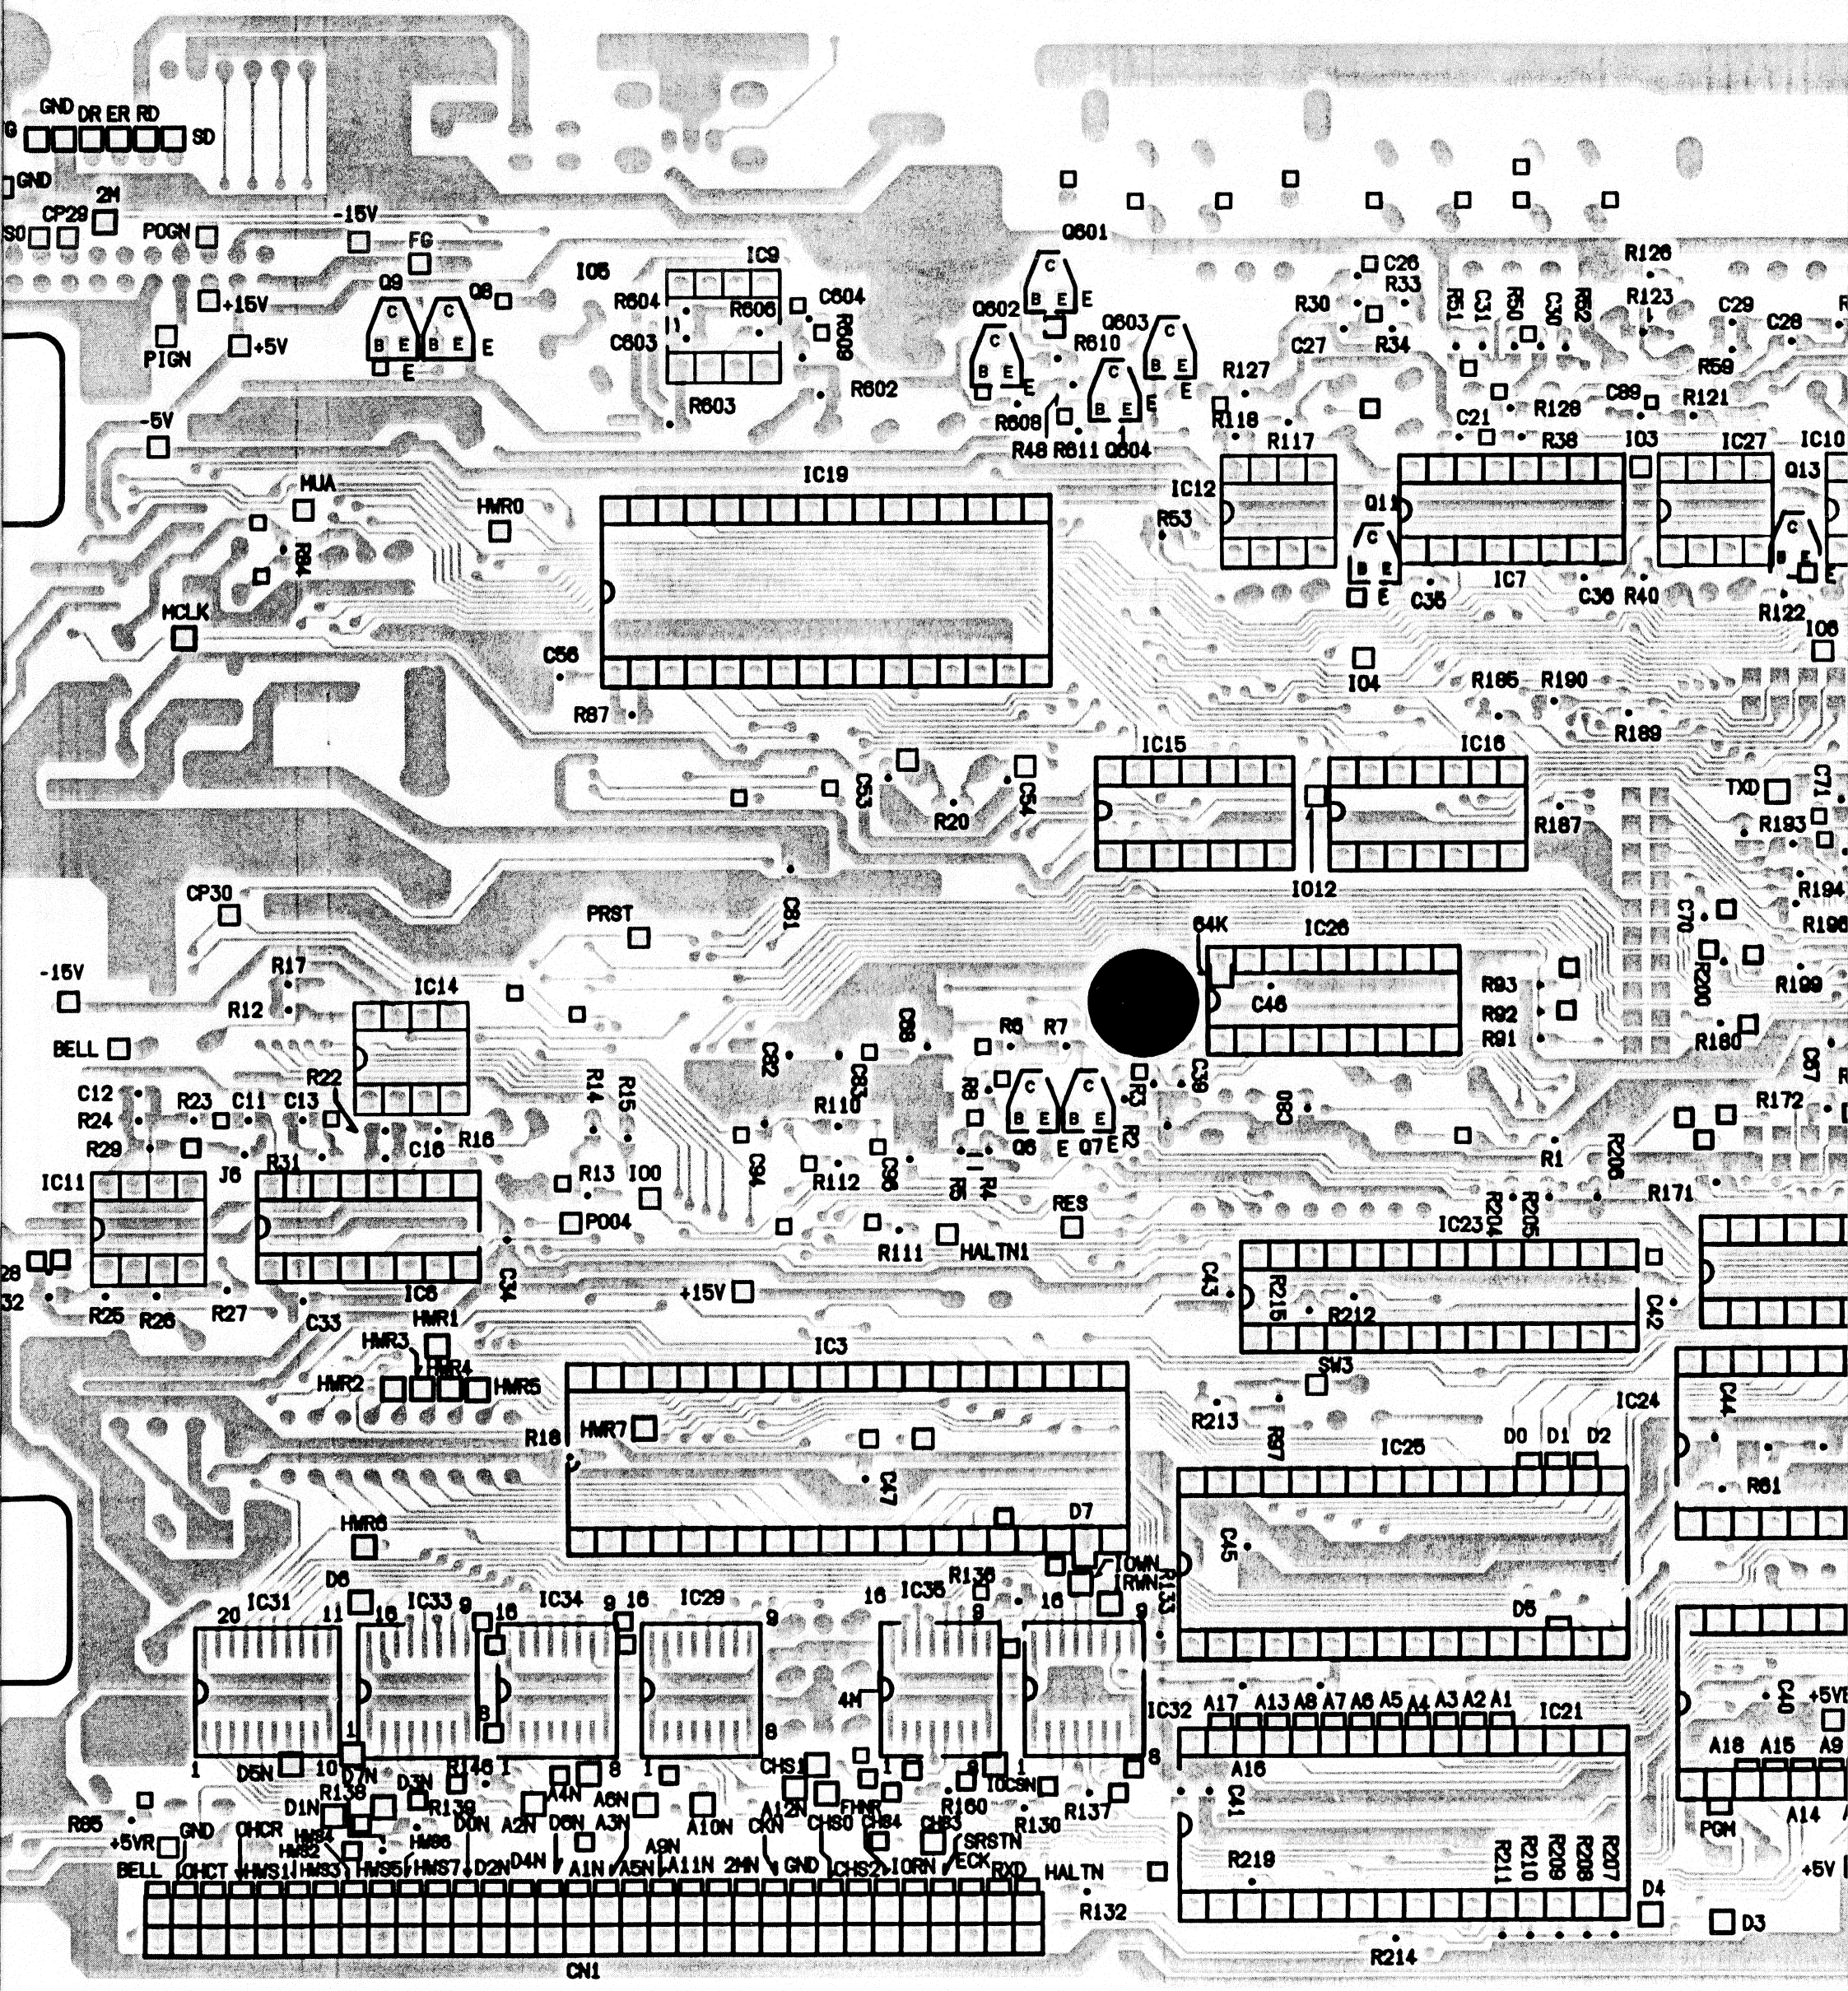

13 14 15 16 17 18 19

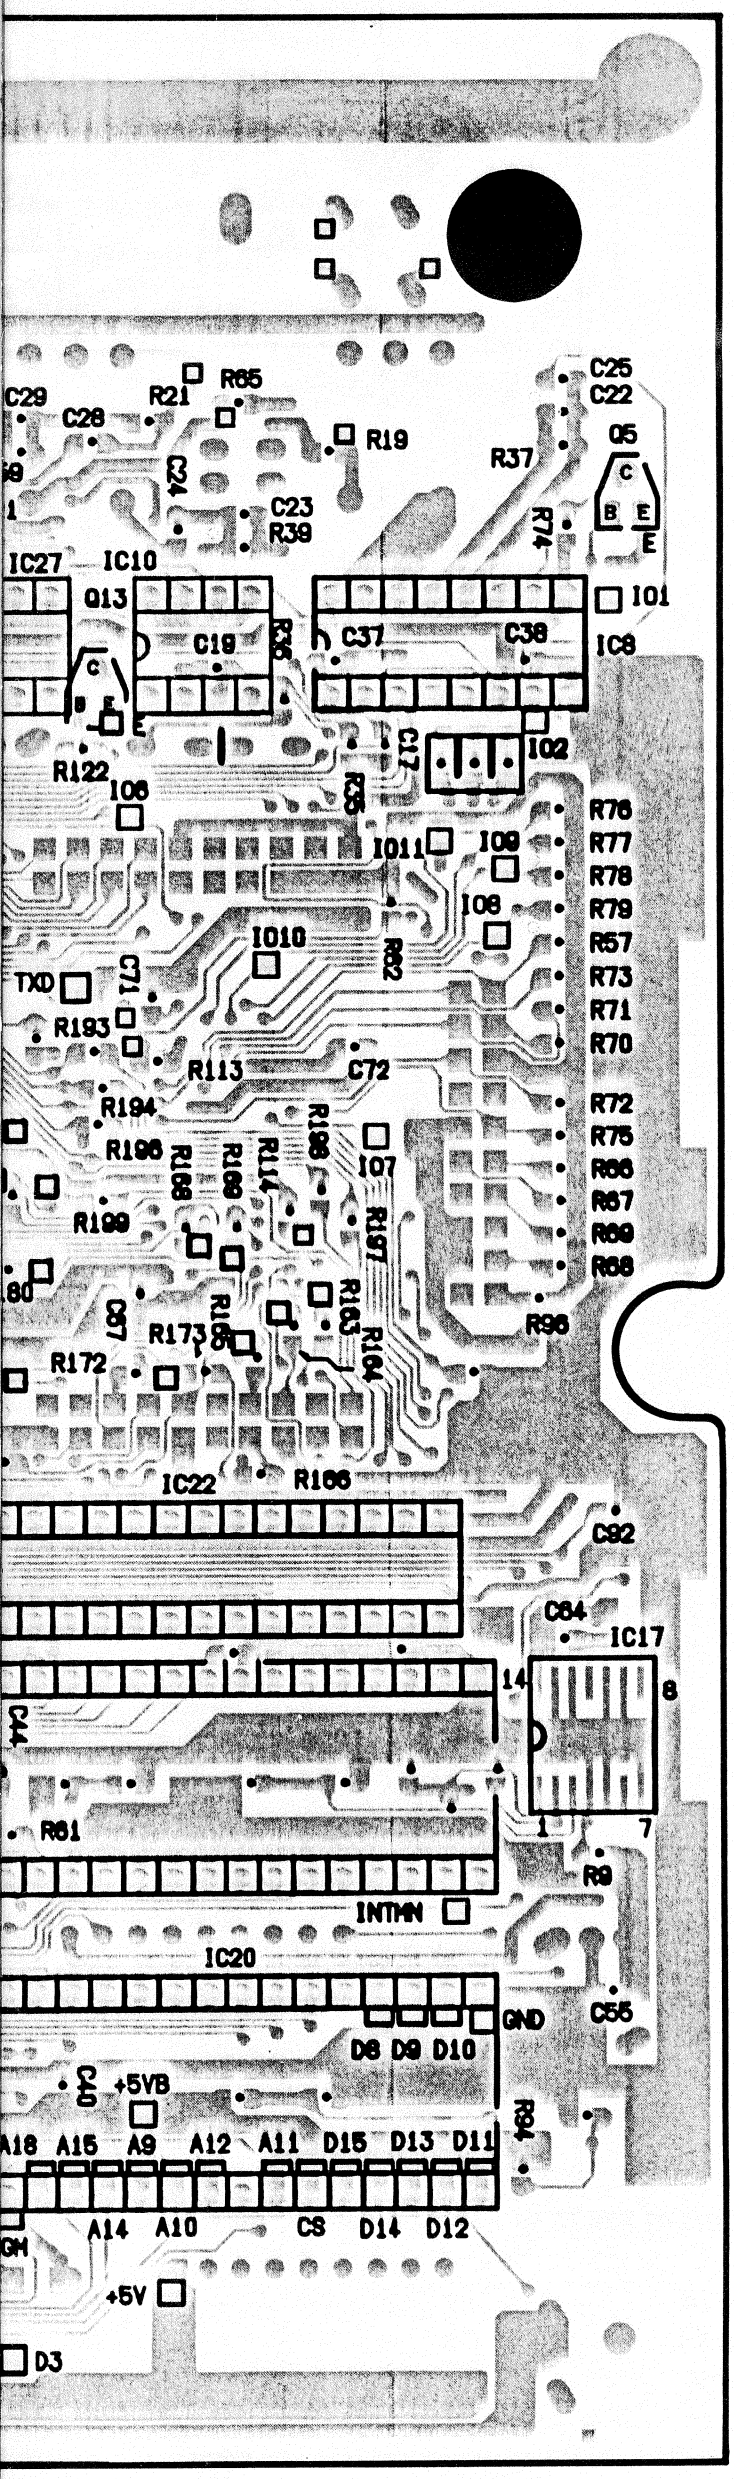

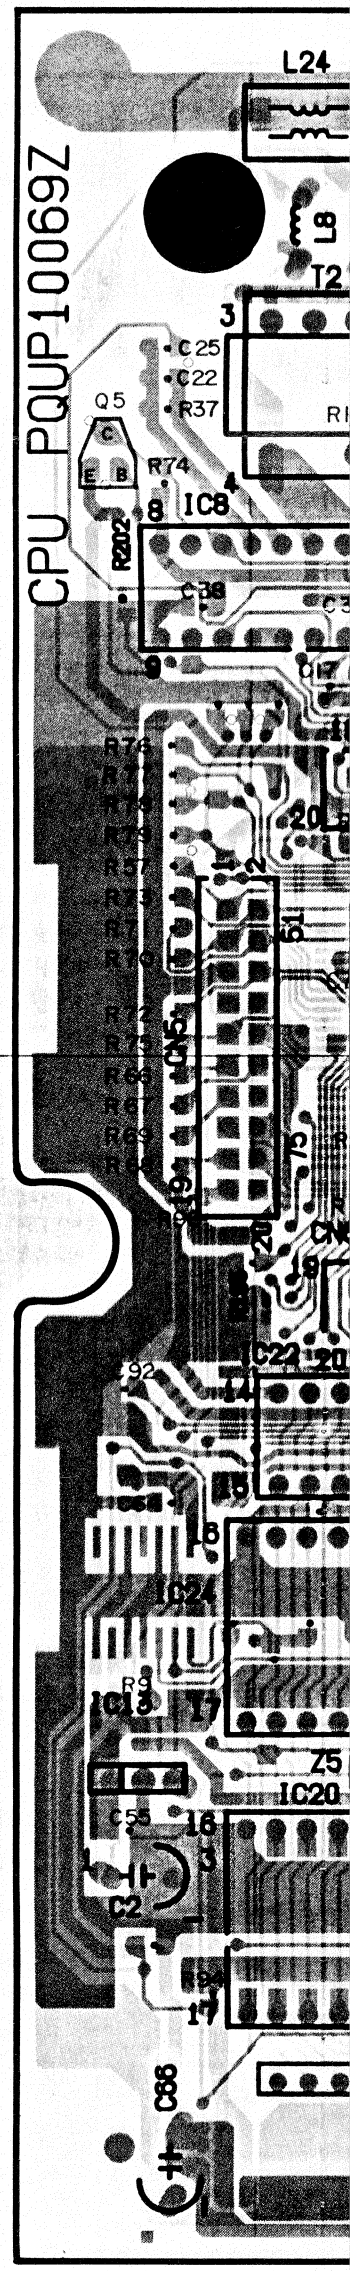

IC1

Pin No.	Voltage & Waveform
26–28	5
29	0
30–35	5
36	0
37–43	5
44	0
45, 46	5
47	0
48–50	5
51, 52	0
56, 57	5
58	5 / 0
59, 60	5 / 0
61	5
62	0
63, 64	5 / 0
65	5 / 0
68–71	5
72	5 / 0
73–75	5
77	5 / 0
78	5
79–81	5 / 0

Value is V.

Note: The following parts are not used on th
IC9
C601~C604
Q601~Q604
R601~R606
R608~R611

PRINTED CIRCUIT BOARD (CPU BOARD)

(COMPONENT VIEW)

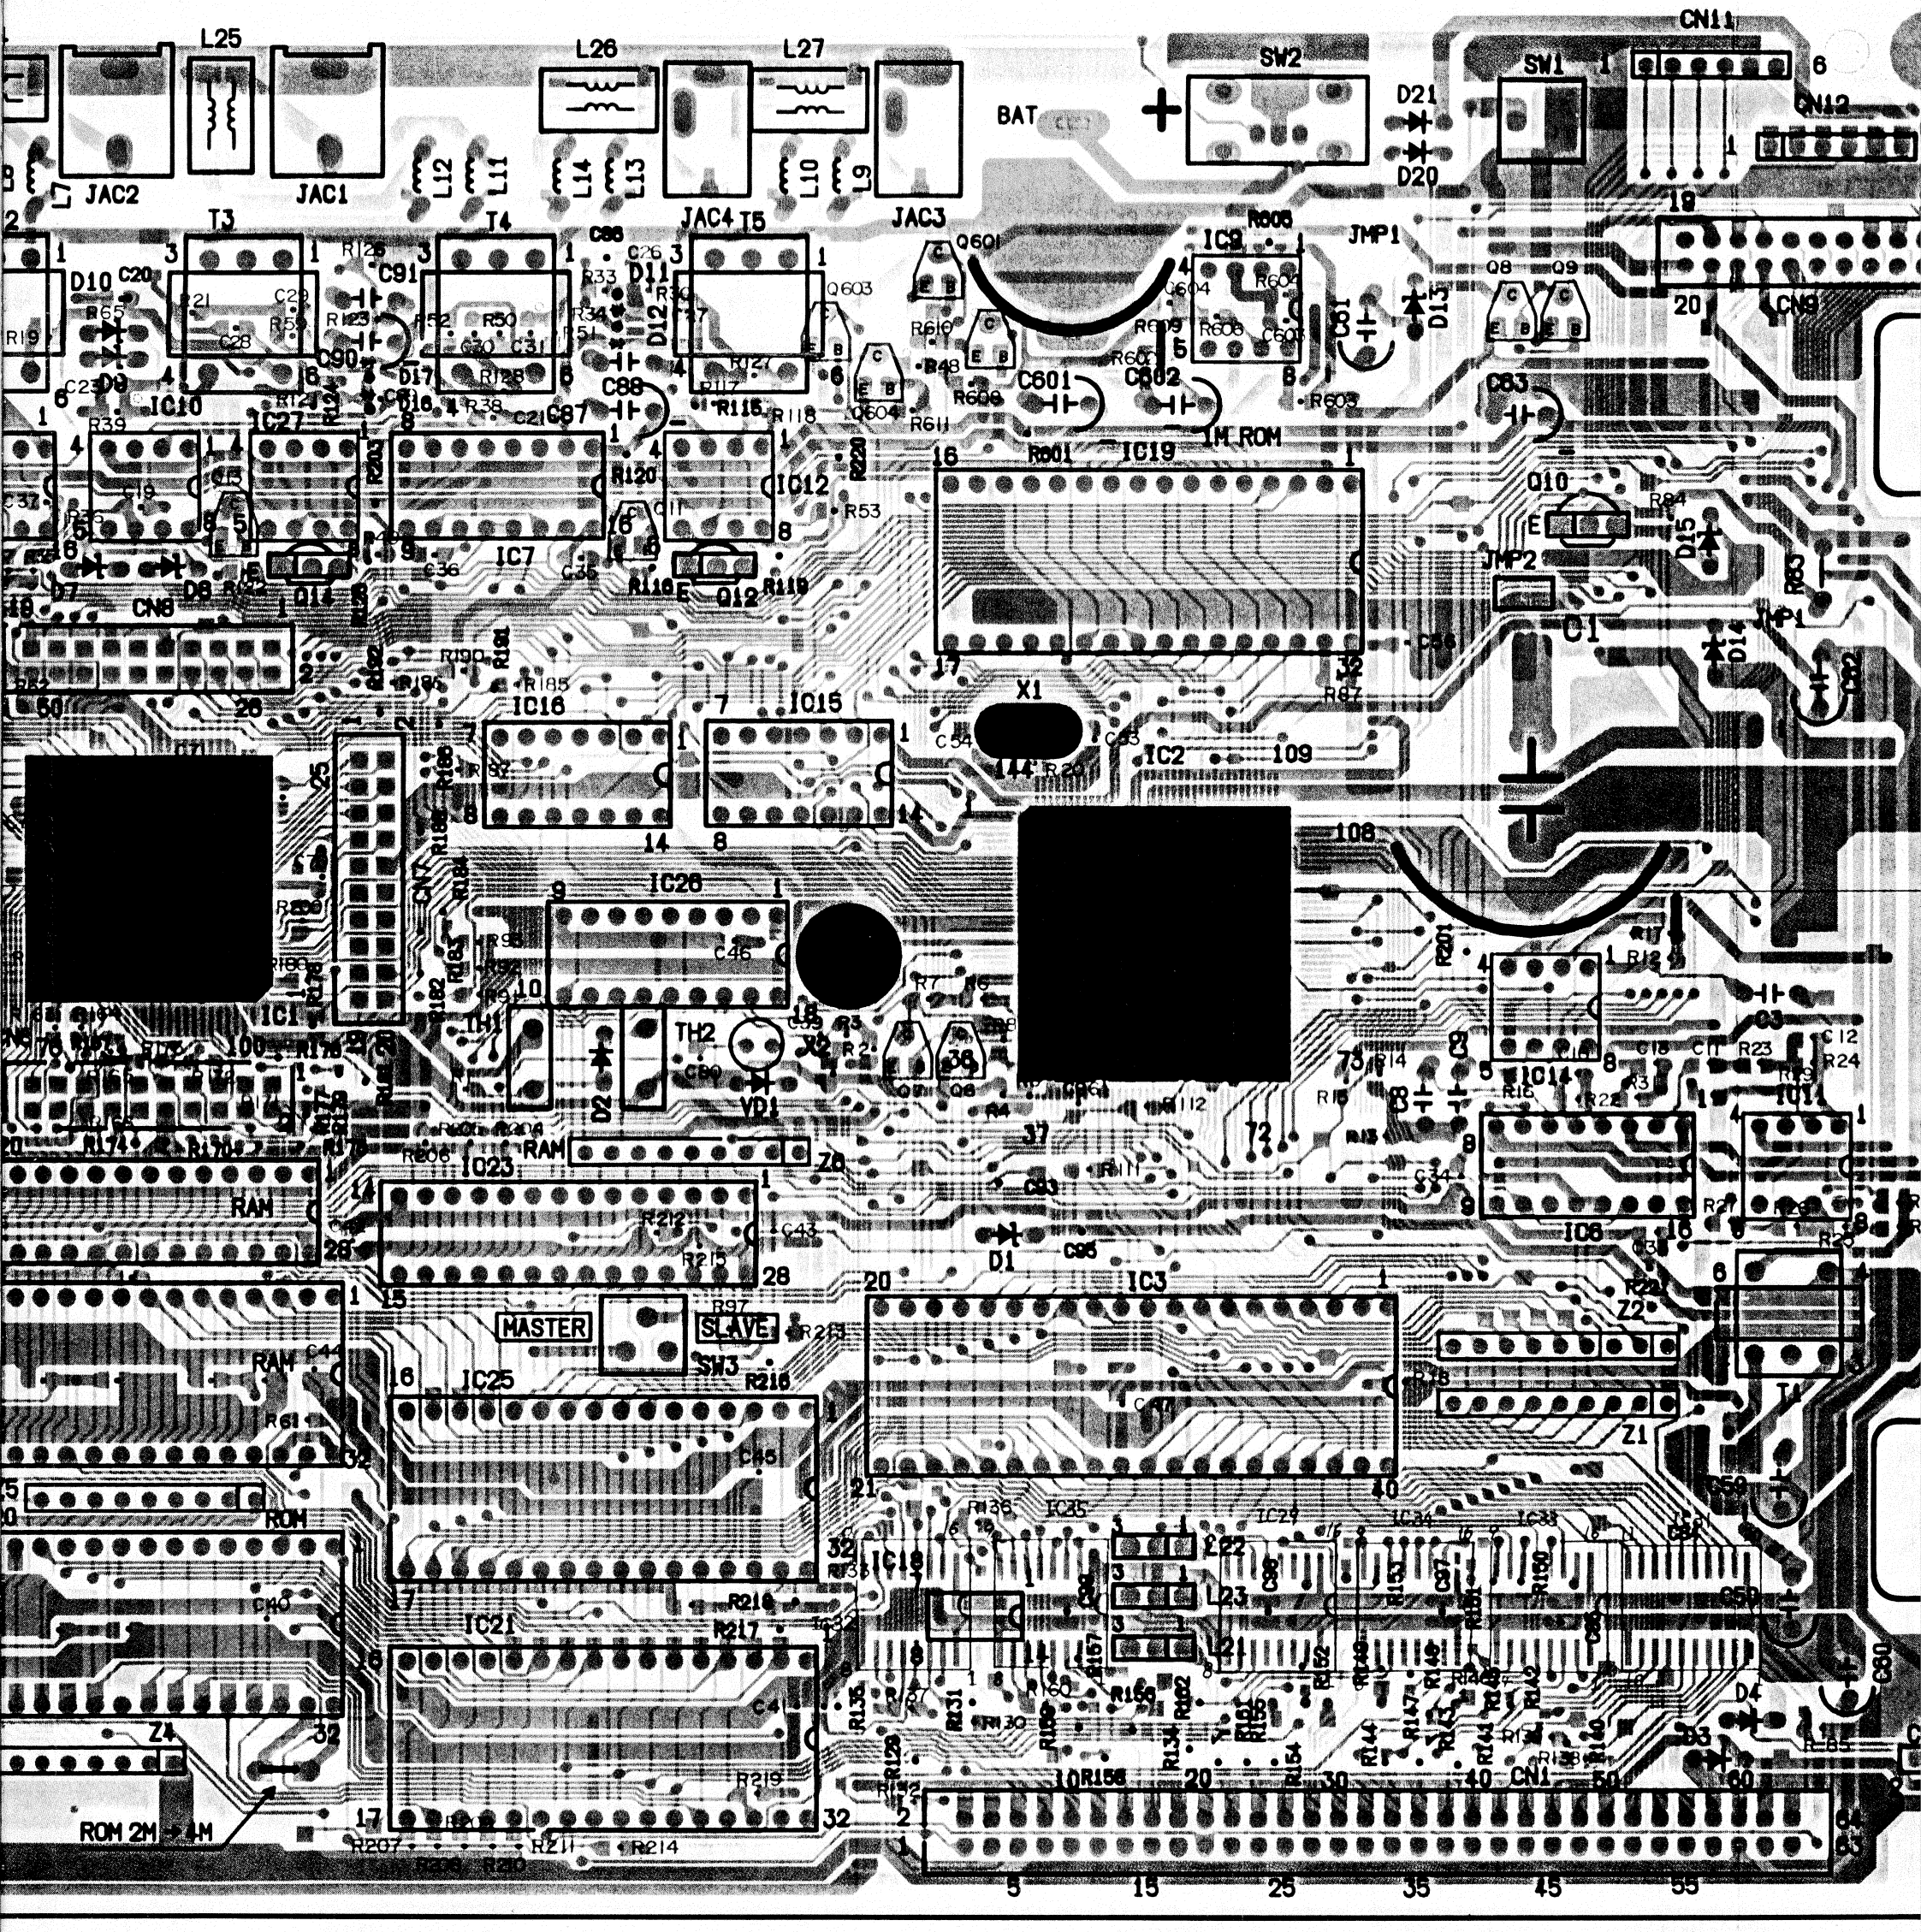

-TD1232C

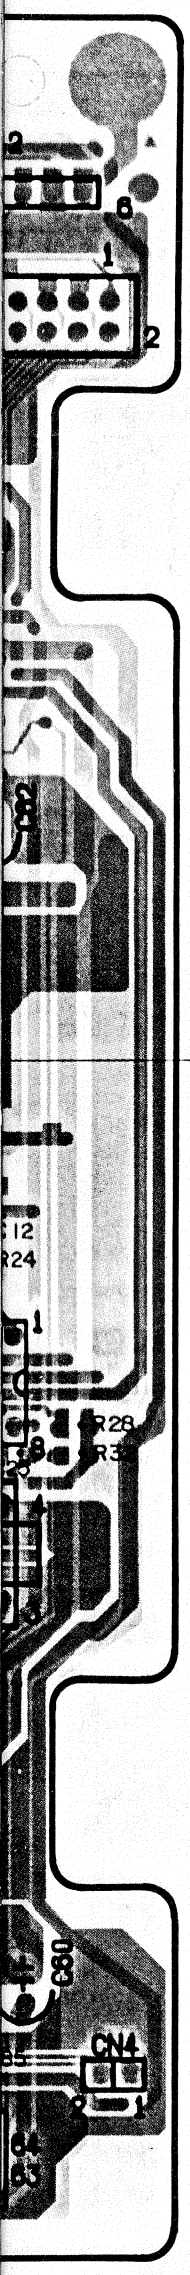

IC2

Pin No.	Voltage & Waveform
1	5
2	0
9	0
18	5
20, 21	0
30	0
41–44	5 / 0
45	0
46	5 / 0
47, 48	5 / 0
54	5
62–65	5 / 0
66	0
67–72	5 / 0
80, 81	0
90	5
102	0
103–110	5 / 0
116	5
117	0
118	5
126	0
128–130	5
137	5 / 0
138	0

Notes:

1. The circuit shown in ▭ on the conductor indicates printed circuit on the back side of the printed circuit board.
2. The circuit shown in ▭ on the conductor indicates printed circuit on the front side of the printed circuit board.
3. This printed circuit board may be modified at any time with the development of new technology.

SCHEMATIC DIAGR

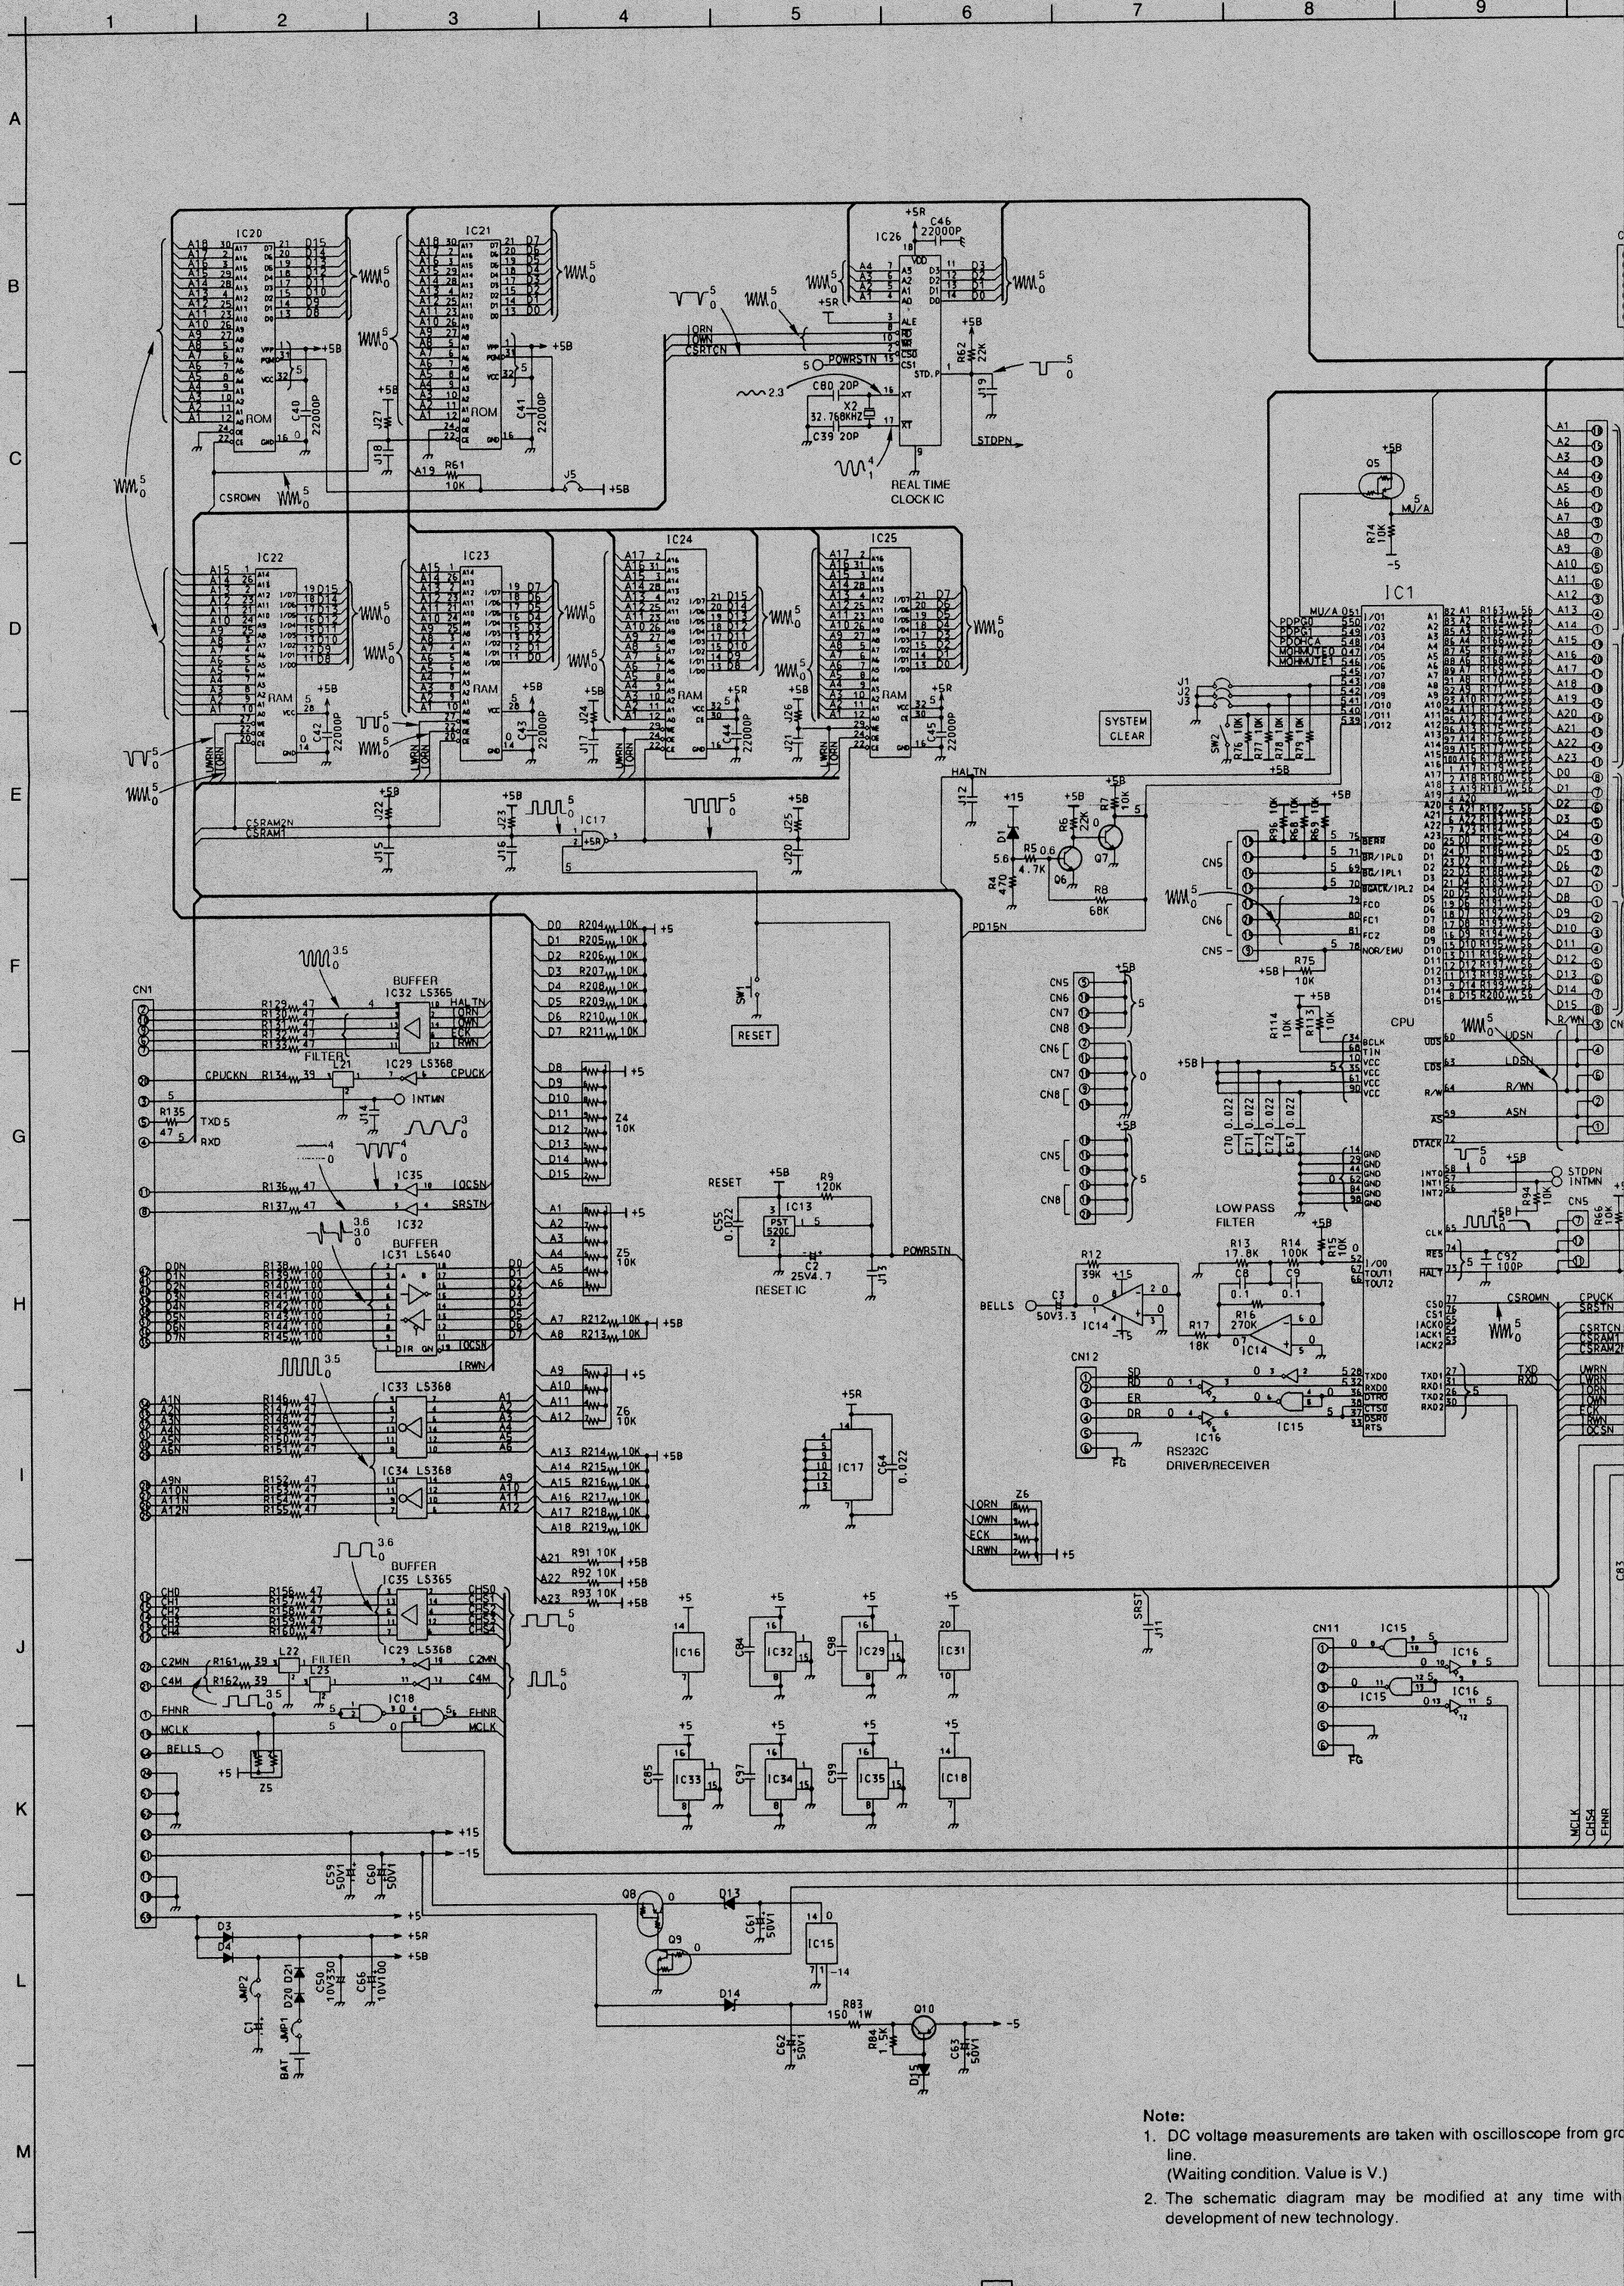

Note:

1. DC voltage measurements are taken with oscilloscope from gro line.
   (Waiting condition. Value is V.)
2. The schematic diagram may be modified at any time with development of new technology.

DIAGRAM (CPU CIRCUIT)

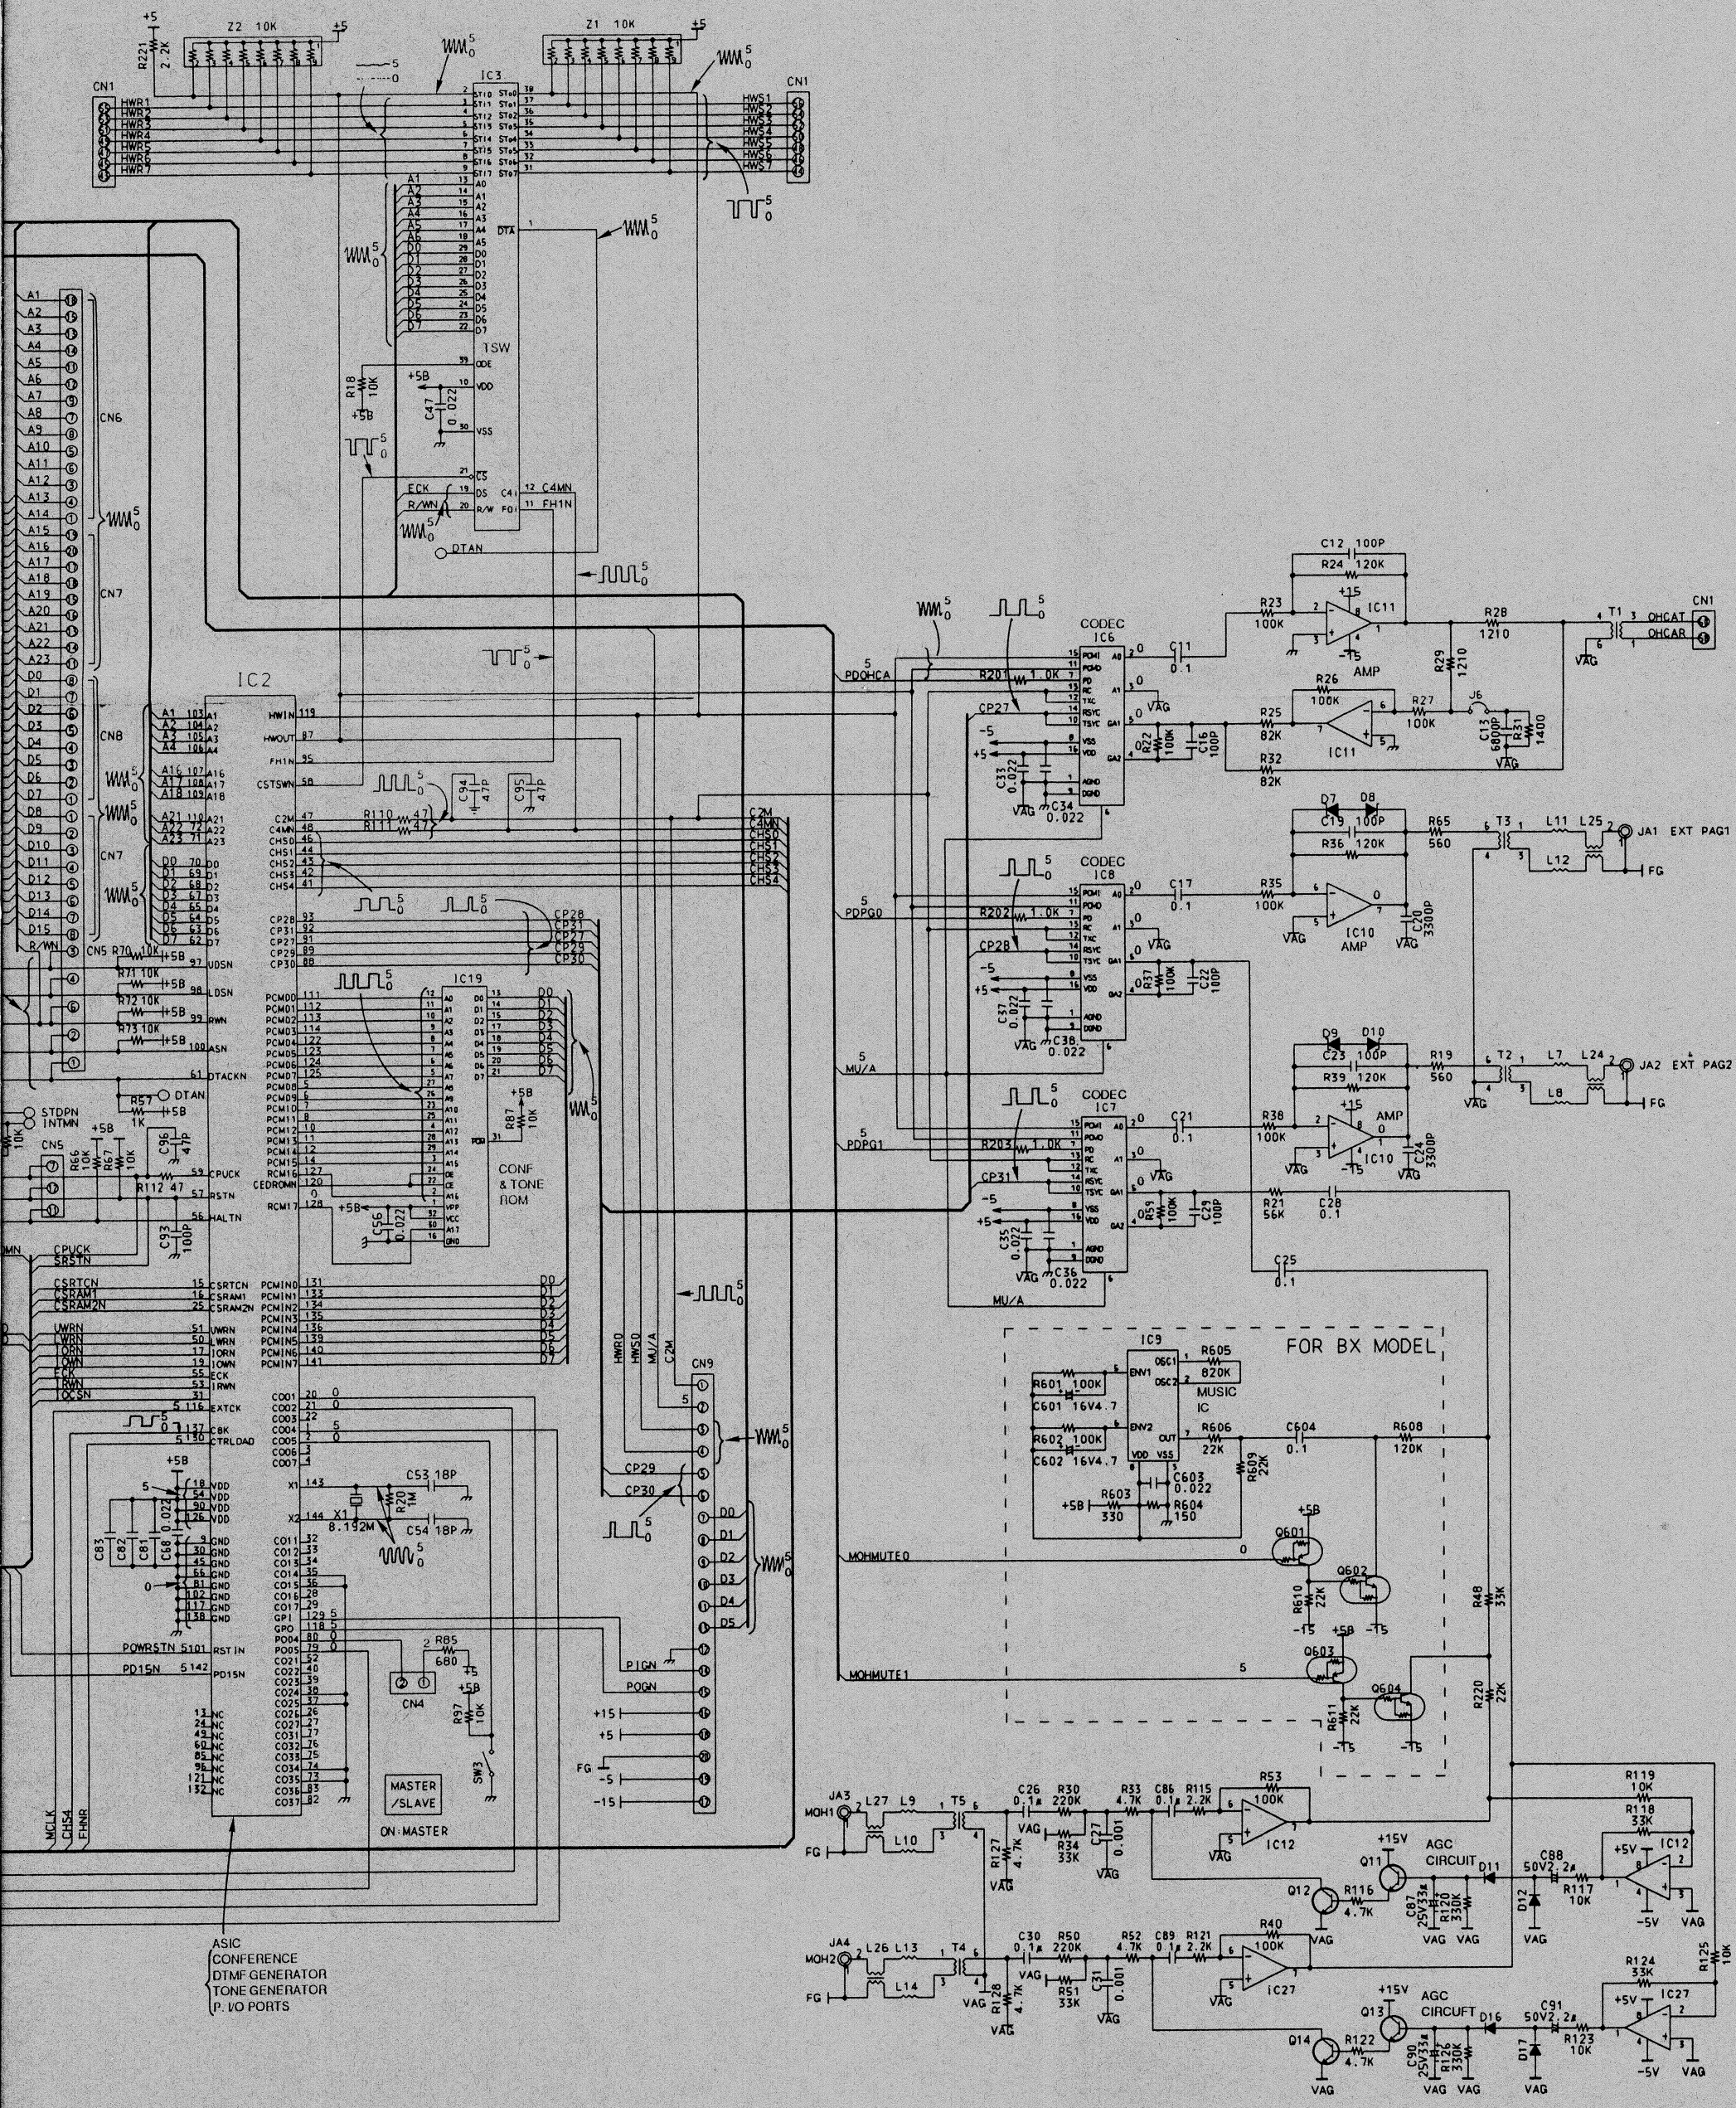

cope from ground

ny time with the

3. Important safety notice
Components identified by ⚠ mark have special characteristics important for safety. When replacing any of these components, use only manufacturer's specified parts.

4.

Varcap.	General	Zener	LED	Photo Diode
Anode / Cathode	Anode / Cathode	Anode / Cathode	Anode / Cathode	Cathode / Anode

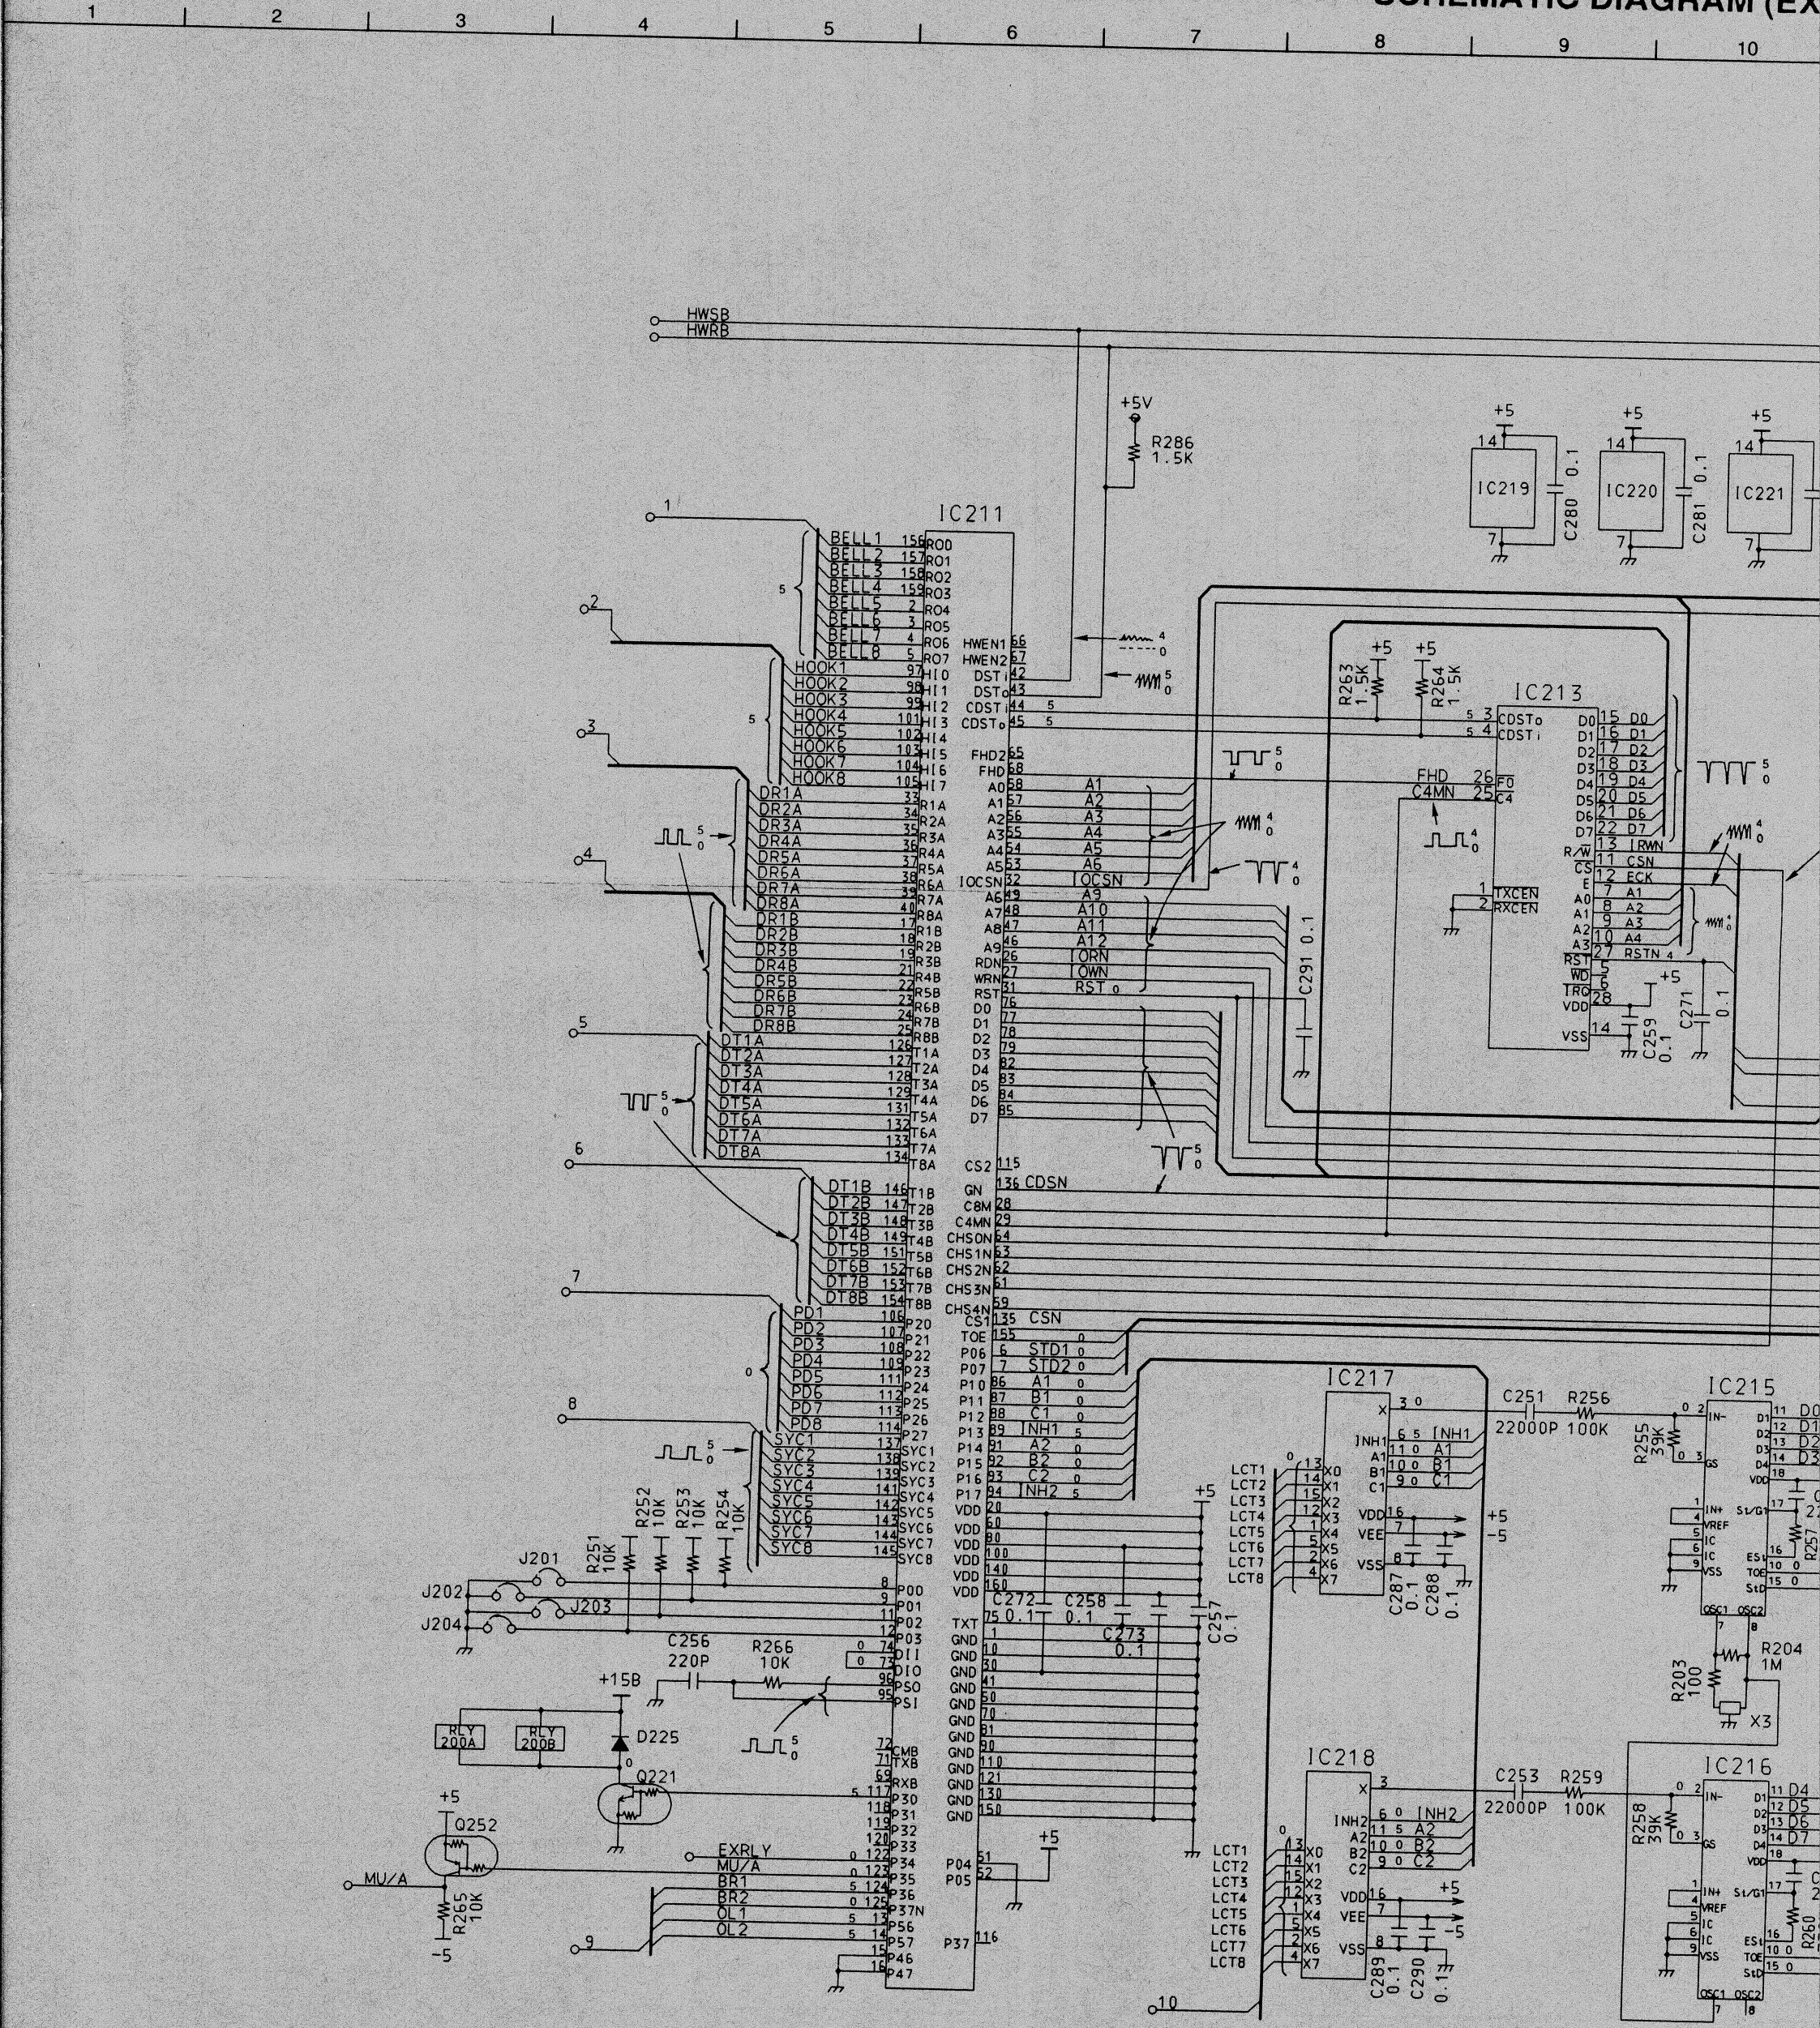
HWSB
HWRB
+5V
R286
1.5K
IC211
BELL1 BELL2 BELL3 BELL4 BELL5 BELL6 BELL7 BELL8
RO0 RO1 RO2 RO3 RO4 RO5 RO6 RO7
HWEN1 HWEN2
HOOK1 HOOK2 HOOK3 HOOK4 HOOK5 HOOK6 HOOK7 HOOK8
HI0 HI1 HI2 HI3 HI4 HI5 HI6 HI7
DSTi DSTo CDSTi CDSTo
FHD2 FHD
DR1A DR2A DR3A DR4A DR5A DR6A DR7A DR8A
R1A R2A R3A R4A R5A R6A R7A R8A
DR1B DR2B DR3B DR4B DR5B DR6B DR7B DR8B
R1B R2B R3B R4B R5B R6B R7B R8B
DT1A DT2A DT3A DT4A DT5A DT6A DT7A DT8A
T1A T2A T3A T4A T5A T6A T7A T8A
DT1B DT2B DT3B DT4B DT5B DT6B DT7B DT8B
T1B T2B T3B T4B T5B T6B T7B T8B
PD1 PD2 PD3 PD4 PD5 PD6 PD7 PD8
P20 P21 P22 P23 P24 P25 P26 P27
SYC1 SYC2 SYC3 SYC4 SYC5 SYC6 SYC7 SYC8
A0 A1 A2 A3 A4 A5 IOCSN A6 A7 A8 A9 RDN WRN RST D0 D1 D2 D3 D4 D5 D6 D7
A1 A2 A3 A4 A5 A6 A9 A10 A11 A12 IORN IOWN RST o
CS2 GN C8M C4MN CHSON CHS1N CHS2N CHS3N CHS4N CS1 TOE P06 P07 P10 P11 P12 P13 P14 P15 P16 P17 VDD VDD VDD VDD VDD VDD TXT GND GND GND GND GND GND GND GND GND GND
CDSN CSN STD1 STD2 A1 B1 C1 INH1 A2 B2 C2 INH2
P00 P01 P02 P03 DII DIO PSO PSI
CMB TXB RXB P30 P31 P32 P33 P34 P35 P36 P37N P56 P57 P46 P47
P04 P05 P37
EXRLY MU/A BR1 BR2 OL1 OL2
J201 J202 J203 J204
R251 10K R252 10K R253 10K R254 10K
C256 220P R266 10K
+15B
RLY 200A RLY 200B
D225
Q221
Q252
MU/A
R265 10K
-5
C272 0.1 C258 0.1 C273 0.1 C257 0.1
C291 0.1
IC219 IC220 IC221
C280 0.1 C281 0.1
R263 1.5K R264 1.5K
IC213
CDSTo CDSTi
D0 D1 D2 D3 D4 D5 D6 D7
IRWN CSN ECK A1 A2 A3 A4 RSTN
FHD C4MN
TXCEN RXCEN
C259 0.1 C271 0.1
IC217
LCT1 LCT2 LCT3 LCT4 LCT5 LCT6 LCT7 LCT8
X0 X1 X2 X3 X4 X5 X6 X7
INH1 A1 B1 C1
VDD VEE VSS
C287 0.1 C288 0.1
C251 22000P R256 100K
IC215
IN- IN+ VREF GS S1/G1 ES1 TOE StD OSC1 OSC2
R255 39K
R204 1M
R203 100
X3
IC218
INH2 A2 B2 C2
C289 0.1 C290 0.1
C253 22000P R259 100K
IC216
R258 39K
R260

DIAGRAM (EXT. ½ CIRCUIT)

10 11 12 13 14 15 16 17 18

IC220 IC221 IC222 IC223 IC224 C281 C282 C283 C284 C285 0.1

C295 R272 IC222 CN201

OHCAT 46
OHCAR 44
HWS 36
HWR 35

R270A 10K
R270B 10K
R270C 10K
R270D 10K
R270E 10K
R270F 10K
R270G 10K
R270H 10K

BELL 50
T1 42
R1 41
T2 40
R2 39
TIP 38
RING 37

IC221 A1N 26 A2N 25 A3N 24 A4N 23 A5N 22 A6N 21

IC219 IOCSN 6 A9N 20 A10N 19 A11N 18 A12N 17

R280 22K CA0 43

IC223 R271 6.8K IC222 IORN 5 IOWN 4 IRWN 2 ECK 1 SRSTN 3

RST RSTN D252 IC219

IC224 R299A 100 D0N 34
R299B 100 D1N 33
R299C 100 D2N 32
R299D 100 D3N 31
R299E 100 D4N 30
R299F 100 D5N 29
R299G 100 D6N 28
R299H 100 D7N 27

R267 100 C2MN 14
R268 100 C4M 13
R269 100 CPUCKN

CHS0 11
CHS1 10
CHS2 9
CHS3 8
CHS4 7

C2M C297 C298 C299 IC220

12
48
GND

D0 D1 D2 D3 D4 D5 D6 D7 IRWN CSN ECK A1 A2 A3 A4 RSTN

IC215 R255 39K C252 22000P R257 330K C295 0.1 C292 50V10 TOE STD1

C271 0.1 C259 0.1

R203 100 R204 1M X3 C296 0.1

IC216 R258 39K C254 22000P R260 330K TOE STD2

+15 F200 +15B R270 22 D223 C260 25V470µ C262 50V33µ CN201 +15 49 GND 15 GND 16

+5 45

F201 -15 47

-5V Q251 R261 1W82 R262 1.5K D251 C255 50V33µ C263 50V33µ C264 50V33µ

PRINTED CIRCUIT BO

4 5 6 7 8 9 10

(COMPONEN

IC213

Pin No.	Voltage & Waveform
3, 4	5
7–10	4 0
11	5 0
12, 13	4 0
15–22	5 0
25	4 0
27	4

Value is V.

IC201A

Pin No.	Voltage & Waveform
2–5	0
7	
10	0
11	4 0
12	4 0
15	4 0

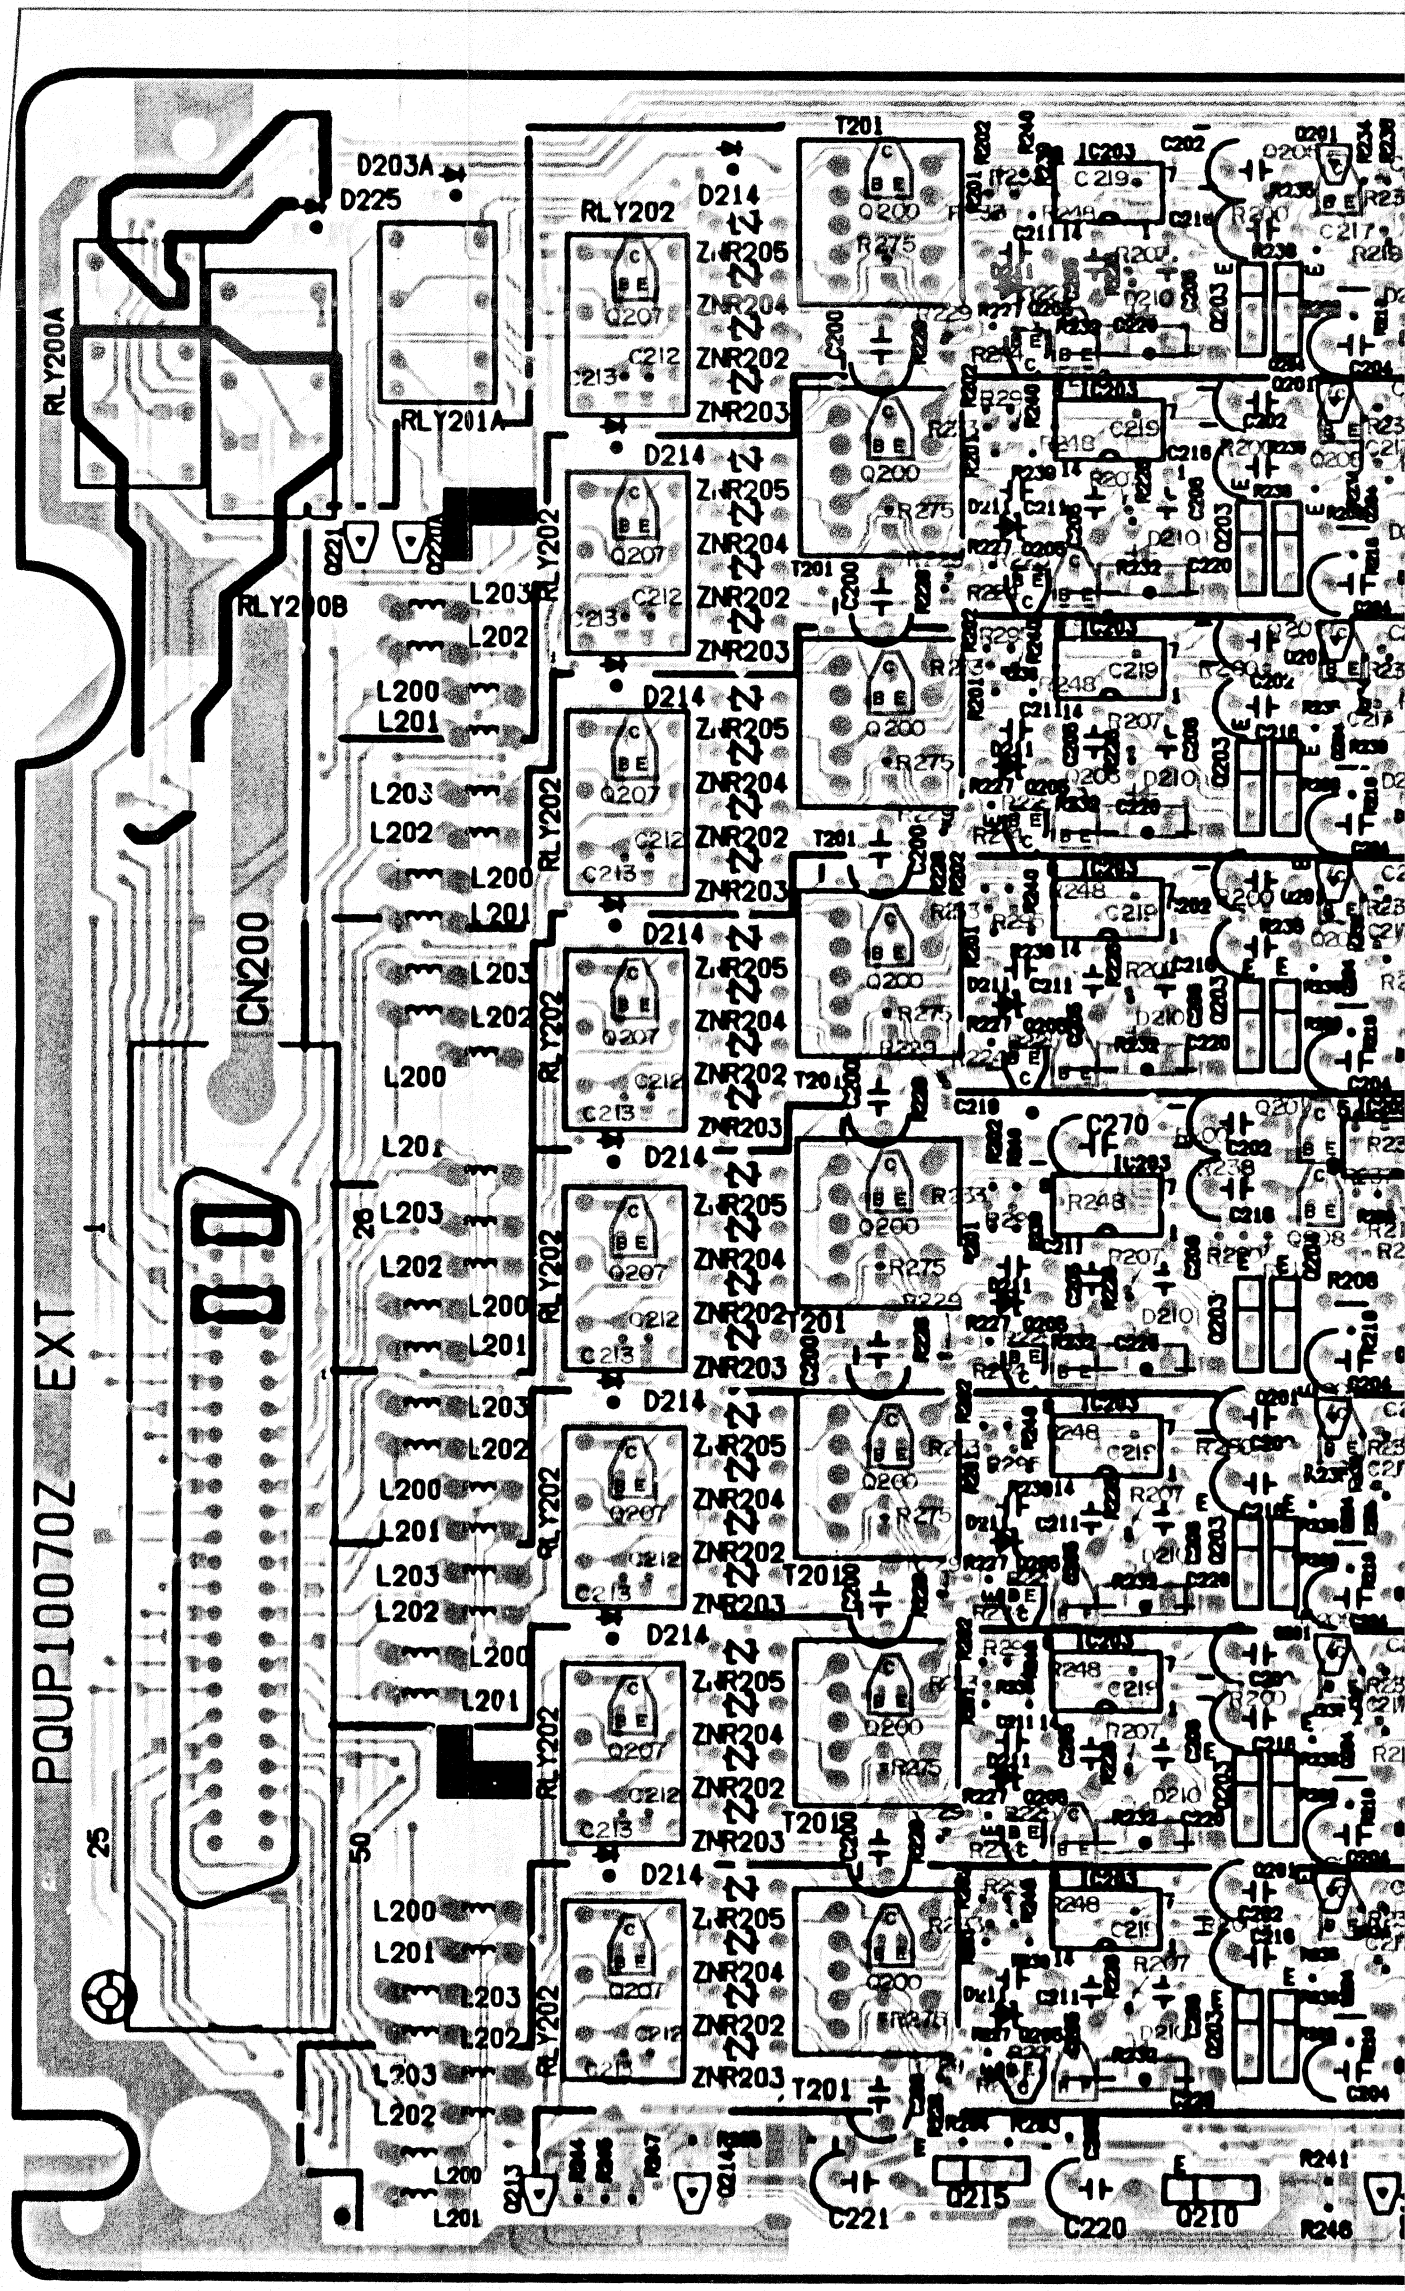

BOARD (EXT. BOARD)

10 | 11 | 12 | 13 | 14 | 15 | 16

)ONENT VIEW)

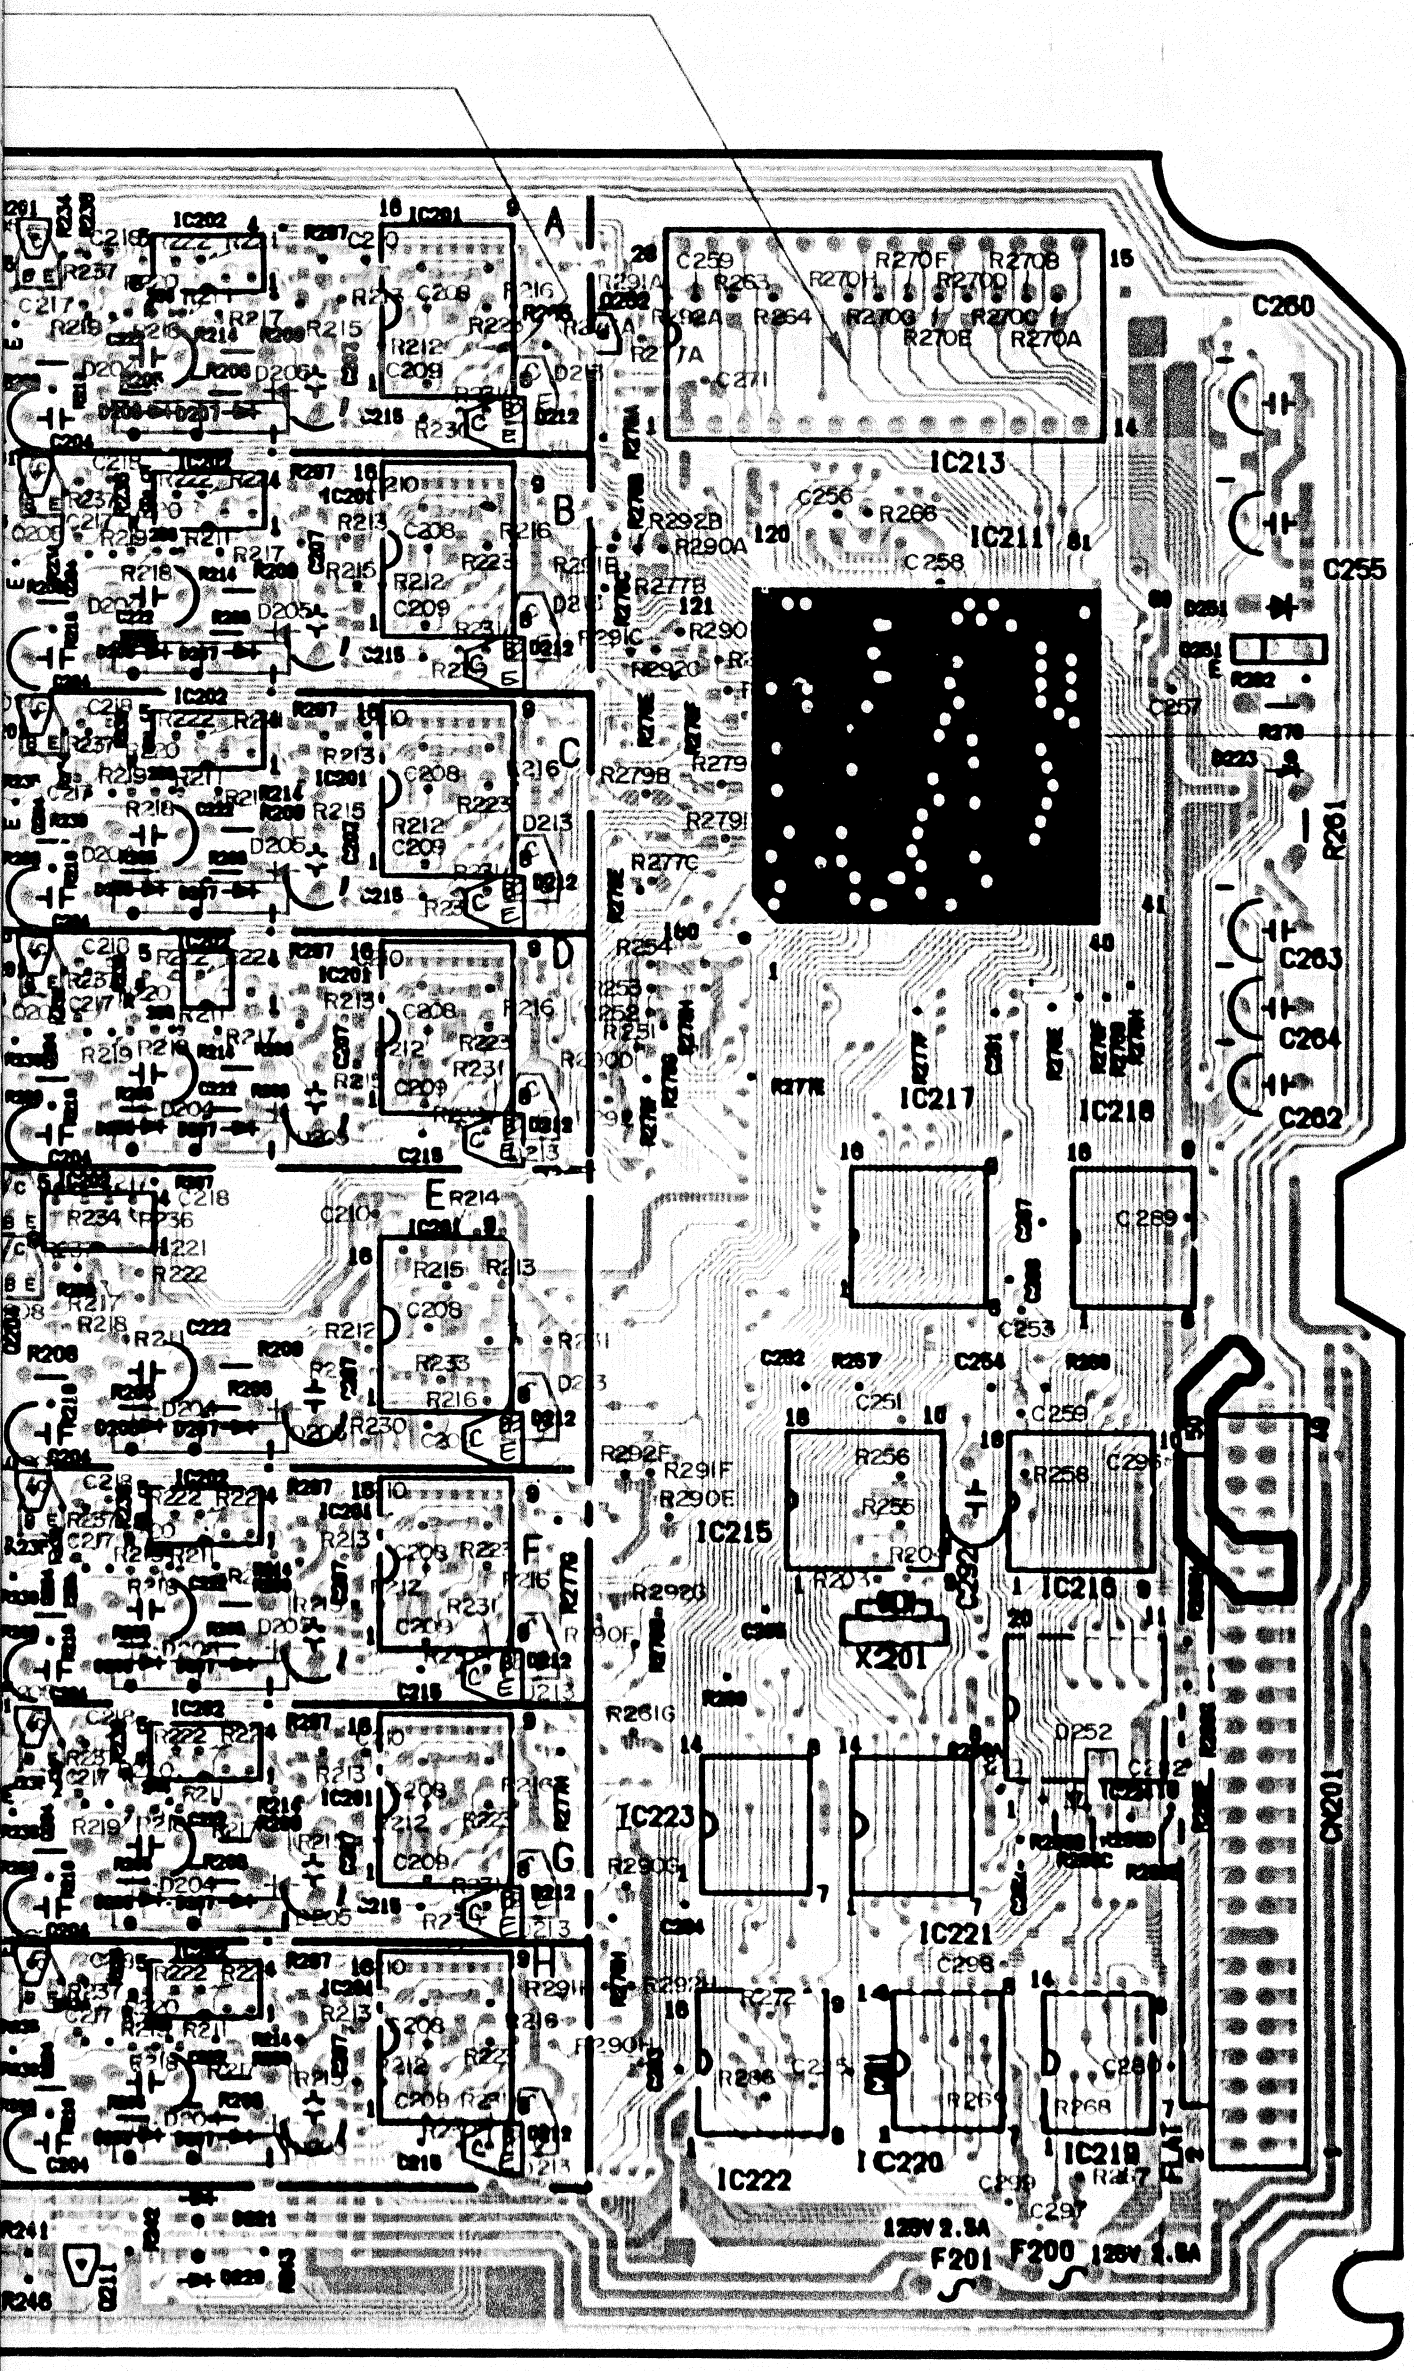

IC211

Pin No.	Voltage & Waveform
2–5	5
6, 7	0
13, 14	5
17–19	⊓⊓ 5 / 0
21–25	
26, 27	⊓⊓ 4 / 0
31	0
33–40	⊓⊓ 5 / 0
42	~~~ 4 / - - - 0
43	⊓⊓⊓⊓ 4 / 0
44, 45	5
46–49	⊓⊓ 4 / 0
53–58	⊓⊓⊓⊓ 4 / 0
68	⊓⊓ 5 / 0
73, 74	0
76–79	⊓⊓ 5 / 0
82–85	
86–88	0
89	5
91–93	0
94	5
95, 96	⊓_ 5 / 0
97–99	5
101–105	
106–109	0
111–114	
117	5
122, 123	0
124	5
125	0
126–129	⊓⊓ 5 / 0
131–134	
137–139	⊓⊓ 5 / 0
141–145	
146–149	⊓⊓ 5 / 0
151–154	
155	0
156–159	5

PRINTED CIRCUIT BOARD (EXT. BOARD)

6 7 8 9 10 11 12

(BOTTOM VIEW)

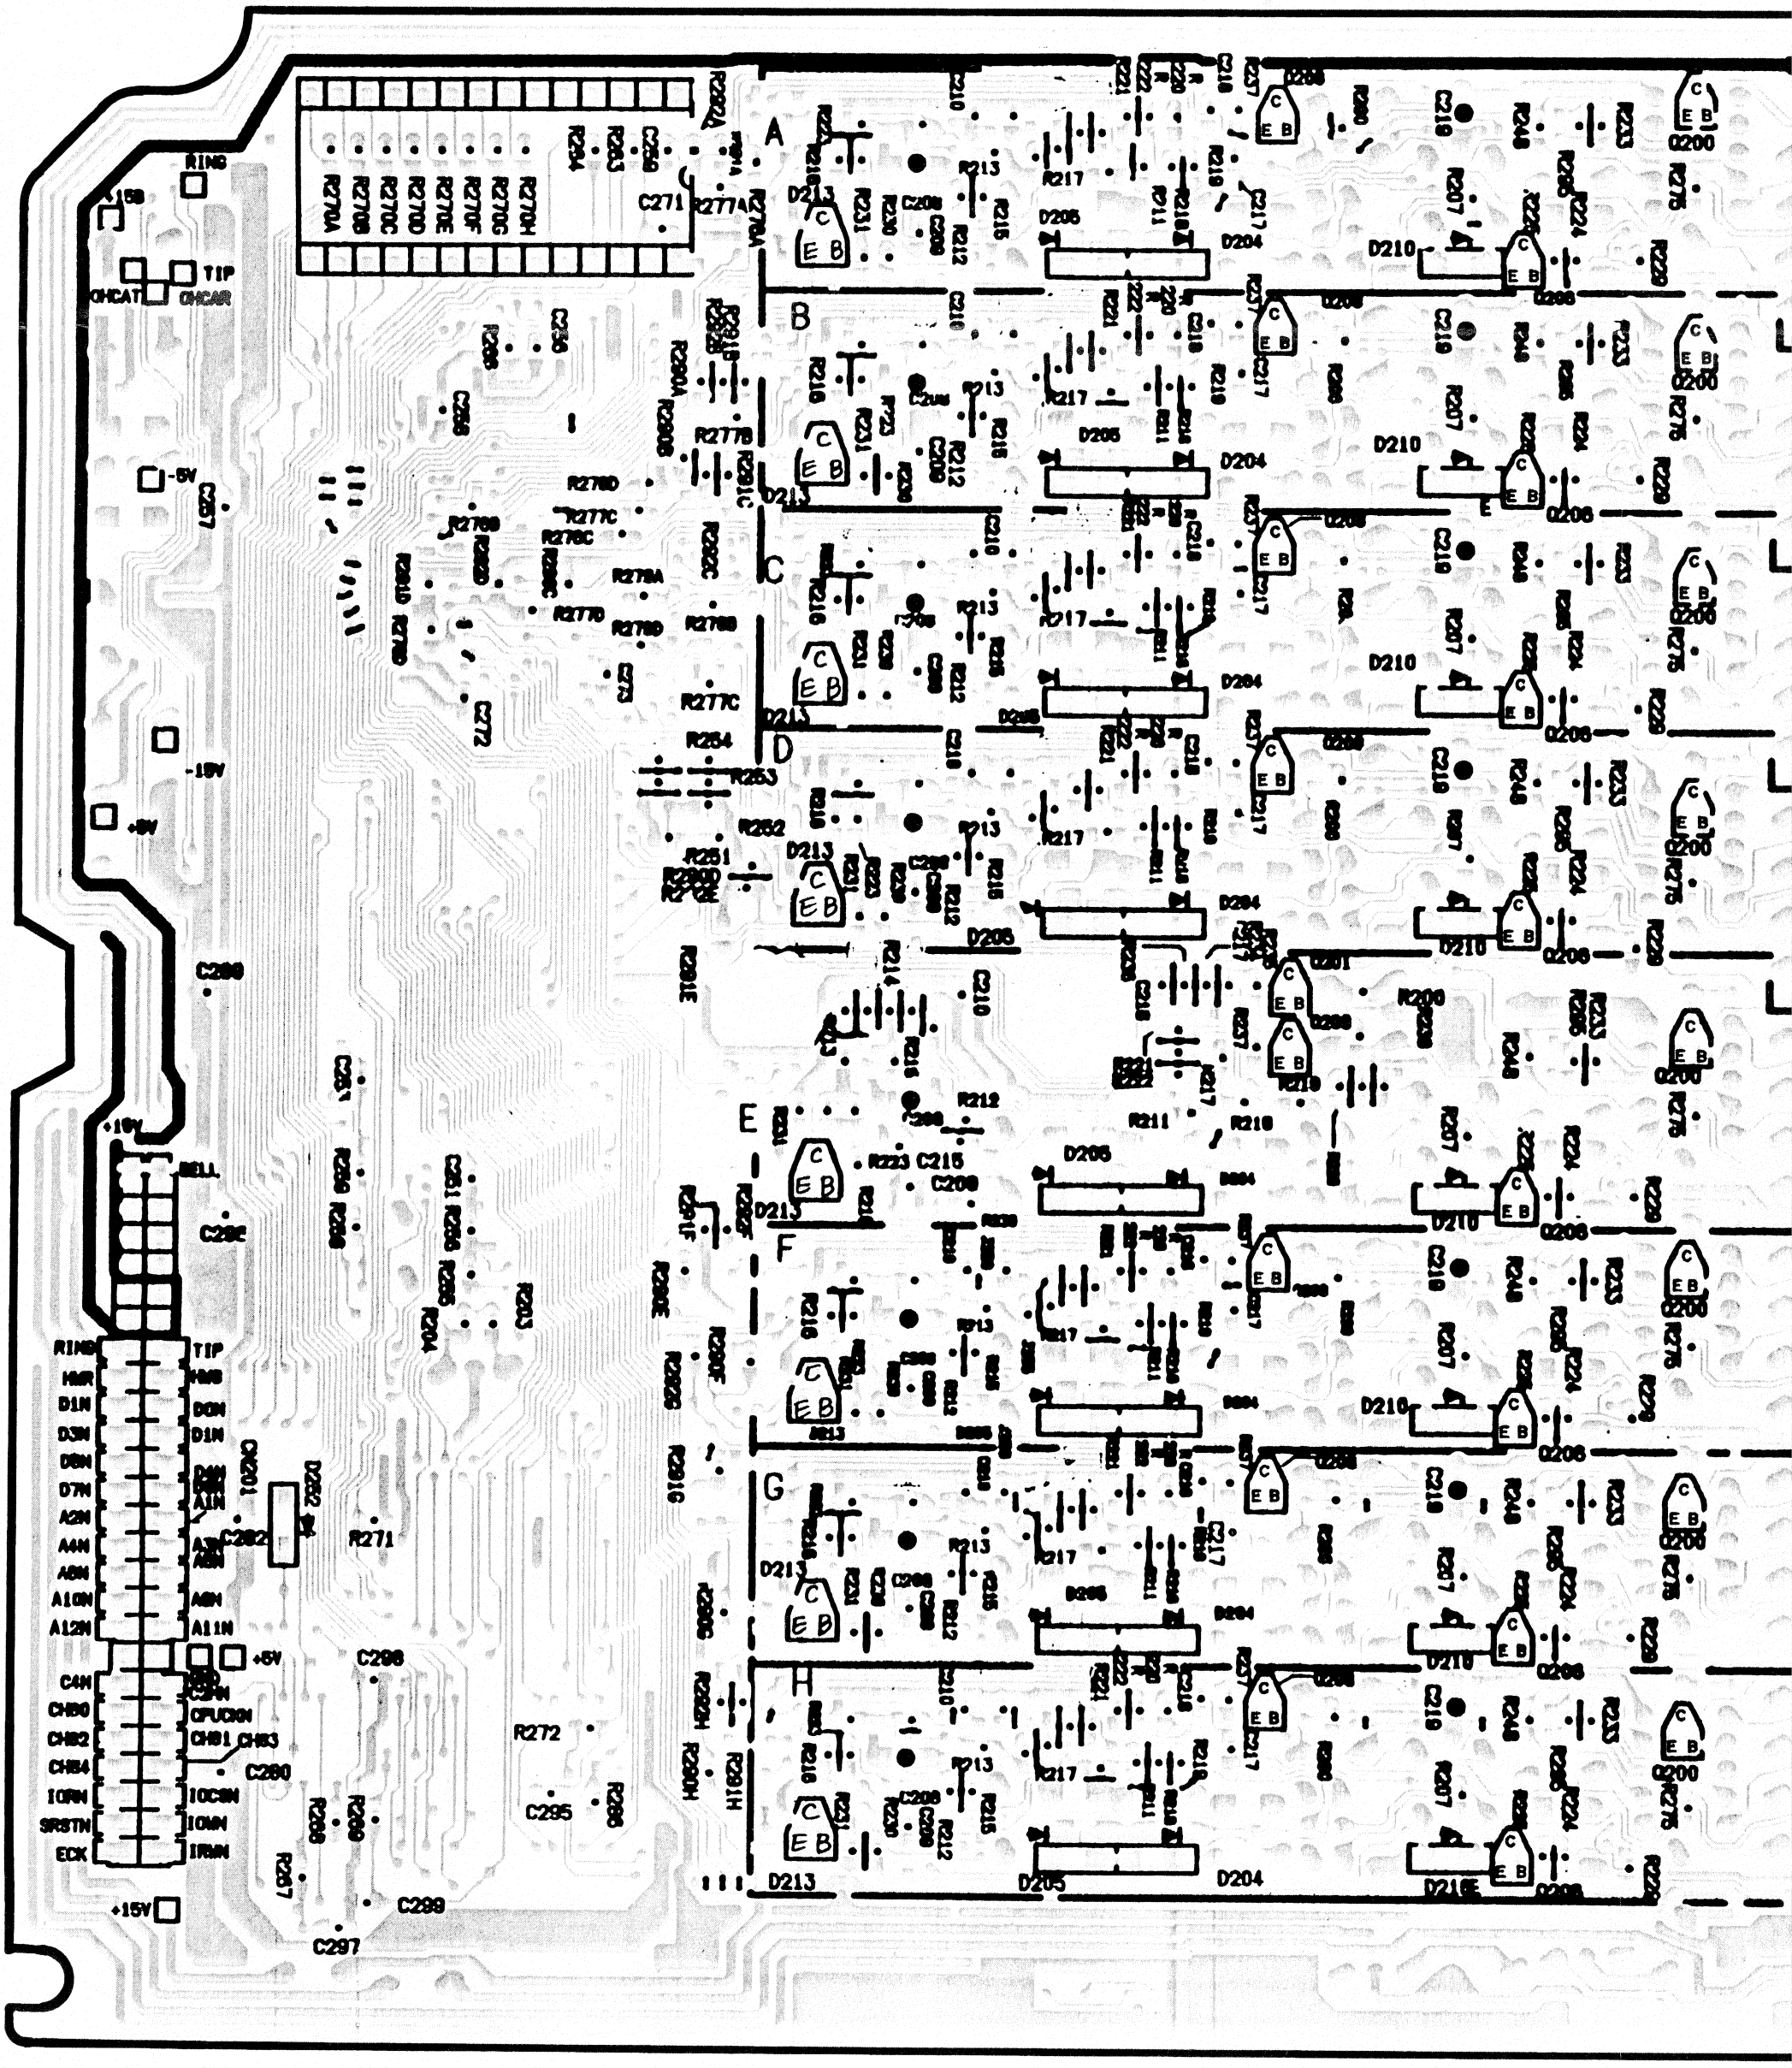

RD)

12 13 14 15 16 17 18

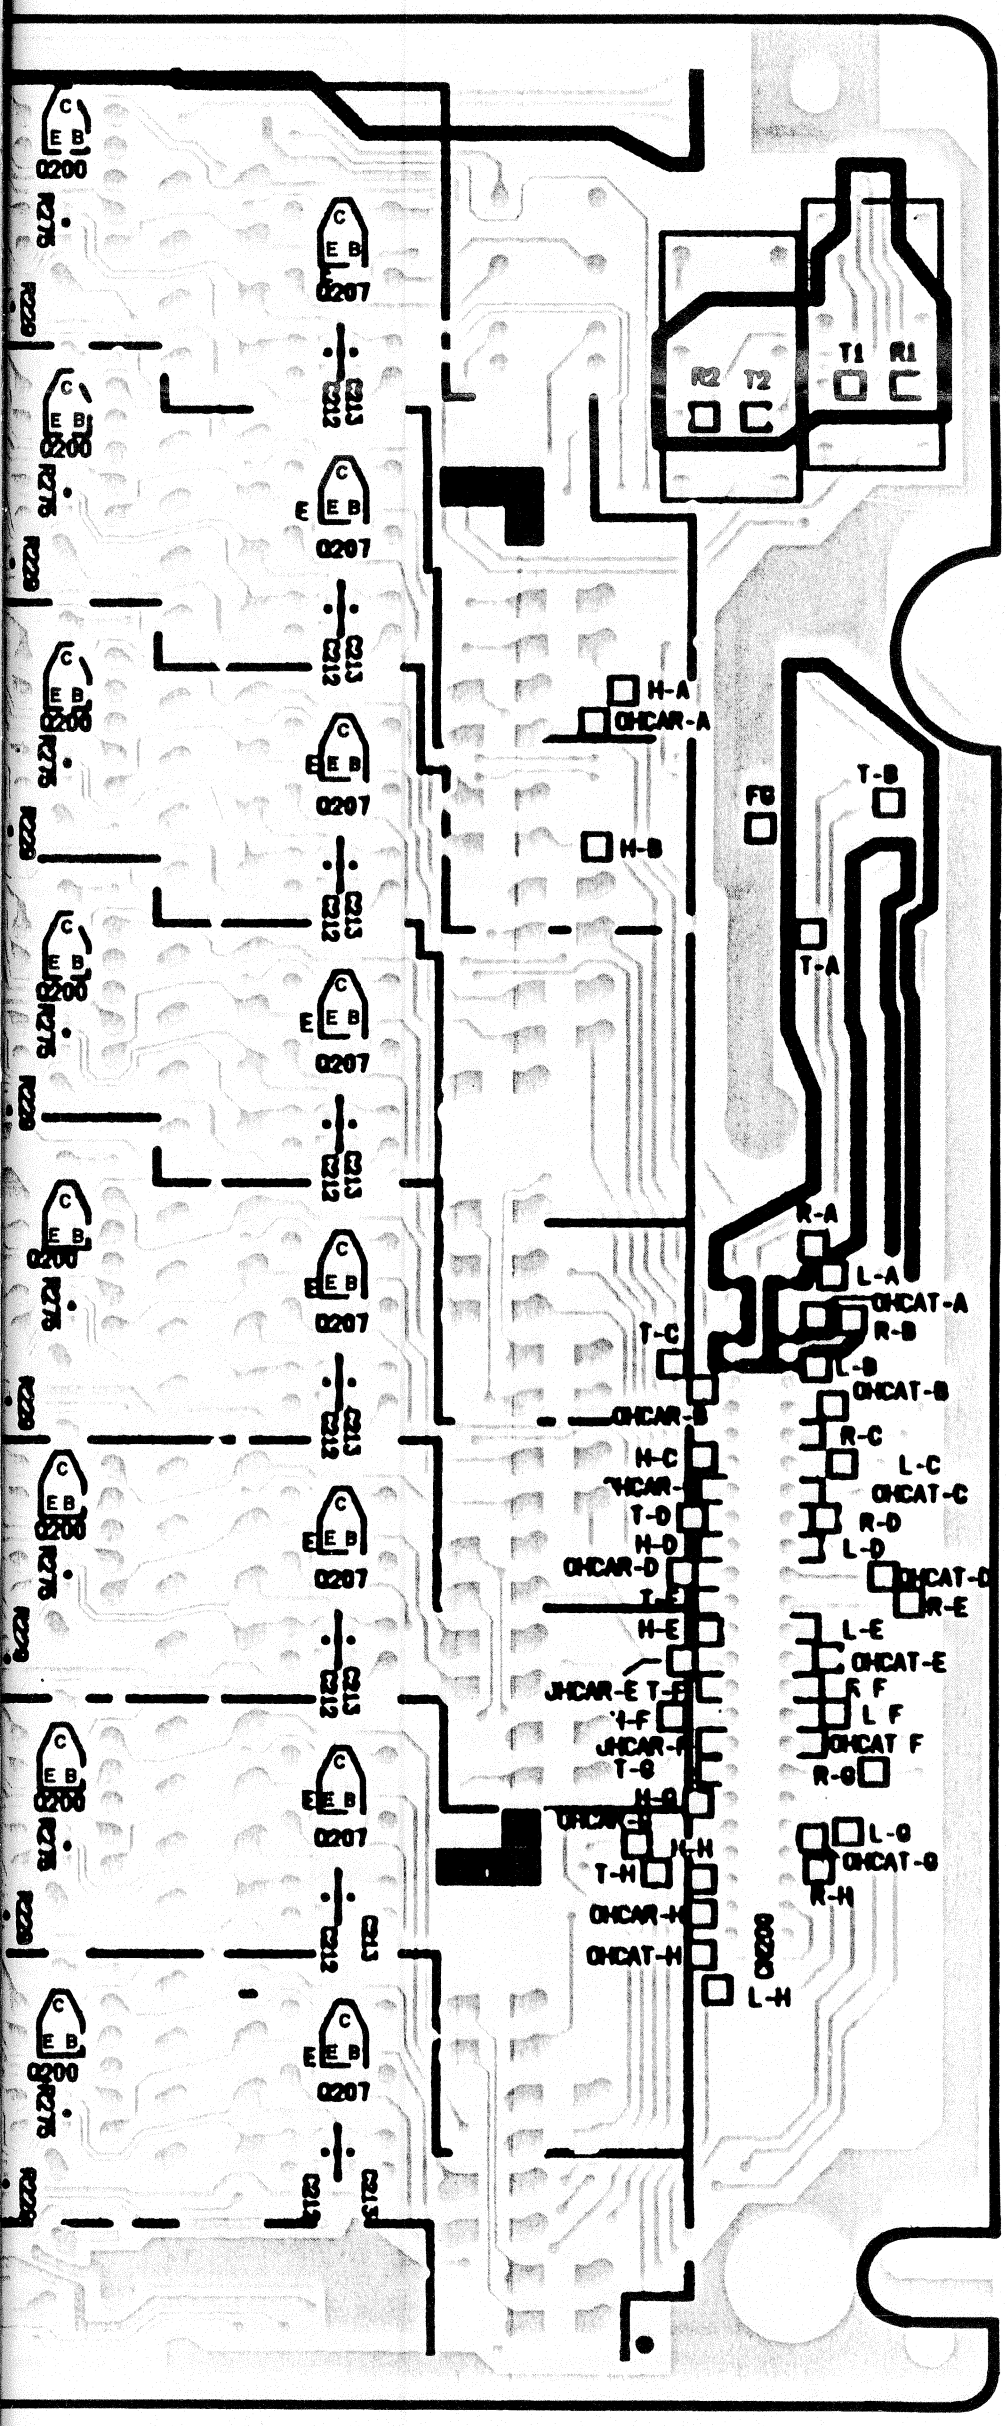

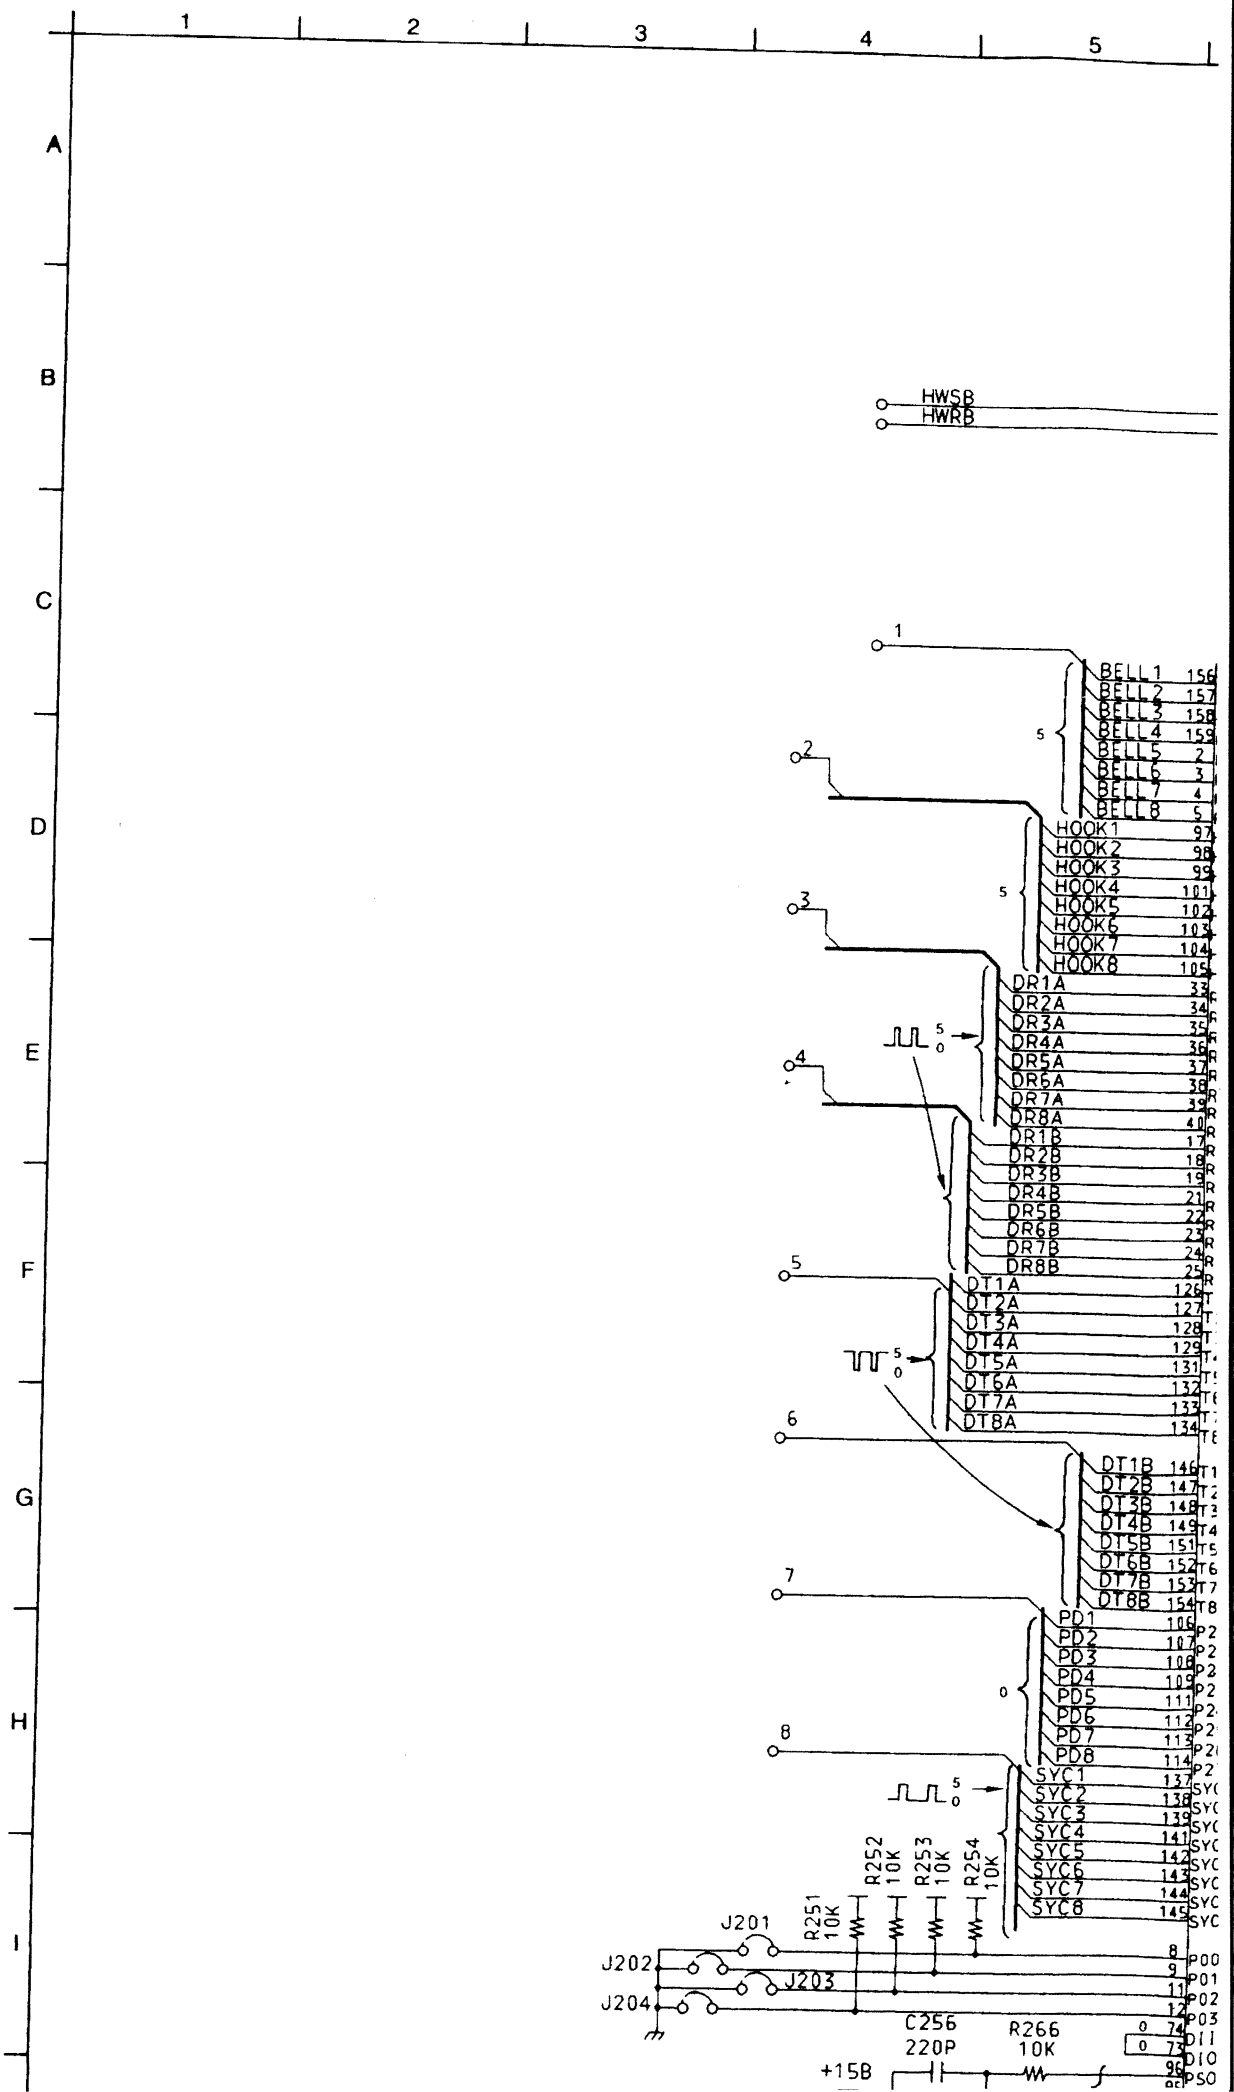
1
2
3
4
5
A
B
C
D
E
F
G
H
I
HWSB
HWRB
BELL1
BELL2
BELL3
BELL4
BELL5
BELL6
BELL7
BELL8
HOOK1
HOOK2
HOOK3
HOOK4
HOOK5
HOOK6
HOOK7
HOOK8
DR1A
DR2A
DR3A
DR4A
DR5A
DR6A
DR7A
DR8A
DR1B
DR2B
DR3B
DR4B
DR5B
DR6B
DR7B
DR8B
DT1A
DT2A
DT3A
DT4A
DT5A
DT6A
DT7A
DT8A
DT1B
DT2B
DT3B
DT4B
DT5B
DT6B
DT7B
DT8B
PD1
PD2
PD3
PD4
PD5
PD6
PD7
PD8
SYC1
SYC2
SYC3
SYC4
SYC5
SYC6
SYC7
SYC8
R251 10K
R252 10K
R253 10K
R254 10K
J201
J202
J203
J204
C256 220P
R266 10K
+15B

SCHEMATIC DIAGRAM (EXT. ½ CIRCUIT)

6 7 8 9 10 11 12 13 14 15 16 17 18

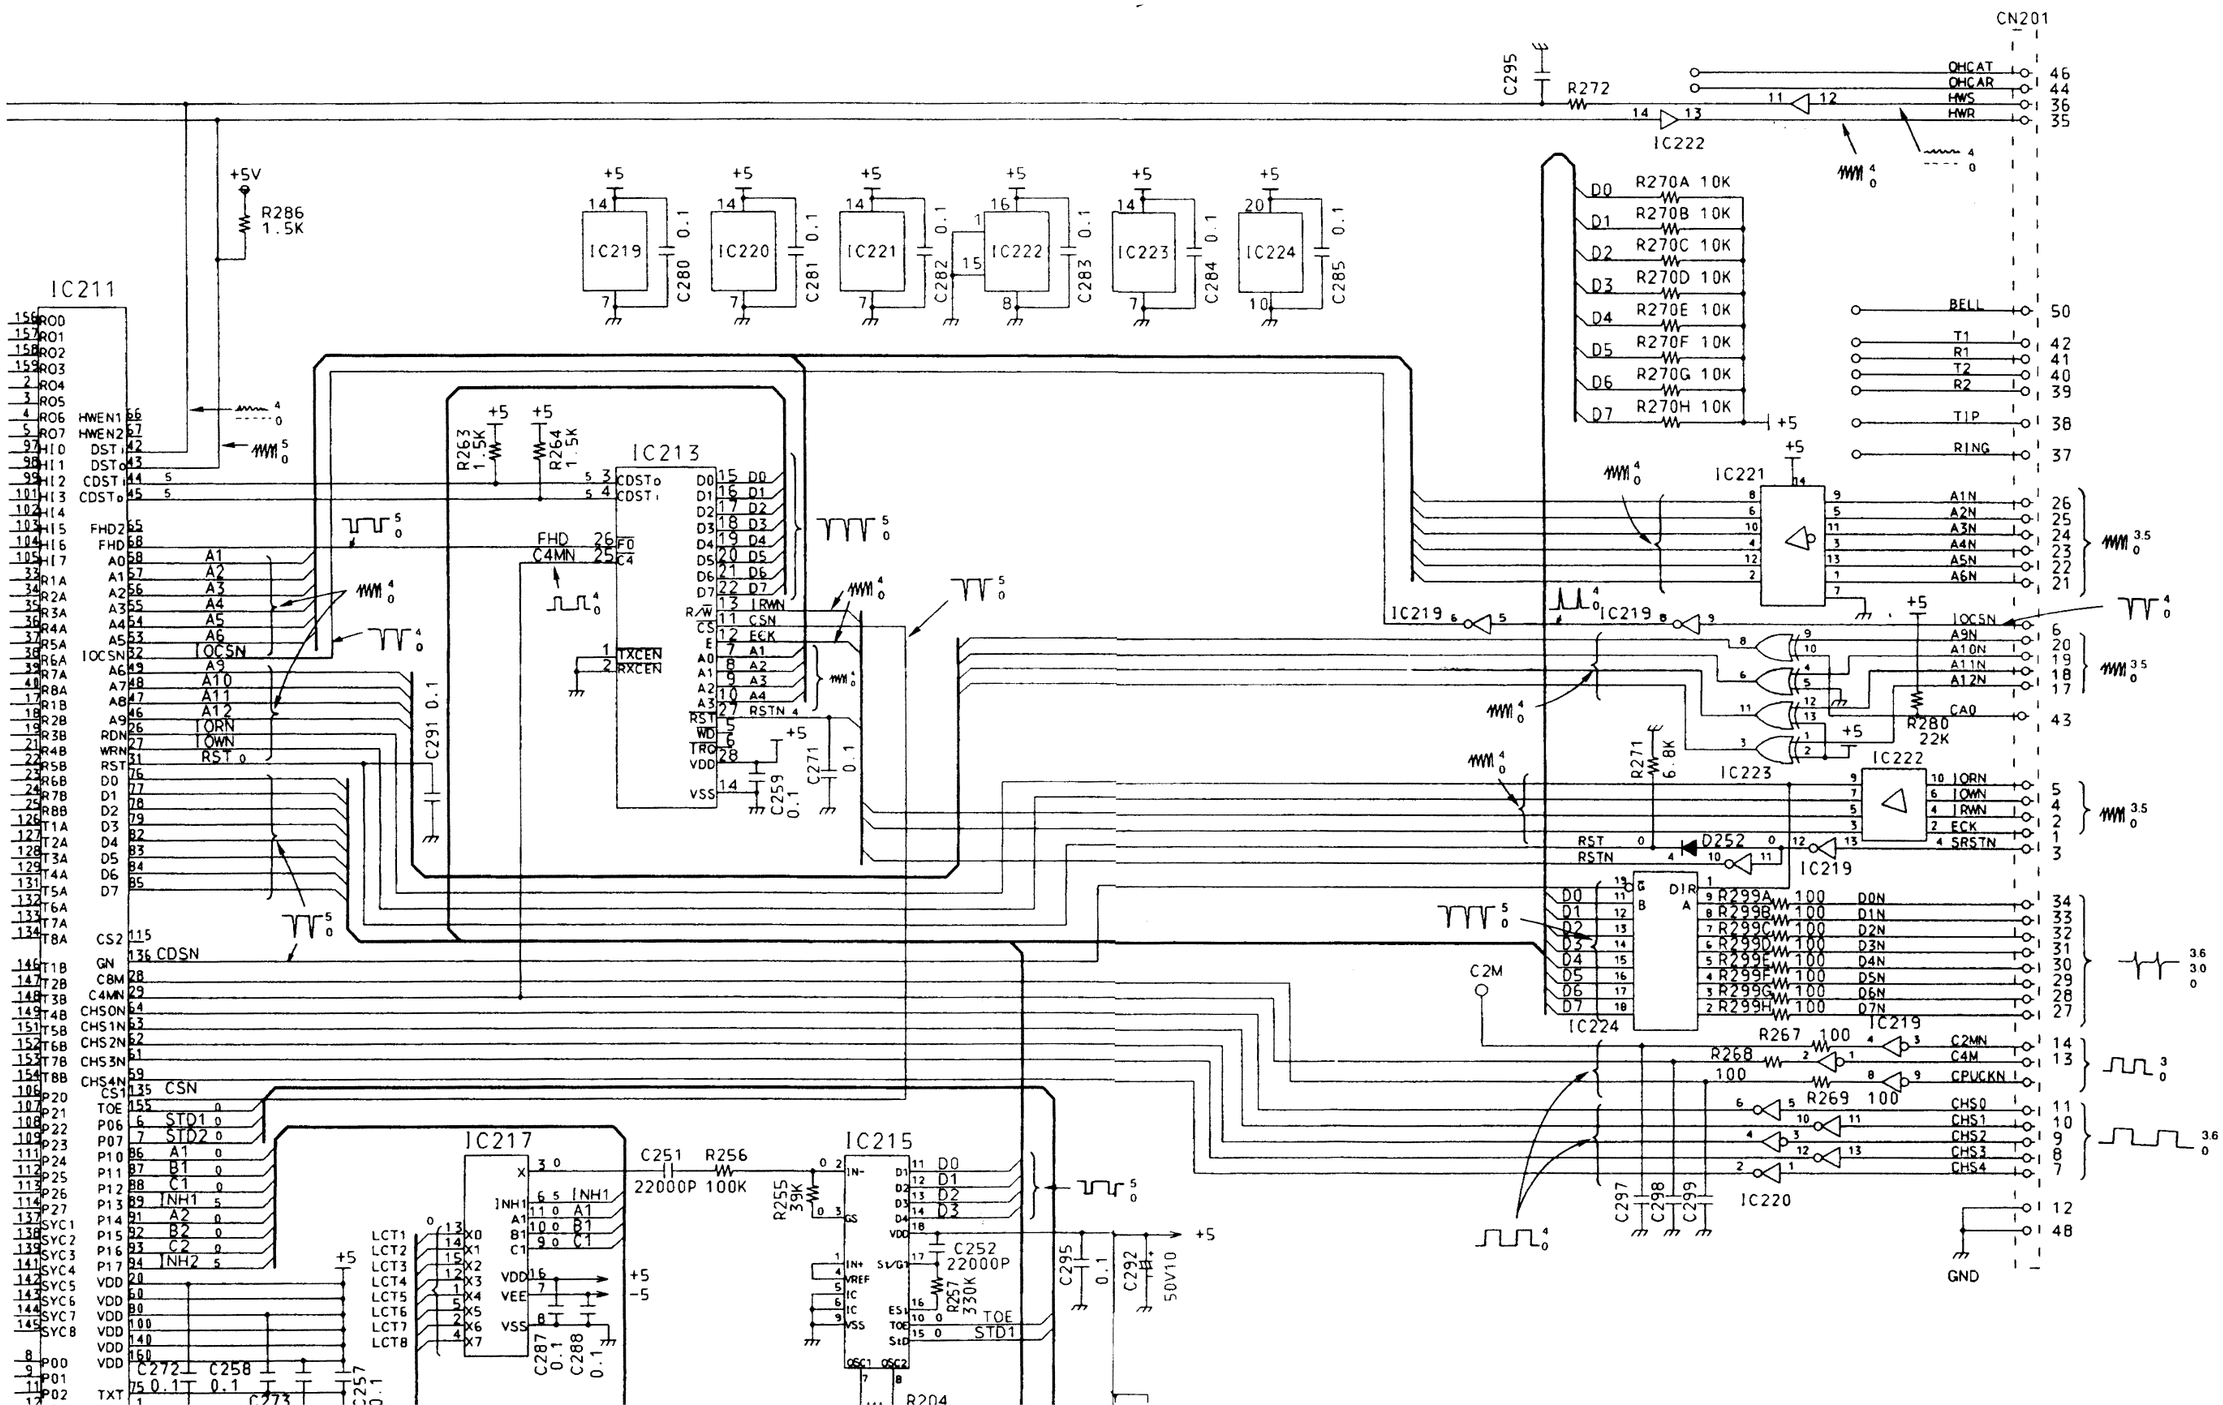

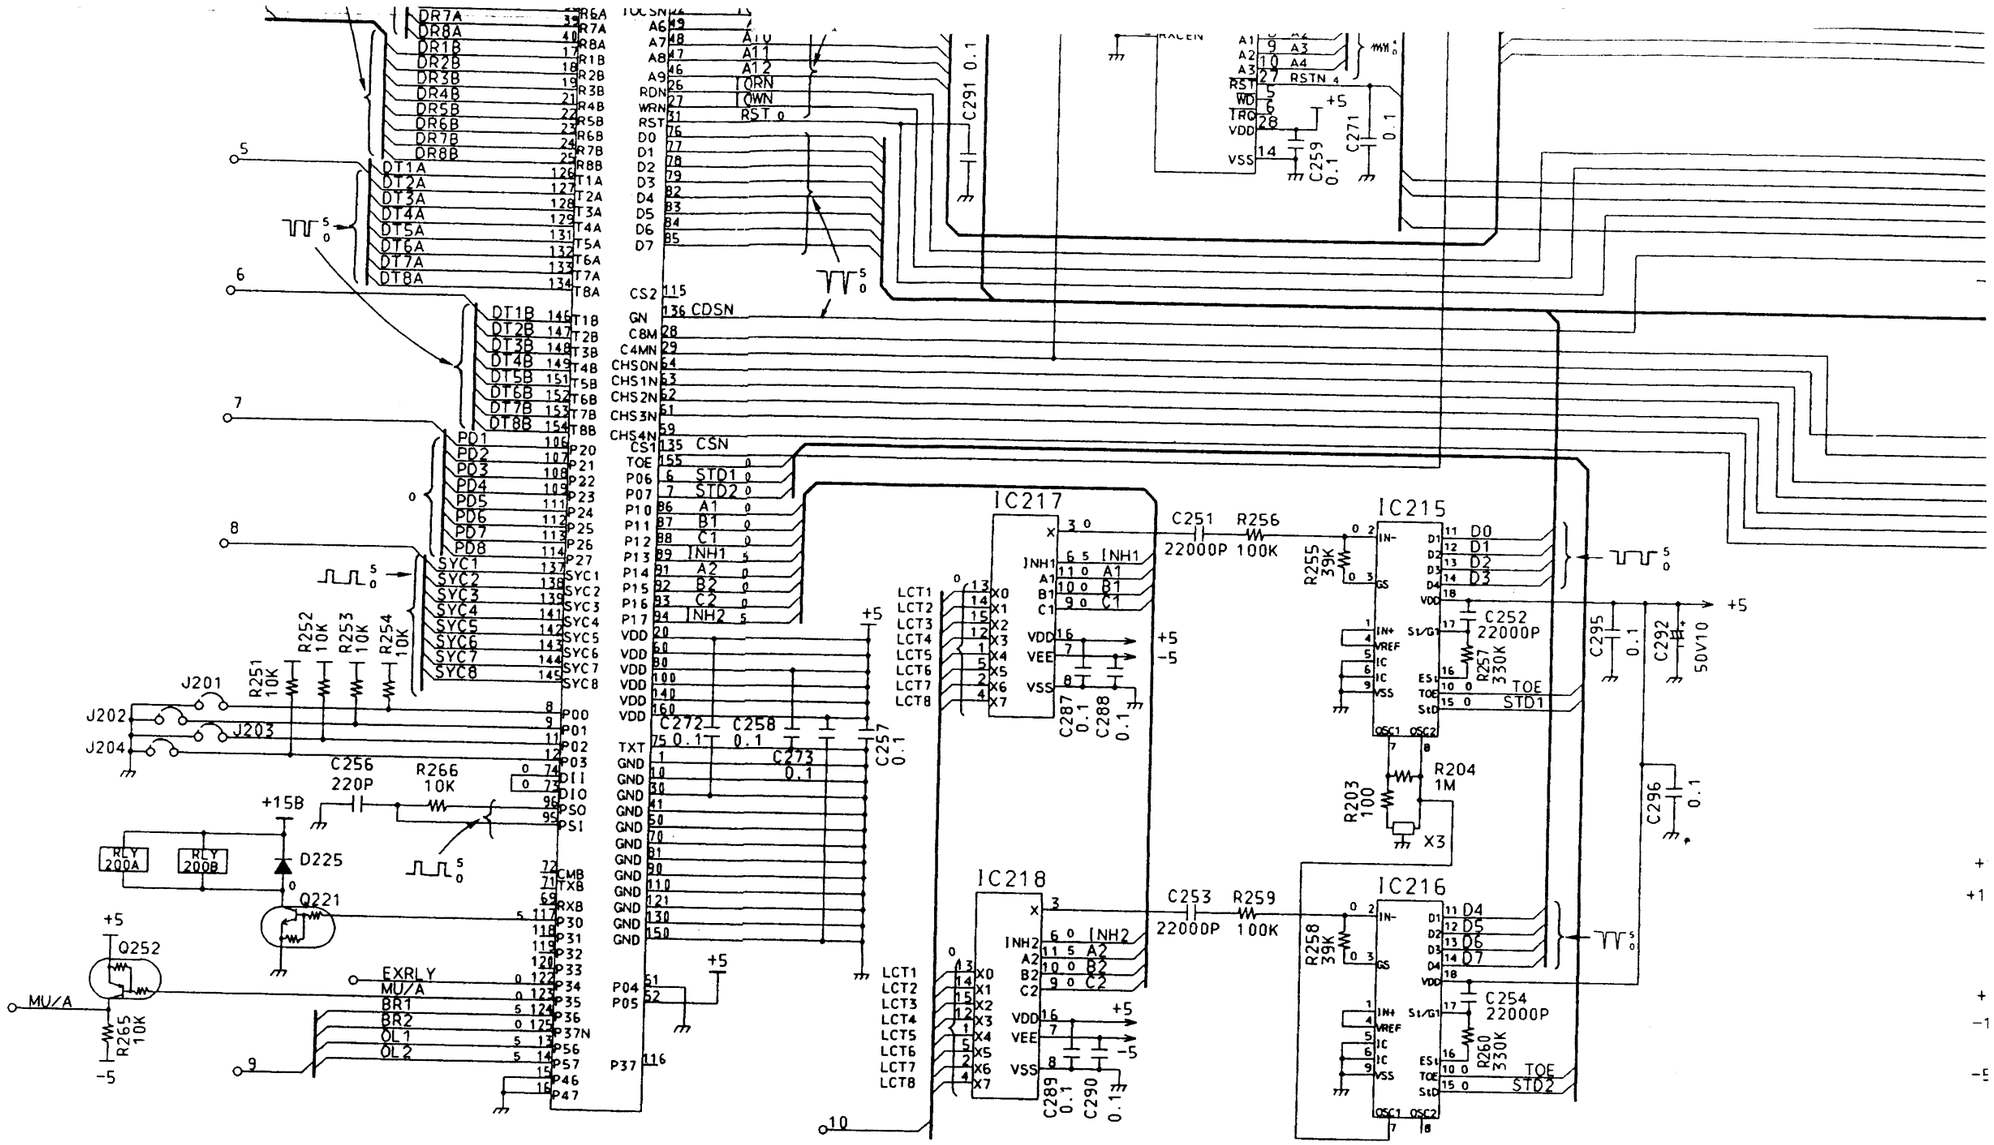
IC217
IC218
IC215
IC216
C251 R256 22000P 100K
C253 R259 22000P 100K
C252 22000P
C254 22000P
R255 39K
R258 39K
R257 330K
R260 330K
R204 1M
R203 100
X3
C271 0.1
C259 0.1
C291 0.1
C272 C258 C273 C257 0.1
C287 C288 C289 C290 0.1
C295 0.1
C292 50V10
C296 0.1
R251 10K
R252 10K
R253 10K
R254 10K
R266 10K
R265 10K
C256 220P
J201
J202
J203
J204
D225
Q221
Q252
RLY 200A
RLY 200B
+15B
+5
-5
MU/A
EXRLY
BR1
BR2
OL1
OL2
TOE
STD1
STD2

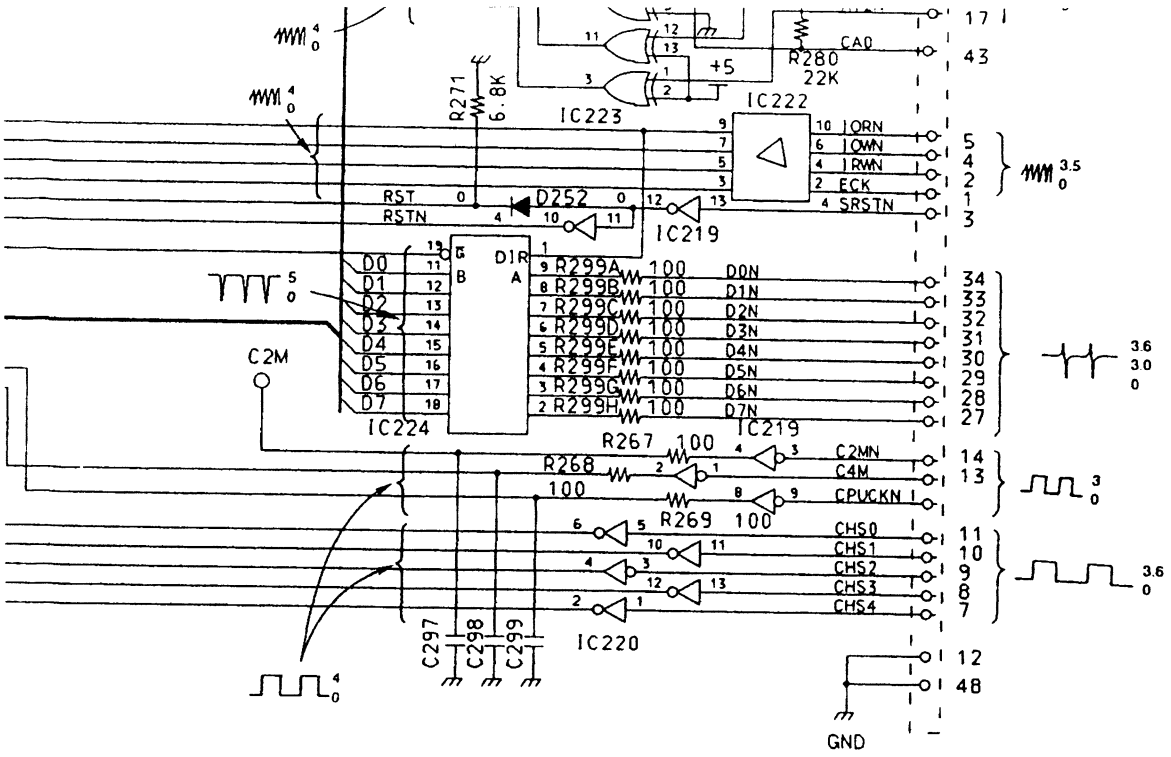
R271
6.8K
IC223
IC222
R280
22K
+5
CA0
ORN
OWN
RWN
ECK
SRSTN
RST
RSTN
D252
IC219
DIR
D0
D1
D2
D3
D4
D5
D6
D7
R299A 100 D0N
R299B 100 D1N
R299C 100 D2N
R299D 100 D3N
R299E 100 D4N
R299F 100 D5N
R299G 100 D6N
R299H 100 D7N
C2M
IC224
R267 100
R268 100
R269 100
C2MN
C4M
CPUCKN
CHS0
CHS1
CHS2
CHS3
CHS4
C297
C298
C299
IC220
GND

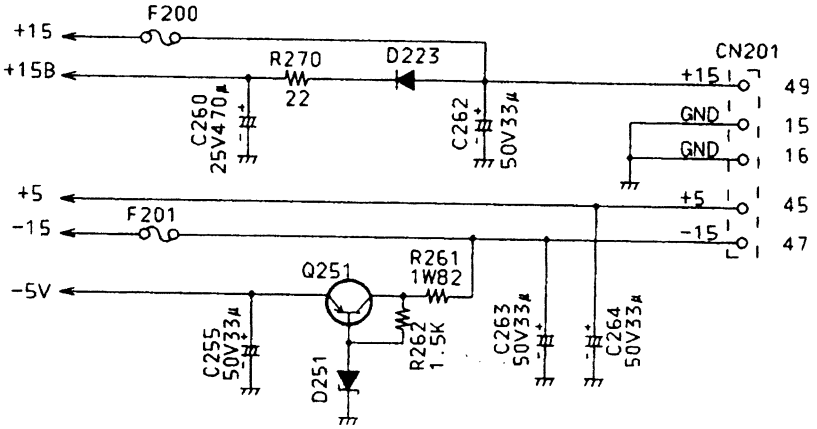
F200
+15
+15B
R270
22
D223
C260
25V470µ
C262
50V33µ
CN201
+15
GND
GND
+5
F201
-15
-5V
Q251
R261
1W82
R262
1.5K
D251
C255
50V33µ
C263
50V33µ
C264
50V33µ

SCHEMATIC DIAGRAM (CO CIRCUIT)

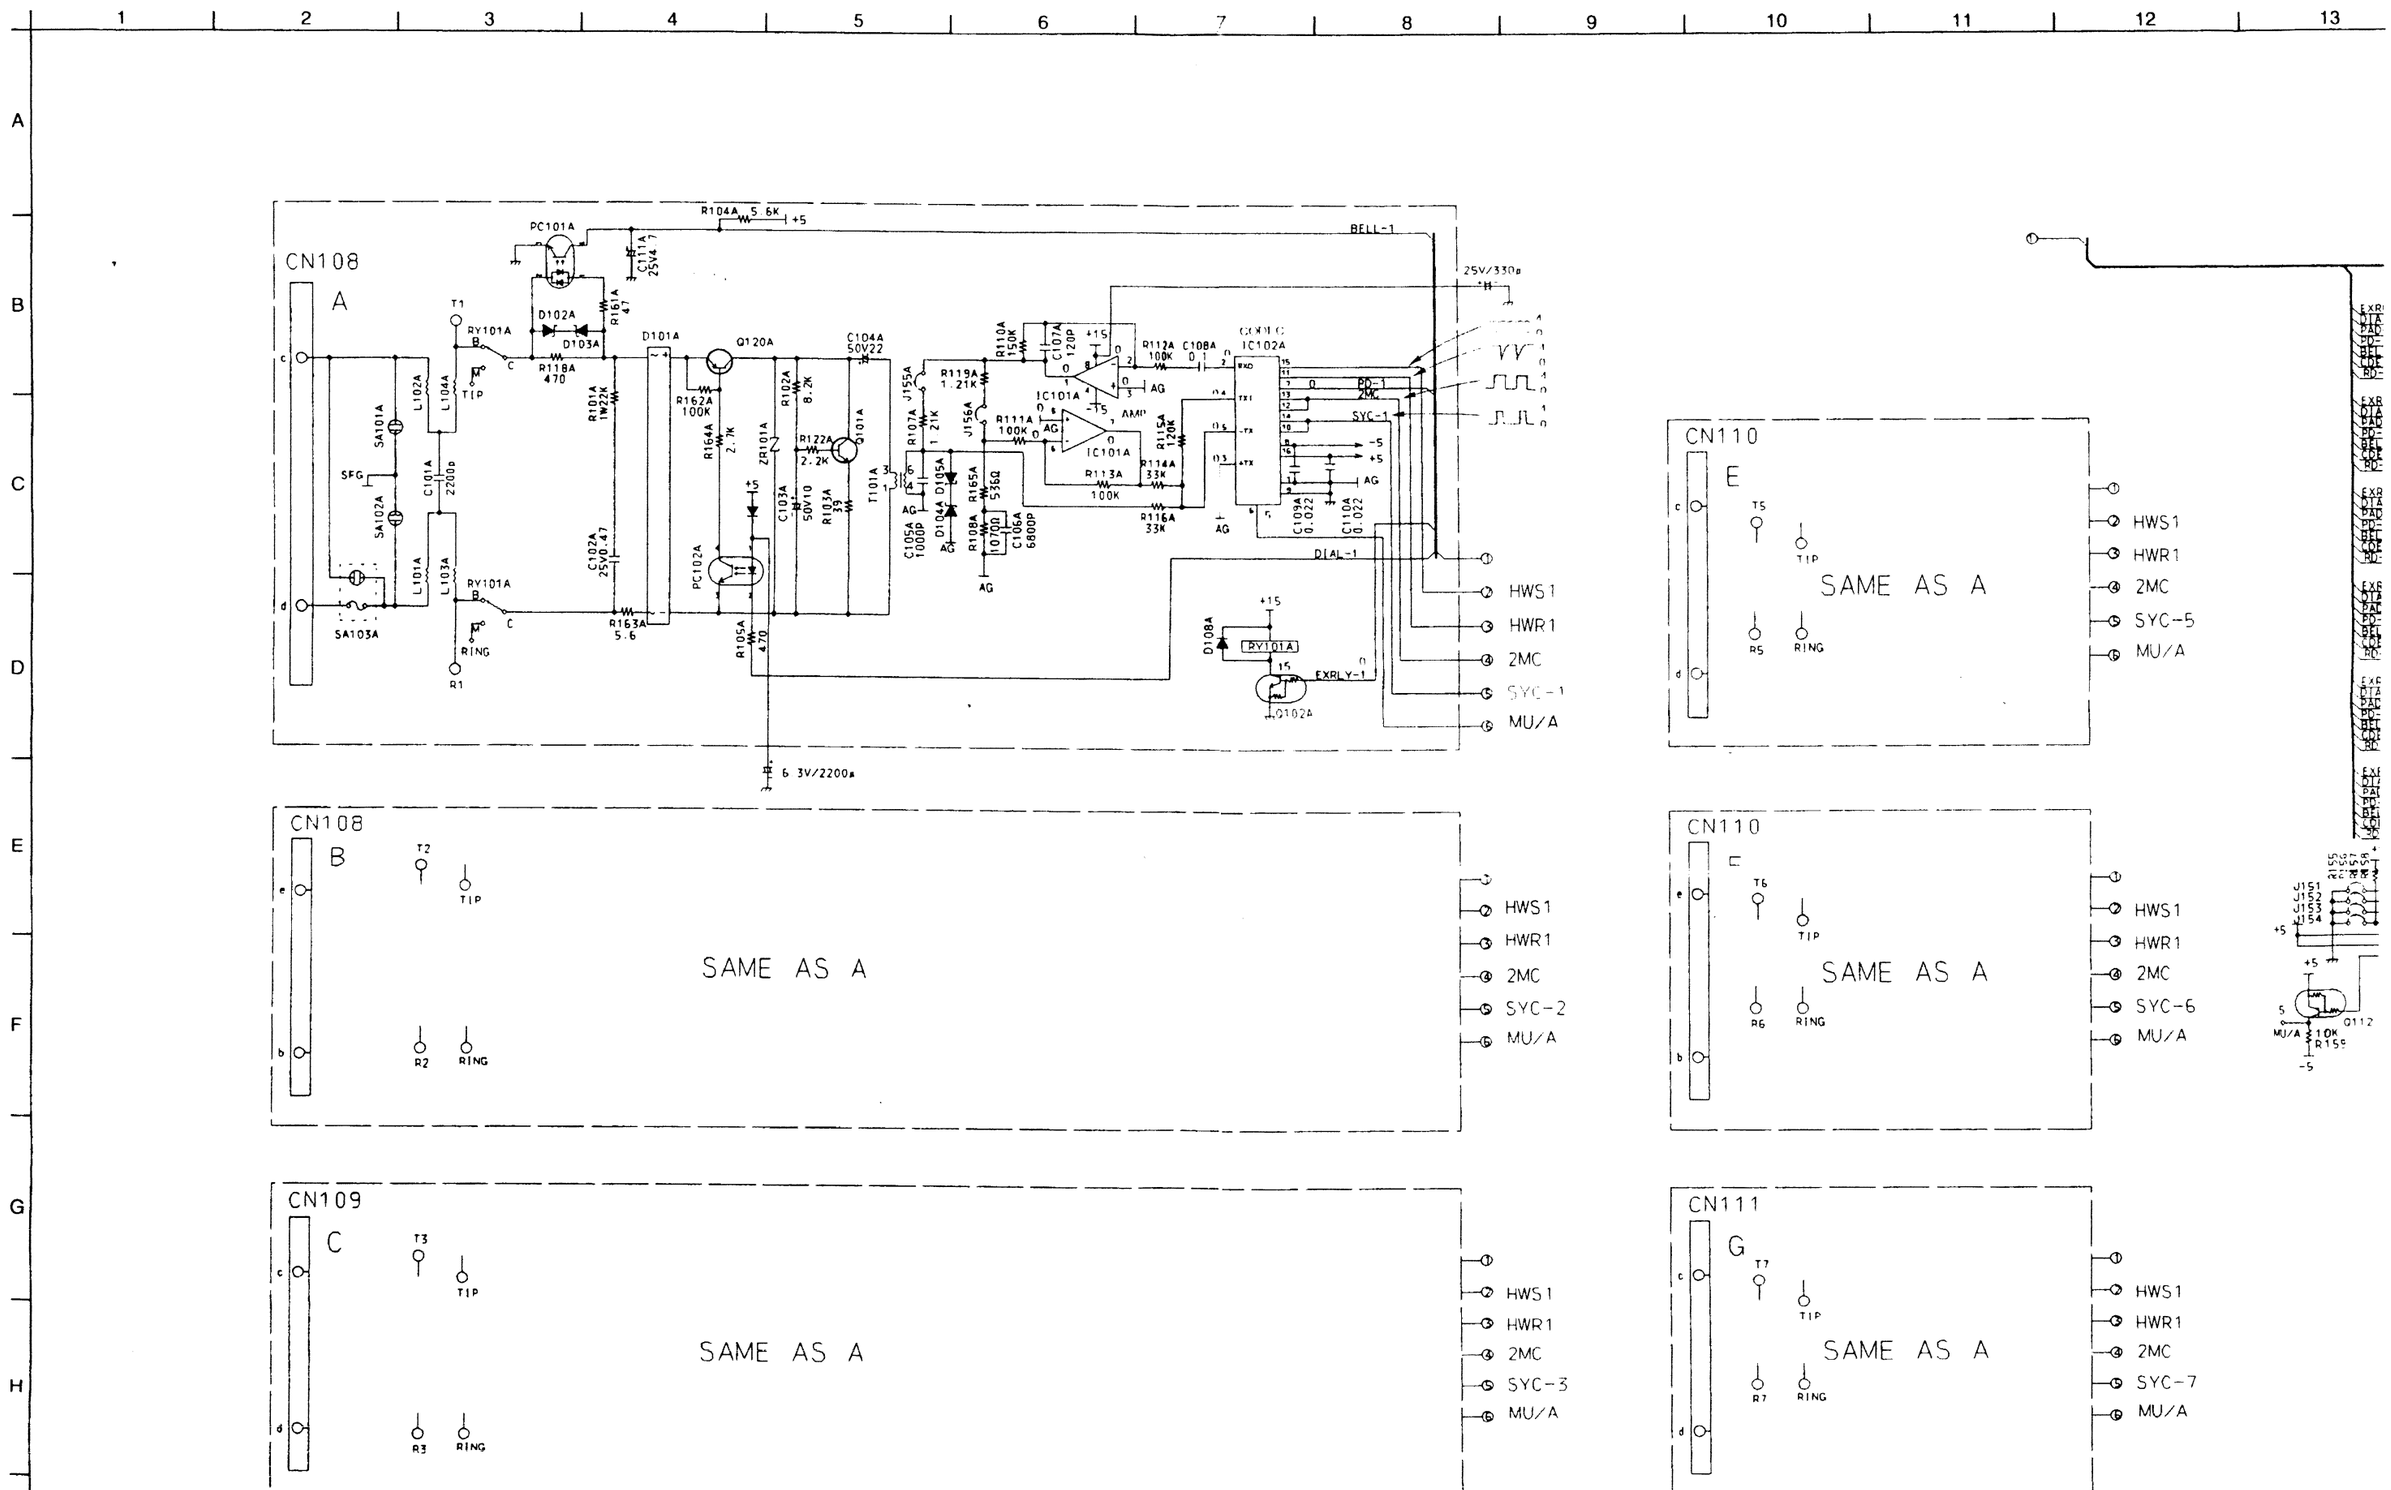

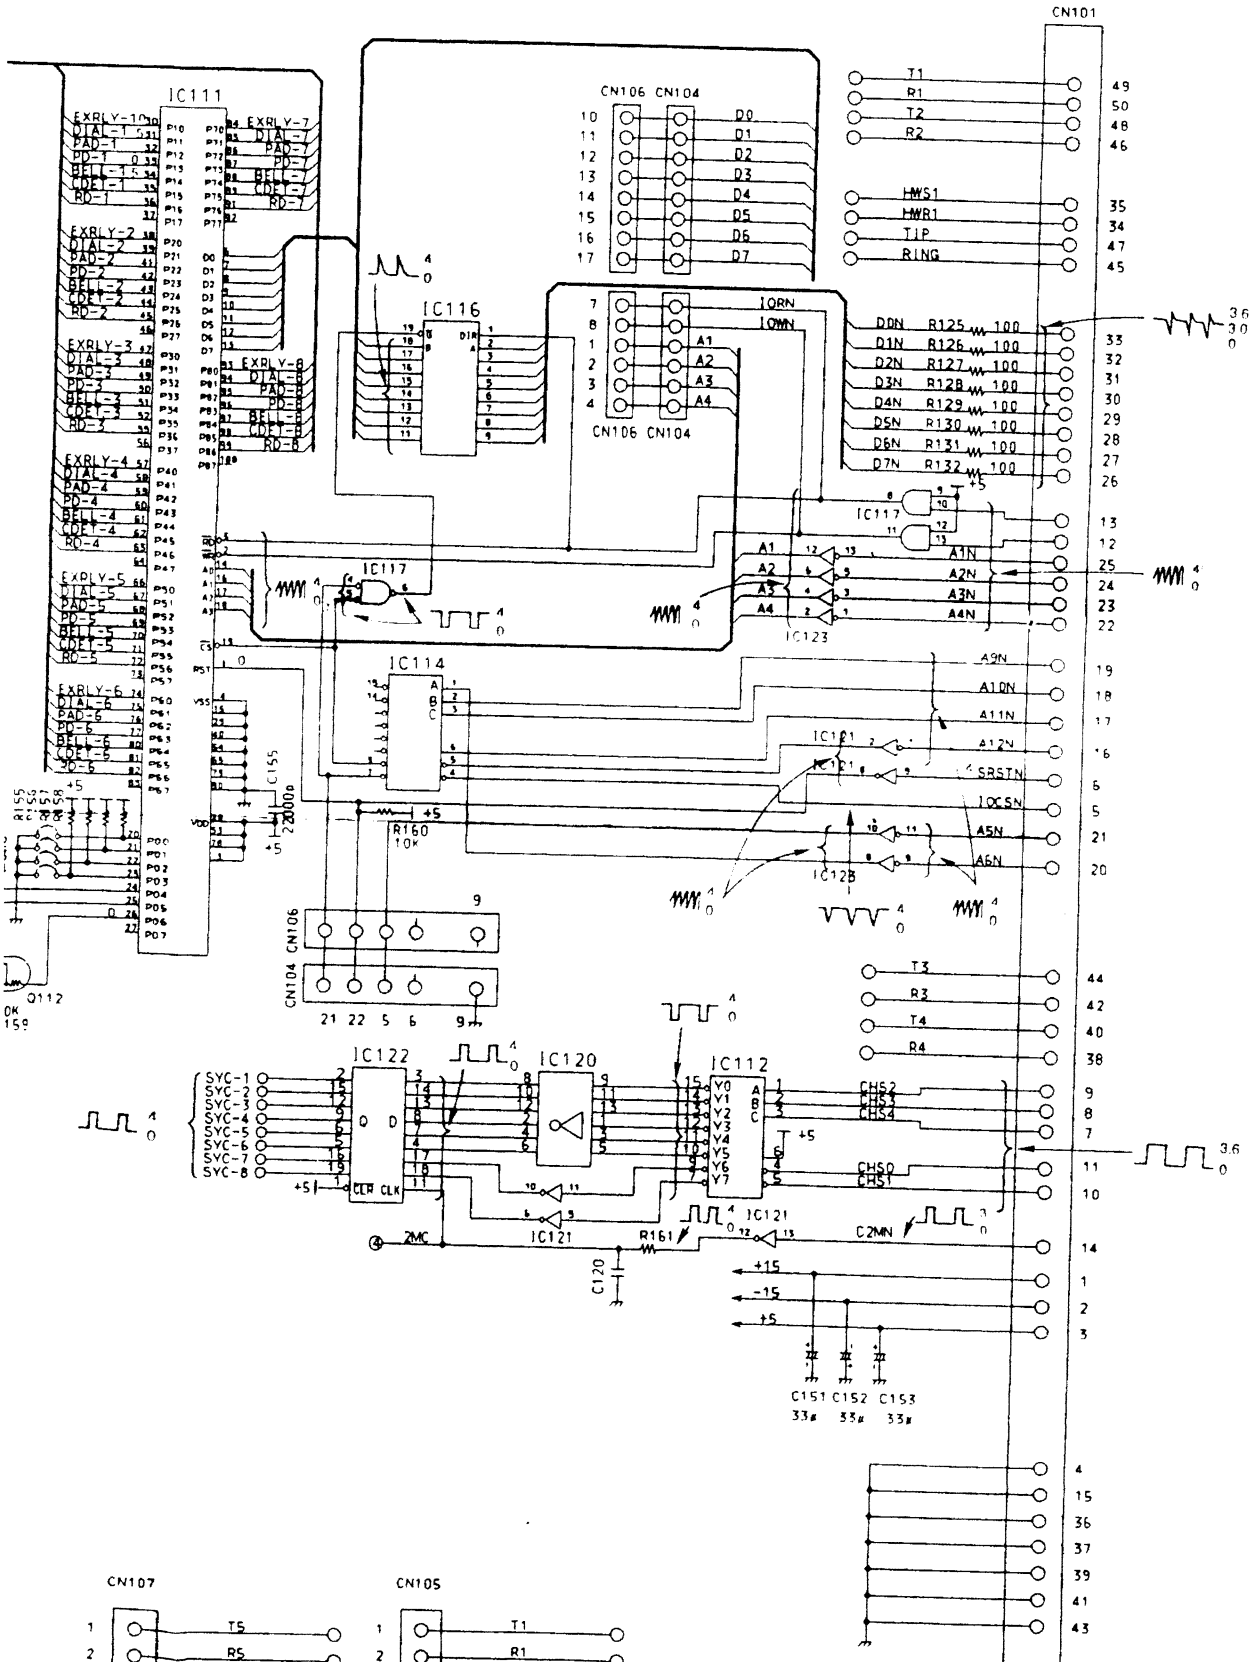
13
14
15
16
17
18
19
CN101
IC111
IC116
IC117
IC114
IC122
IC120
IC112
IC121
IC123
IC128
CN106 CN104
CN107
CN105
T1
R1
T2
R2
HWS1
HWR1
TIP
RING
D0
D1
D2
D3
D4
D5
D6
D7
R125
R126
R127
R128
R129
R130
R131
R132
A1N
A2N
A3N
A4N
A9N
A10N
A11N
A12N
SRSTN
IOCSN
A5N
A6N
T3
R3
T4
R4
CHS2
CHS3
CHS4
CHS0
CHS1
C2MN
2MC
R160
R161
C120
C151
C152
C153
C155
Q112
T5
R5

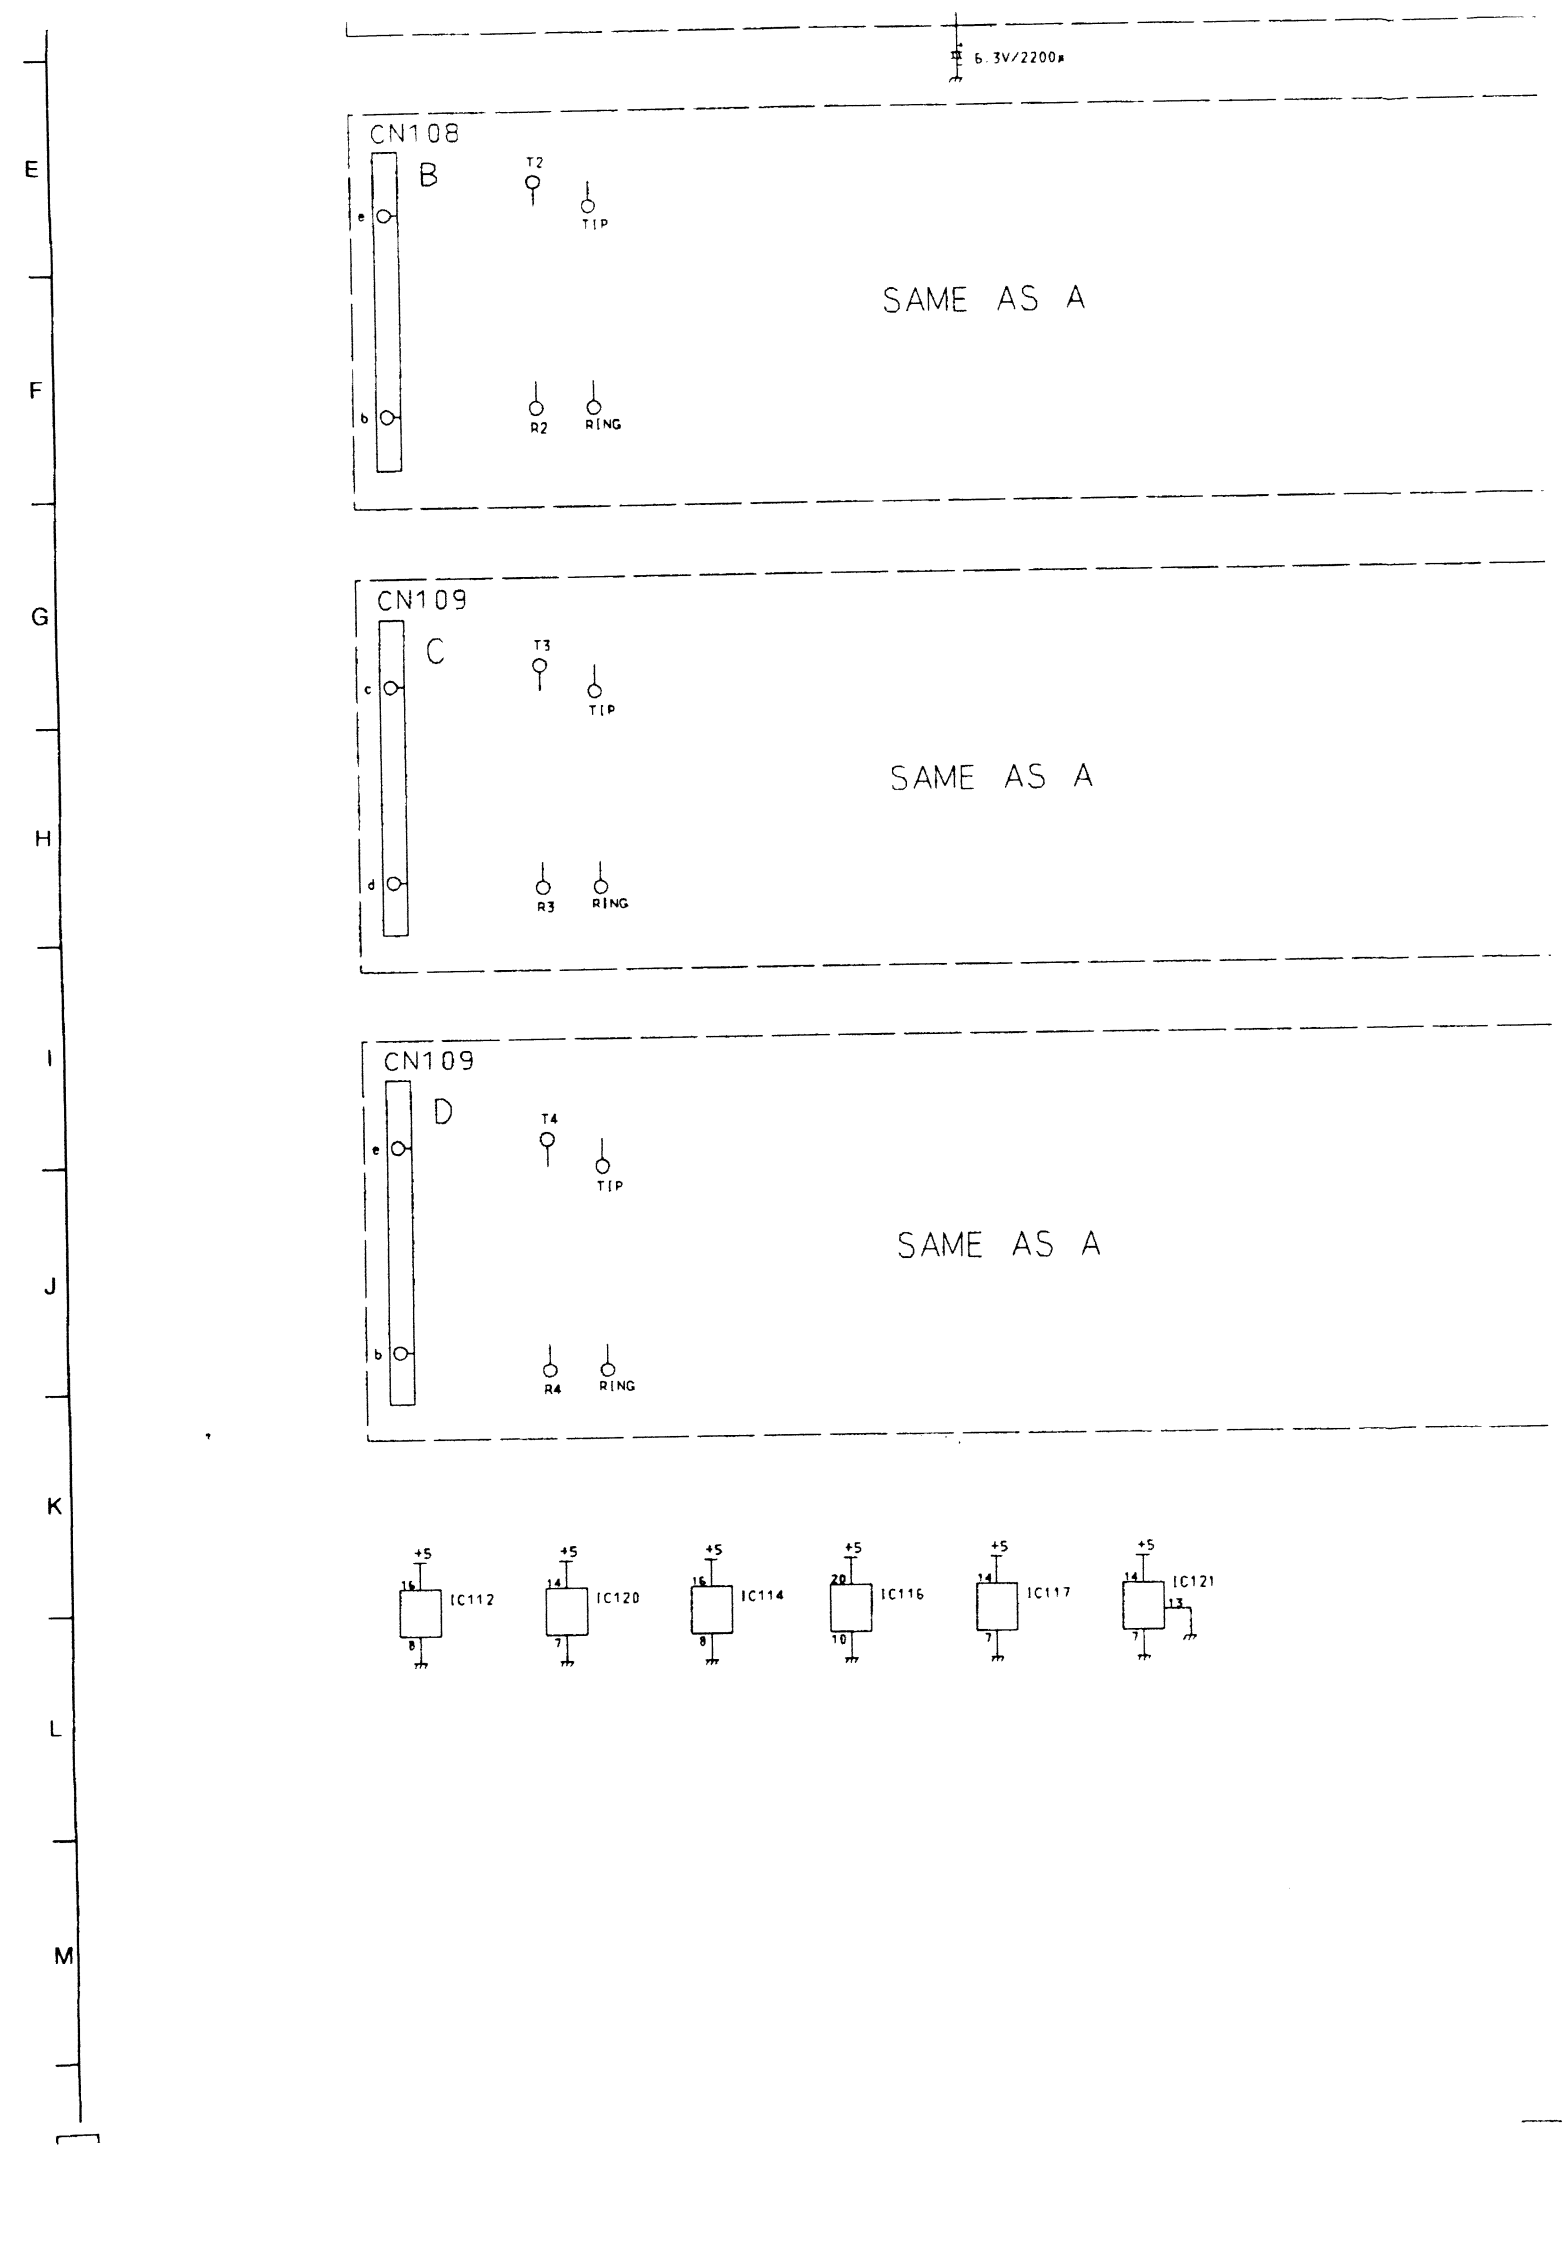
6.3V/2200μ
CN108
B
T2
TIP
e
b
R2
RING
SAME AS A
CN109
C
T3
TIP
c
d
R3
RING
SAME AS A
CN109
D
T4
TIP
e
b
R4
RING
SAME AS A
+5
IC112
IC120
IC114
IC116
IC117
IC121
E
F
G
H
I
J
K
L
M

CN110
E
T6
TIP
R6
RING
SAME AS A
HWS1
HWR1
2MC
SYC-2
MU/A
HWS1
HWR1
2MC
SYC-6
MU/A

CN111
G
T7
TIP
R7
RING
SAME AS A
HWS1
HWR1
2MC
SYC-3
MU/A
HWS1
HWR1
2MC
SYC-7
MU/A

CN111
H
T8
TIP
R8
RING
SAME AS A
HWS1
HWR1
2MC
SYC-4
MU/A
HWS1
HWR1
2MC
SYC-8
MU/A

IC114
IC121
IC122
IC120
IC112
IC121
IC123
IC122
Q112
Q111
CN106
CN104
CN107
CN105
CN106
CN104
SFG
FG
5A104
R159 10K
R160 10K
R161
R154 1W220
R153 1.5K
D154
C154 50V 1μ
C120
C151 C152 C153 33μ 33μ 33μ
C155 2200p
+5
-5
+15
-15
MU/A
2MC
C2MN
EXRLY-6
SAL-6
SD-6
SC-6
SYC-1
SYC-2
SYC-3
SYC-4
SYC-5
SYC-6
SYC-7
SYC-8
A10N
A11N
A12N
SRSTN
IOCSN
A5N
A6N
T3
R3
T4
R4
CHS2
CHS3
CHS4
CHS0
CHS1
T5
R5
T6
R6
T7
R7
T8
R8
T1
R1
T2
R2
T3
R3
T4
R4
20
19
18
+5

SCHEMATIC DIAGRAM (EXT. 2/2 CIRCUIT)

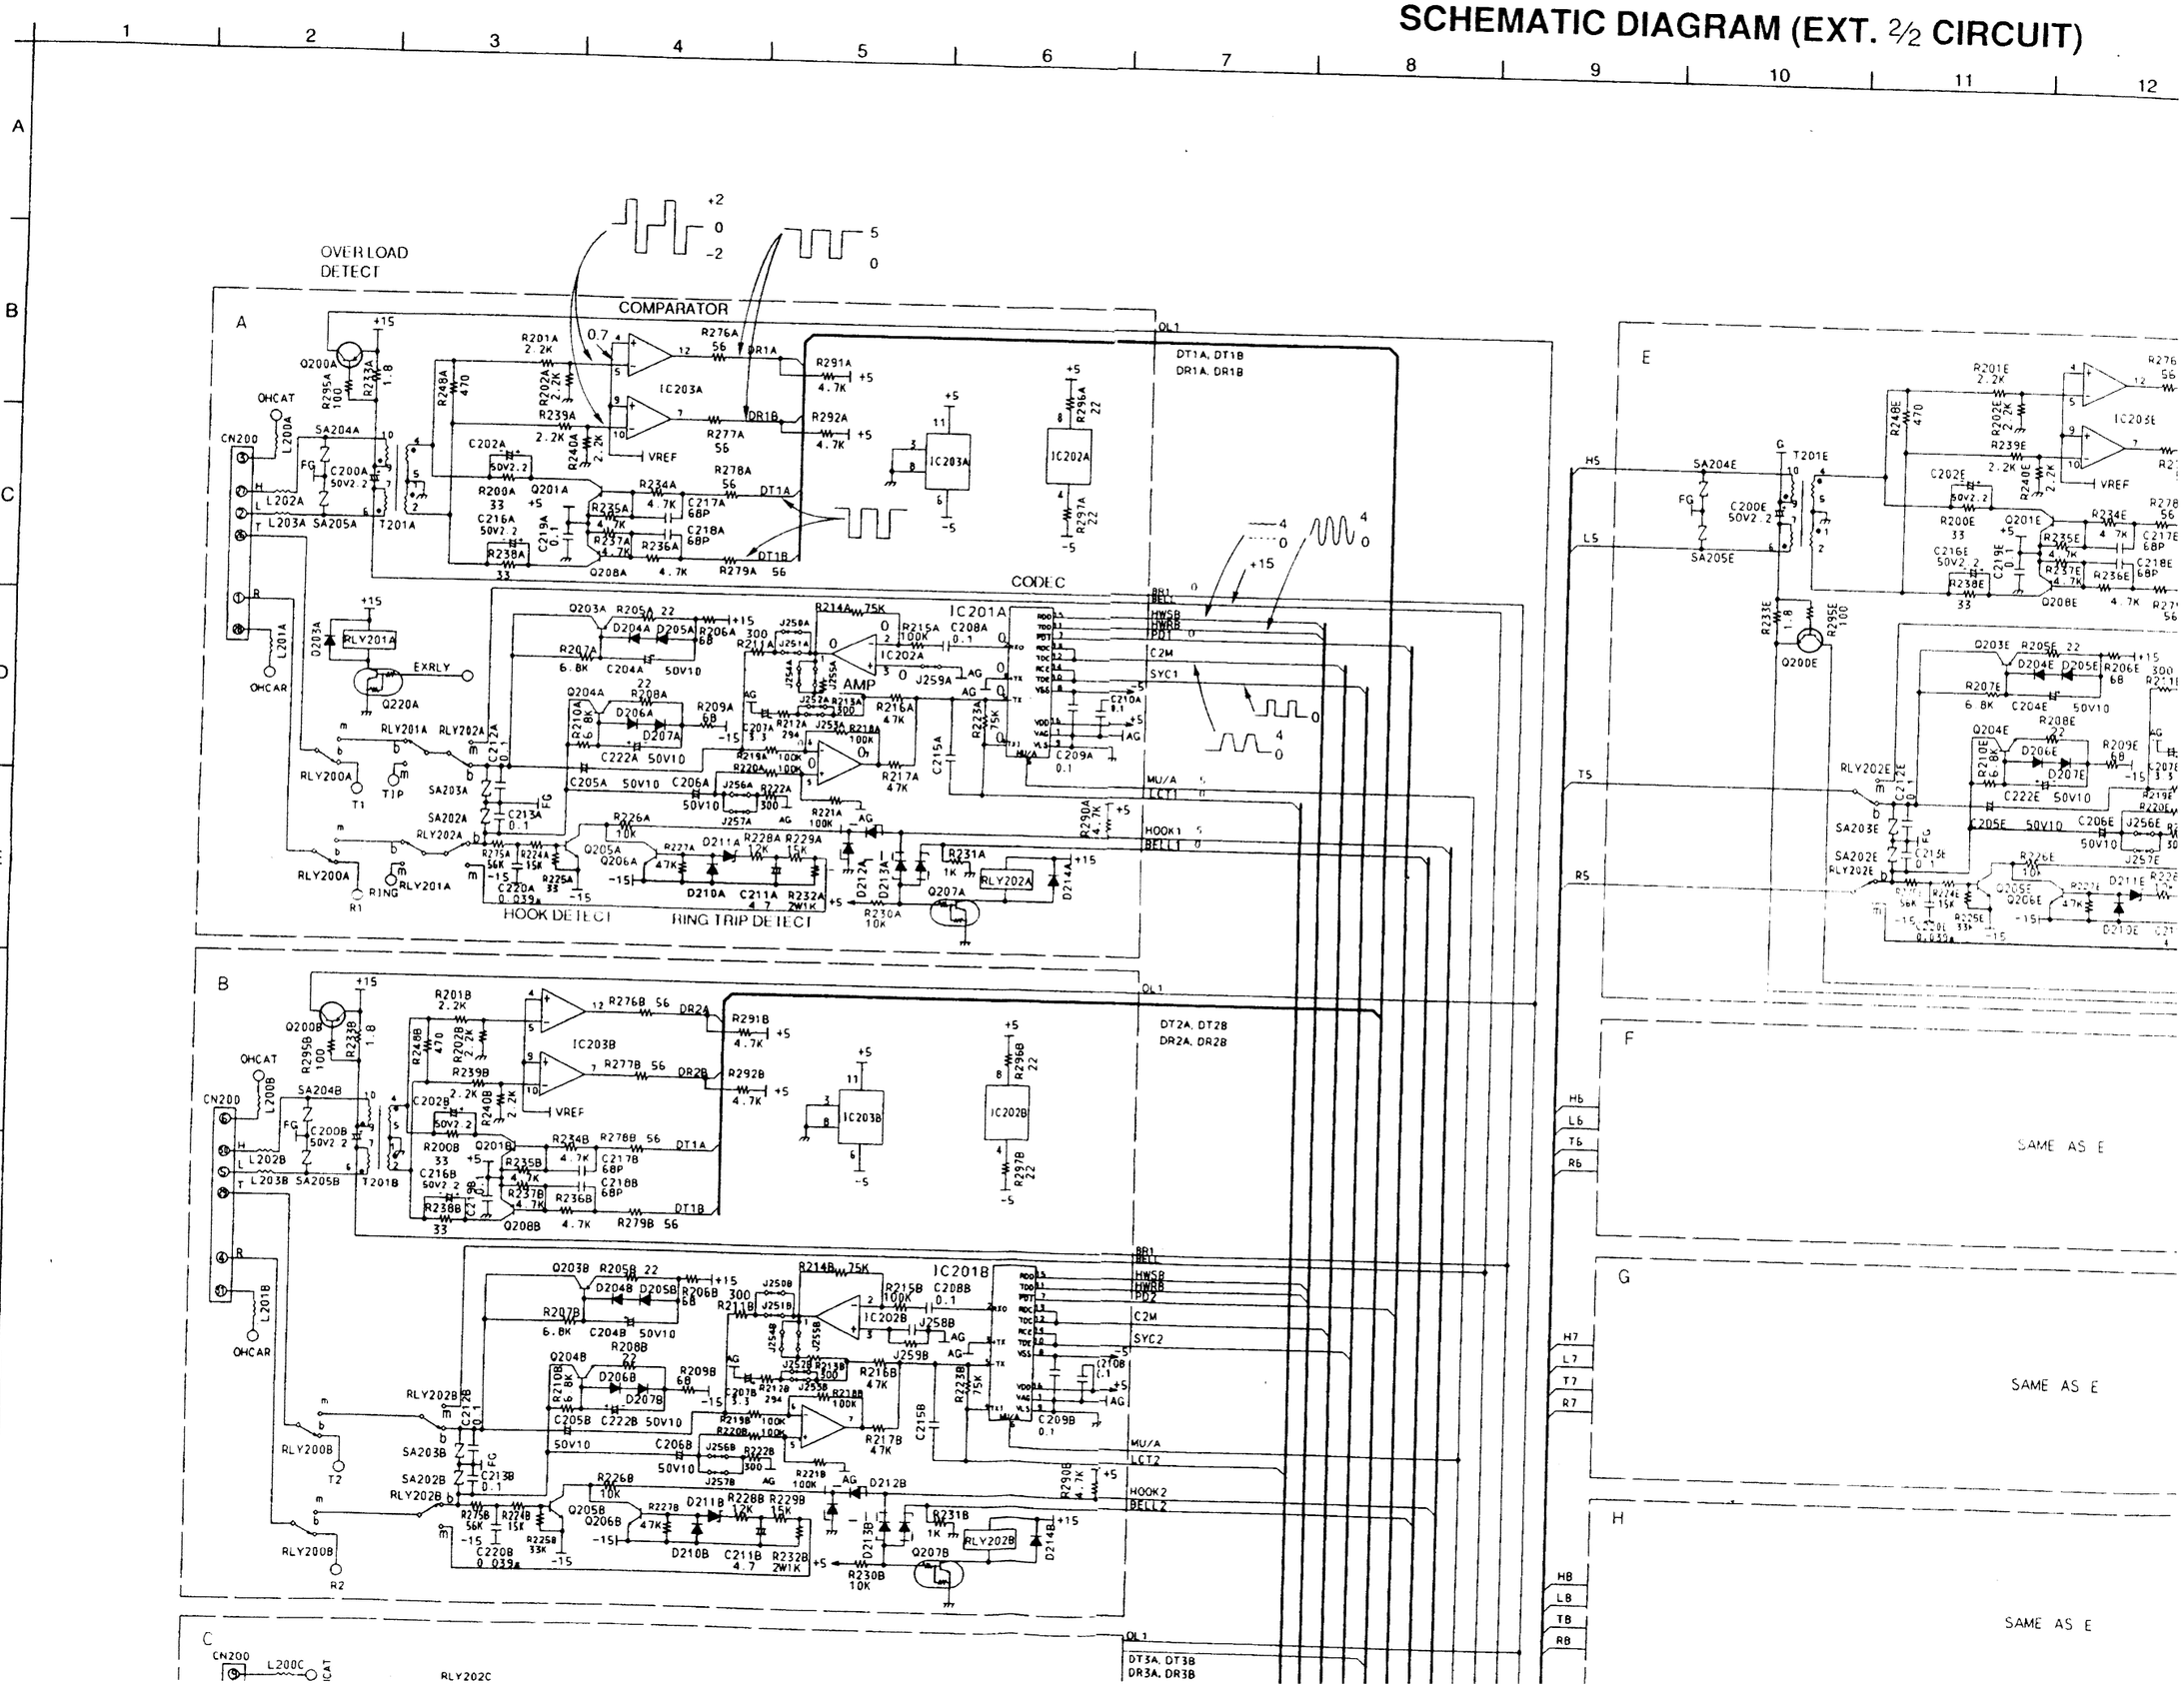

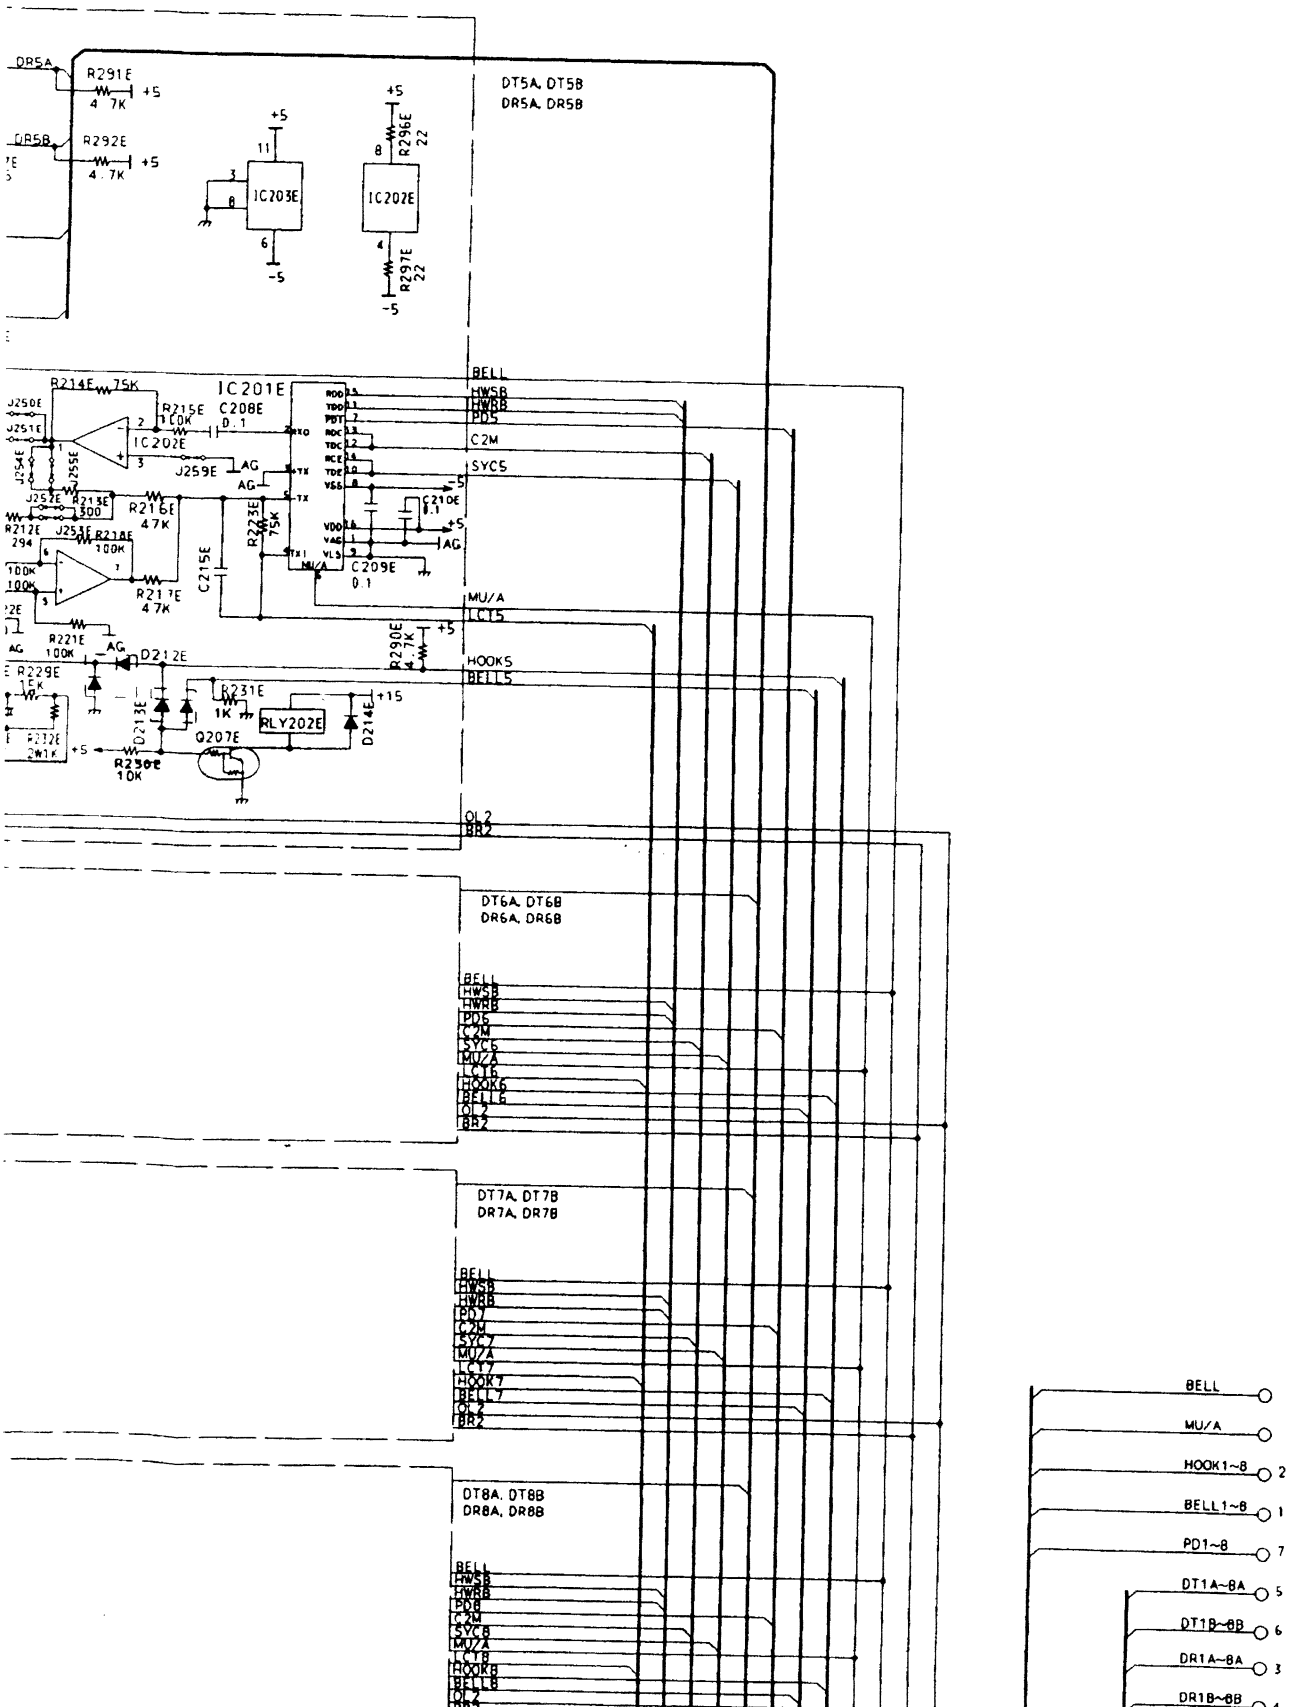
DR5A
R291E
4.7K
+5
DR5B
R292E
4.7K
+5
DT5A, DT5B
DR5A, DR5B
IC203E
IC202E
R296E
22
R297E
22
-5
IC201E
R214E 75K
R215E 100K
C208E 0.1
IC202E
J259E
AG
R216E 47K
R217E 47K
C215E
R223E 75K
C210E 0.1
C209E 0.1
R221E 100K
D212E
R229E 15K
R231E 1K
RLY202E
D213E
D214E
Q207E
R230E 10K
+15
R290E 4.7K
BELL
HWSB
HWRB
PD5
C2M
SYC5
MU/A
LC15
HOOK5
BELL5
OL2
BR2
DT6A, DT6B
DR6A, DR6B
BELL
HWSB
HWRB
PD6
C2M
SYC6
MU/A
LC16
HOOK6
BELL6
OL2
BR2
DT7A, DT7B
DR7A, DR7B
BELL
HWSB
HWRB
PD7
C2M
SYC7
MU/A
LC17
HOOK7
BELL7
OL2
BR2
DT8A, DT8B
DR8A, DR8B
BELL
HWSB
HWRB
PD8
C2M
SYC8
MU/A
LC18
HOOK8
BELL8
OL2
BR2
BELL
MU/A
HOOK1~8
BELL1~8
PD1~8
DT1A~8A
DT1B~8B
DR1A~8A
DR1B~8B
2
1
7
5
6
3
4

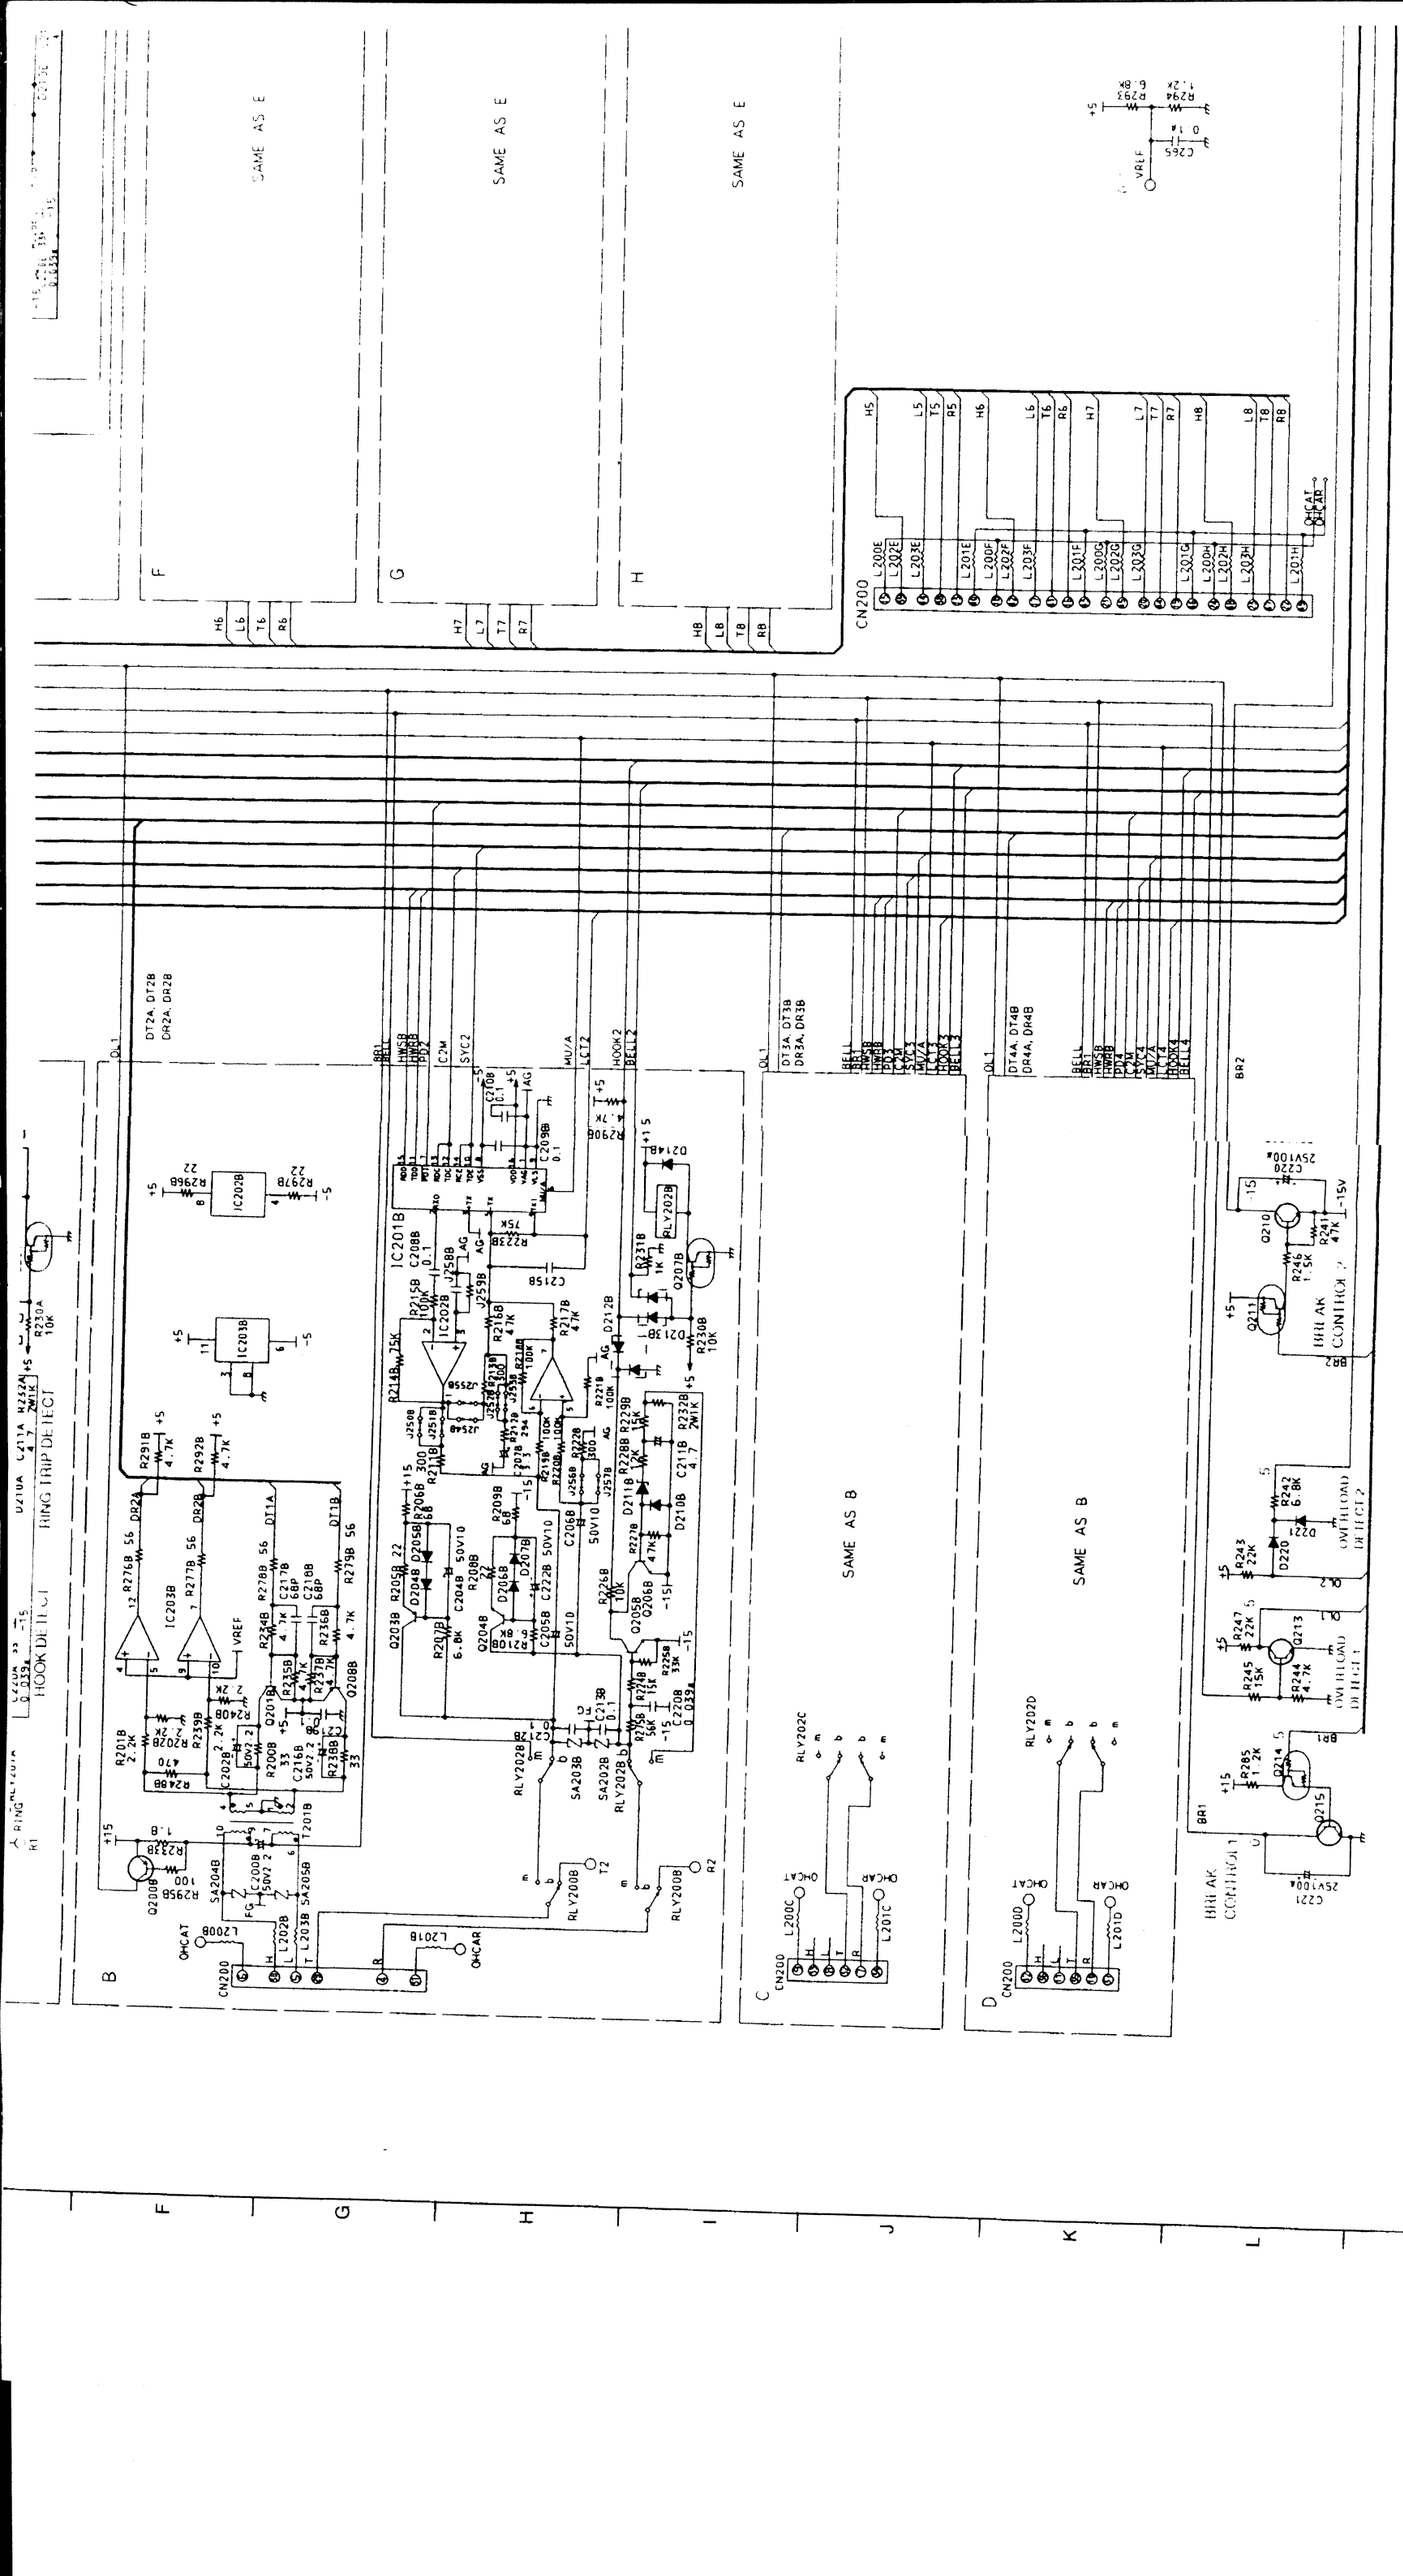
SAME AS E
SAME AS E
SAME AS E
CN200
SAME AS B
SAME AS B
HOOK DETECT
RING TRIP DETECT
IC201B
IC203B
IC202B
DT2A DT2B
DR2A DR2B
DT3A DT3B
DR3A DR3B
DT4A DT4B
DR4A DR4B
OHCAT
OHCAR
HOOK2
BELL2
BELL3
BELL4
MU/A
LCT2
SYC2
C2M
VREF
RLY202B
RLY202C
RLY202D
OVERLOAD DETECT 1
OVERLOAD DETECT 2
HIGH AK CONTROL

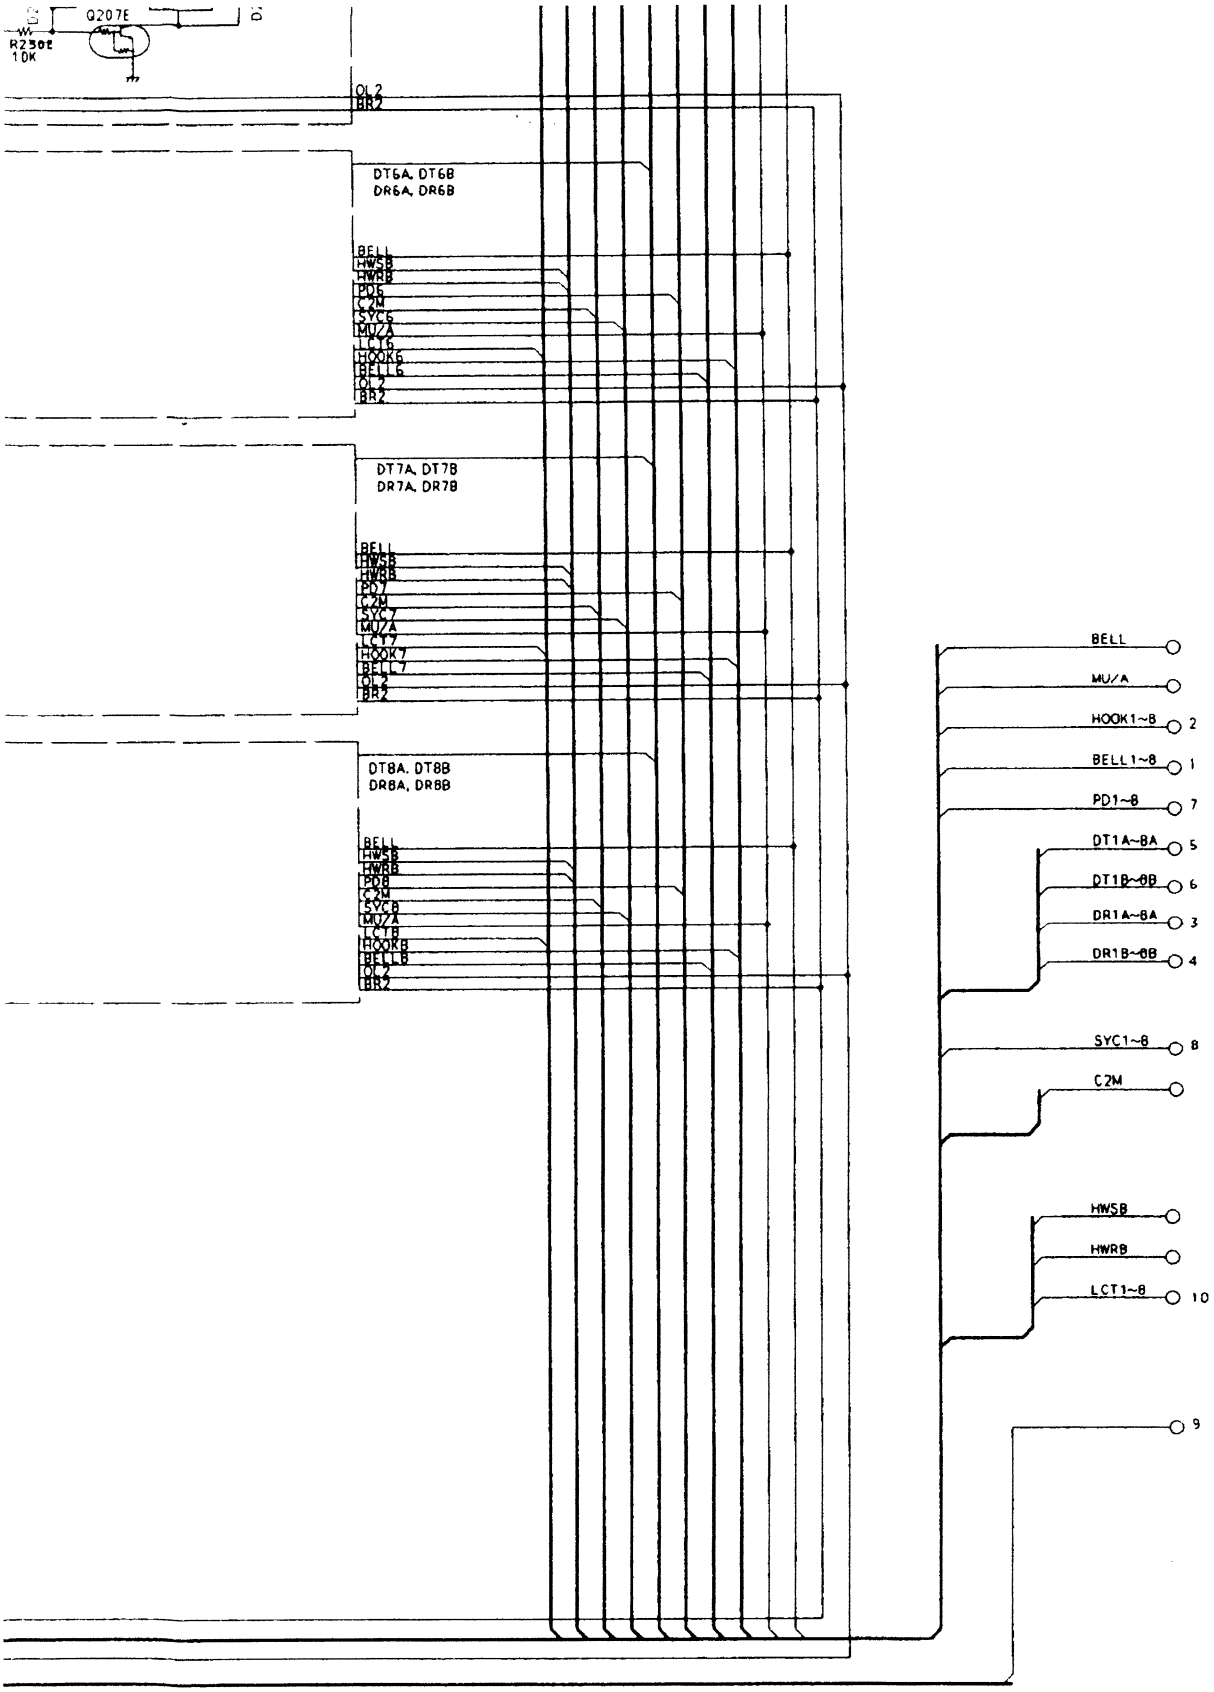
Q207E
R230E
10K
OL2
BR2
DT6A, DT6B
DR6A, DR6B
BELL
HWSB
HWRB
PD6
C2M
SYC6
MUZA
LCT6
HOOK6
BELL6
OL2
BR2
DT7A, DT7B
DR7A, DR7B
BELL
HWSB
HWRB
PD7
C2M
SYC7
MUZA
LCT7
HOOK7
BELL7
OL2
BR2
DT8A, DT8B
DR8A, DR8B
BELL
HWSB
HWRB
PD8
C2M
SYC8
MUZA
LCT8
HOOK8
BELL8
OL2
BR2
BELL
MU/A
HOOK1~8
2
BELL1~8
1
PD1~8
7
DT1A~8A
5
DT1B~8B
6
DR1A~8A
3
DR1B~8B
4
SYC1~8
8
C2M
HWSB
HWRB
LCT1~8
10
9

SCHEMATIC DIAGRAM (CPU CIRCUIT)

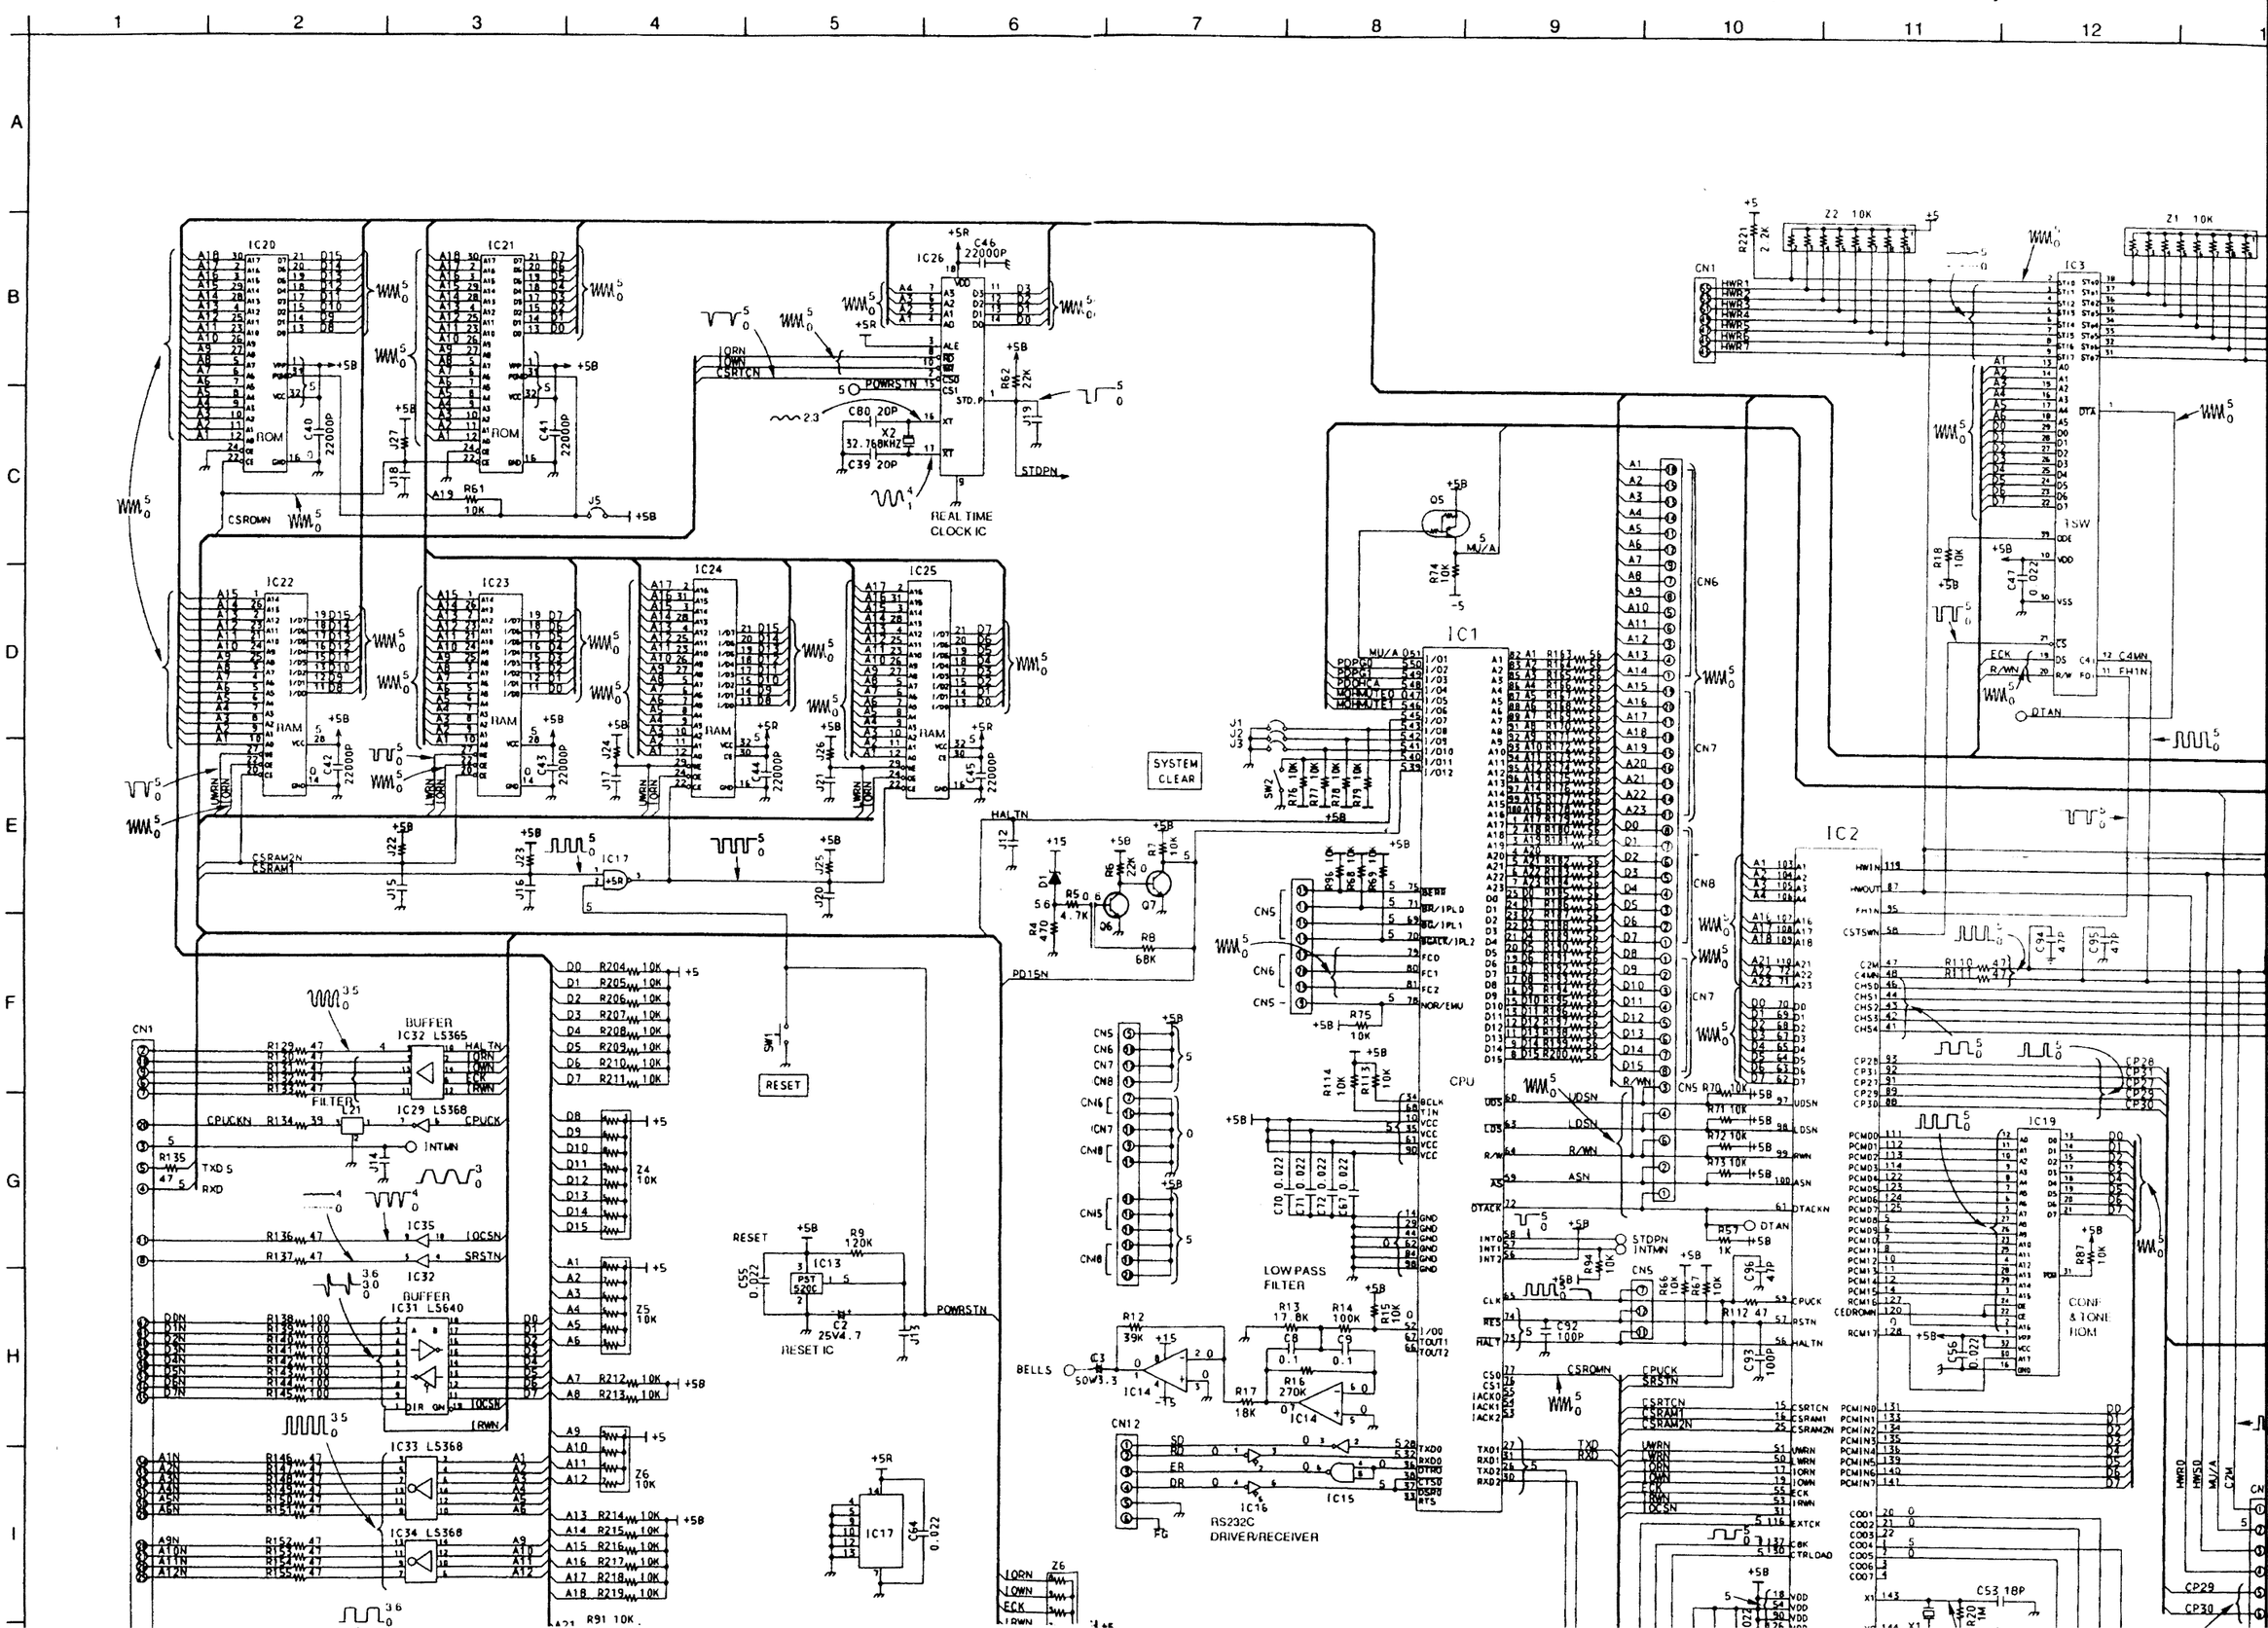

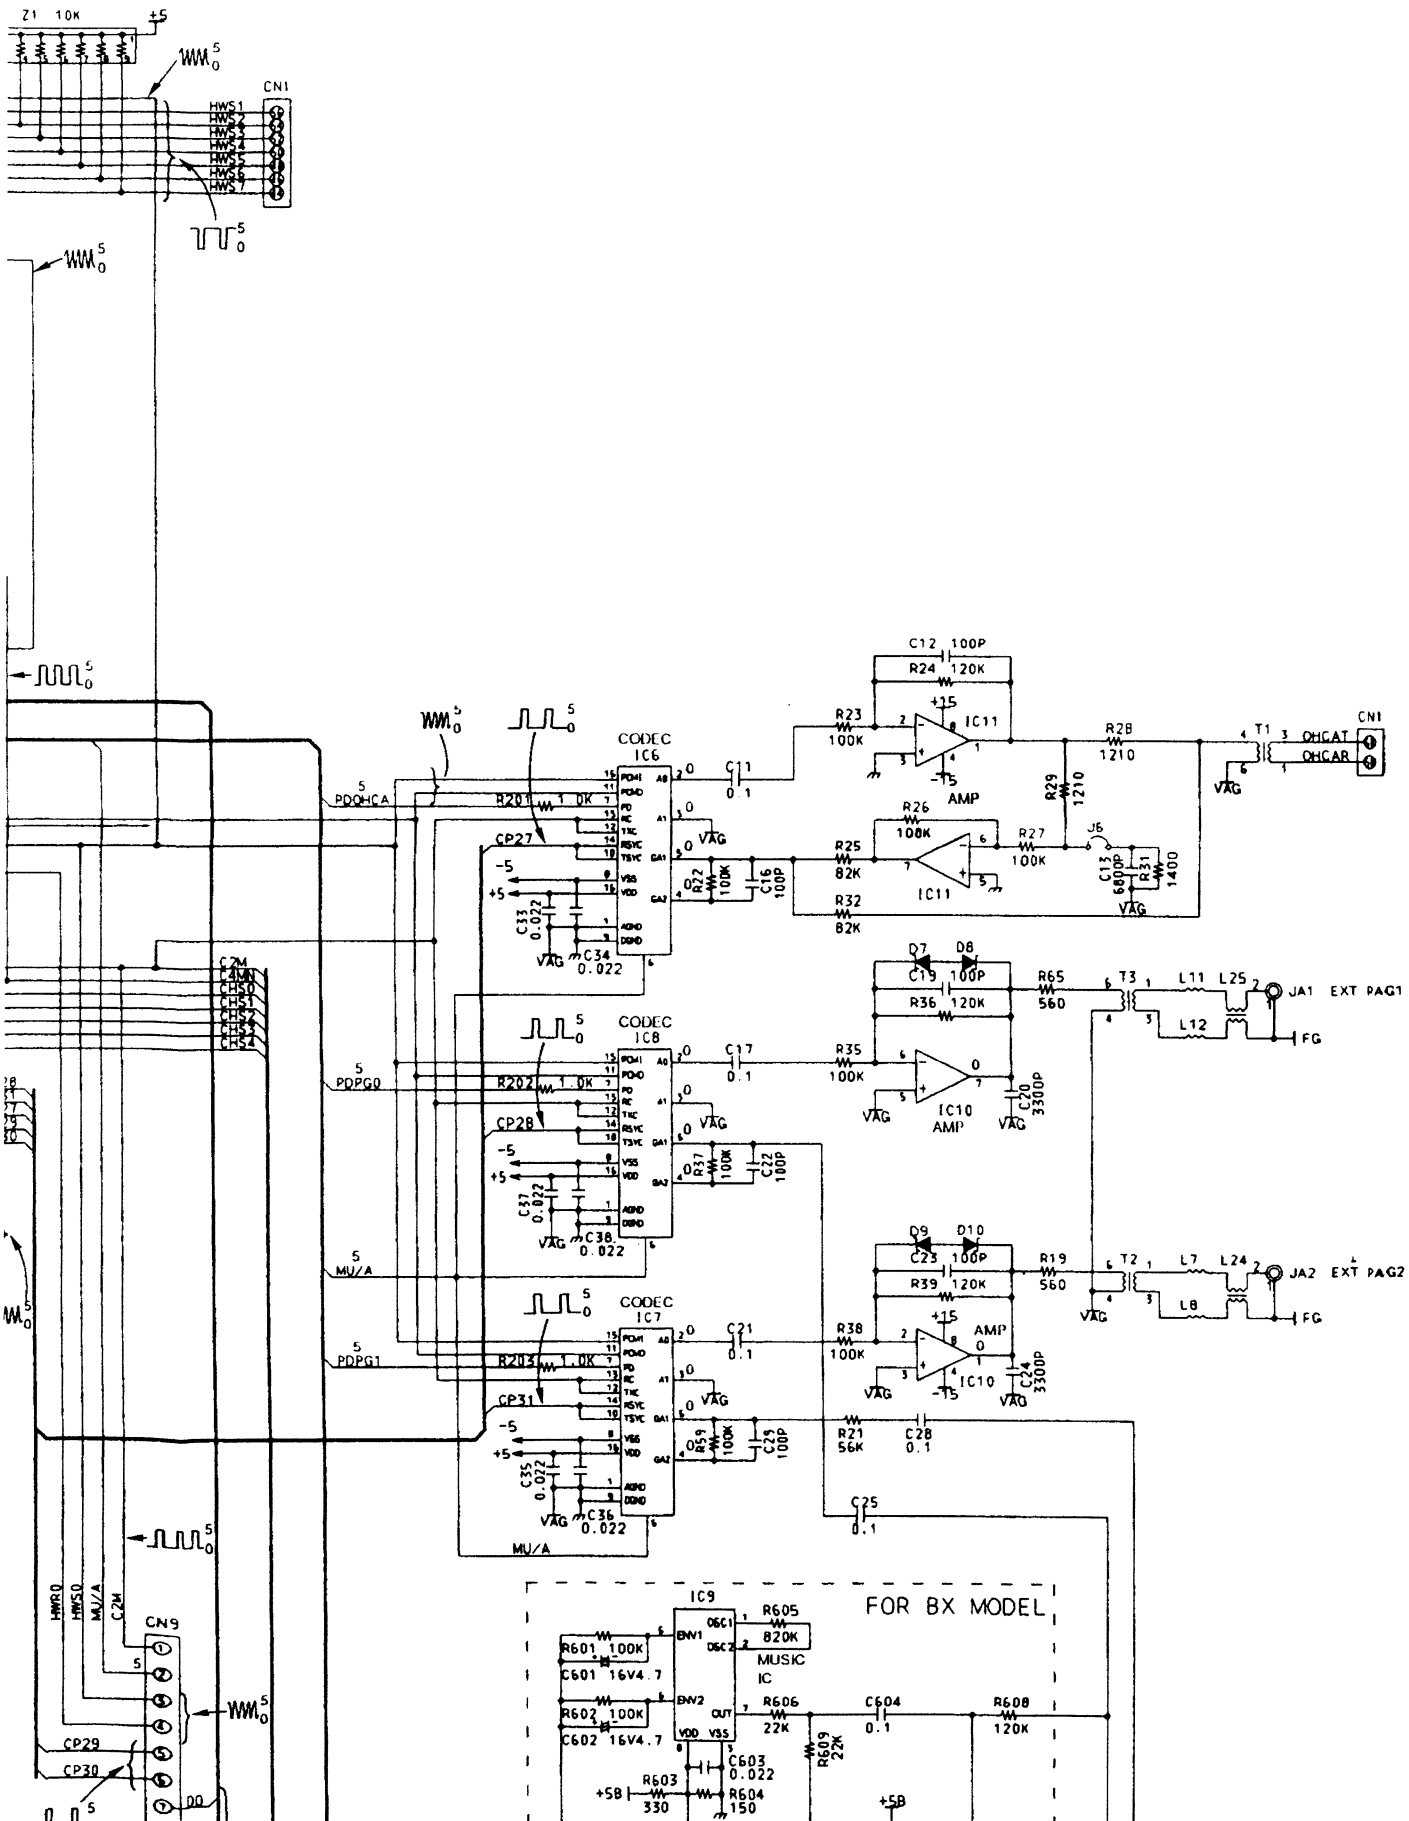
Z1 10K
CN1
HWS1
HWS2
HWS3
HWS4
HWS5
HWS6
HWS7
HWS8
CODEC IC6
CODEC IC8
CODEC IC7
PDOHCA
PDPG0
PDPG1
MU/A
R201 1.0K
R202 1.0K
R203 1.0K
CP27
CP28
CP31
C33 0.022
C34 0.022
C37 0.022
C38 0.022
C35 0.022
C36 0.022
C11 0.1
C17 0.1
C21 0.1
C16 100P
C22 100P
C29 100P
R22 100K
R37 100K
R59 100K
R23 100K
R25 82K
R32 82K
R35 100K
R38 100K
R21 56K
C28 0.1
C25 0.1
C12 100P
R24 120K
IC11
AMP
R26 100K
R27 100K
R28 1210
R29 1210
J6
C13 680P
R31 1400
VAG
T1
OHCAT
OHCAR
C19 100P
R36 120K
IC10
C20 3300P
R65 560
T3
L11
L25
L12
JA1 EXT PAG1
FG
C23 100P
R39 120K
C24 3300P
R19 560
T2
L7
L24
L8
JA2 EXT PAG2
D7
D8
D9
D10
CN9
HWR0
HWS0
MU/A
C2M
CP29
CP30
DO
FOR BX MODEL
IC9
MUSIC IC
R605 820K
R601 100K
C601 16V4.7
R602 100K
C602 16V4.7
R606 22K
C604 0.1
R608 120K
R609 22K
C603 0.022
R603 330
R604 150
+5B

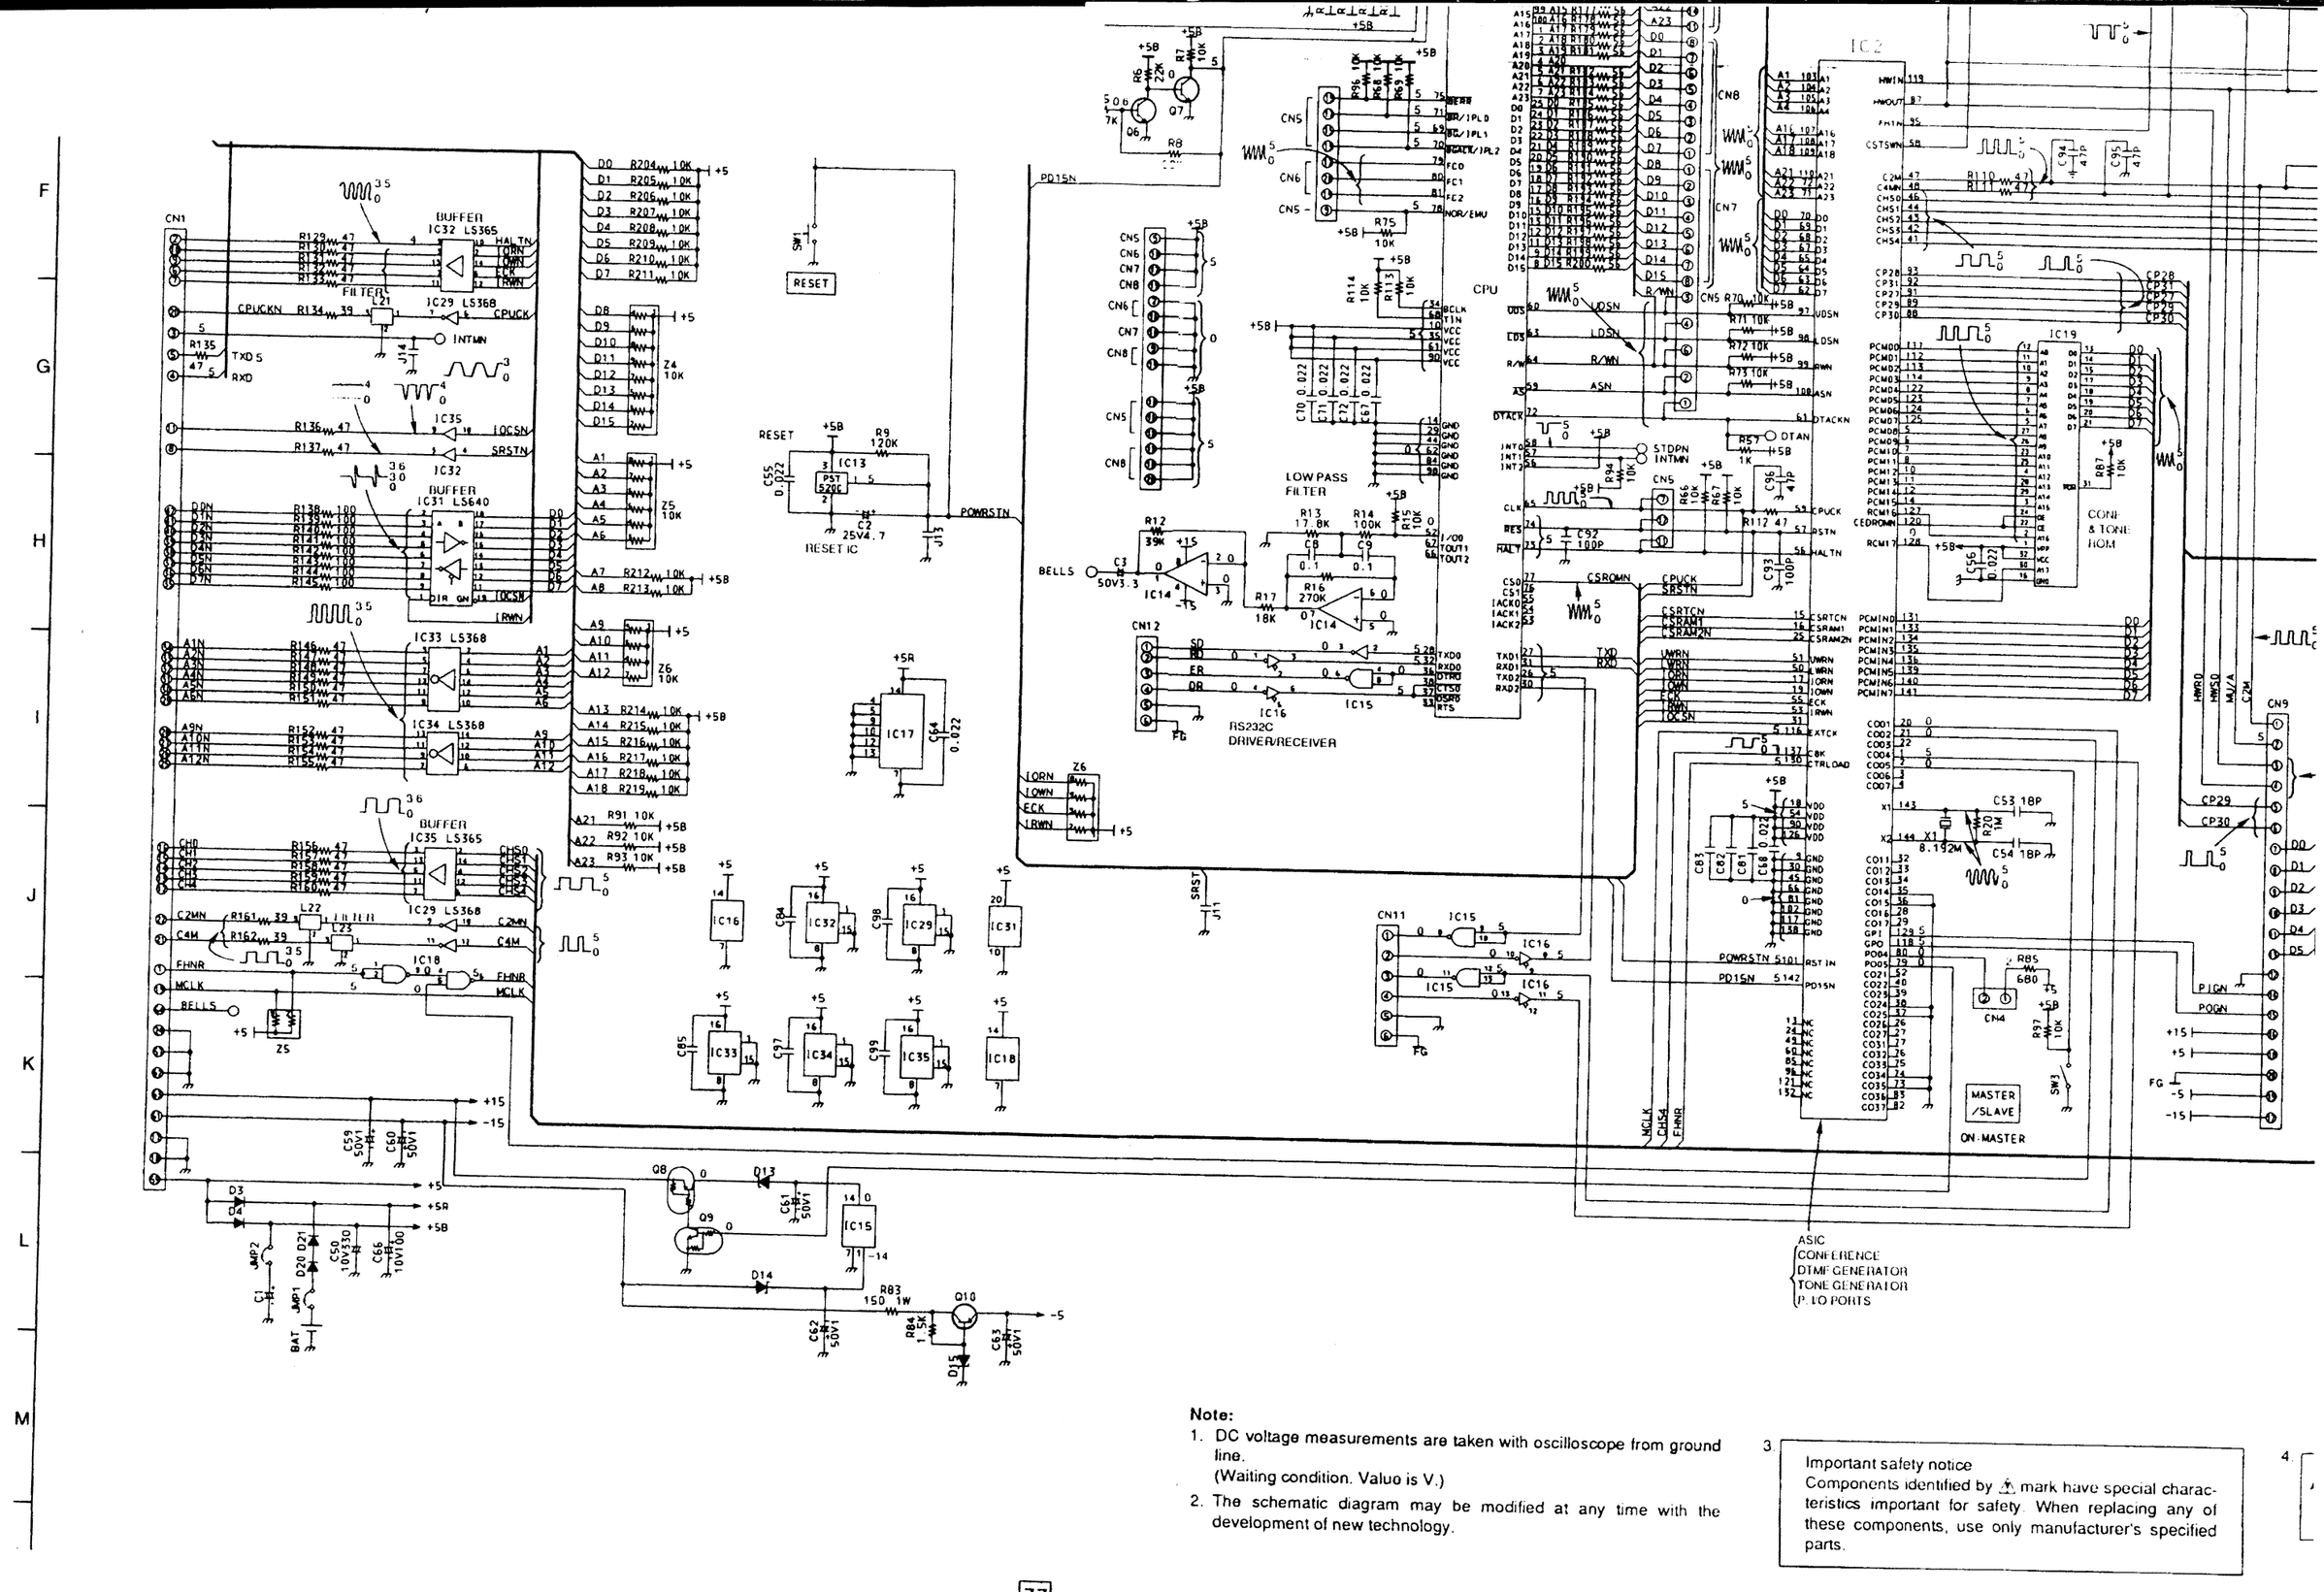

Note:

1. DC voltage measurements are taken with oscilloscope from ground line.
   (Waiting condition. Valuo is V.)
2. The schematic diagram may be modified at any time with the development of new technology.

3. Important safety notice
   Components identified by ⚠ mark have special characteristics important for safety. When replacing any of these components, use only manufacturer's specified parts.

4.

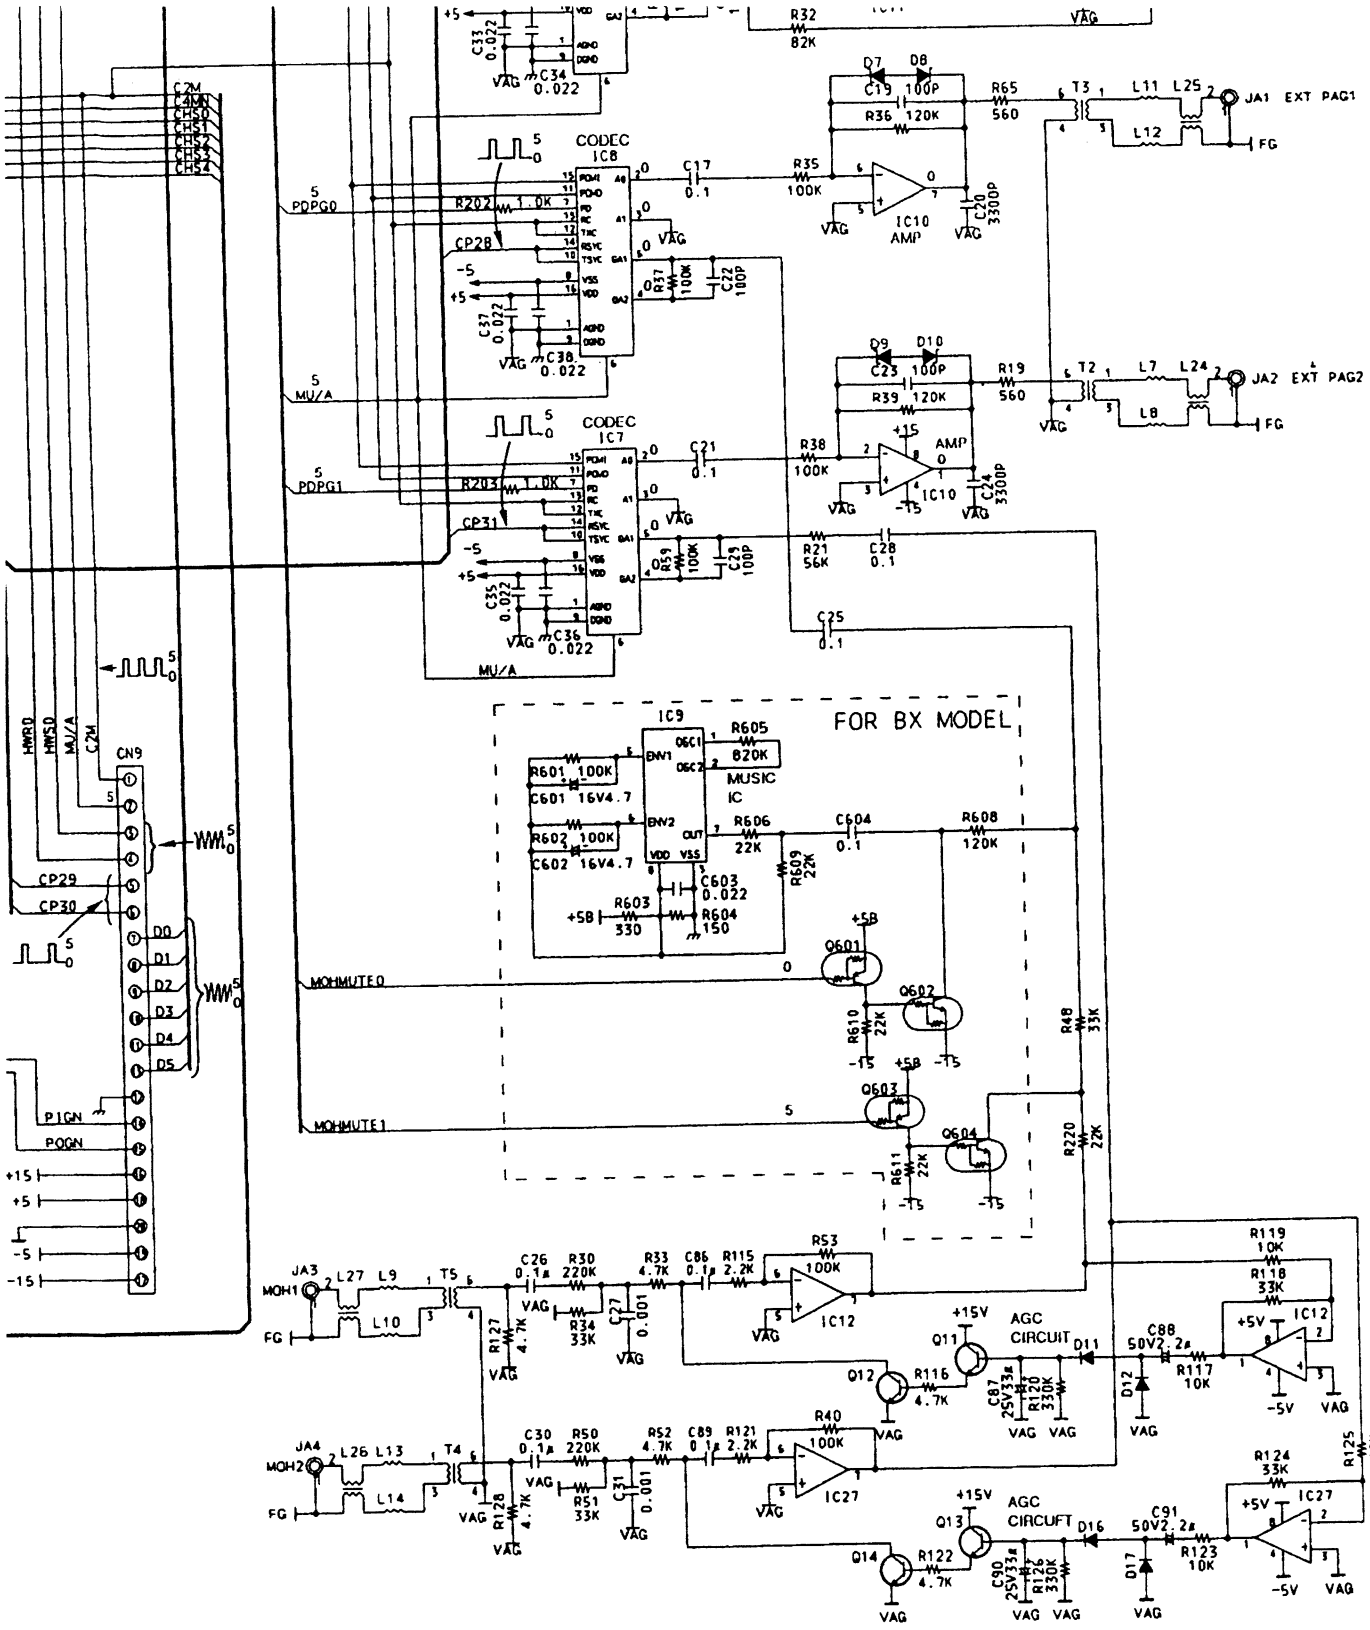

4.

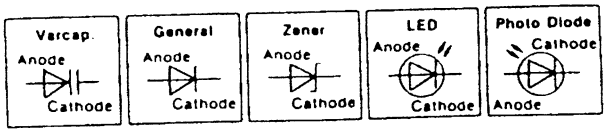

al charac-
g any of
specified

OVER LOAD DETECT

COMPARATOR

A

B

C

D

CODEC

IC201A

IC201B

AMP

HOOK DETECT

RING TRIP DETECT

SAME AS B

SAME AS B

BREAK CONTROL1

BREAK CONTROL 2

OVER LOAD DETECT 1

OVER LOAD DETECT 2

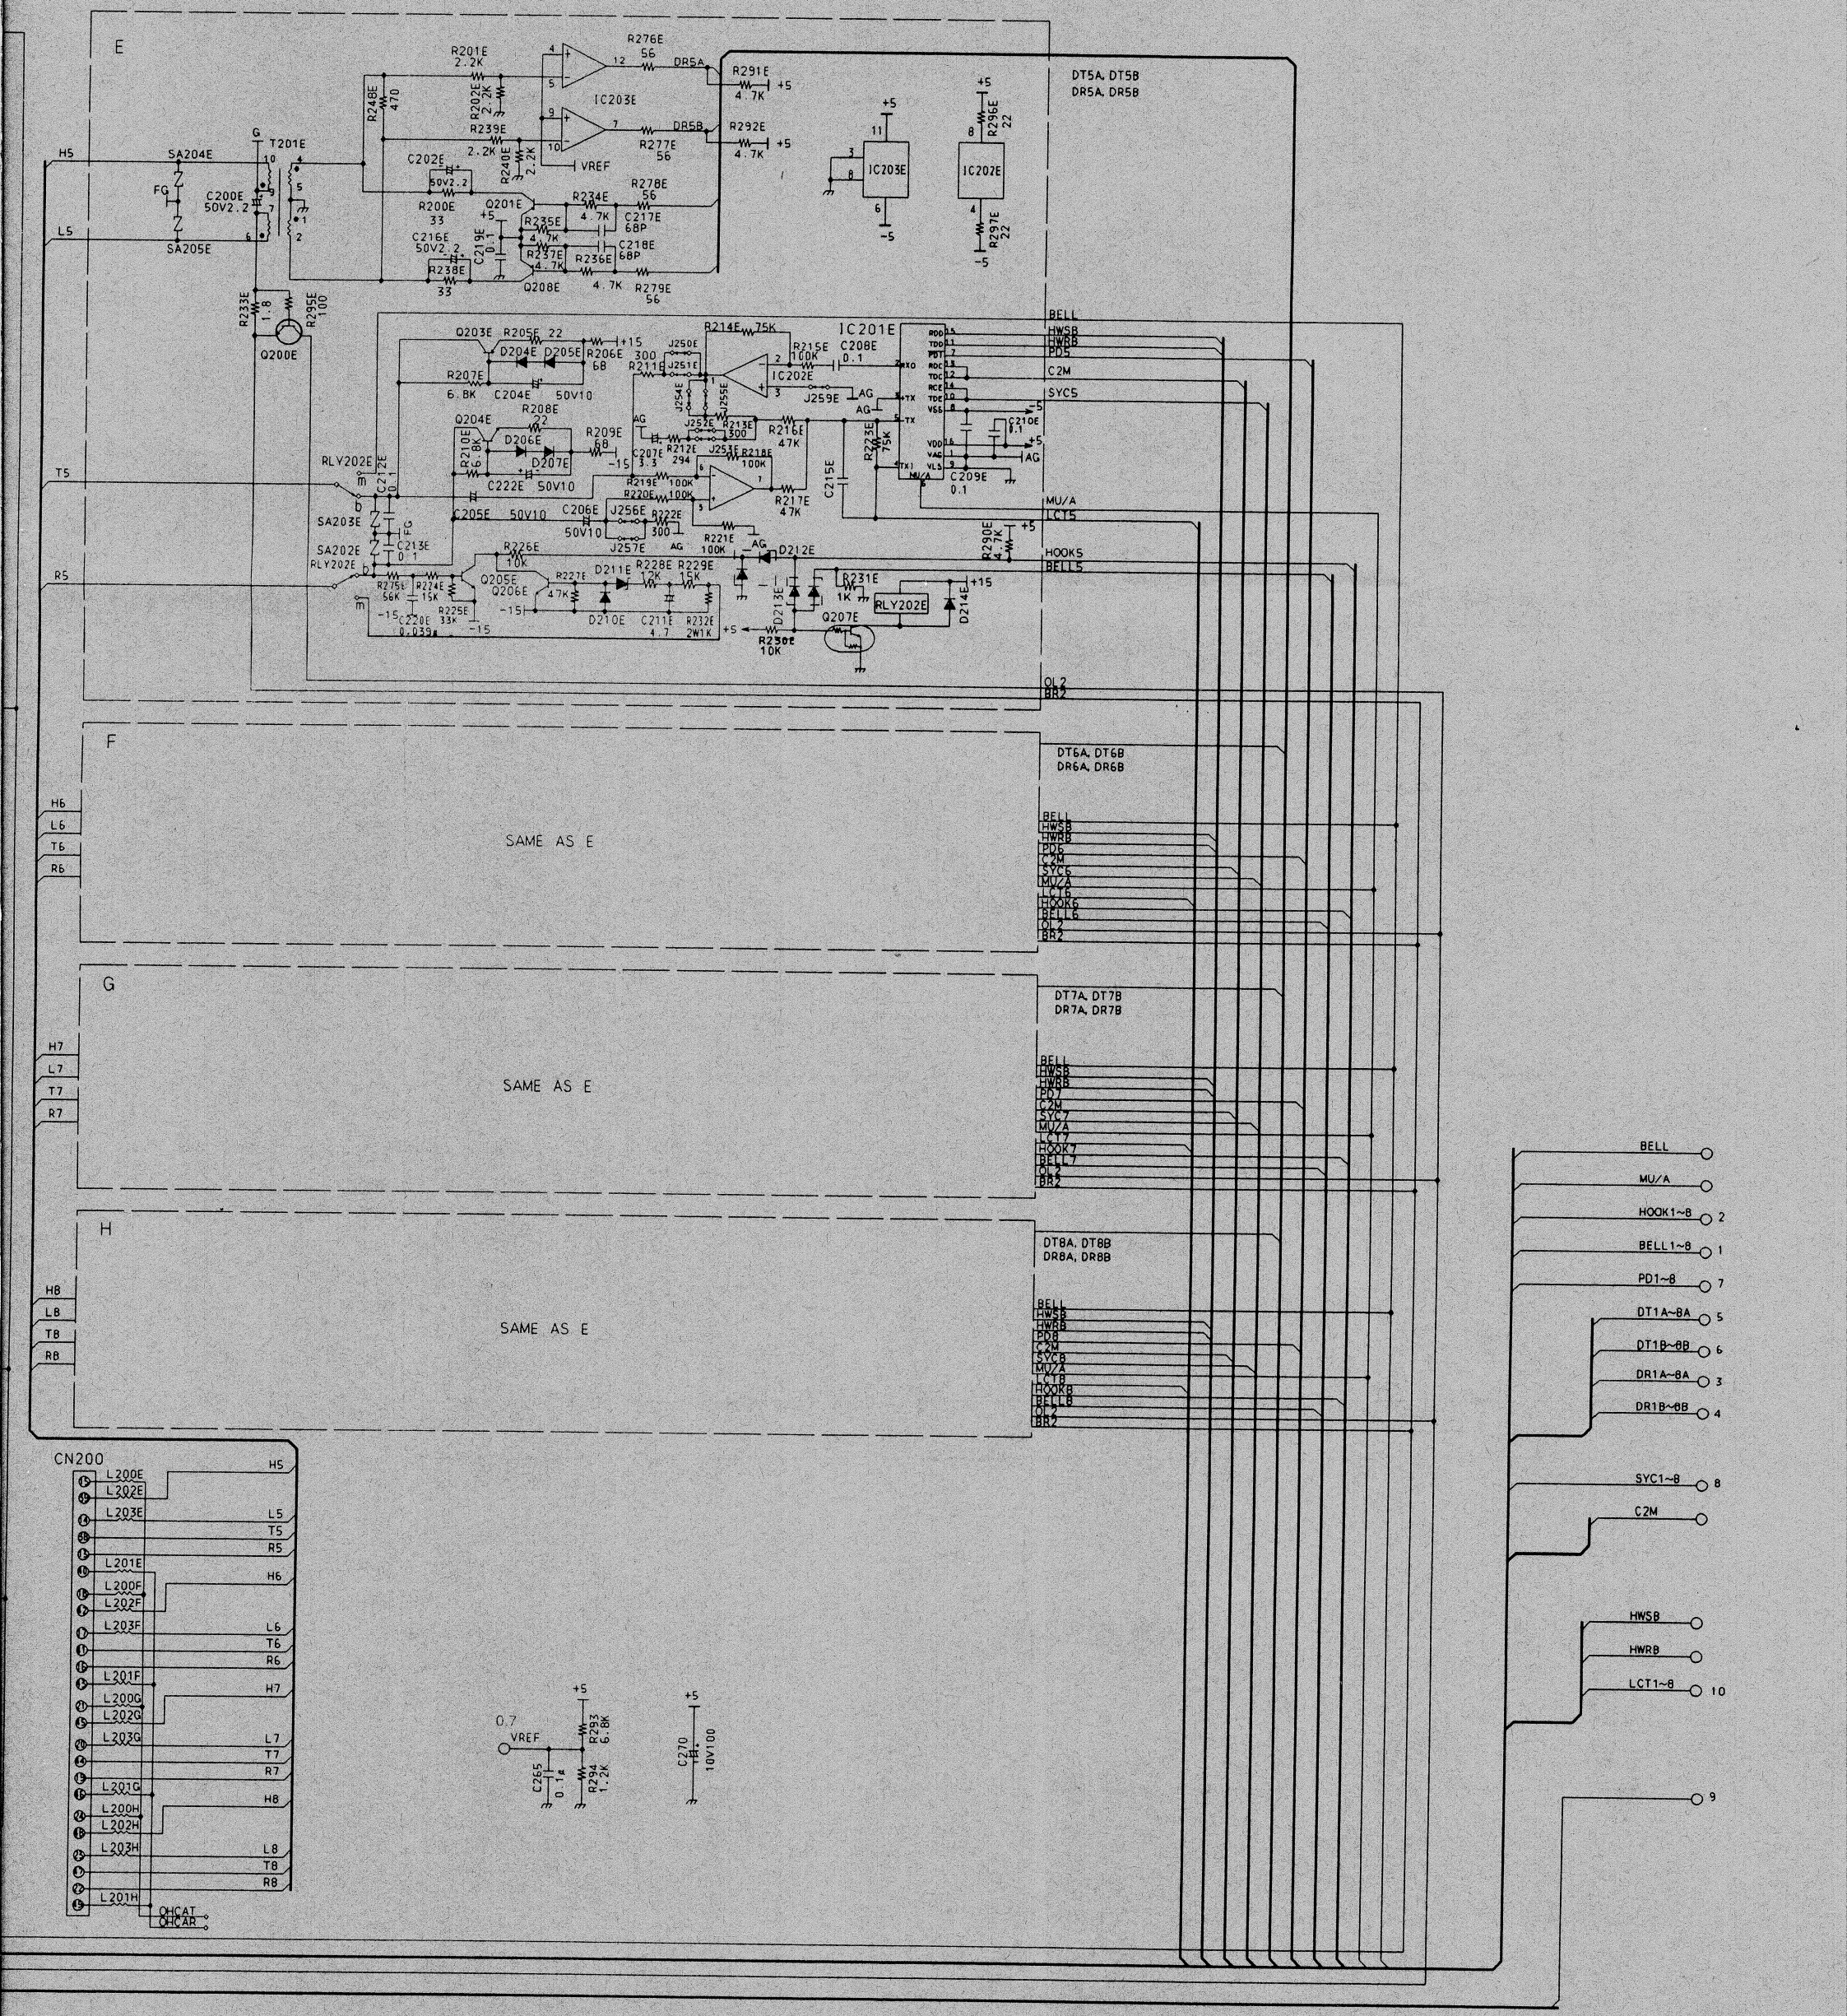
E
F
G
H
SAME AS E
SAME AS E
SAME AS E
DT5A, DT5B
DR5A, DR5B
DT6A, DT6B
DR6A, DR6B
DT7A, DT7B
DR7A, DR7B
DT8A, DT8B
DR8A, DR8B
IC201E
IC202E
IC203E
IC202E
T201E
Q200E
Q201E
Q208E
Q203E
Q204E
Q205E
Q206E
Q207E
RLY202E
SA204E
SA205E
SA203E
SA202E
VREF
BELL
HWSB
HWRB
PD5
C2M
SYC5
MU/A
LCT5
HOOK5
BELL5
OL2
BR2
H5
L5
T5
R5
H6
L6
T6
R6
H7
L7
T7
R7
H8
L8
T8
R8
CN200
OHCAT
OHCAR
BELL
MU/A
HOOK1~8
BELL1~8
PD1~8
DT1A~8A
DT1B~8B
DR1A~8A
DR1B~8B
SYC1~8
C2M
HWSB
HWRB
LCT1~8
9
10

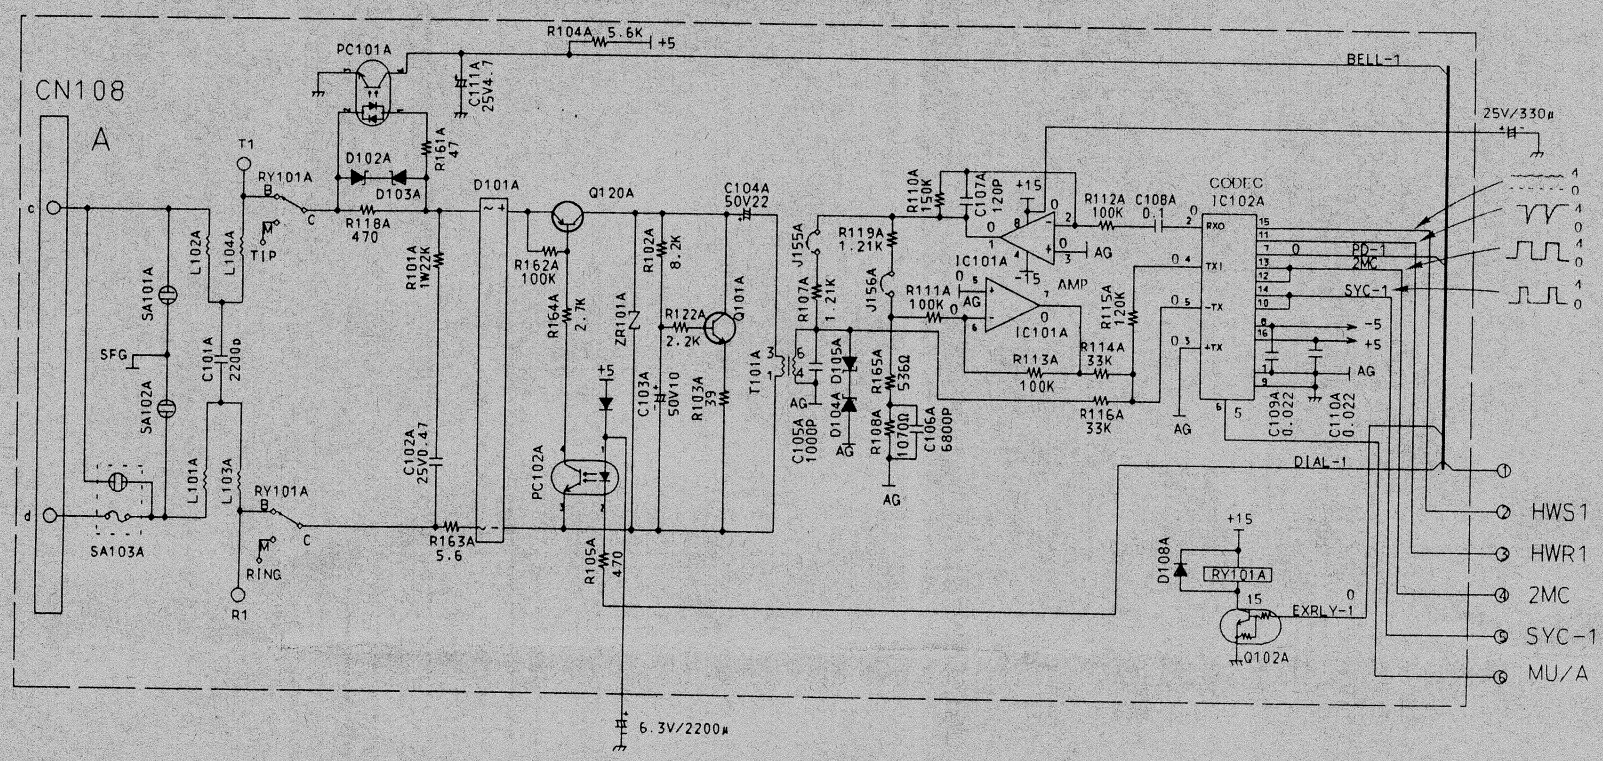
CN108
A
PC101A
R104A 5.6K
+5
BELL-1
C111A 25V4.7
R161A 47
D102A
D103A
T1
RY101A
TIP
R118A 470
D101A
Q120A
C104A 50V22
25V/330μ
R162A 100K
R164A 2.7K
ZR101A
R102A 8.2K
R122A 2.2K
Q101A
T101A
R103A 39
C103A 50V10
PC102A
C102A 25V0.47
R163A 5.6
R105A 470
6.3V/2200μ
R101A 1W22K
L102A
L104A
L101A
L103A
C101A 2200p
SA101A
SA102A
SA103A
SFG
RING
R1
J155A
J156A
R119A 1.21K
R107A 1.21K
C105A 1000P
D104A
D105A
R108A 1070Ω
R165A 536Ω
C106A 6800P
AG
R110A 150K
C107A 120P
+15
R112A 100K
C108A 0.1
CODEC
IC102A
RXO
TXI
-TX
+TX
IC101A
AMP
R111A 100K
R113A 100K
R114A 33K
R115A 120K
R116A 33K
C109A 0.022
C110A 0.022
-5
+5
PD-1
2MC
SYC-1
DIAL-1
HWS1
HWR1
2MC
SYC-1
MU/A
D108A
RY101A
EXRLY-1
Q102A
CN110
E
T5
R5

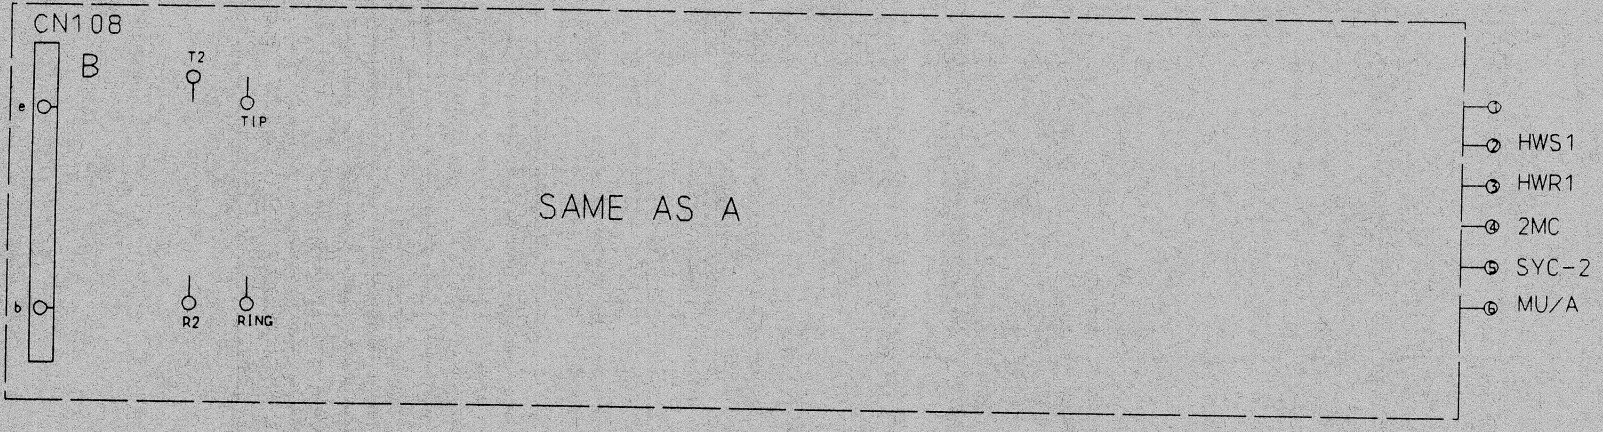
CN108
B
T2
TIP
R2
RING
SAME AS A
HWS1
HWR1
2MC
SYC-2
MU/A
CN110
F
T6
R6

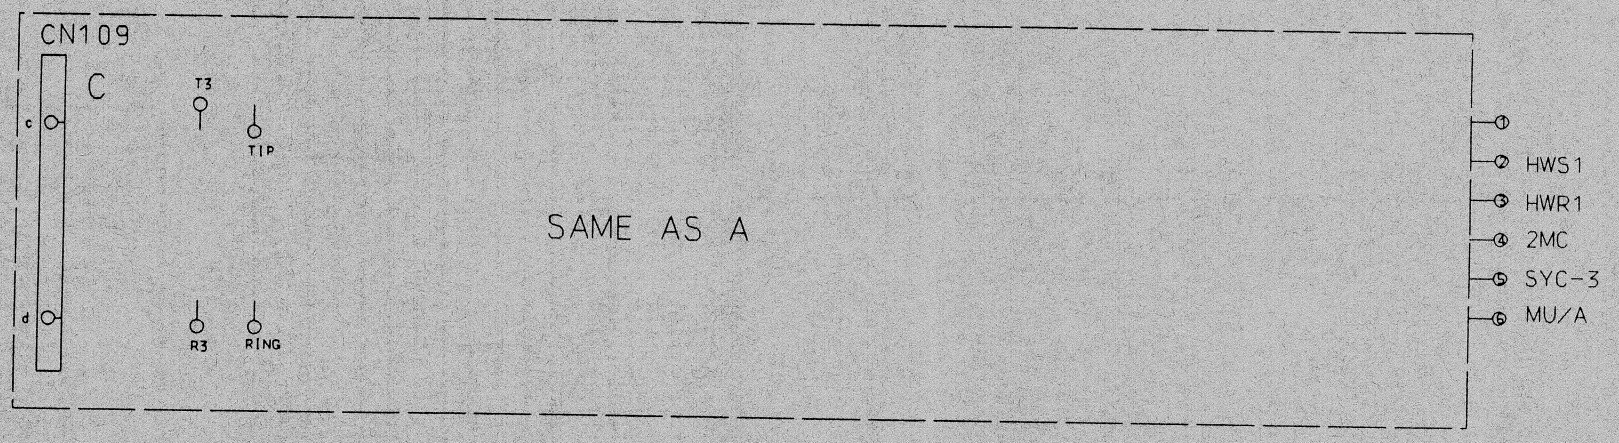
CN109
C
T3
TIP
R3
RING
SAME AS A
HWS1
HWR1
2MC
SYC-3
MU/A
CN111
G
T7
R7

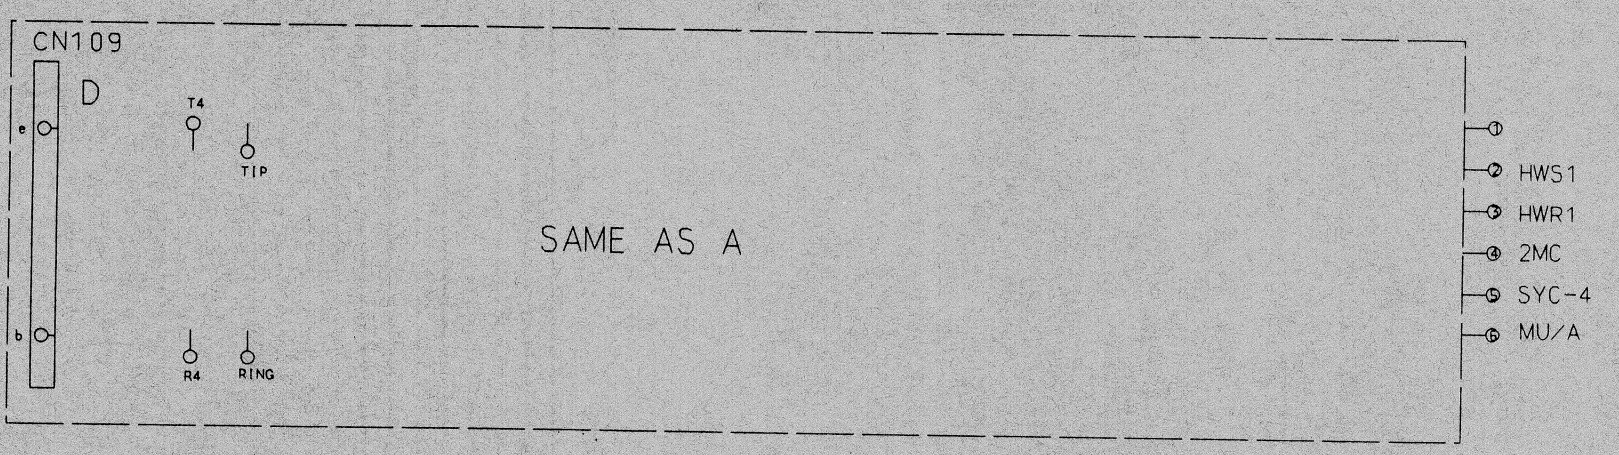
CN109
D
T4
TIP
R4
RING
SAME AS A
HWS1
HWR1
2MC
SYC-4
MU/A
CN111
H
T8
R8

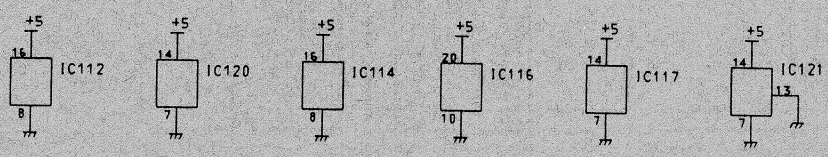
IC112
IC120
IC114
IC116
IC117
IC121
IC122
IC123
+5

GRAM (CO CIRCUIT)

10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19

N110
E
T5
TIP
SAME AS A
R5
RING
① HWS1
② HWR1
③ 2MC
④ SYC-5
⑤ MU/A

110
E
T6
TIP
SAME AS A
R6
RING
① HWS1
② HWR1
③ 2MC
④ SYC-6
⑤ MU/A

11
G
T7
TIP
SAME AS A
R7
RING
① HWS1
② HWR1
③ 2MC
④ SYC-7
⑤ MU/A

11
T8
TIP
SAME AS A
R8
RING
① HWS1
② HWR1
③ 2MC
④ SYC-8
⑤ MU/A

SFG
SA104
FG

IC111
IC116
IC117
IC114
IC122
IC120
IC112
IC123
IC121
CN101
CN106 CN104
CN104 CN106
CN107
CN105
CN106
CN104
Q112
Q111
C155 2200p
C120
C151 C152 C153 33μ
R160 10K
R159 10K
R161
R154 1W220
R153 1.5K
D154
C154 50V 1μ

PRINTED CIRCUIT BOARD (CO E

5 6 7 8 9 10 11

(COMPONENT VIEW)

IC102A

Pin No.	Voltage & Waveform
2–5	0
6	5
7	0
11	4 / 0
13	4 / 0
14	4 / 0
15	4 / 0

Value is V.

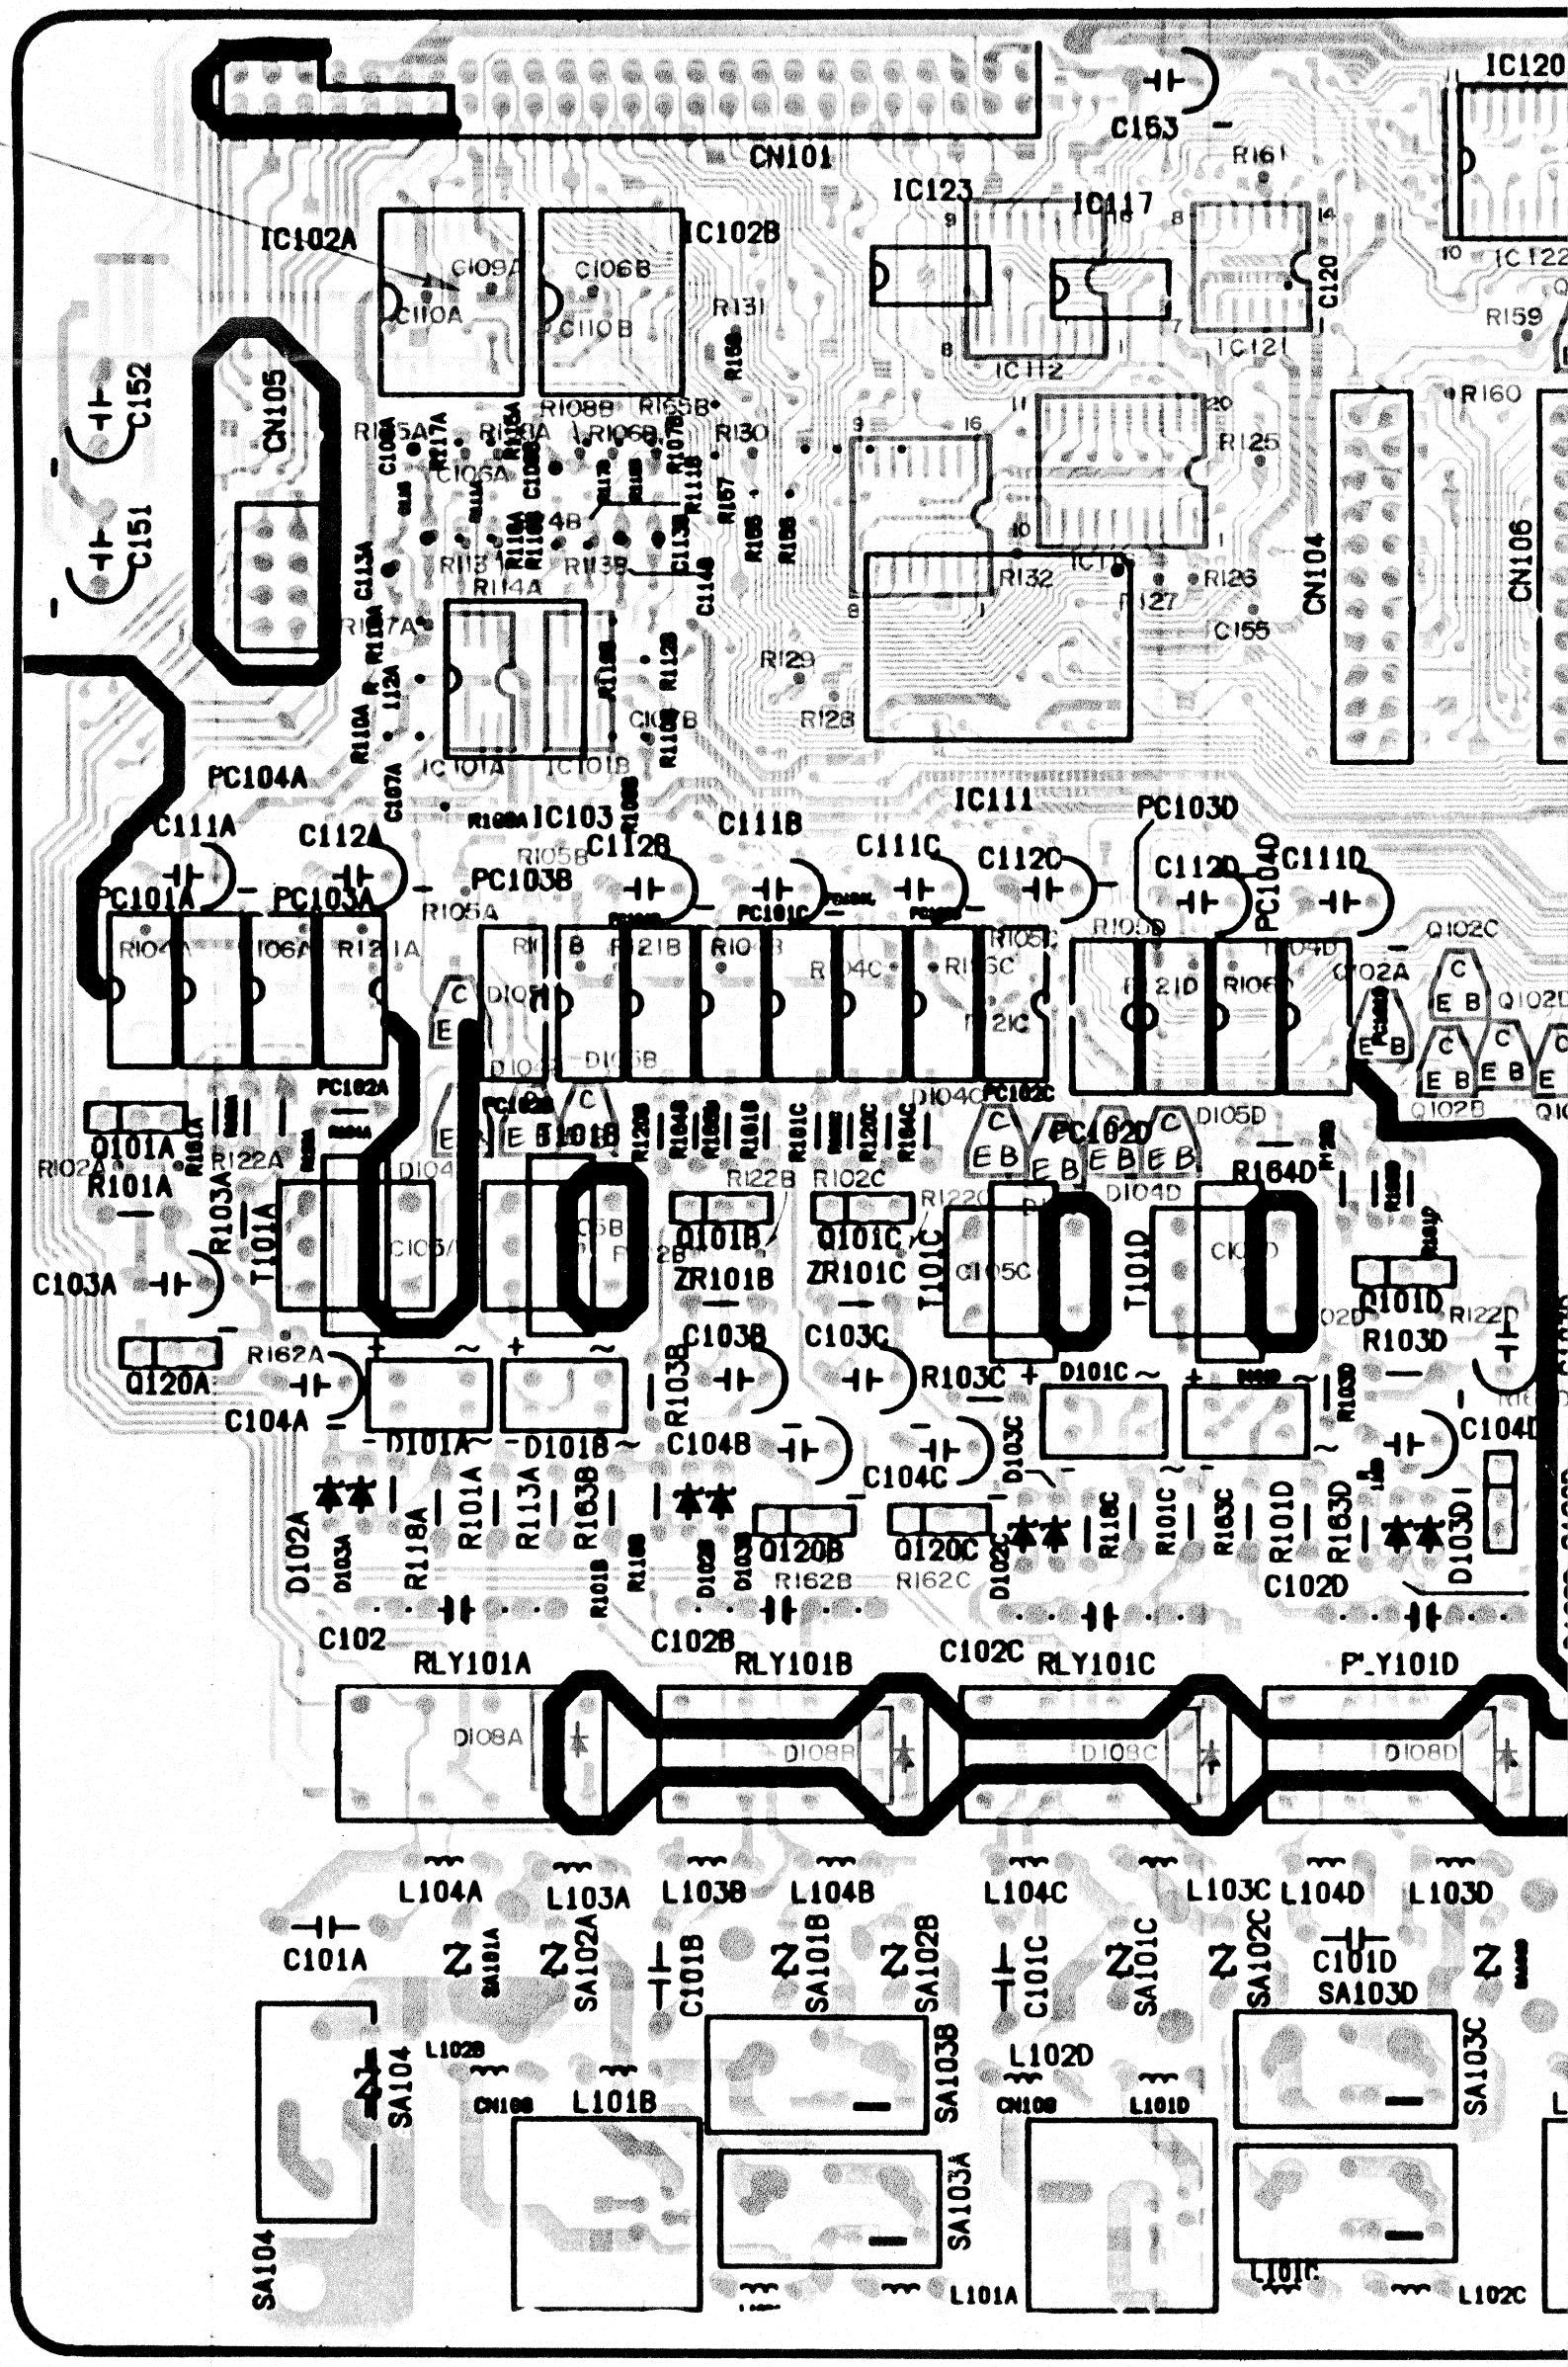

CO BOARD)

11 | 12 | 13 | 14 | 15 | 16 | 17

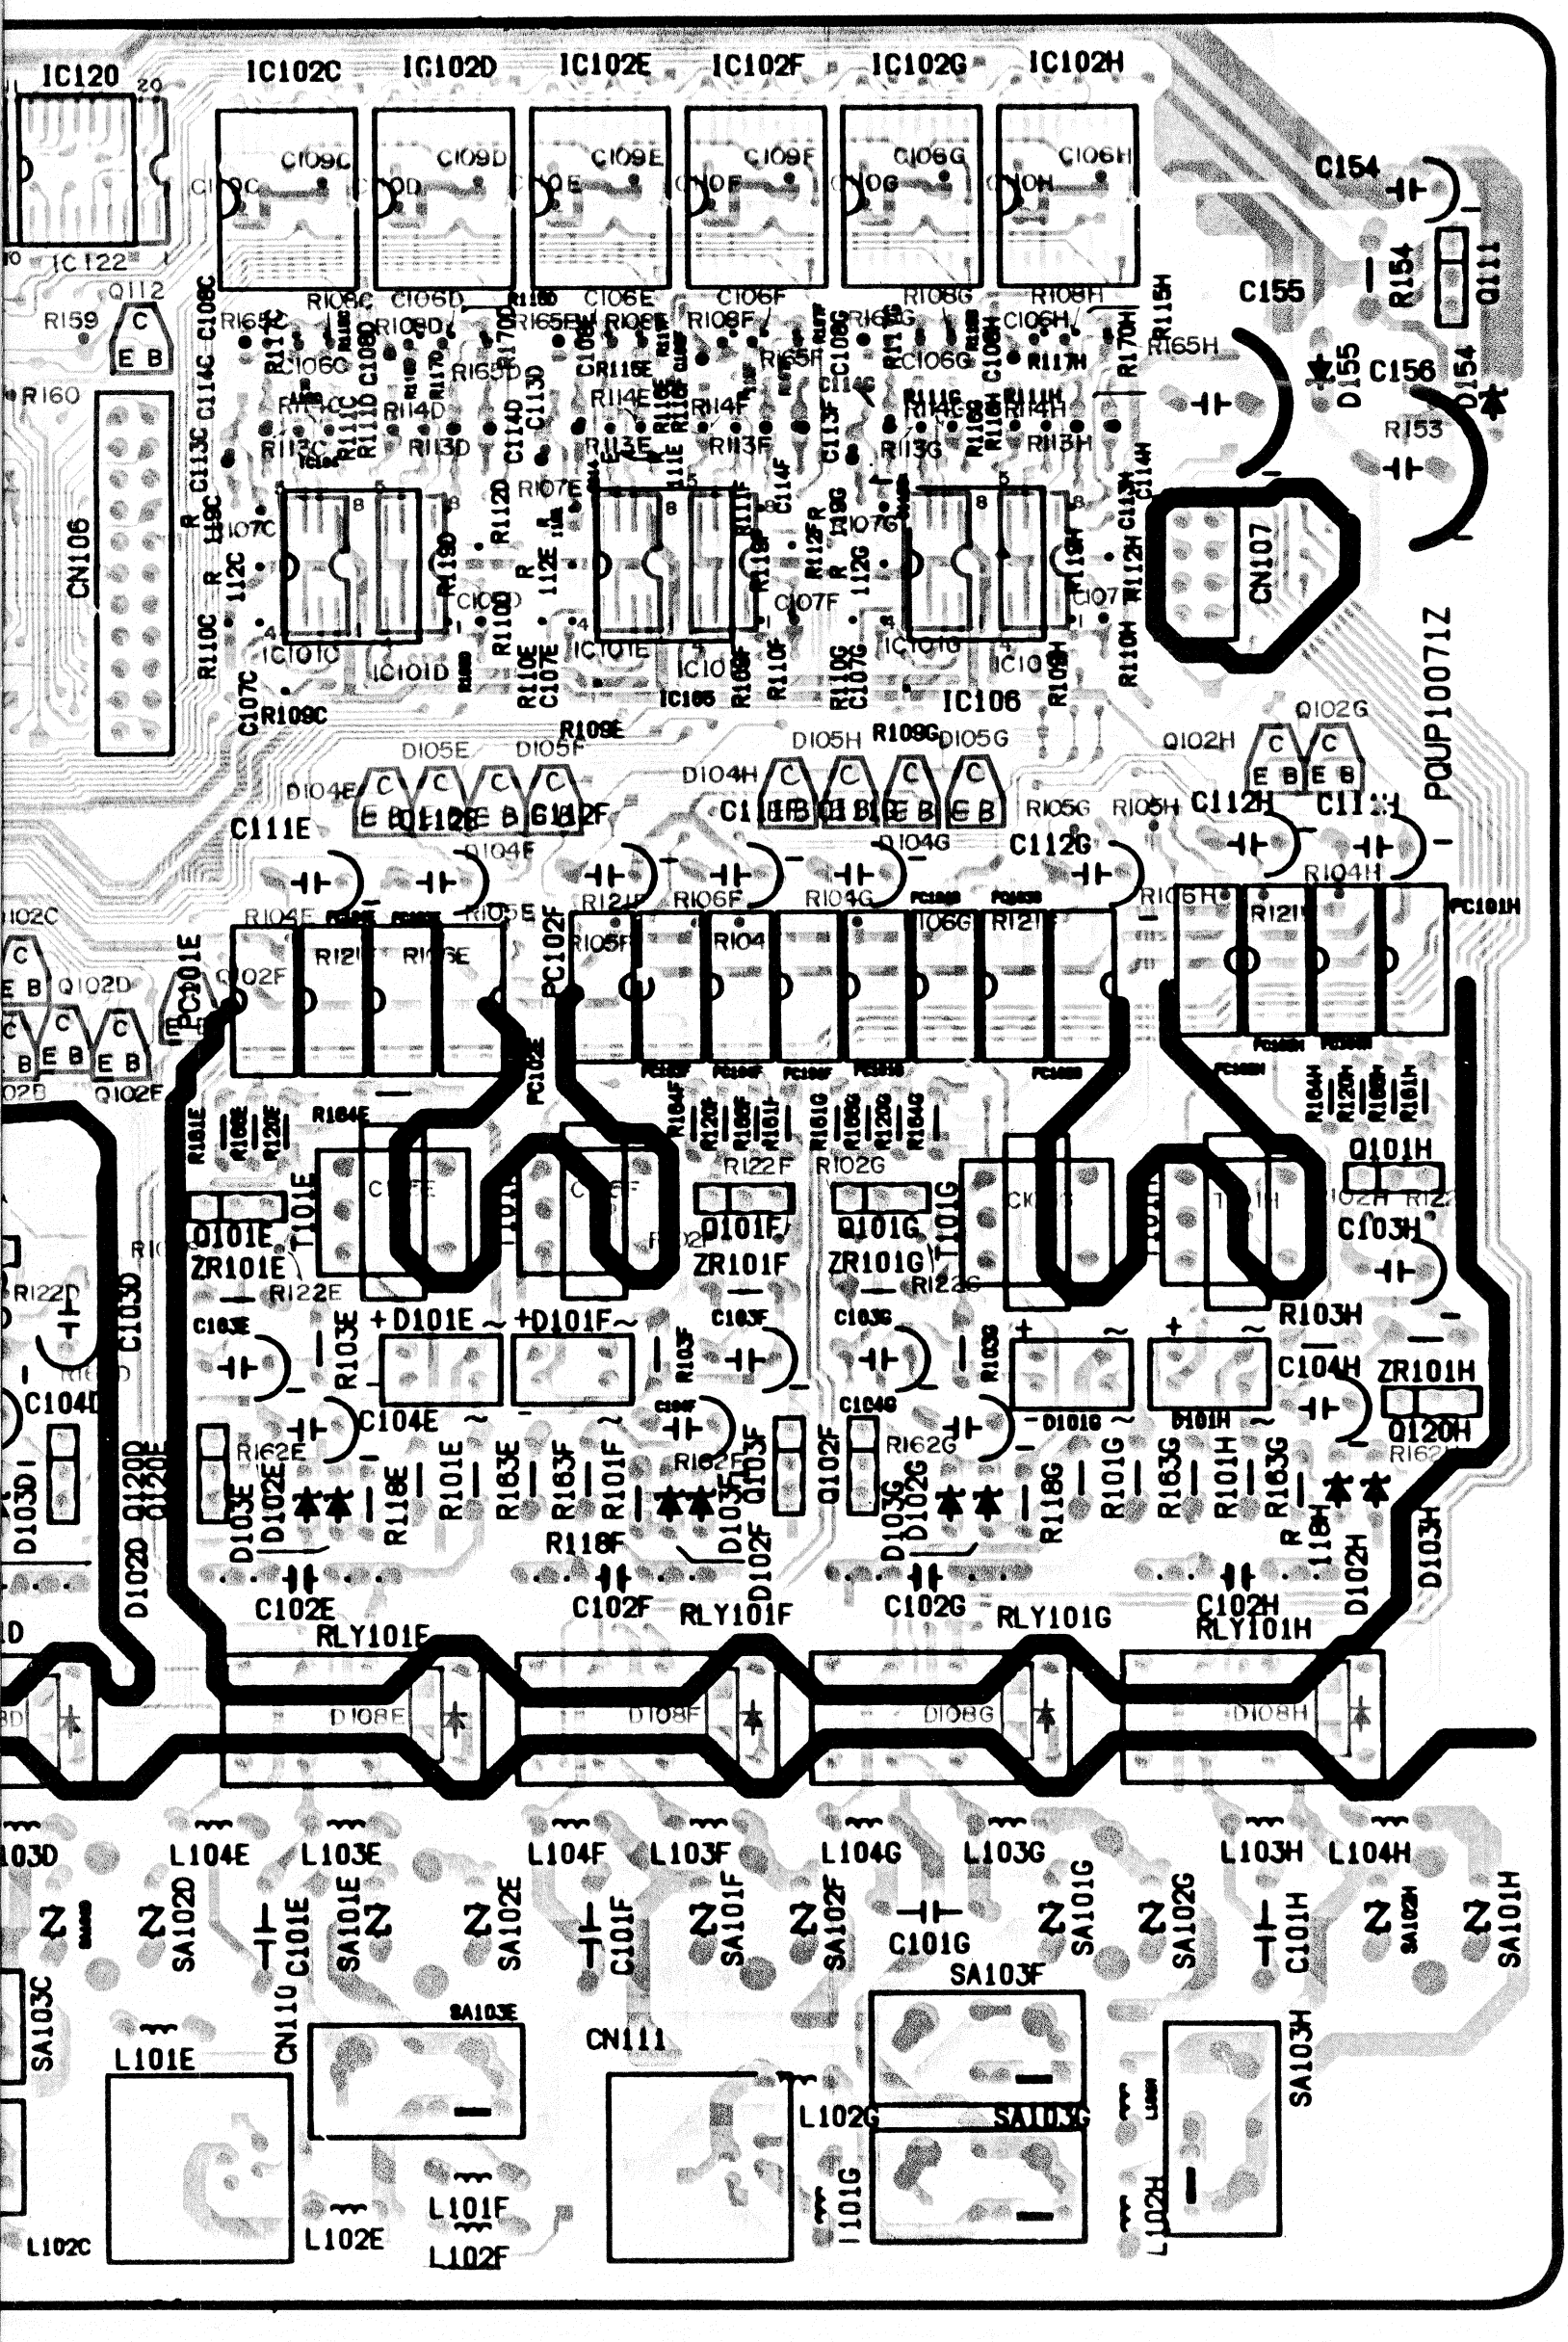

PRINTED CIRCUIT BOARD

5 | 6 | 7 | 8 | 9 | 10

(BOTTOM VIEW)

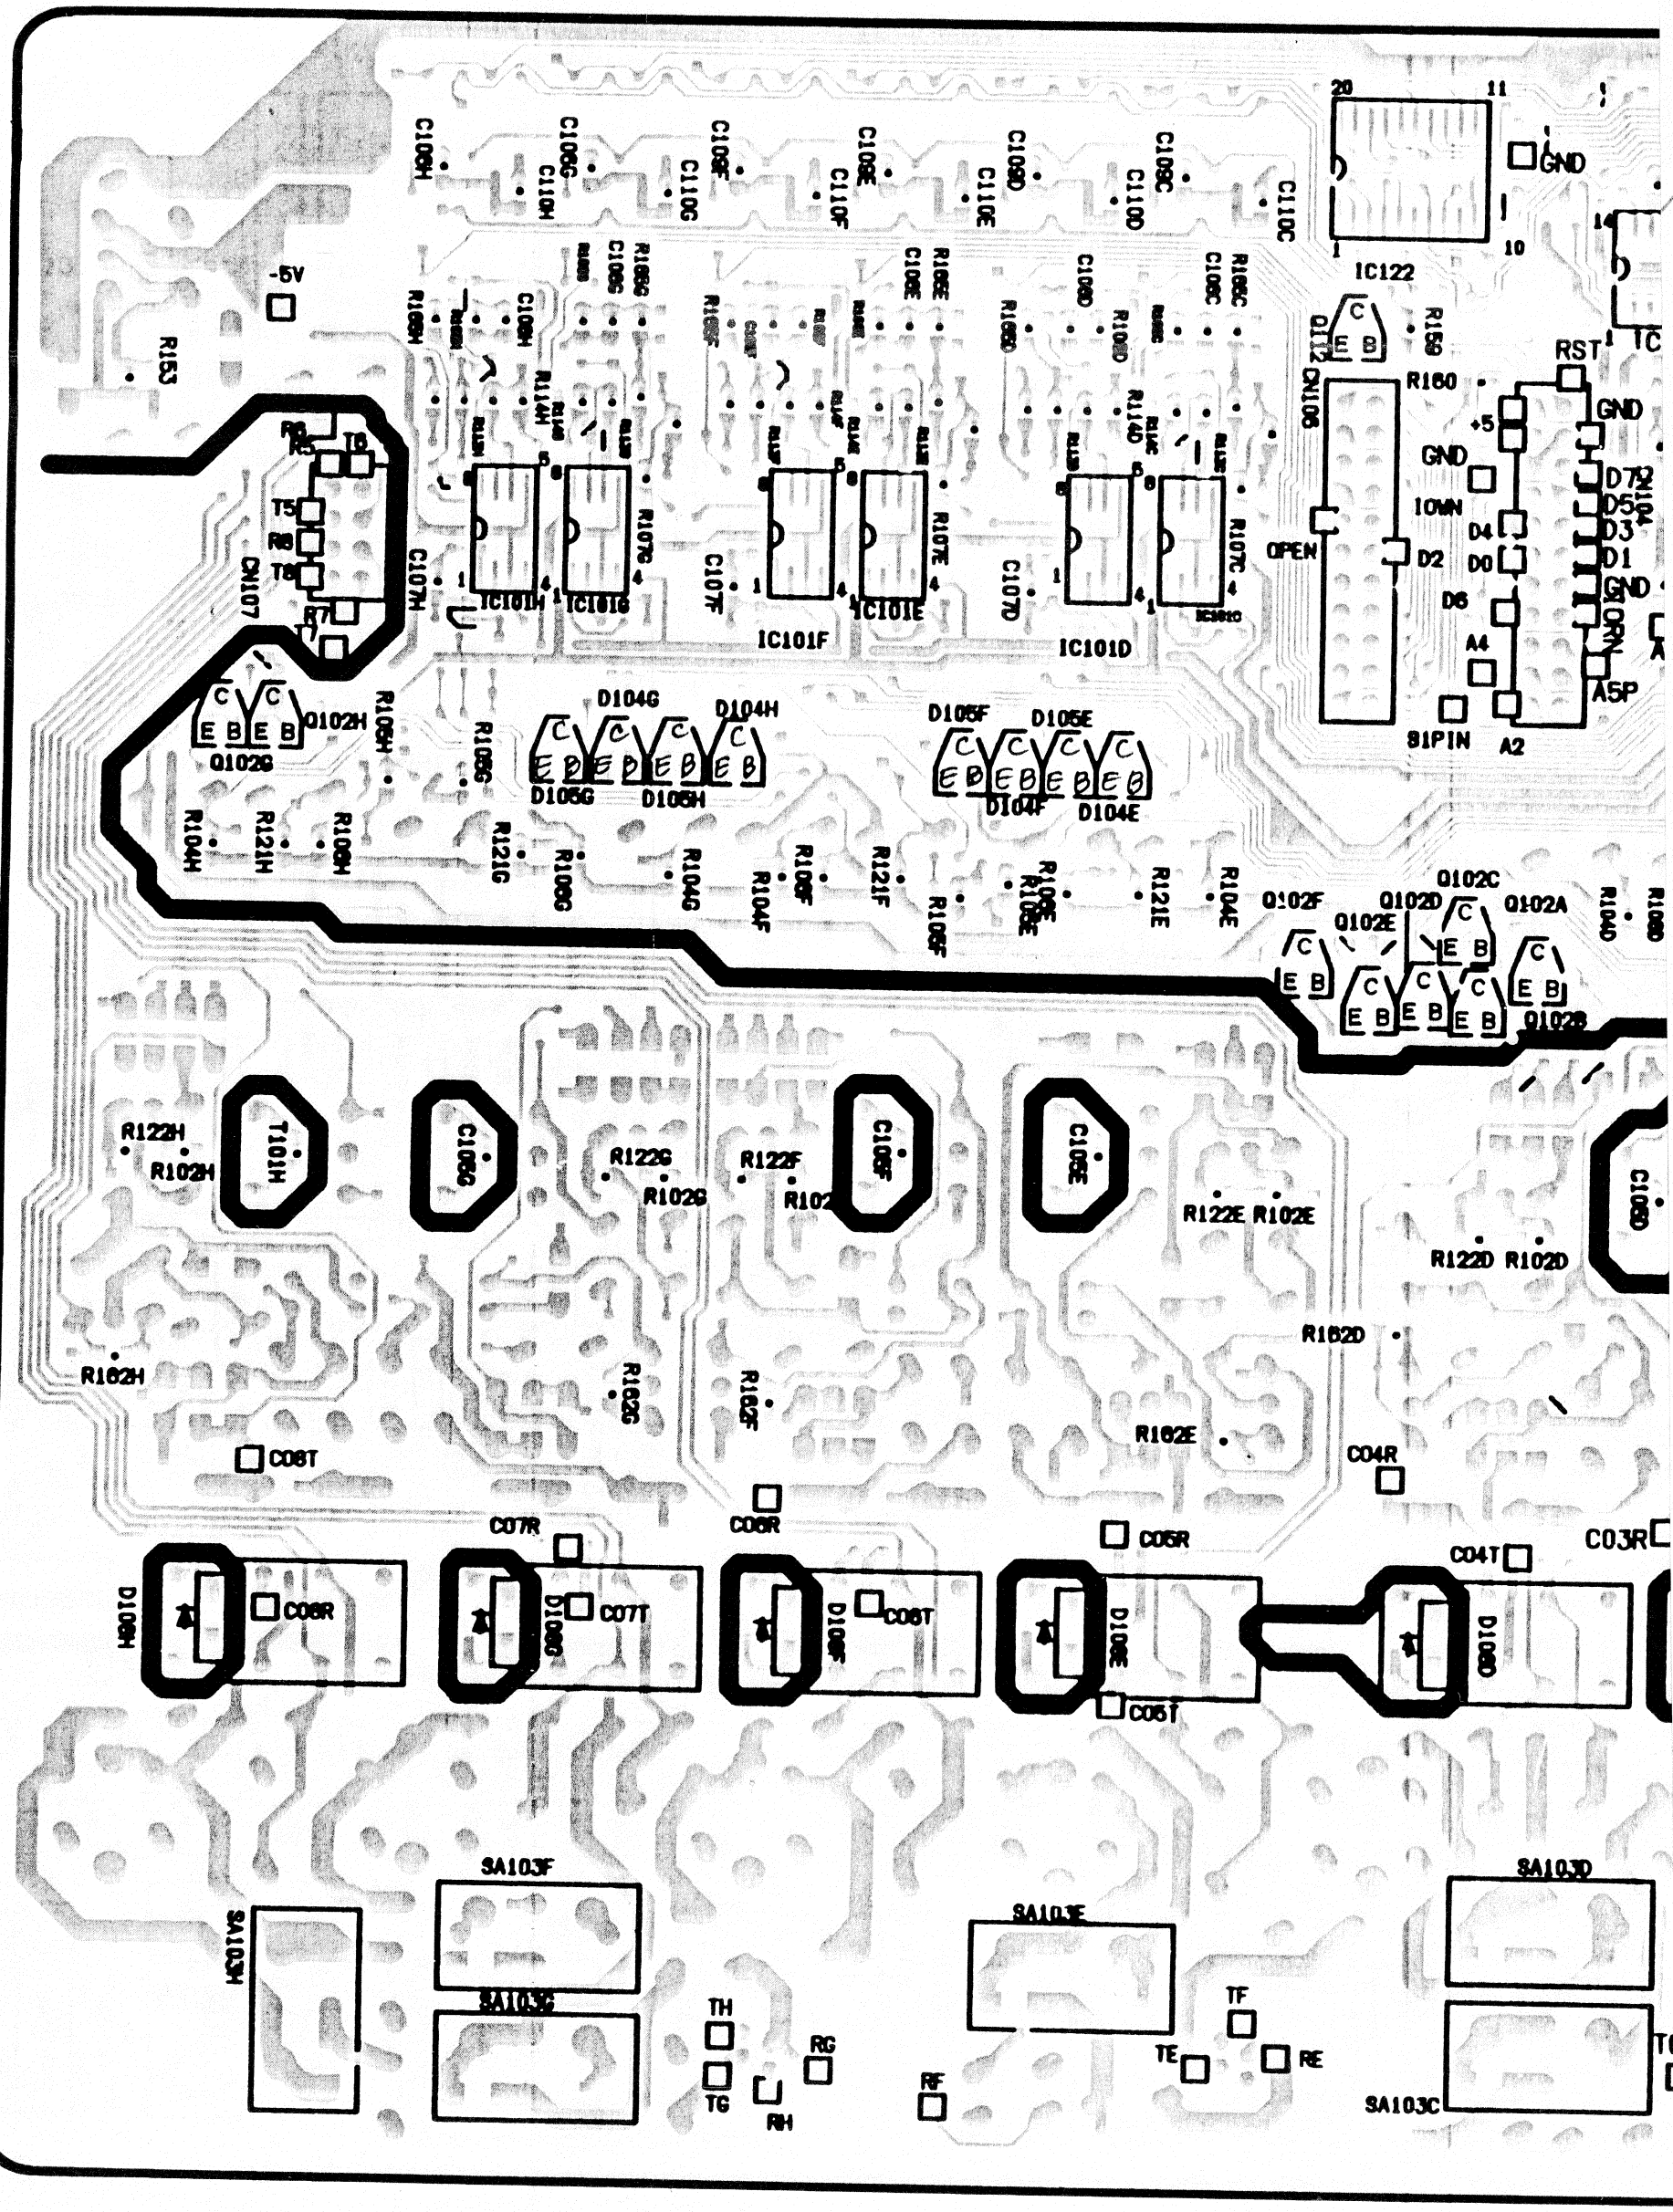

PRINTED CIRCUIT BOARD (CO BOARD)

9 10 11 12 13 14 15

(BOTTOM VIEW)

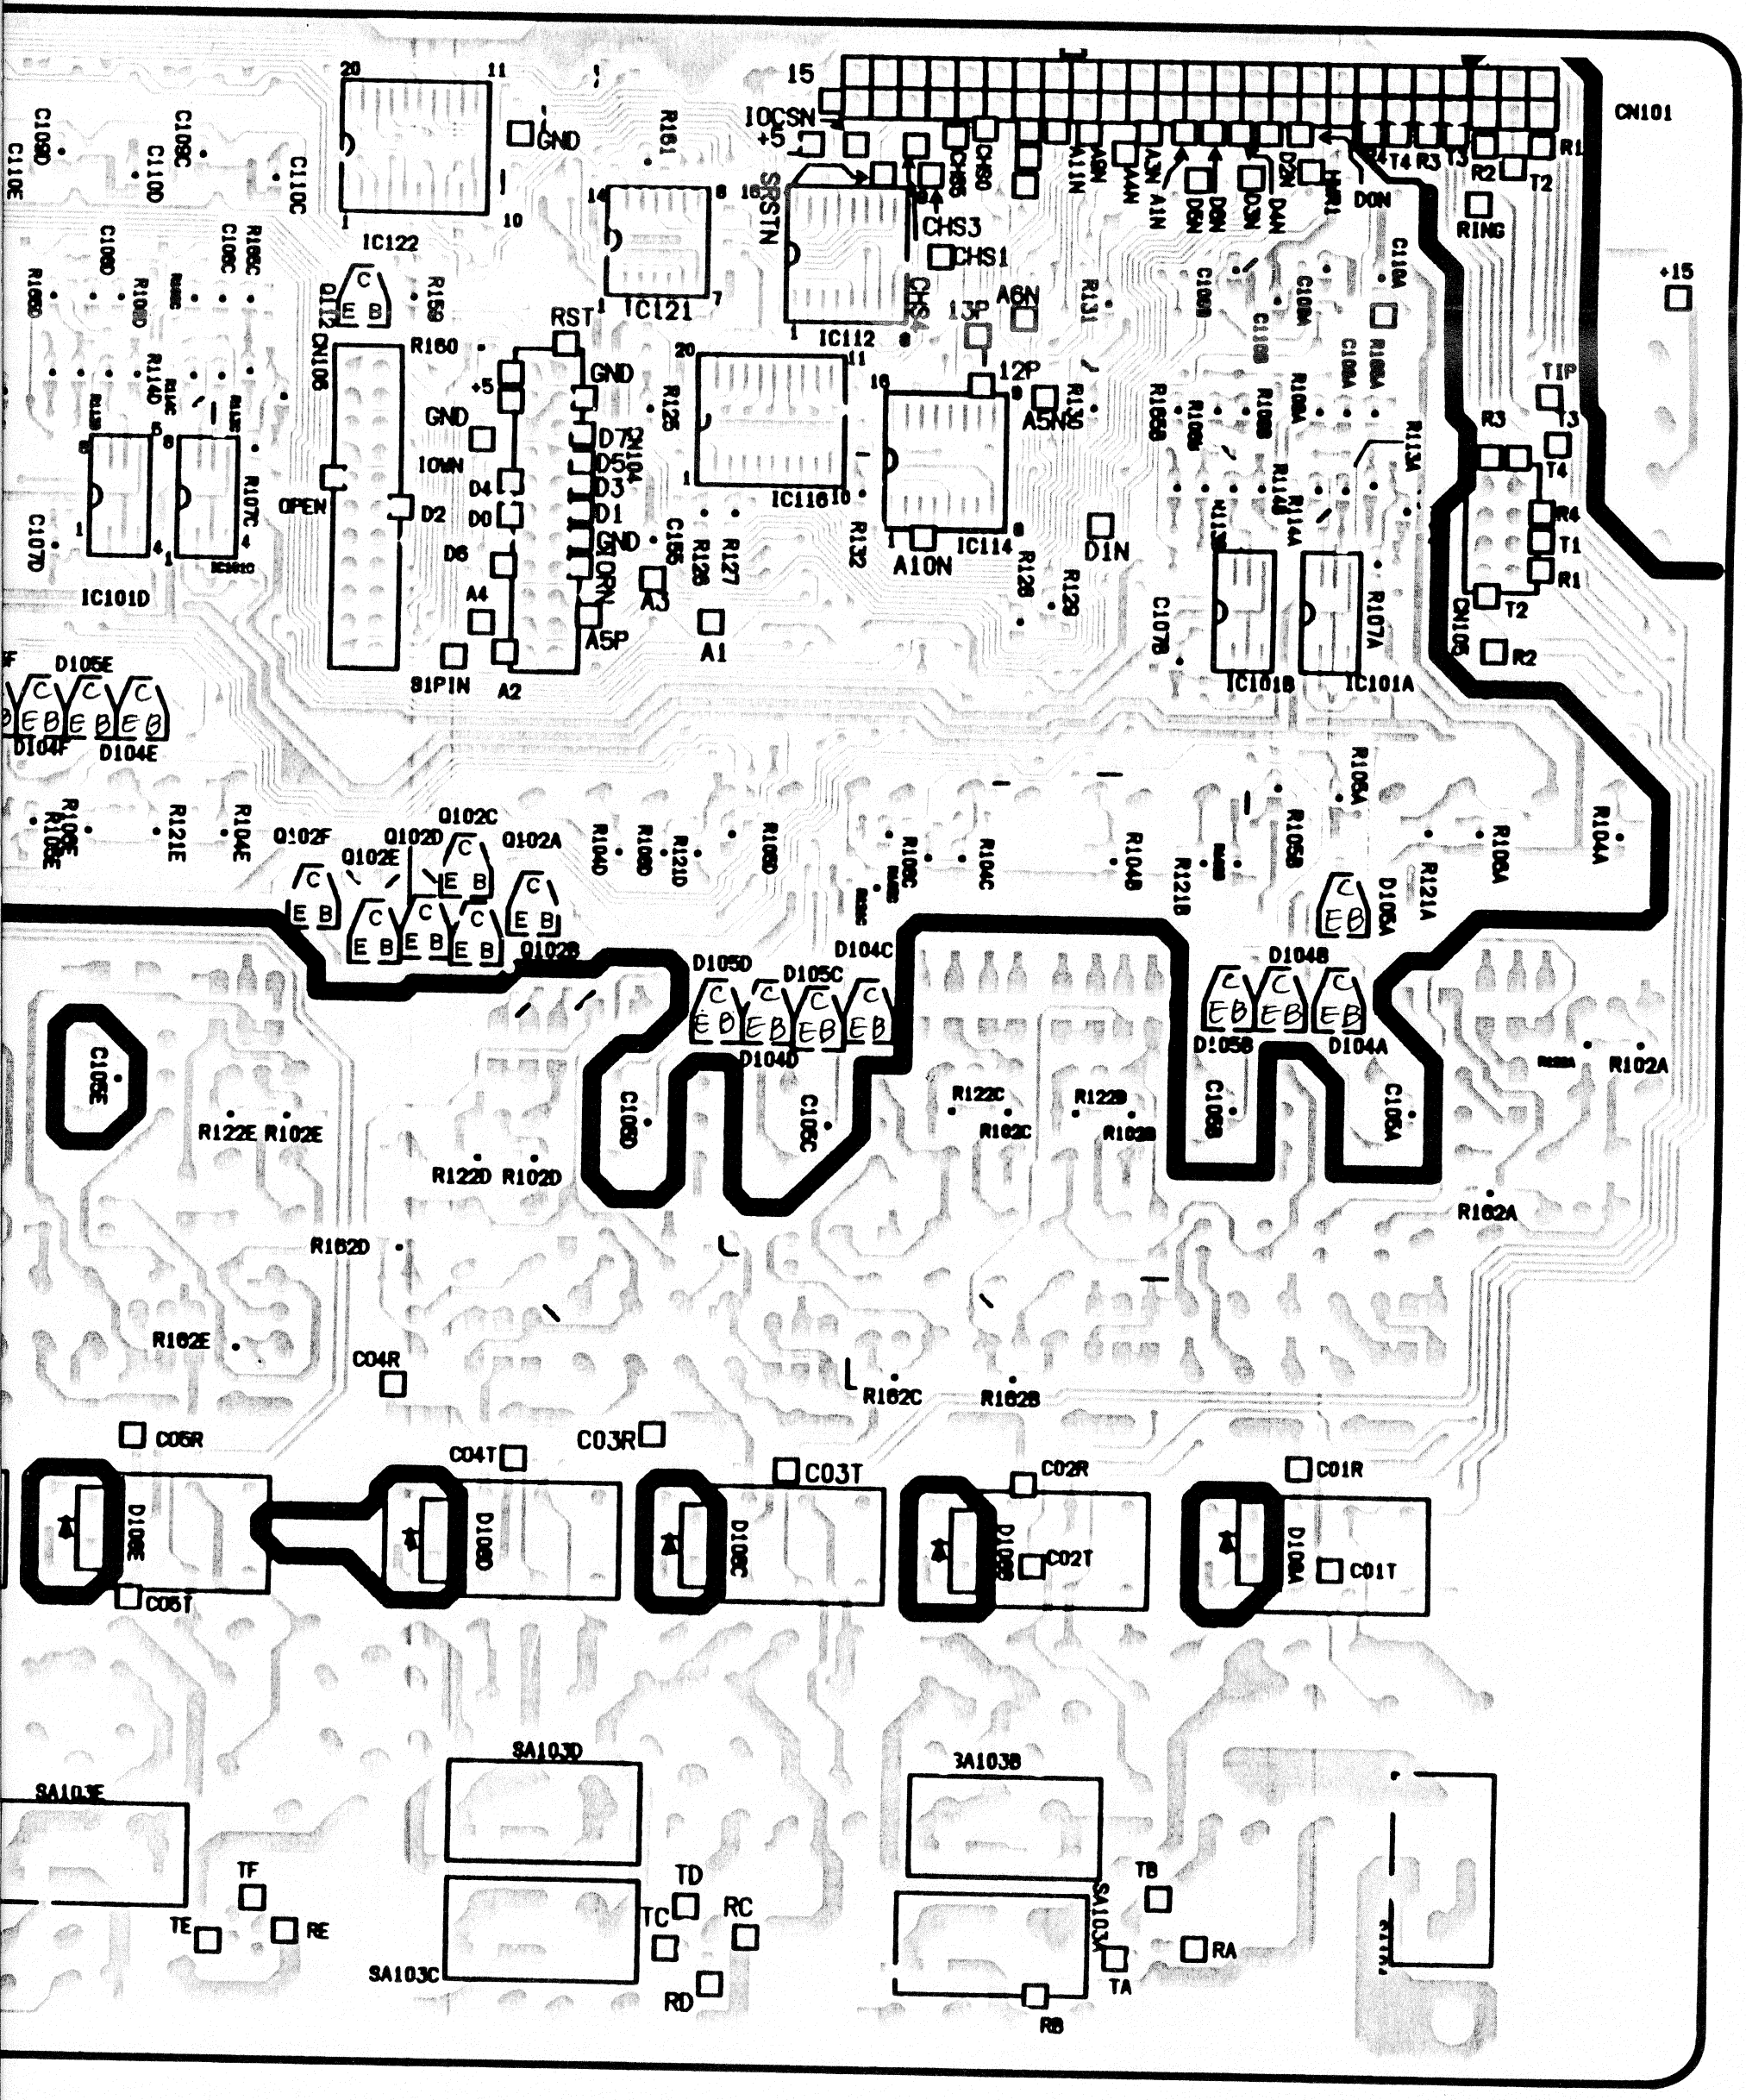

PRINTED CIRCUIT BOARD (SMDR/LED)

(COMPONENT VIEW)

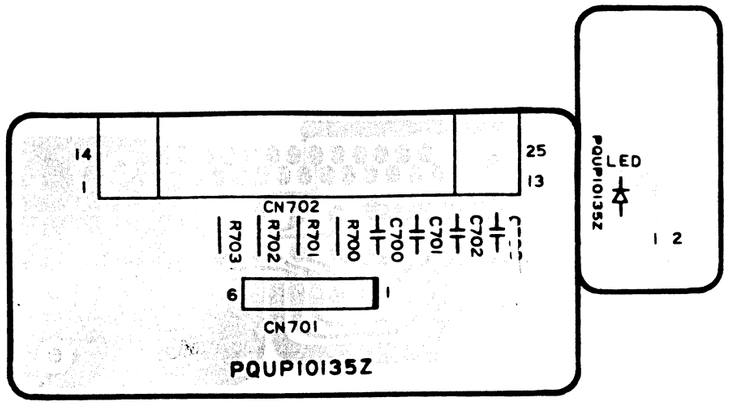

SCHEMATIC DIAGRAM (SMDR/LED)

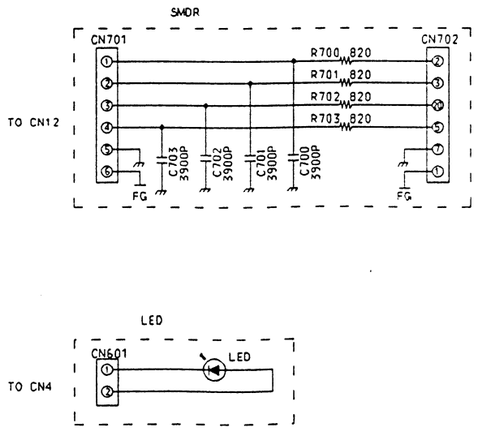

MEMO

PRINTED CIRCUIT BOARD (MOTHER BOARD)

(COMPONENT VIEW)

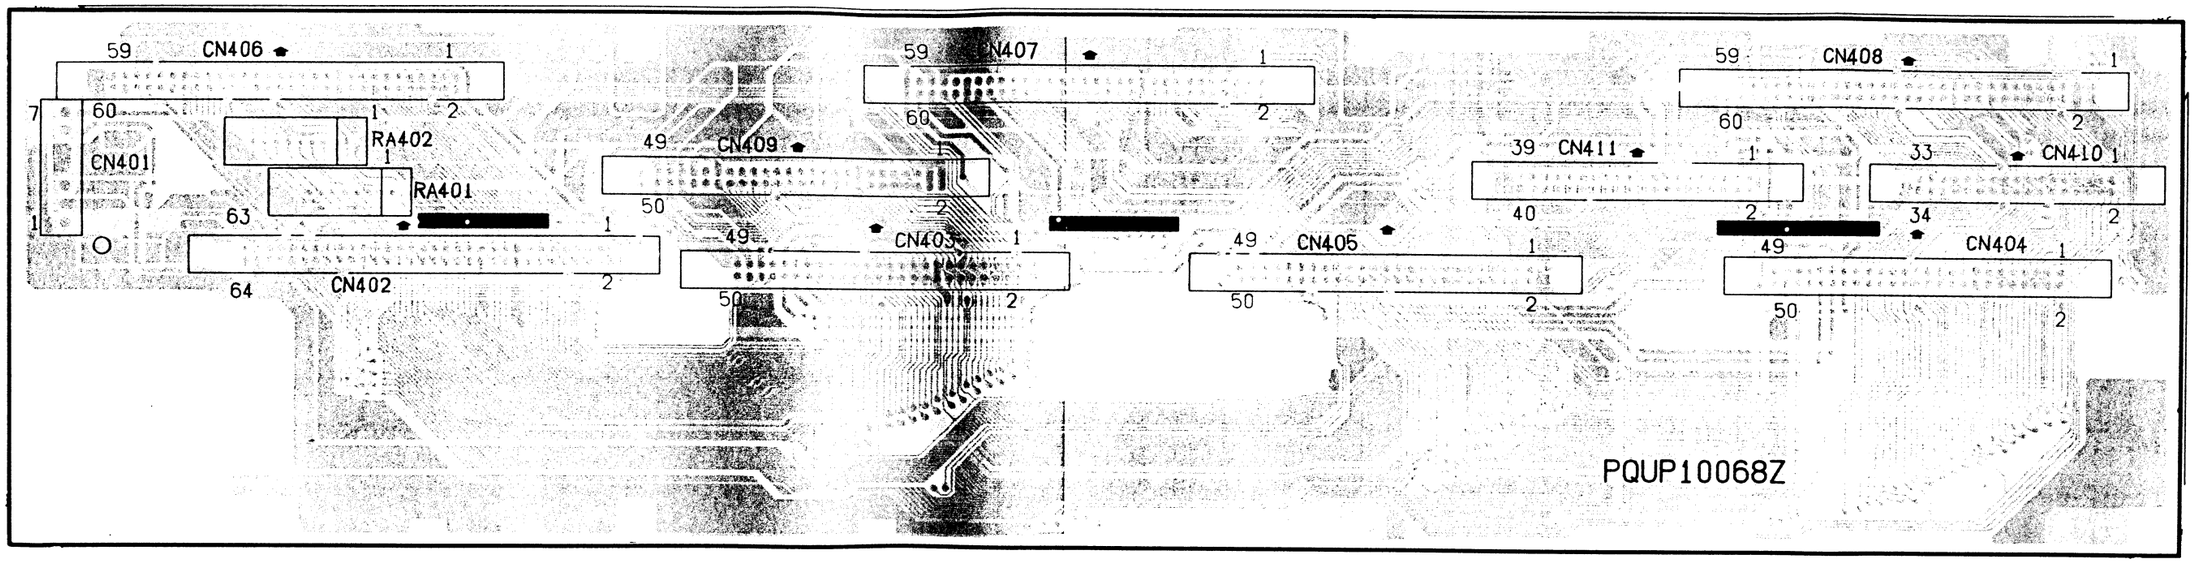

SCHEMATIC DIAGRAM (MOTHER CIRCUIT)

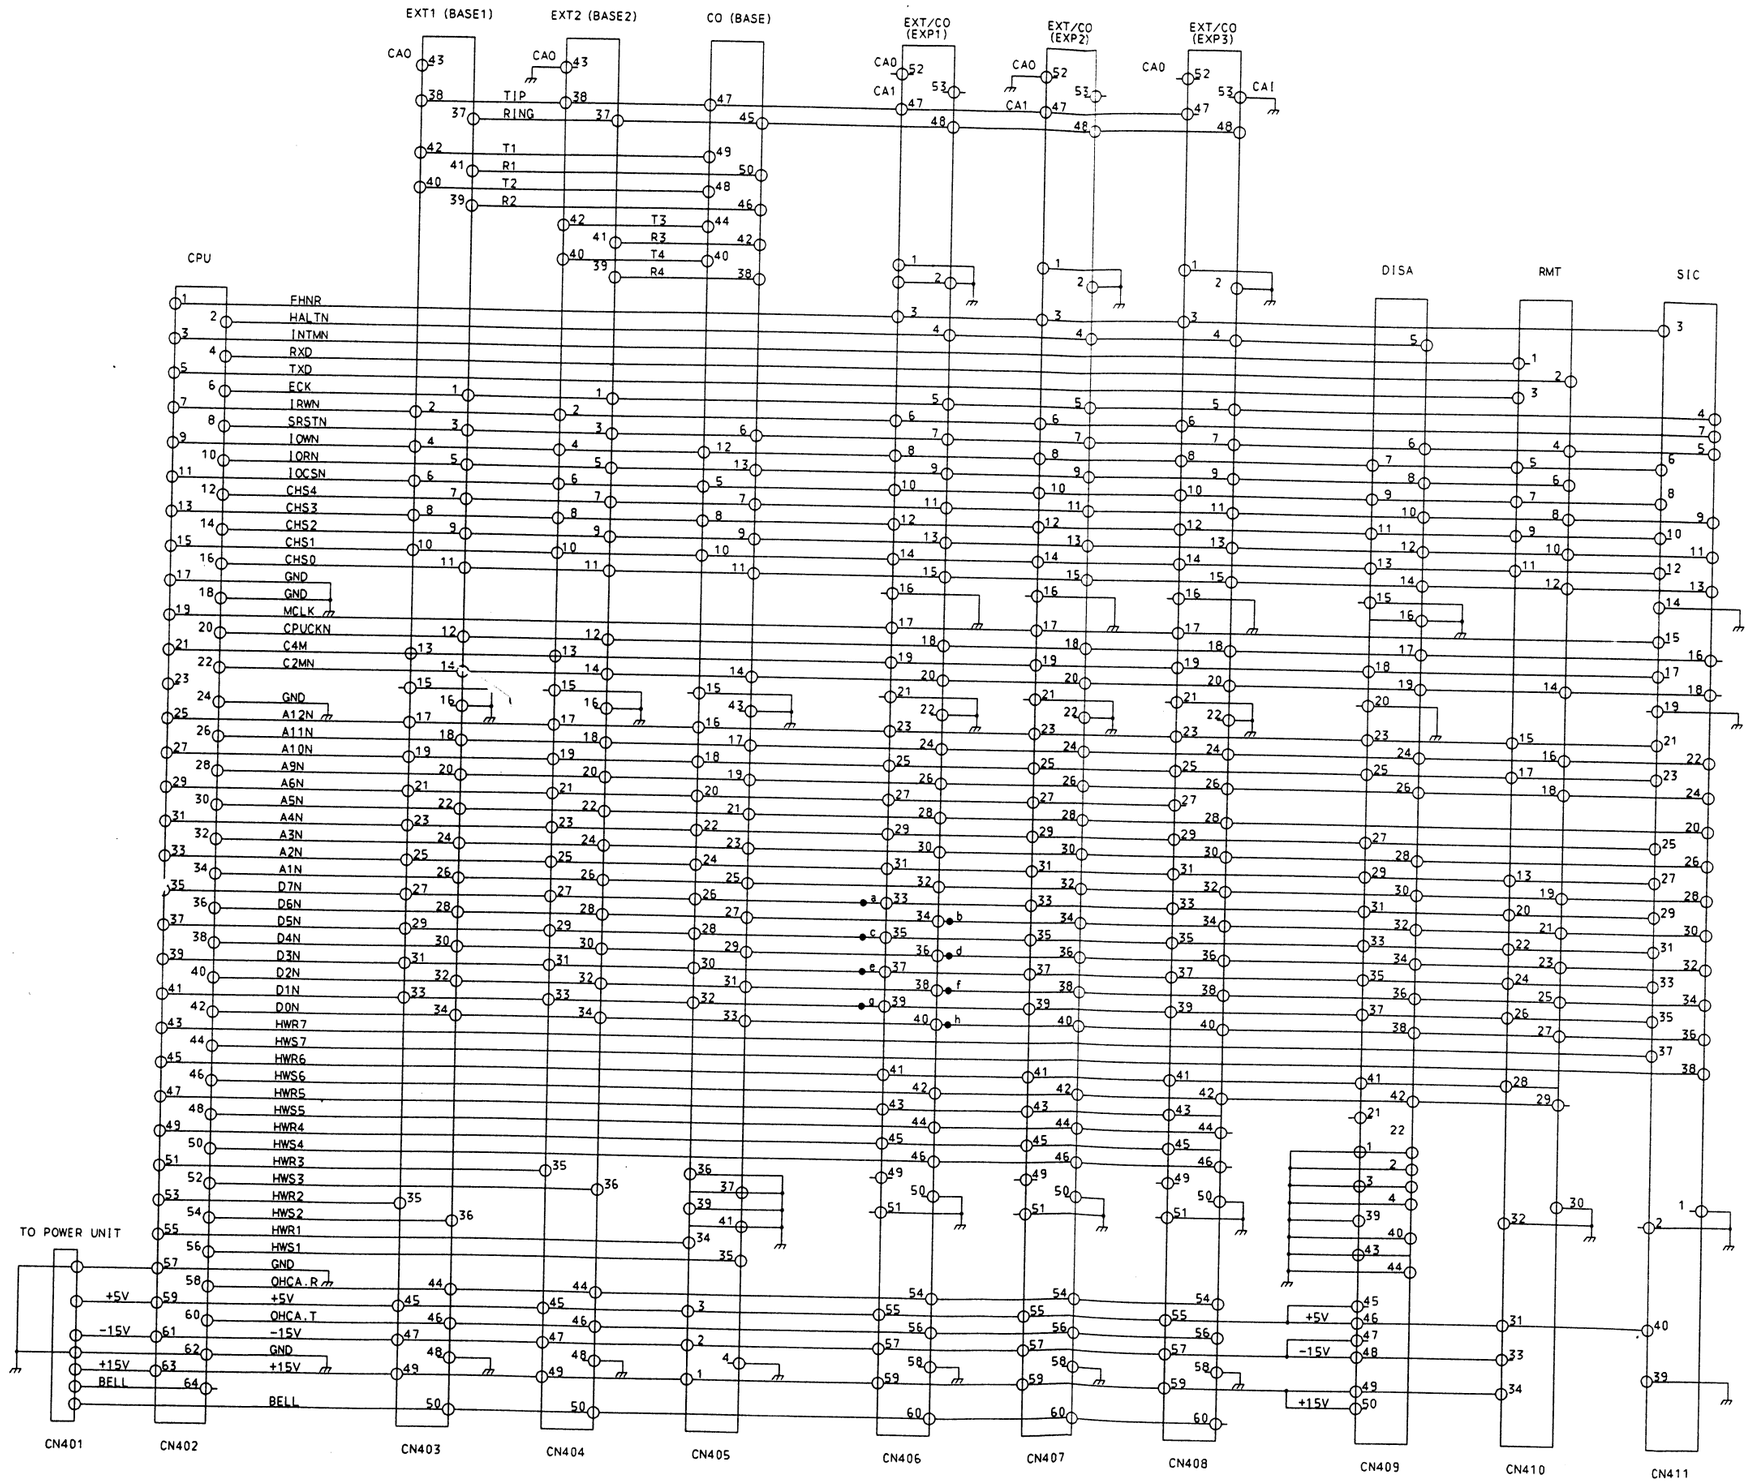



SCHEMATIC DIAGRAM (POWER SUPPLY CIRCUIT)

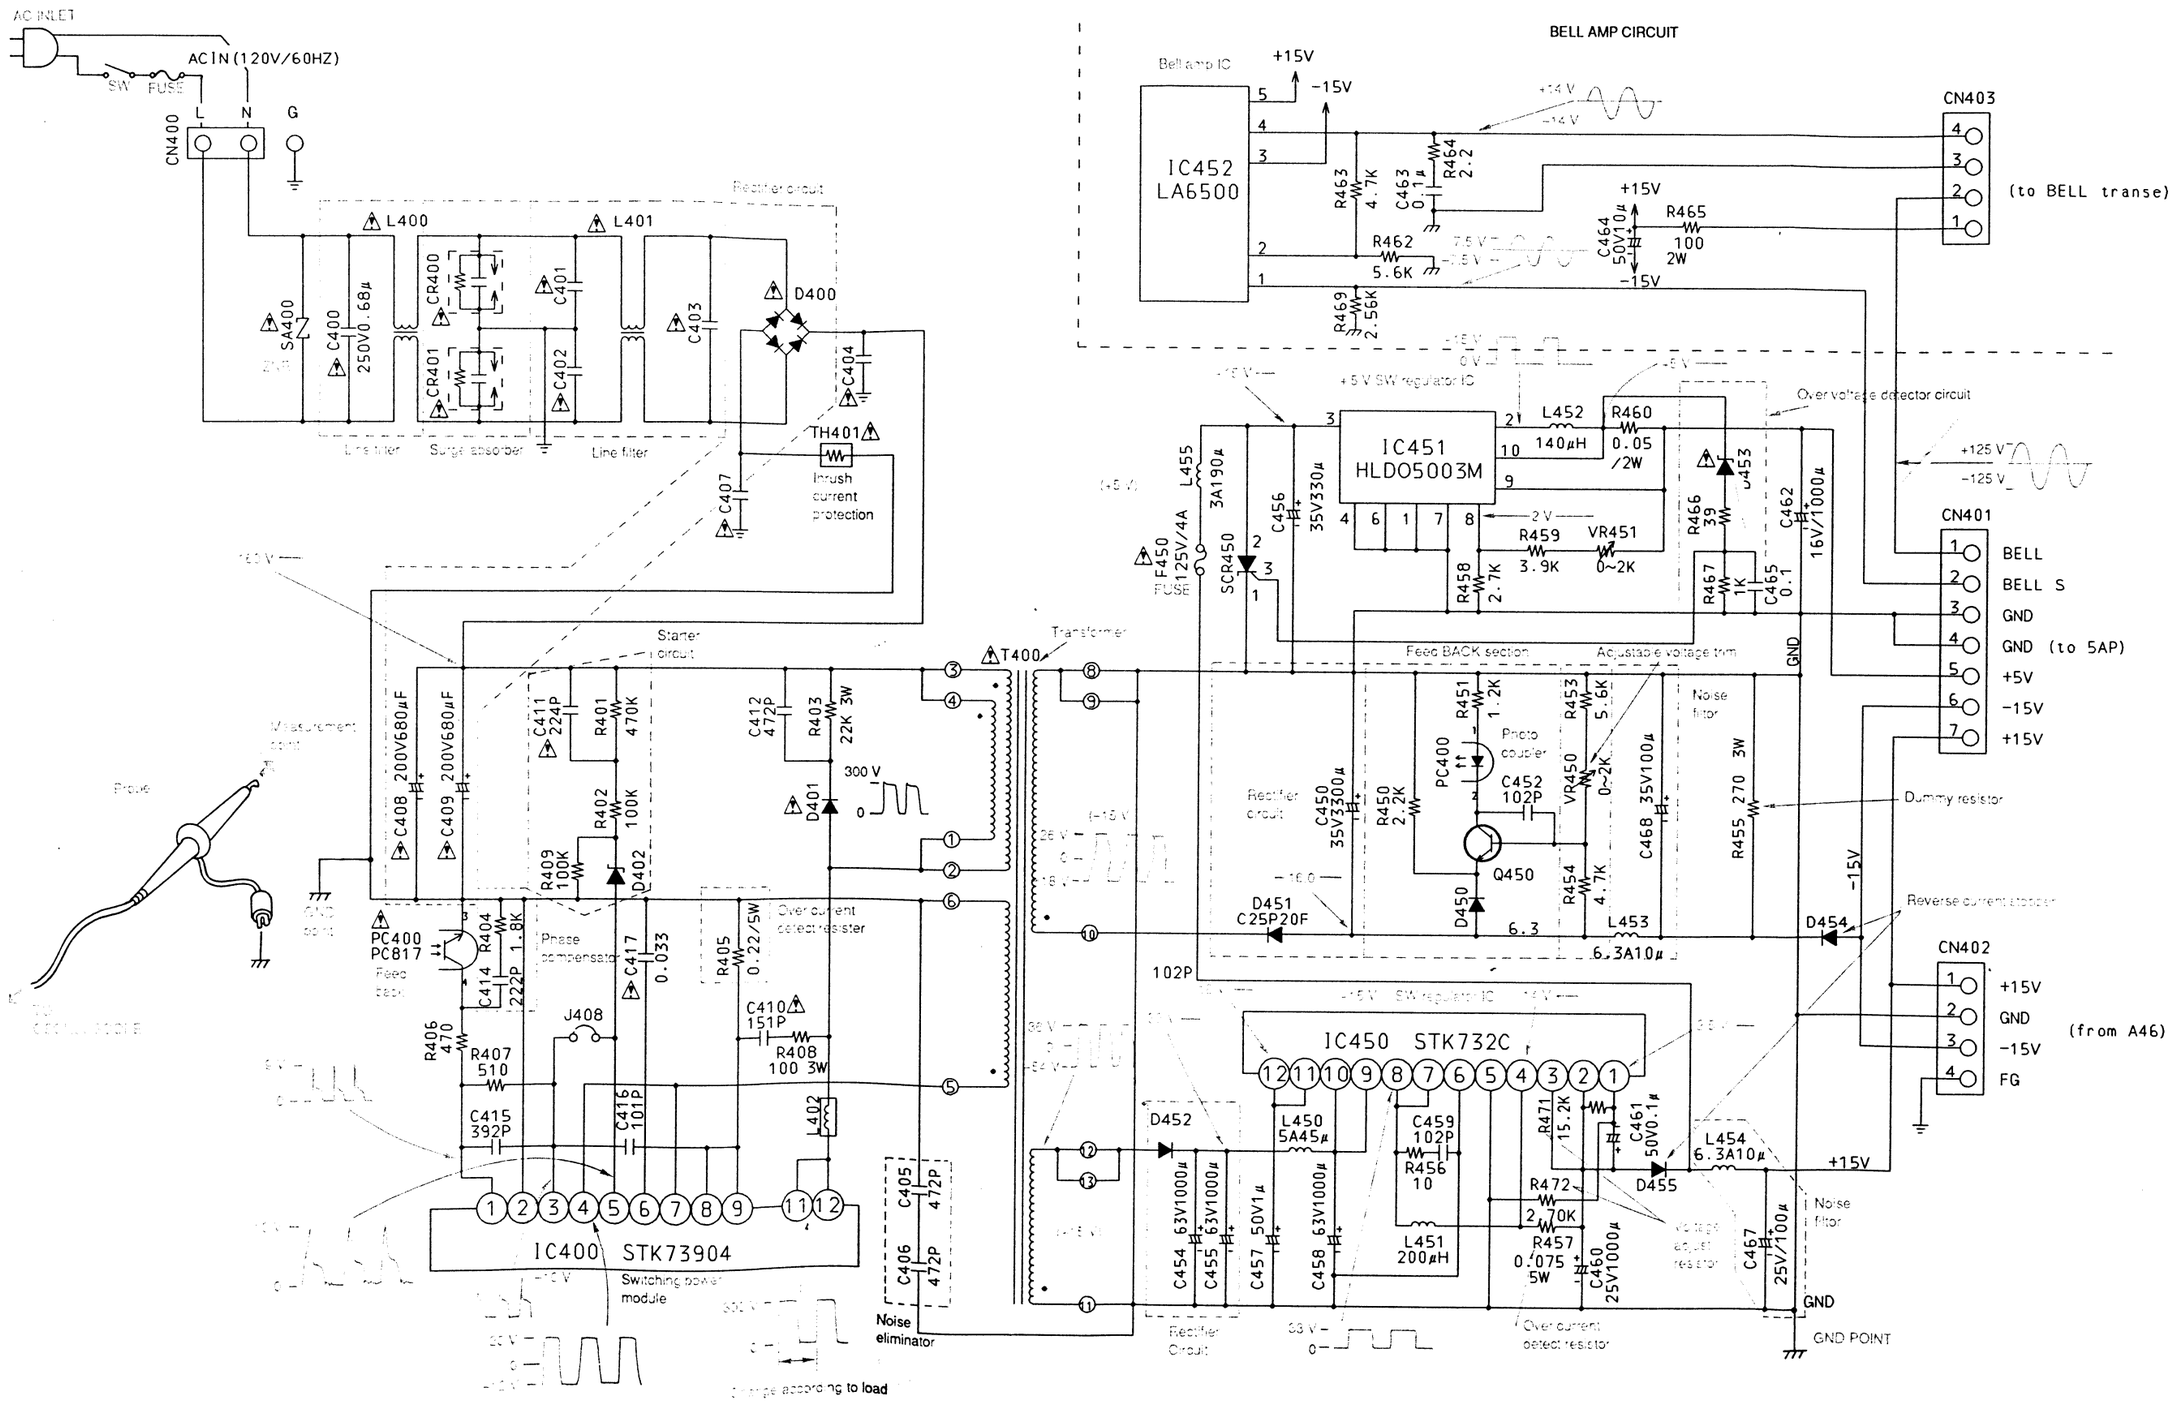

PRINTED CIRCUIT BOARD (POWER SUPPLY BOARD)

COMPONENT VIEW

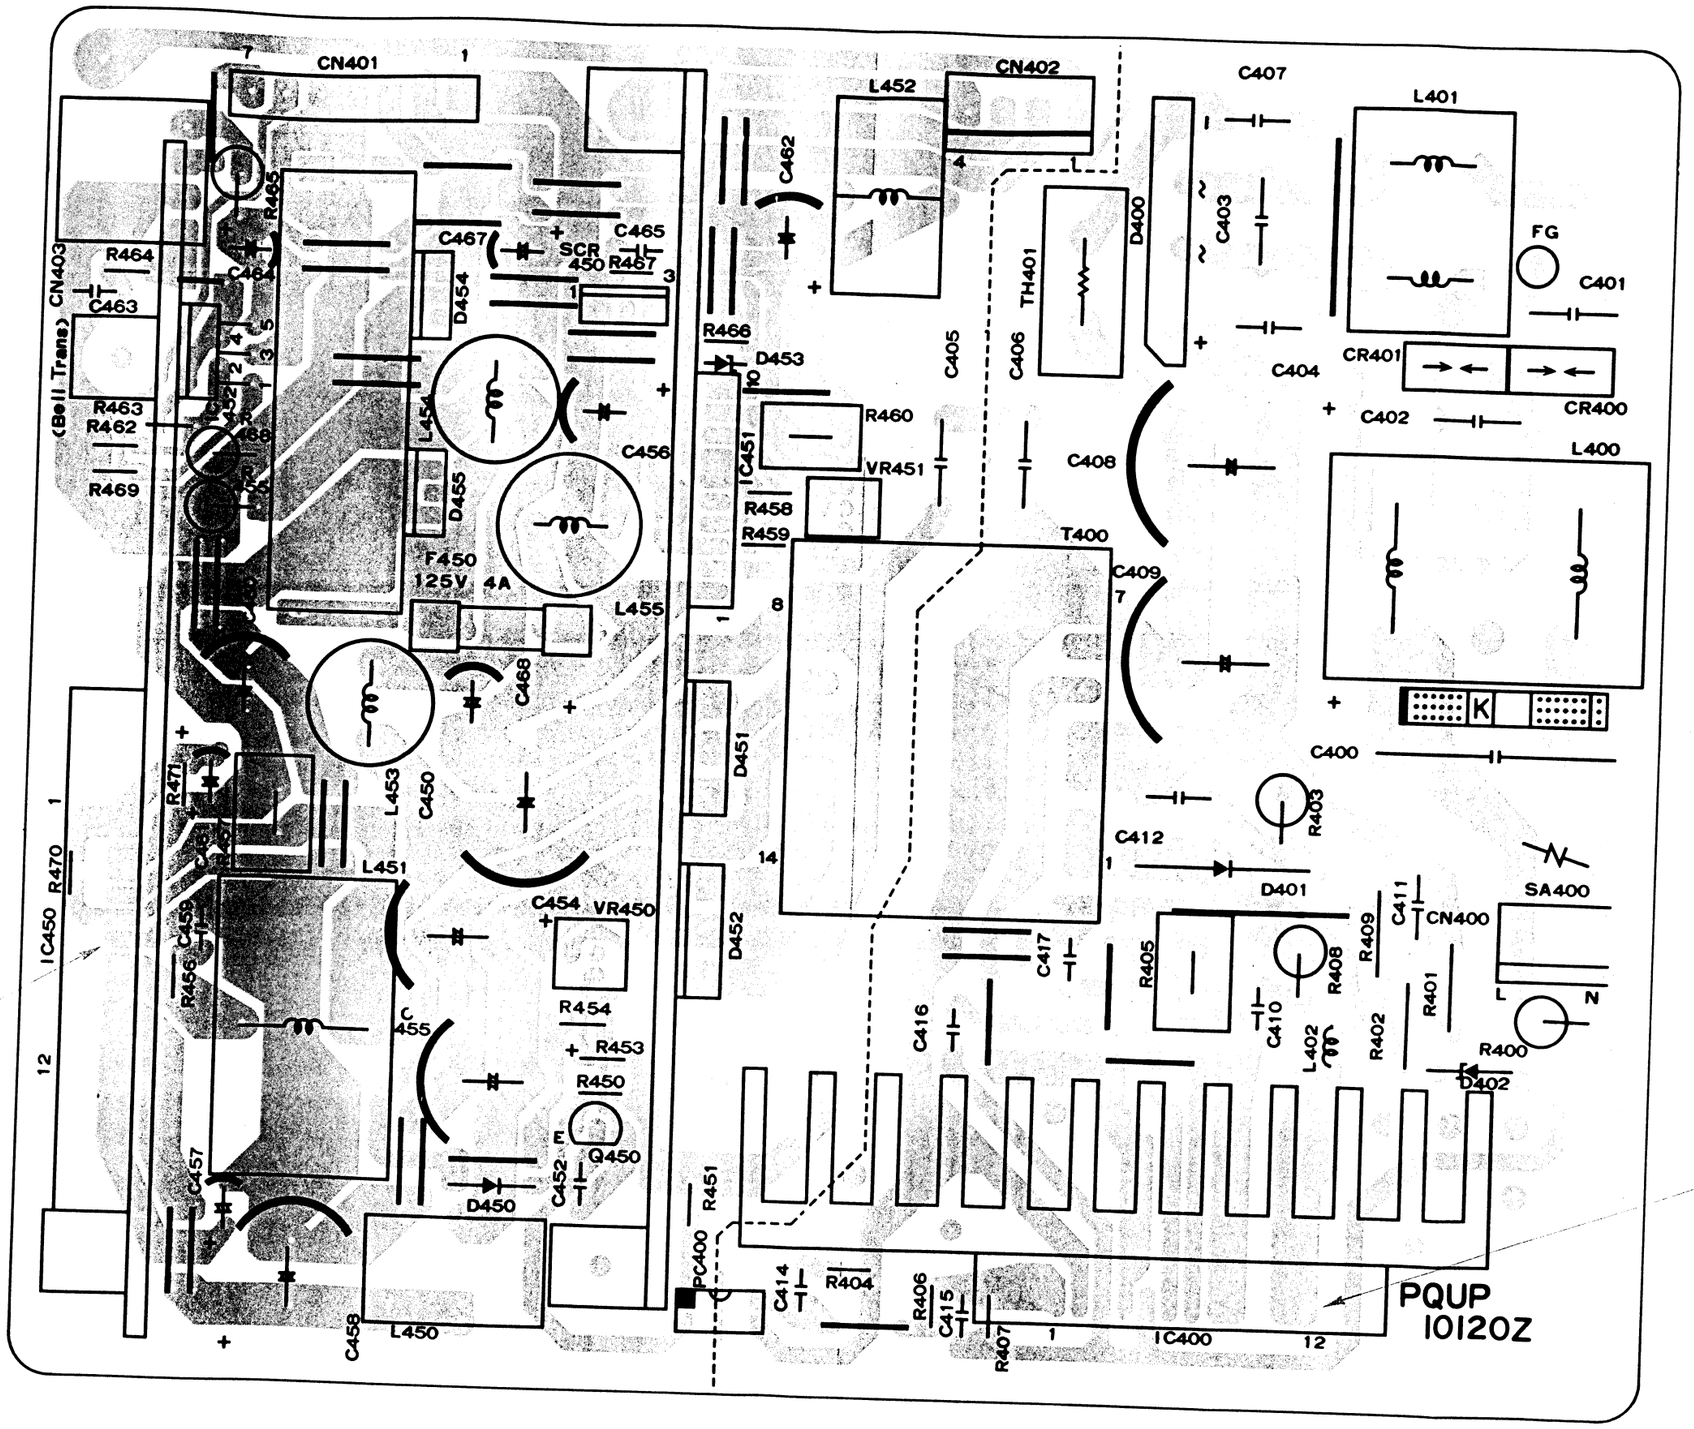

IC450

Pin No.	Waveform
1	9 V
4	
8	39 V, 0
12	18 V

Value is V.

IC400

Pin No.	Waveform
1	9 V, 0
3	10 V
4	20 V, 0, 12 V
5	10 V, 0
11	300 V, 0
12	300 V, 0

TERMINAL GUIDE OF IC'S, TRANSISTORS AND DIODES

 PQVIMT8980DE	 PQVI63HB110	 PQVIMT8952BE PQVITC5183SD	 PQWI2TD1232C PQWI1D1232C1	 PQVISN7H00S
 PQVIMC45503P	 PQVI68301FCG	 PQVINJM4558M	 PQVISN7L14S PQVINJM319VT PQVISN7L00S PQVIHD75189P PQVIHD75188P	PQVISN7L04S PQVISN7L08S PQVISN7L86S
 PQVIMC4051BF PQVISN7L138M PQVIMC45503W PQVISN7L365S PQVISN7L368M	 PQVI620890F	 PQVISN7L273M PQVISN7L640M	 PQVI603830F	 PQVICM8870FI
 PQVIMS6242BS	 PQVIHLD05003	 PQVDC25P30F	 PQVISTK73904	 PQVISTK732C
 PQVIPS520C	 PQVTDTC143EK 2SB1218A, 2SD1819A PQVTDTC143E UN5113	MA3047 2SC2412K PQVTDTA144EK 2SA1576	 2SD1994A 2SB1218A 2SB1322	 2SA933
2SC4641 2SC2878	2SD2137	2SA1627	2SD1897	 PQVDD5SB40
PQVDS1YB40F1	PQVILA6500	PQVDD10SC4M	MA151WK	1SS181, MA723

 MA4091, MA4039 MA4057M, MA4030 MA4056	 RLS71	 MA4068 2SC2412K	 PQVDRD6.2FB	 PQVDAK03
PQVDHZS2B1	PQVDERD3805L			

EXTENSION CABLE FOR SERVICING

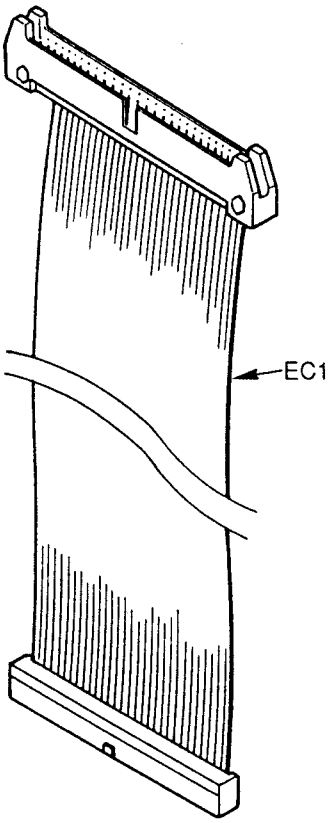

(64 Pin Cord)

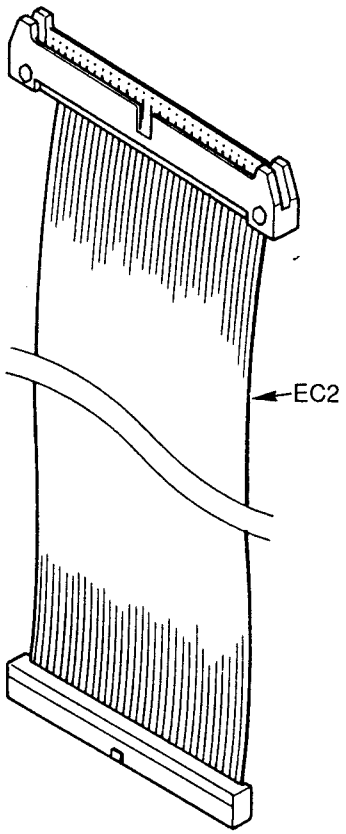

(60 Pin Cord)

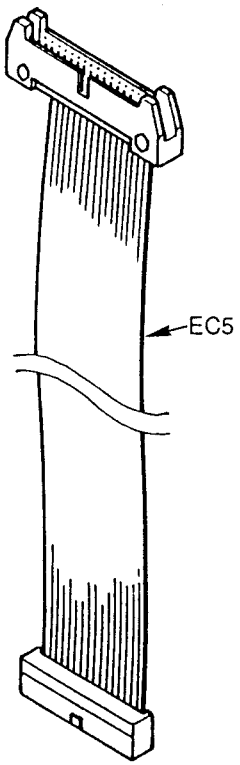

(34 Pin Cord)

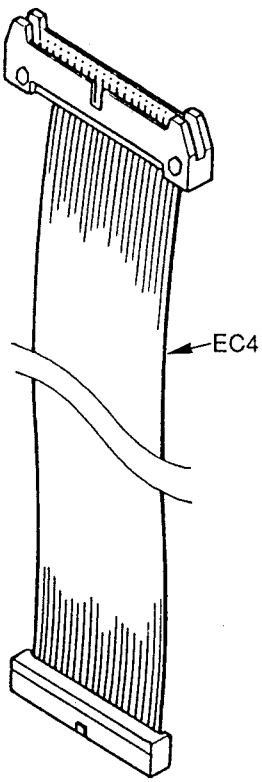

(40 Pin Cord)

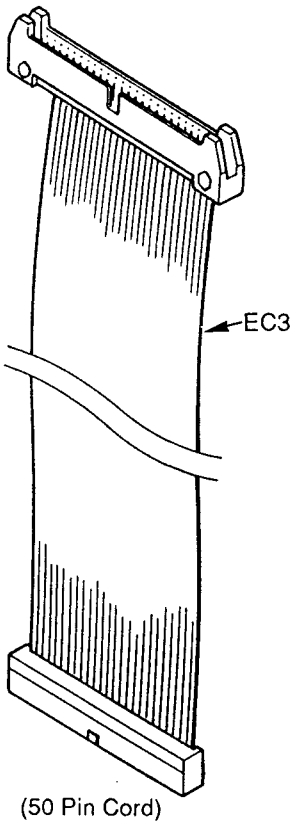

(50 Pin Cord)

CABINET AND ELECTRICAL PARTS LOCATION

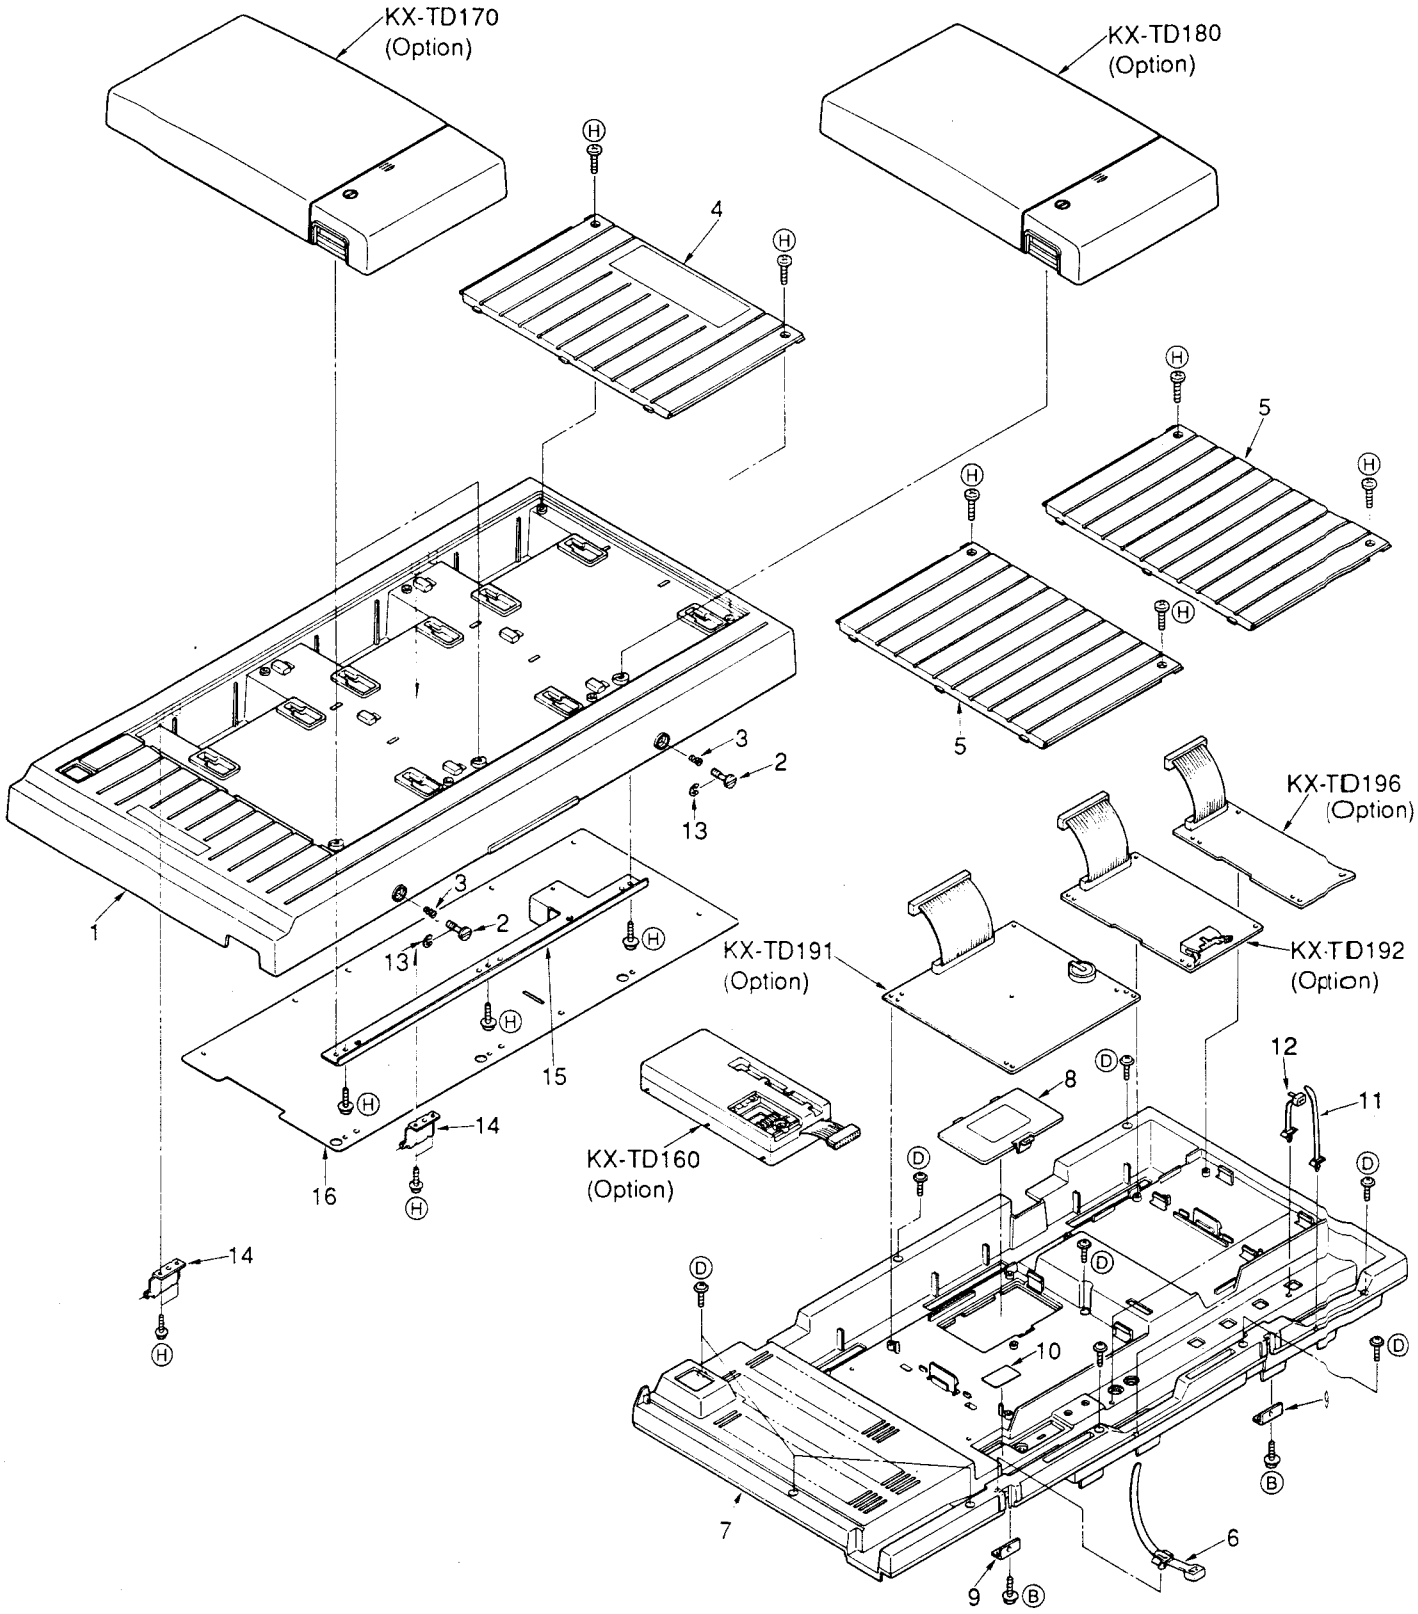

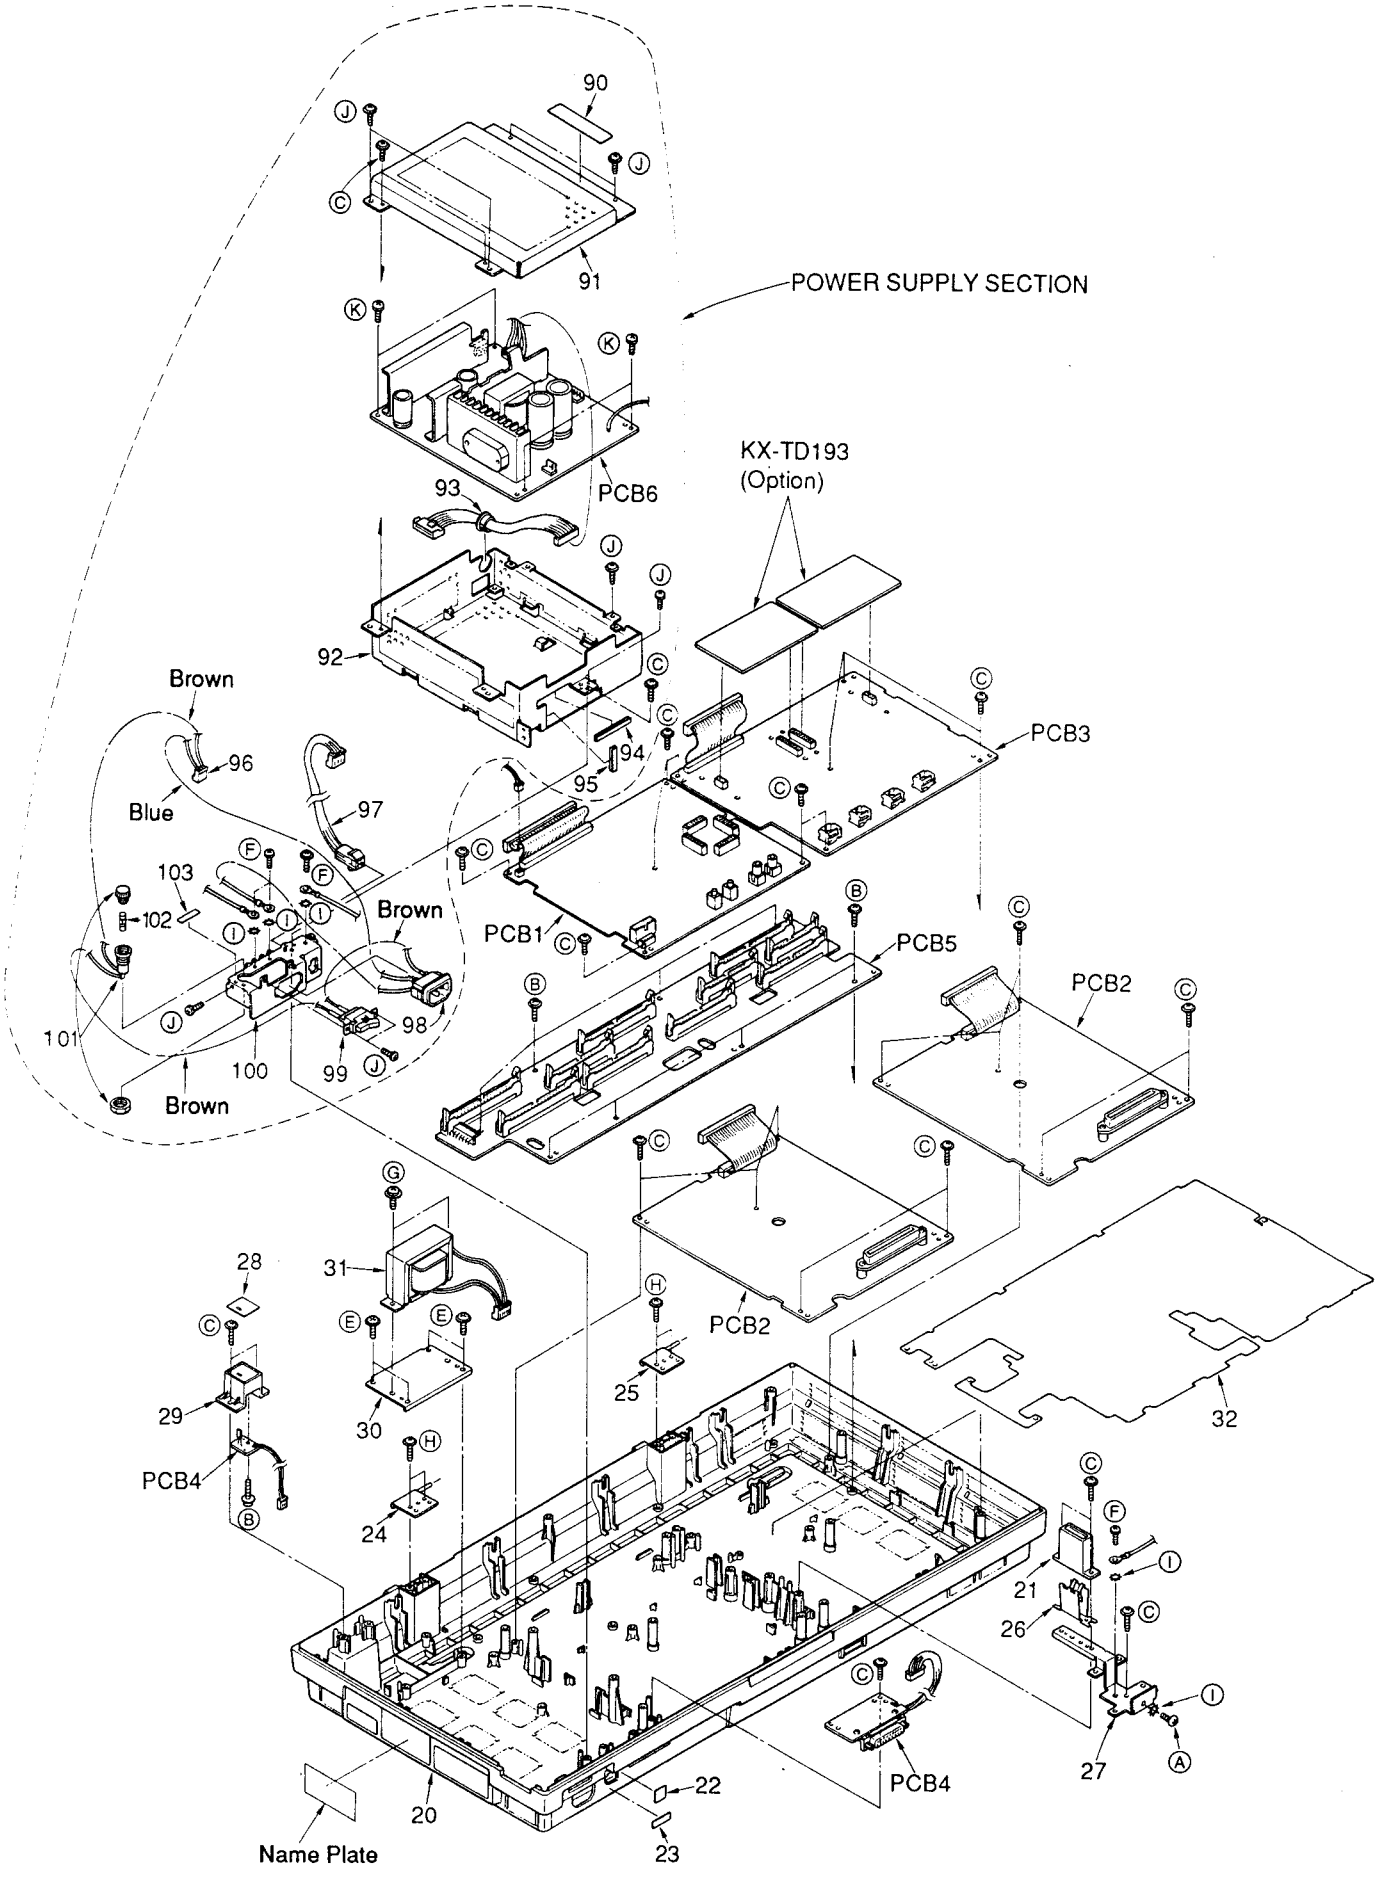
90
91
POWER SUPPLY SECTION
PCB6
93
KX-TD193
(Option)
92
94
95
PCB3
Brown
96
Blue
97
103
102
101
100
99
98
Brown
Brown
PCB1
PCB5
PCB2
PCB2
28
31
29
30
PCB4
24
25
32
21
26
27
PCB4
22
20
23
Name Plate

ACTUAL SIZE OF SCREWS AND WASHER

Ref. No.	Part No.	Figure
Ⓐ	XSN4D8FN	
Ⓑ	XTW3+S10P	
Ⓒ	XTW3+S12P	
Ⓓ	XTW3+S14P	
Ⓔ	XTW4+12S	
Ⓕ	XYN4+C8	
Ⓖ	XYN4+F8	
Ⓗ	XTB3+10GFN	
Ⓘ	XWC4B	
Ⓙ	XYN3+C6	
Ⓚ	XYN3+F6	

ACCESSORIES AND PACKING MATERIALS

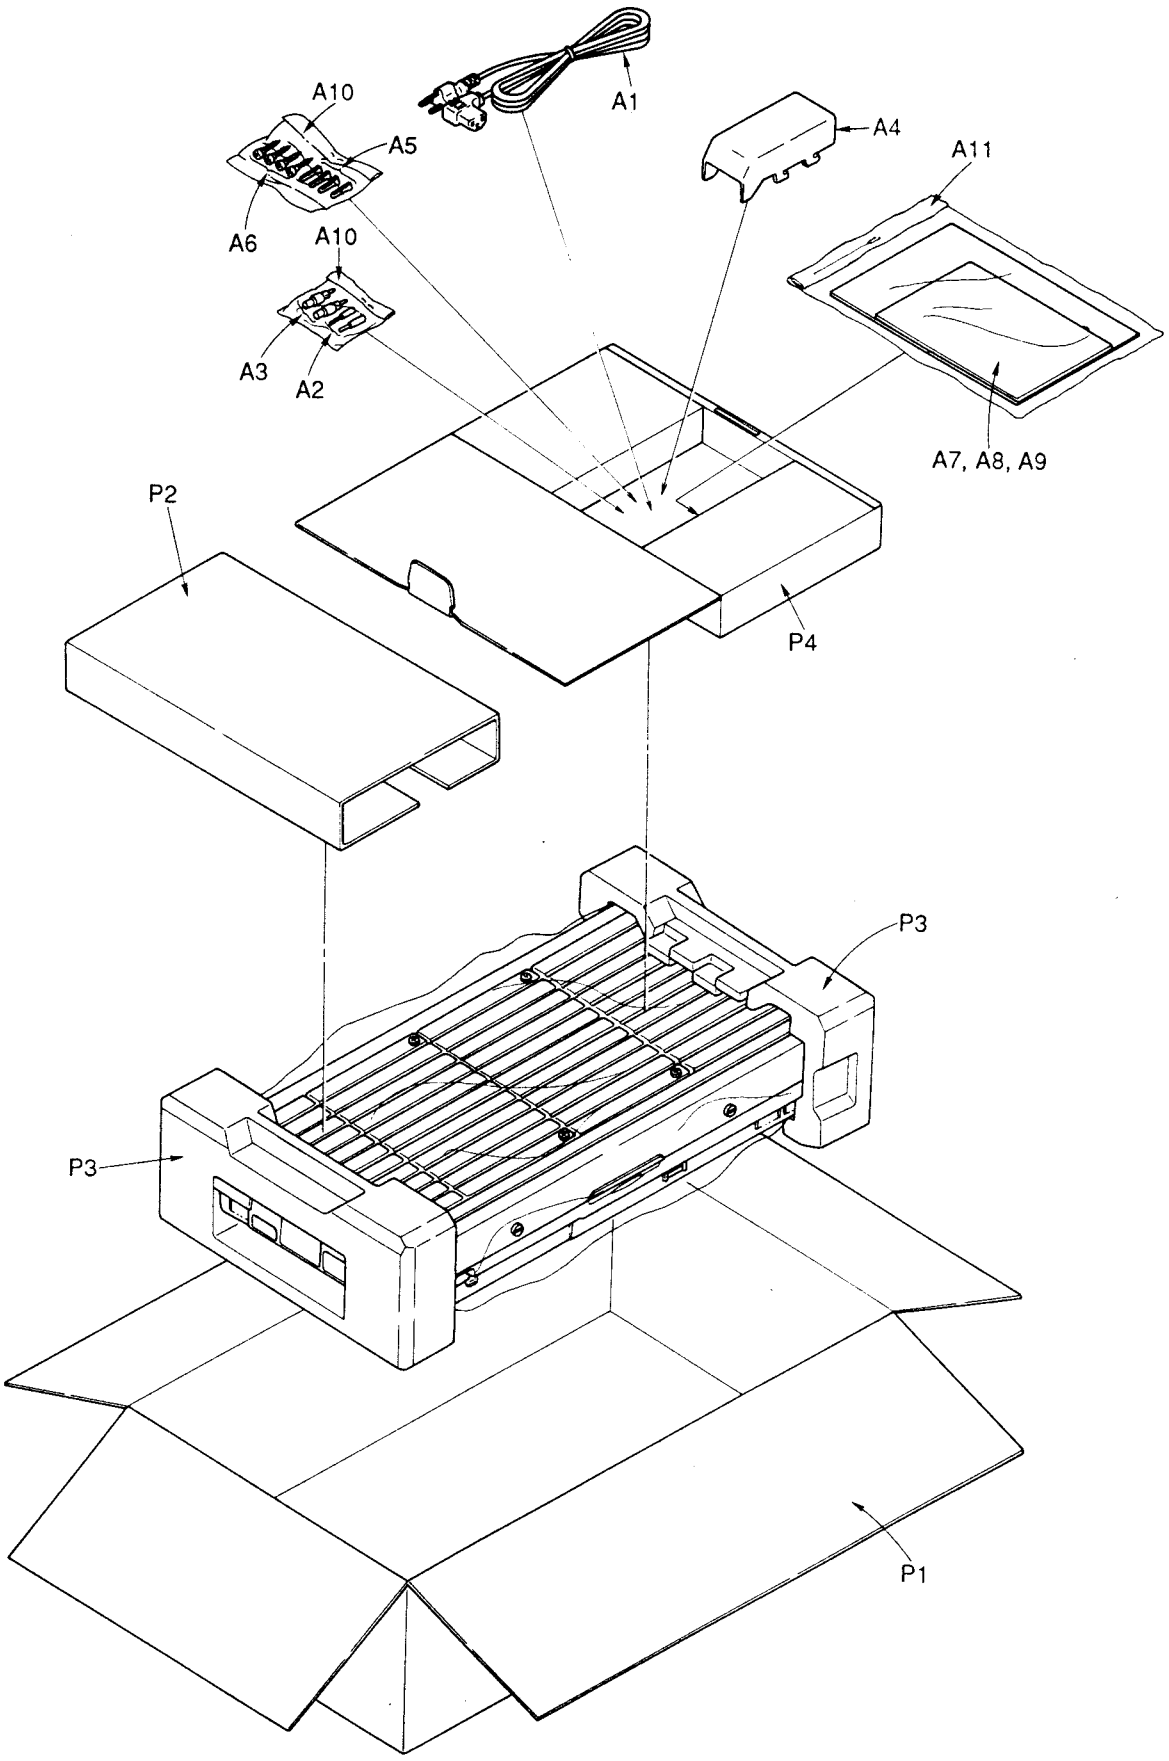

This replacement parts list is for CANADA version only. Refer to the simplified manual (cover) for other areas.

REPLACEMENT PARTS LIST

Model KX-TD1232C

Notes:

1. The marking (RTL) indicates that the Retention Time is limited for this item. After the discontinuation of this assembly in production, the item will continue to be available for a specific period of time. The retention period of availability is dependent on the type of assembly, and in accordance with the laws governing part and product retention. After the end of this period, the assembly will no longer be available.
2. Important safety notice.
   Components identified by the ⚠ mark special characteristics important for safety.
   When replacing any of these components, use only manufacturer's specified parts.
3. The S mark indicates service standard parts and may differ from production parts.
4. RESISTORS & CAPACITORS
   Unless otherwise specified.
   All resistors are in ohms (Ω) k=1000Ω, M=1000kΩ
   All capacitors are in MICRO FARADS(μF) P= μμF
   *Type &Wattage of Resistor

Type

ERC:Solid	ERX:Metal Film	PQRD:Carbon
ERD:Carbon	ERG:Metal Oxide	PQRQ:Fuse
PQ4R:Chip	ERO:Metal Film	ERF:Wire Wound

Wattage

10,16,18:1/8W	14,25,S2:1/4W	12,50,S1:1/2W	1:1W	2:2W	5:5W

*Type & Voltage of Capacitor

Type

ECFD:Semi-Conductor	ECCD,ECKD,PQCBC,PQVP : Ceramic
ECQS:Styrol	ECQM,ECQV,ECQE,ECQU,ECQB : Polyester
PQCBX,ECUV:Chip	ECEA,ECSZ,ECOS : Electrolytic
ECMS:Mica	ECQP : Polyproplylene

Voltage

ECQ Type	ECQG ECQV Type	ECSZ Type	Others	
1H: 50V	05: 50V	OF:3.15V	OJ :6.3V	1V :35V
2A:100V	1:100V	1A:10V	1A :10V	50,1H:50V
2E:250V	2:200V	1V:35V	1C :16V	1J :63V
2H:500V		OJ:6.3V	1E,25:25V	2A :100V

Ref. No.	Part No.	Part Name & Description	Pcs
		CABINET & ELECTRICAL PARTS	
1	PQKE10002Z1	TOP COVER	1
2	PQHD10011Z	SCREW	2
3	PQUS141Z	COIL SPRING	2
4	PQKV10006Z1	COVER-A, FRONT	1
5	PQKV10005Z1	COVER-B, FRONT	2
6	PQHR10031Z	CLAMPER-A	1
7	PQKF10018Z1	INSIDE COVER	1
8	PQKK10018Y1	LID, ROM	1
9	PQMH10008Z	ANGLE, FRONT COVER	2
10	PQQT10125Z	CAUTION LABEL-A	1
11	PQHR10028Z	CLAMPER-B	2
12	PQHR10029Z	CLAMPER-C	2
13	XUC3VW	E-RING	2
14	PQMH10009Z	HINGE-A	2
15	PQMC10010Z	ANGLE, FG (TOP COVER)	1
16	PQMC10064Z	SHEET, TOP COVER	1
20	PQKM10021Z1	CABINET BODY	1
21	PQHR10032Z	COVER, FG SPRING	1
22	PQQT10470Z	CAUTION LABEL-B	1
23	PQQT10126Z	CAUTION LABEL-C	1
24	PQMH10010Y	HINGE-B	1
25	PQMH10010Z	HINGE-C	1
26	PQMH10007Z	SPRING, FG	1
27	PQMC10009Z	ANGLE, FG (CABINET BODY)	1
28	PQGP10009Z1	PANEL, LED	1
29	PQGG10009Z1	GRILLE, LED	1
30	PQMH10026Z	FRAME, BELL TRANSFORMER	1
31	PQLT1U9M1A	BELL TRANSFORMER	1
32	PQMC10063Z	SHEET, CABINET BODY	1

Ref. No.	Part No.	Value, Part Name & Description	Pcs
		ACCESSORIES AND PACKING MATERIALS	
A1	PQJA10016Z	AC CORD	1
A2	PQJP1E1Z	PLUG	2
A3	PQJP1E2Z	PLUG	2
A4	PQHR10113Z1	COVER, TEL CORD	1
A5	PQHE10Z	MOUNTING BRACKET (CURL PLUG)	4
A6	PQHE5008Z	MOUNTING BRACKET (SCREW)	4
A7	PQQX10191Z	INSTRUCTION BOOK (ENGLISH)	1
A8	PQQX10192Z	INSTRUCTION BOOK (FRENCH)	1
A9	PQQX10193Z	PRINTED MATTER(TEMPLATE)	1
A10	XZB05X08A03	PROTECTION COVER (SCREW etc)	2
A11	XZB23X35A01	PROTECTION COVER (DOCUMENTS)	1
P1	PQPK10095Z	PACKING CASE	1
P2	PQPD10045Z	CUSHION, TOP	1
P3	PQPN10196Z	CUSHION, L/R	2
P4	PQPN10191Z	ACCESSORY BOX	1
		CPU BOARD PARTS	
PCB1	PQWP1TD1232C	CPU BOARD ASS'Y (RTL)	1
		(ICs)	
IC 1	PQVI68301FCG	IC	1
IC 2	PQVI620890F	IC	1
IC 3	PQVIMT8980DE	IC	1
IC 6~8	PQVIMC45503P	IC	3
IC10~12 ,14, 27	PQVINJM4558D	IC	5
IC13	PQVIPS520C	IC	1
IC15	PQVIHD75188P	IC S	1
IC16	PQVIHD75189P	IC S	1
IC17	PQVISN7H00S	IC S	1
IC18	PQVISN7L00S	IC	1
IC19	PQWI2TD1232C	IC (ROM)	1
IC20, 21	PQWI1D1232C1	IC (ROM PACK)	1
IC22, 23	PQVITC5183SD	IC S	2
IC24, 25	PQVIMB84256D	IC S	2
IC26	PQVIMS6242BS	IC	1
IC29	PQVISN7L368M	IC	1
IC31	PQVISN7L640M	IC	1
IC32	PQVISN7L365S	IC	1
IC33, 34	PQVISN7L368M	IC	2
IC35	PQVISN7L365S	IC	1
		(TRANSISTORS)	
Q 5	PQVTDTA144EK	TRANSISTOR(SI)	1
Q 6	2SC2412K	TRANSISTOR(SI)	1
Q 7	2SC2412K	TRANSISTOR(SI)	1
Q 8	PQVTDTA143E	TRANSISTOR(SI)	1
Q 9	PQVTDTC144E	TRANSISTOR(SI)	1
Q10	2SA933	TRANSISTOR(SI) (or 2SA1317)	1
Q11	2SC2412K	TRANSISTOR(SI)	1
Q12	2SC2878	TRANSISTOR(SI)	1
Q13	2SC2412K	TRANSISTOR(SI)	1
Q14	2SC2878	TRANSISTOR(SI)	1
		(DIODES)	
D1	MA4091	DIODE(SI)	1
D4	PQVDAK03	DIODE(SI)	2
D7~10	MA4068	DIODE(SI)	4
D11, 12	RLS71	DIODE(SI)	2
D13, 14	MA4030	DIODE(SI)	2
D15	MA4056	DIODE(SI)	1
D16, 17	RLS71	DIODE(SI)	2
D3, 20, D21	MA723	DIODE(SI)	3
		(RESISTORS)	
R 4	PQ4R10XJ471	470	1
R 5	PQ4R10XJ472	4.7K	1
R 6	PQ4R10XJ223	22K	1
R 7	PQ4R10XJ103	10K	1
R 8	PQ4R10XJ683	68K	1
R 9	PQ4R10XJ124	120K	1

This replacement parts list is for CANADA version only. Refer to the simplified manual (cover) for other areas.

Ref. No.	Part No.	Value	Pcs
R12	PQ4R10XJ393	39K	1
R13	PQ4R10XF1782	17.8K	1
R14	PQ4R10XJ104	100K	1
R15	PQ4R10XJ103	10K	1
R16	PQ4R10XJ274	270K	1
R17	PQ4R10XJ183	18K	1
R18	PQ4R10XJ103	10K	1
R19	PQ4R10XJ561	560	1
R20	PQ4R10XJ105	1M	1
R21	PQ4R10XJ563	56K	1
R22	PQ4R10XJ104	100K	1
R23	PQ4R10XJ104	100K	1
R24	PQ4R10XJ124	120K	1
R25	PQ4R10XJ823	82K	1
R26	PQ4R10XJ104	100K	1
R27	PQ4R10XJ104	100K	1
R28	PQ4R10XF1211	1.21K	1
R29	PQ4R10XF1211	1.21K	1
R30	PQ4R10XJ224	220K	1
R31	PQ4R10XF1401	1.4K	1
R32	PQ4R10XJ823	82K	1
R33	PQ4R10XJ472	4.7K	1
R34	PQ4R10XJ333	33K	1
R35	PQ4R10XJ104	100K	1
R36	PQ4R10XJ124	120K	1
R37	PQ4R10XJ104	100K	1
R38	PQ4R10XJ104	100K	1
R39	PQ4R10XJ124	120K	1
R40	PQ4R10XJ104	100K	1
R48	PQ4R10XJ333	33K	1
R50	PQ4R10XJ224	220K	1
R51	PQ4R10XJ333	33K	1
R52	PQ4R10XJ472	4.7K	1
R53	PQ4R10XJ104	100K	1
R57	PQ4R10XJ102	1K	1
R59	PQ4R10XJ104	100K	1
R61	PQ4R10XJ103	10K	1
R62	PQ4R10XJ223	22K	1
R65	PQ4R10XJ561	560	1
R66	PQ4R10XJ103	10K	1
R67	PQ4R10XJ103	10K	1
R68	PQ4R10XJ103	10K	1
R69	PQ4R10XJ103	10K	1
R70	PQ4R10XJ103	10K	1
R71	PQ4R10XJ103	10K	1
R72	PQ4R10XJ103	10K	1
R73	PQ4R10XJ103	10K	1
R74	PQ4R10XJ103	10K	1
R75	PQ4R10XJ103	10K	1
R76	PQ4R10XJ103	10K	1
R77	PQ4R10XJ103	10K	1
R78	PQ4R10XJ103	10K	1
R79	PQ4R10XJ103	10K	1
R83	ERDS1TJ151	150	1
R84	PQ4R10XJ152	1.5K	1
R85	PQ4R10XJ681	680	1
R87	PQ4R10XJ103	10K	1
R91	PQ4R10XJ103	10K	1
R92	PQ4R10XJ103	10K	1
R93	PQ4R10XJ103	10K	1
R94	PQ4R10XJ103	10K	1
R96	PQ4R10XJ103	10K	1
R97	PQ4R10XJ103	10K	1
R110	PQ4R10XJ470	47	1
R111	PQ4R10XJ470	47	1
R112	PQ4R10XJ470	47	1
R113	PQ4R10XJ103	10K	1
R114	PQ4R10XJ103	10K	1
R115	PQ4R10XJ222	2.2K	1
R116	PQ4R10XJ472	4.7K	1
R117	PQ4R10XJ103	10K	1
R118	PQ4R10XJ333	33K	1
R119	PQ4R10XJ103	10K	1
R120	PQ4R10XJ334	330K	1
R121	PQ4R10XJ222	2.2K	1
R122	PQ4R10XJ472	4.7K	1
R123	PQ4R10XJ103	10K	1
R124	PQ4R10XJ333	33K	1
R125	PQ4R10XJ103	10K	1
R126	PQ4R10XJ334	330K	1
R127	PQ4R10XJ472	4.7K	1
R128	PQ4R10XJ472	4.7K	1
R129	PQ4R10XJ470	47	1
R130	PQ4R10XJ470	47	1
R131	PQ4R10XJ470	47	1
R132	PQ4R10XJ470	47	1
R133	PQ4R10XJ470	47	1
R134	PQ4R10XJ390	39	1
R135	PQ4R10XJ470	47	1
R136	PQ4R10XJ470	47	1
R137	PQ4R10XJ470	47	1
R138	PQ4R10XJ101	100	1
R139	PQ4R10XJ101	100	1
R140	PQ4R10XJ101	100	1
R141	PQ4R10XJ101	100	1
R142	PQ4R10XJ101	100	1
R143	PQ4R10XJ101	100	1
R144	PQ4R10XJ101	100	1
R145	PQ4R10XJ101	100	1
R146	PQ4R10XJ470	47	1
R147	PQ4R10XJ470	47	1
R148	PQ4R10XJ470	47	1
R149	PQ4R10XJ470	47	1
R150	PQ4R10XJ470	47	1
R151	PQ4R10XJ470	47	1
R152	PQ4R10XJ470	47	1
R153	PQ4R10XJ470	47	1
R154	PQ4R10XJ470	47	1
R155	PQ4R10XJ470	47	1
R156	PQ4R10XJ470	47	1
R157	PQ4R10XJ470	47	1
R158	PQ4R10XJ470	47	1
R159	PQ4R10XJ470	47	1
R160	PQ4R10XJ470	47	1
R161	PQ4R10XJ390	39	1
R162	PQ4R10XJ390	39	1
R163	PQ4R10XJ560	56	1
R164	PQ4R10XJ560	56	1
R165	PQ4R10XJ560	56	1
R166	PQ4R10XJ560	56	1
R167	PQ4R10XJ560	56	1
R168	PQ4R10XJ560	56	1
R169	PQ4R10XJ560	56	1
R170	PQ4R10XJ560	56	1
R171	PQ4R10XJ560	56	1
R172	PQ4R10XJ560	56	1
R173	PQ4R10XJ560	56	1
R174	PQ4R10XJ560	56	1
R175	PQ4R10XJ560	56	1
R176	PQ4R10XJ560	56	1
R177	PQ4R10XJ560	56	1
R178	PQ4R10XJ560	56	1
R179	PQ4R10XJ560	56	1
R180	PQ4R10XJ560	56	1
R181	PQ4R10XJ560	56	1

This replacement parts list is for CANADA version only. Refer to the simplified manual (cover) for other areas.

Ref. No.	Part No.	Value	Pcs
R181	PQ4R10XJ560	56	1
R182	PQ4R10XJ560	56	1
R183	PQ4R10XJ560	56	1
R184	PQ4R10XJ560	56	1
R185	PQ4R10XJ560	56	1
R186	PQ4R10XJ560	56	1
R187	PQ4R10XJ560	56	1
R188	PQ4R10XJ560	56	1
R189	PQ4R10XJ560	56	1
R190	PQ4R10XJ560	56	1
R191	PQ4R10XJ560	56	1
R192	PQ4R10XJ560	56	1
R193	PQ4R10XJ560	56	1
R194	PQ4R10XJ560	56	1
R195	PQ4R10XJ560	56	1
R196	PQ4R10XJ560	56	1
R197	PQ4R10XJ560	56	1
R198	PQ4R10XJ560	56	1
R199	PQ4R10XJ560	56	1
R200	PQ4R10XJ560	56	1
R201	PQ4R10XJ102	1K	1
R202	PQ4R10XJ102	1K	1
R203	PQ4R10XJ102	1K	1
R204	PQ4R10XJ103	10K	1
R205	PQ4R10XJ103	10K	1
R206	PQ4R10XJ103	10K	1
R207	PQ4R10XJ103	10K	1
R208	PQ4R10XJ103	10K	1
R209	PQ4R10XJ103	10K	1
R210	PQ4R10XJ103	10K	1
R211	PQ4R10XJ103	10K	1
R212	PQ4R10XJ103	10K	1
R213	PQ4R10XJ103	10K	1
R214	PQ4R10XJ103	10K	1
R215	PQ4R10XJ103	10K	1
R216	PQ4R10XJ103	10K	1
R217	PQ4R10XJ103	10K	1
R218	PQ4R10XJ103	10K	1
R219	PQ4R10XJ103	10K	1
R220	PQ4R10XJ223	22K	1
R221	PQ4R10XJ222	2.2K	1
J 5	ERDS2TJ0T	0	1
J 6, 7	PQ4R10XJ000	0	2
		(CAPACITORS)	
C 1	EECFE5R5474	5.47M	1
C 2	ECEA1EU4R7	4.7	1
C 3	ECEA1HN3R3S	3.3	1
C 8	ECQV1H104JZ	0.1	1
C 9	ECQV1H104JZ	0.1	1
C11	PQCUV1H104ZF	0.1	1
C12	PQCUV1H101JC	100P	1
C13	PQCUV1H682KB	0.0068	1
C16	PQCUV1H101JC	100P	1
C17	PQCUV1H104ZF	0.1	1
C19	PQCUV1H101JC	100P	1
C20	PQCUV1H332KB	0.0033	1
C21	PQCUV1H104ZF	0.1	1
C22	PQCUV1H101JC	100P	1
C23	PQCUV1H101JC	100P	1
C24	PQCUV1H332KB	0.0033	1
C25	PQCUV1H104ZF	0.1	1
C26	PQCUV1H104ZF	0.1	1
C27	PQCUV1H102J	0.001	1
C28	PQCUV1H104ZF	0.1	1
C29	PQCUV1H101JC	100P	1
C30	PQCUV1H104ZF	0.1	1
C31	PQCUV1H102J	0.001	1

Ref. No.	Part No.	Value, Part Name & Description		Pcs
C33	PQCUV1H223KB	0.022		1
C34	PQCUV1H223KB	0.022		1
C35	PQCUV1H223KB	0.022		1
C36	PQCUV1H223KB	0.022		1
C37	PQCUV1H223KB	0.022		1
C38	PQCUV1H223KB	0.022		1
C39	PQCUV1H200JC	20P		1
C40	PQCUV1H223KB	0.022		1
C41	PQCUV1H223KB	0.022		1
C42	PQCUV1H223KB	0.022		1
C43	PQCUV1H223KB	0.022		1
C44	PQCUV1H223KB	0.022		1
C45	PQCUV1H223KB	0.022		1
C46	PQCUV1H223KB	0.022		1
C47	PQCUV1H223KB	0.022		1
C50	ECEA1EU331	330		1
C53	PQCUV1H180JC	18P		1
C54	PQCUV1H180JC	18P		1
C55	PQCUV1H223KB	0.022		1
C56	PQCUV1H223KB	0.022		1
C59	ECEA1HU010	1		1
C60	ECEA1HU010	1		1
C61	ECEA1HU010	1		1
C62	ECEA1HU010	1		1
C63	ECEA1HU010	1		1
C64	PQCUV1H223KB	0.022		1
C66	ECEA1AU101	100		1
C67	PQCUV1H223KB	0.022		1
C68	PQCUV1H223KB	0.022		1
C70	PQCUV1H223KB	0.022		1
C71	PQCUV1H223KB	0.022		1
C72	PQCUV1H223KB	0.022		1
C80	PQCUV1H200JC	20P		1
C81	PQCUV1H223KB	0.022		1
C82	PQCUV1H223KB	0.022		1
C83	PQCUV1H223KB	0.022		1
C84	PQCUV1H223KB	0.022		1
C85	PQCUV1H223KB	0.022		1
C86	PQCUV1H104ZF	0.1		1
C87	ECEA1VU330	33	S	1
C88	ECEA1HN2R2S	2.2		1
C89	PQCUV1H104ZF	0.1		1
C90	ECEA1VU330	33	S	1
C91	ECEA1HN2R2S	2.2		1
C92	PQCUV1H101JC	100P		1
C93	PQCUV1H101JC	100P		1
C94	PQCUV1H470JC	47P		1
C95	PQCUV1H470JC	47P		1
C96	PQCUV1H470JC	47P		1
C97	PQCUV1H223KB	0.022		1
C98	PQCUV1H223KB	0.022		1
C99	PQCUV1H223KB	0.022		1
		(TRANSFORMERS)		
T1	ETA14Y180AY	TRANSFORMER		1
T2~5	PQLT2D6A	TRANSFORMER	S	4
		(COILS)		
L7~14	PQLE106	COIL		8
L21~23	PQVFTU50MT	CERAMIC FILTER		3
L24~27	PQVFCM04RC01	CERAMIC FILTER		4
		(JACKS)		
JAC1, 2	PQJJ1G1Z	JACK, PAGING		2
JAC3, 4	PQJJ1D3Z	JACK, EP		2
		(CONNECTORS)		1
CN1	PQJS64R15Z	CONNECTOR, 64P		1
CN4	PQJP2D70Z	CONNECTOR, 2P		1

This replacement parts list is for CANADA version only. Refer to the simplified manual (cover) for other areas.

Ref. No.	Part No.	Part Name & Description		Pcs
CN9	PQJP20A08Z	CONNECTOR, 20P		1
CN12	PQJP6D70Z	CONNECTOR, 6P		
		(BATTERY)		1
BAT	CR2354-1HF	LITHIUM BATTERY		1
		(SWITCHES)		
SW1	EVQ21409K	SWITCH		1
SW2	PQSS2A24Z	SWITCH		1
SW3	ESD11V120	SWITCH		1
		(CRYSTAL OSCILLATORS)		
X1	PQVCJ8192N8Z	CRYSTAL OSCILLATOR		1
X2	PQVCL3276N6Z	CRYSTAL OSCILLATOR		1
		(COMPONENTS COMBINATIONS)		
Z1, 2, 4~6	PQRSLD8X103J	RESISTOR ARRAY		5
		EXTENSION BOARD PARTS		
PCB2	PQWP2TD1232C	EXTENSION BOARD ASS'Y (RTL)		1
		(ICs)		
IC201A~ IC201H	PQVIMC45503W	IC		8
IC202A~ IC202H	PQVINJM4558M	IC		8
IC203A~ IC203H	PQVINJM319VT	IC		8
IC211	PQVI603830F	IC		1
IC213	PQVIMT8952BE	IC		1
IC215	PQVICM8870FI	IC	S	1
IC216	PQVICM8870FI	IC	S	1
IC217	PQVIMC4051BF	IC	S	1
IC218	PQVIMC4051BF	IC	S	1
IC219	PQVISN7L14S	IC	S	1
IC220	PQVISN7L14S	IC	S	1
IC221	PQVISN7L14S	IC	S	1
IC222	PQVISN7L365S	IC		1
IC223	PQVISN7L86S	IC	S	1
IC224	PQVISN7L640M	IC		1
		(TRANSISTORS)		
Q200A~ Q200D	2SB1218A	TRANSISTOR(SI) (or 2SA1576R)	S	8
Q200E~ Q200H	2SD1819A	TRANSISTOR(SI) (or 2SA4081R)	S	4
Q201A~ Q201D, Q201F~ Q201H	2SA1576	TRANSISTOR(SI)	S	7
Q201E	2SB1218A	TRANSISTOR(SI) (or 2SA1576R)	S	1
Q203A~ Q203H	2SB1322	TRANSISTOR(SI)		8
Q204A~ Q204H	2SD1994A	TRANSISTOR(SI)		8
Q205A~ Q205H	2SD1819A	TRANSISTOR(SI) (or 2SC4081R)	S	8
Q206A~ Q206H	2SD1819A	TRANSISTOR(SI) (or 2SC4081R)	S	8
Q207A~ Q207H	PQVTDTC143E	TRANSISTOR(SI)		8
Q208A~ Q208H	2SB1218A	TRANSISTOR(SI) (or 2SA1576R)	S	8
Q210	2SD2137	TRANSISTOR(SI)		1
Q211	UN5113	TRANSISTOR(SI)	S	1
Q213	2SD1819A	TRANSISTOR(SI) (or 2SC4081R)	S	1
Q214	UN5213	TRANSISTOR(SI)	S	1
Q215	2SD2137	TRANSISTOR(SI)		1
Q220A	UN5213	TRANSISTOR(SI)	S	1
Q221	PQVTDTC143E	TRANSISTOR(SI)		1
Q251	2SB1322	TRANSISTOR(SI) (or 2SB1237R)	S	1
Q252	UN5113	TRANSISTOR(SI)	S	1

Ref. No.	Part No.	Value, Part Name & Description		Pcs
		(DIODES)		
D203A	RLS71	DIODE(SI)		1
D204A~ D204H	RLS71	DIODE(SI)		8
D205A~ D205H	RLS71	DIODE(SI)		8
D206A~ D206H	RLS71	DIODE(SI)		8
D207A~ D207H	RLS71	DIODE(SI)		8
D210A~ D210H	RLS71	DIODE(SI)		8
D211A~ D211H	MA4039	DIODE(SI)		8
D212A D212H	MA151WK	DIODE(SI) (or 1SS184)	S	8
D213A~ D213H	1SS181	DIODE(SI)		8
D214A~ D214H	RLS71	DIODE(SI)		8
D220	RLS71	DIODE(SI)		1
D221	RLS71	DIODE(SI)		1
D223	RLS71	DIODE(SI)		1
D225	RLS71	DIODE(SI)		1
D251	MA4056	DIODE(SI)		1
D252	RLS71	DIODE(SI)		1
		(RESISTORS)		
R200A~ R200H	PQ4R10XJ330	33		8
R201A~ R201H	PQ4R10XJ222	2.2K		8
R202A~ R202H	PQ4R10XJ222	2.2K		8
R203	PQ4R10XJ101	100		1
R204	PQ4R10XJ105	1M		1
R205A~ R205H	ERDS2TJ220	22		8
R206A~ R206H	ERDS2TJ680	68		8
R207A~ R207H	PQ4R10XJ682	6.8K		8
R208A~ R208H	ERDS2TJ220	22		8
R209A~ R209H	ERDS2TJ680	68		8
R210A R210H	PQ4R10XJ682	6.8K		8
R211A ~ R211H	PQ4R10XF3000	300		8
R212A~ R212H	PQ4R10XF2940	294		8
R213A~ R213H	PQ4R10XF3000	300		8
R214A~ R214H	PQ4R10XF7502	75K		8
R215A~ R215H	PQ4R10XF1003	100K		8
R216A~ R216H	PQ4R10XF4702	47K		8
R217A~ R217H	PQ4R10XF4702	47K		8
R218A~ R218H	PQ4R10XF1003	100K		8
R219A~ R219H	PQ4R10XF1003	100K		8
R220A~ R220H	PQ4R10XF1003	100K		8
R221A~ R221H	PQ4R10XF1003	100K		8
R222A~ R222H	PQ4R10XF3000	300		8

This replacement parts list is for CANADA version only. Refer to the simplified manual (cover) for other areas.

Ref. No.	Part No.	Value	Pcs
R223A~ R223H	PQ4R10XF7502	75K	8
R224A~ R224H	PQ4R10XJ153	15K	8
R225A~ R225H	PQ4R10XJ333	33K	8
R226A~ R226H	PQ4R10XJ103	10K	8
R227A~ R227H	PQ4R10XJ473	47K	8
R228A~ R228H	PQ4R10XJ123	12K	8
R229A~ R229H	PQ4R10XJ333	33K	8
R230A~ R230H	PQ4R10XJ103	10K	8
R231A~ R231H	PQ4R10XJ102	1K	8
R232A~ R232H	PQRD2TJ102	1K	8
R233A~ R233H	PQ4R10XJ1R8	1.8	8
R234A~ R234H	PQ4R10XJ472	4.7K	8
R235A~ R235H	PQ4R10XJ472	4.7K	8
R236A~ R236H	PQ4R10XJ472	4.7K	8
R237A~	PQ4R10XJ472	4.7K	8
R237A~	PQ4R10XJ472	4.7K	8
R238A~ R238H	PQ4R10XJ330	33	8
R239A~ R239H	PQ4R10XJ222	2.2K	8
R240A~ R240H	PQ4R10XJ222	2.2K	8
R241	PQ4R10XJ473	47K	1
R242	PQ4R10XJ682	6.8K	1
R243	PQ4R10XJ223	22K	1
R244	PQ4R10XJ472	4.7K	1
R245	PQ4R10XJ153	15K	1
R246	PQ4R10XJ152	1.5K	1
R247	PQ4R10XJ223	22K	1
R248A~ R248H	PQ4R10XJ471	470	8
R251	PQ4R10XJ103	10K	1
R252	PQ4R10XJ103	10K	1
R253	PQ4R10XJ103	10K	1
R254	PQ4R10XJ103	10K	1
R255	PQ4R10XJ393	39K	1
R256	PQ4R10XJ104	100K	1
R257	PQ4R10XJ334	330K	1
R258	PQ4R10XJ393	39K	1
R259	PQ4R10XJ104	100K	1
R260	PQ4R10XJ334	330K	1
R261	PQRD1TJ820	82 S	1
R262	PQ4R10XJ152	1.5K	1
R263	PQ4R10XJ152	1.5K	1
R264	PQ4R10XJ152	1.5K	1
R265	PQ4R10XJ103	10K	1
R266	PQ4R10XJ103	10K	1
R267	PQ4R10XJ101	100	1
R268	PQ4R10XJ101	100	1
R269	PQ4R10XJ101	100	1
R270	ERDS2TJ220	22	1
R270A-H	PQ4R10XJ103	10K	8
R271	PQ4R10XJ682	6.8K	1
R272	PQ4R10XJ101	100	1
R273	PQ4R10XJ103	100K	1

Ref. No.	Part No.	Value	Pcs
R274	Not Used		
R275A~ R275H	PQ4R10XJ563	56K	8
R276A~ R276H	PQ4R10XJ560	56	8
R277A~ R277H	PQ4R10XJ560	56	8
R278A~ R278H	PQ4R10XJ560	56	8
R279A~ R279H	PQ4R10XJ560	56	8
R280	PQ4R10XJ223	22K	1
R285	PQ4R10XJ122	1.2K	1
R286	PQ4R10XJ152	1.5K	1
R290A~ R290H	PQ4R10XJ472	4.7K	8
R291A~ R291H	PQ4R10XJ472	4.7K	8
R292A~ R292H	PQ4R10XJ472	4.7K	8
R293	PQ4R10XF6801	6.8K	1
R294	PQ4R10XF1201	1.2K	1
R295A~ R295H	PQ4R10XJ101	100	8
R296A~ R296H	PQ4R10XJ220	22	8
R297A~ R297H	PQ4R10XJ220	22	8
R299A~ R299H	PQ4R10XJ101	100	8
J201~ J204	PQ4R10XJ000	0	8
J251A ~ J251H	PQ4R10XJ000	0	8
J253A~ J253H	PQ4R10XJ000	0	8
J255A~ J255H	PQ4R10XJ000	0	8
J257A~ J257H	PQ4R10XJ000	0	8
J259A ~ J259H	PQ4R10XJ000	0	8
		(CAPACITORS)	
C200A~ C200H	ECEA1HKS2R2	2.2	8
C202A~ C202H	ECEA1HKS2R2	2.2	8
C204A~ C204H	ECEA1HU100	10	8
C205A~ C205H	ECEA1EN100S	10	8
C206A~ C206H	ECEA1EN100S	10	8
C207A~ C207H	ECEA1HKS3R3	3.3	8
C208A~ C208H	ECUV1H104MD	0.1 S	8
C209A~ C209H	PQCUV1H104ZF	0.1	8
C210A~ C210H	PQCUV1H104ZF	0.1	8
C211A~ C211H	ECEA1HN4R7S	4.7	8
C212A~ C212H	PQCUV1H104ZF	0.1	8
C213A ~ C213H	PQCUV1H104ZF	0.1	8
C214	Not Used		
C215	Not Used		

This replacement parts list is for CANADA version only. Refer to the simplified manual (cover) for other areas.

Ref. No.	Part No.	Value, Part Name & Description		Pcs
C216A ~ C216H	ECEA1HKS2R2	2.2		8
C217A ~ C217H	PQCUV1H680JC	68P		1
C218A~ C218H	PQCUV1H680JC	68P		8
C219A~ C219H	ECUV1H104MD	0.1		8
C220	ECEA1EU101	100		1
C220A~ C220H	ECUV1H393KB	0.039		8
C221	ECEA1EU101	100		1
C222A~ C222H	ECEA1HU100	10		8
C251~ C254	PQCUV1H223KB	0.022		4
C255	ECEA1VU330	33	S	1
C256	PQCUV1H221JC	220P		1
C257~ C259	PQCUV1H104ZF	0.1		3
C260	ECEA1ESS471U	470		
C262~ C264	ECEA1VU330	33	S	1 3
C265	PQCUV1H104ZF	0.1		1
C270	ECEA1AU101	100		1
C272	PQCUV1H104ZF	0.1		1
C273	PQCUV1H104ZF	0.1		1
C280	PQCUV1H104ZF	0.1		1
C281	PQCUV1H104ZF	0.1		1
C282	PQCUV1H104ZF	0.1		1
C283	PQCUV1H104ZF	0.1		1
C284	PQCUV1H104ZF	0.1		1
C285	PQCUV1H104ZF	0.1		1
C287	PQCUV1H104ZF	0.1		1
C288	PQCUV1H104ZF	0.1		1
C289	PQCUV1H104ZF	0.1		1
C290	PQCUV1H104ZF	0.1		1
C292	ECEA1EU101	100		1
C295, 296	PQCUV1H104ZF	0.1		2
		(CONNECTORS)		
CN200	PQJS50A04Z	CONNECTOR ,50P		1
CN201	PQJS50R15Z	CONNECTOR ,50P		1
		(CHOKE COILS)		
L200A~ L200H	PQLQZM100K	CHOKE COIL	S	8
L201A ~ L201H	PQLQZM100K	CHOKE COIL	S	8
L202A~ L202H	PQLE106	CHOKE COIL		8
L203A~ L203H	PQLE106	CHOKE COIL		8
		(RELAYS)		
RY200A, RY200B	PQSL44Z	RELAY		2
RY201A, RY202A~ RY202H	PQSL119Z	RELAY		9
		(TRANSFORMERS)		
T201A~ T201H	ETE13K79AY	TRANSFORMER		8
		(FUSES)		
F200, 201	PQBA1N15NMAL	FUSE		2

Ref. No.	Part No.	Value, Part Name & Description		Pcs
		(VARISTORS)		
ZR202A~ ZR202H	PQVDNV039D03	VARISTOR		8
ZR203A~ ZR203H	PQVDNV039D03	VARISTOR		8
ZR204A~ ZR204H	PQVDNV039D03	VARISTOR		8
ZR205A~ ZR205H	PQVDNV039D03	VARISTOR		8
		(CERAMIC RESONATOR)		
X201	PQVBFC3584A1	CERAMIC RESONATOR		1
		CO LINE BOARD PARTS		
PCB3	PQWP3TD1232C	CO LINE BOARD ASS'Y (RTL)		1
		(ICs)		
IC101A~ IC101H	PQVINJM4558M	IC		8
IC102A~ IC102H	PQVIMC45503W	IC		8
IC111	PQVI63HB110	IC	S	1
IC112	PQVISN7L138M	IC		1
IC114	PQVISN7L138M	IC		1
IC116	PQVISN7L640M	IC		1
IC117	PQVISN7L08S	IC	S	1
IC120	PQVISN7L04S	IC	S	1
IC121	PQVISN7L14S	IC	S	1
IC122	PQVISN7L273M	IC		1
IC123	PQVISN7L14S	IC	S	1
		(TRANSISTORS)		
Q101A ~ Q101H	2SD1897	TRANSISTOR(SI)		8
Q102A~ Q102H	PQVTDTC143EK	TRANSISTOR(SI)		8
Q111	2SB1322	TRANSISTOR(SI) (or 2SB1237R)	S	1
Q112	UN5113	TRANSISTOR(SI)	S	1
Q120A~ Q120H	2SA1627	TRANSISTOR(SI)		8
		(DIODES)		
D101A~ D101H	PQVDS1YB40F1	DIODE(SI)		8
D102A~ D102H	PQVDHZS2B1	DIODE(SI)		8
D103A~ D103H	PQVDHZS2B1	DIODE(SI)		8
D104A~ D104H	MA3047	DIODE(SI)		8
D105A~ D105H	MA3047	DIODE(SI)		8
D108A~ D108H	RLS71	DIODE(SI)		8
D154	MA4056	DIODE(SI)		1
D155	MA723	DIODE(SI)		1
		(RESISTORS)		
R101A~ R101H	ERQN1VJ223	22K		8
R102A ~ R102H	PQ4R10XJ822	8.2K		8
R103A~ R103H	ERDS2TJ390	39		8
R104A~ R104H	PQ4R10XJ103	10K		8
R105A~ R105H	PQ4R10XJ471	470		8
R107A~ R107H	PQ4R10XF1211	1.21K		8
R108A~ R108H	PQ4R10XF1001	1K		8
R110A~ R110H	PQ4R10XF2323	232K		8

This replacement parts list is for CANADA version only. Refer to the simplified manual (cover) for other areas.

Ref. No.	Part No.	Value, Part Name & Description	Pcs
R111A~ R111H	PQ4R10XF1003	100K	8
R112A~ R112H	PQ4R10XF1003	100K	8
R113A~ R113H	PQ4R10XF1003	100K	8
R114A~ R114H	PQ4R10XF4702	47K	8
R115A~ R115H	PQ4R10XF1203	120K	8
R116A~ R116H	PQ4R10XF4702	47K	8
R118A~ R118H	ERDS2TJ122	1.2K	8
R119A~ R119H	PQ4R10XF1211	1.21K	8
R122A~ R122H	PQ4R10XJ222	2.2K	8
R125 ~ R132	PQ4R10XJ101	100	8 1
R153	PQ4R10XJ152	1.5K	1
R154	PQRD1VJ221	220	1
R155~ R160	PQ4R10XJ103	10K	8
R161	PQ4R10XJ101	100	1
R161A~ R161H	ERDS2TJ560	56	8
R162A~ R162H	PQ4R10XJ104	100K	8
R163A ~ R163H	PQRQ25VJ5R6	5.6	8
R164A~ R164H	ERDS2TJ272	2.7K	8
R165A~ R165H	ERJ6ENF5360	536	8
J151~ J154	PQ4R10XJ000	0	4
J155A~ J155H	PQ4R10XJ000	0	8
J156A~ J156H	PQ4R10XJ000	0	8
		(CAPACITORS)	
C101A ~ C101H	ECKDKC222KB	0.0022	8
C102A~ C102H	ECQE2474KF	0.47	8
C103A~ C103H	ECEA1HU100	10	8
C104A~ C104H	ECEA1HU220	22	8
C105A~ C105H	PQCUV1H102J	0.001	8
C106A~ C106H	PQCUV1H473MD	0.047	8
C107A~ C107H	PQCUV1H820JC	82P	8
C108A~ C108H	ECUV1H104MD	0.1	8
C109A C109H	PQCUV1H223KB	0.022	8
C110A~ C110H	PQCUV1H223KB	0.022	8
C111A~ C111H	ECEA1HKSR47	0.47	8
C120	PQCUV1H101JC	100	1
C151	ECEA1HU330	33	1
C152	ECEA1HU330	33	1
C153	ECEA1HU330	33	1
C154	ECEA1HKS010	1	1
C155	ECEA1ESS331	330	1
C156	ECEA0JU222	2200	1

Ref. No.	Part No.	Value, Part Name & Description		Pcs
		(CONNECTORS)		
CN101	PQJS50R15Z	CONNECTOR, 50P		1
CN104	PQJS22A15Z	CONNECTOR, 22P		1
CN105	PQJS08A15Z	CONNECTOR, 8P		
CN106	PQJS22A15Z	CONNECTOR, 22P		1
CN107	PQJS08A15Z	CONNECTOR, 8P		1
CN108~ CN111	PQJJ1TB25Y	JACK, TEL		4
		(COILS)		
L101A~ L101H	PQLE106	COIL		8
L102A~ L102H	PQLE106	COIL		8
L103A~ L103H	PQLE106	COIL		8
L104A~ L104H	PQLE106	COIL		8
		(PHOTO ELECTRIC TRANSDUCERS)		
PC101A~ PC101H	ON3181R	PHOTO ELECTRIC TRANSDUCER		8
PC102A~ PC102H	PQVITLP627	PHOTO ELECTRIC TRANSDUCER		8
		(RELAYS)		
RY101A~ RY101H	PQSL41Z	RELAY		8
		(VARISTORS)		
SA101A~ SA101H	PQVDRA311PT2	VARISTOR (SURGE ABSORBER)		8
SA102A~ SA102H	PQVDRA311PT2	VARISTOR (SURGE ABSORBER)		8
SA103A~ SA103H	PQVDDSV301Y	VARISTOR (SURGE ABSORBER)		8
SA104	PQVDDSV301Y	VARISTOR (SURGE ABSORBER)		1
ZR101A~ ZR101H	ERZC07DK820	VARISTOR	S	8
		(TRANSFORMERS)		
T101A~ T101H	ETA14Y85AY	TRANSFORMER	S	8

SMDR / LED BOARD PARTS

PCB4	PQWP4TD1232C	SMDR / LED BOARD ASS'Y (RTL)		1
		(DIODE)		
LED	LN242RP	DIODE(SI)	S	
		(TRANSISTORS)		
R700	ERDS2TJ821	820		1
R701	ERDS2TJ821	820		1
R702	ERDS2TJ821	820		1
R703	ERDS2TJ821	820		1
		(CAPACITORS)		
C700	ECKD1H392MD	0.0039	S	1
C701	ECKD1H392MD	0.0039	S	1
C702	ECKD1H392MD	0.0039	S	1
C703	ECKD1H392MD	0.0039	S	1
		(CONNECTORS)		
CN701	PQJS06R49Z	CONNECTOR, 6P		1
CN702	PQJS25P31Z	SOCKET, 25P		1
CN703	PQJS02R48Z	CONNECTOR, 2P		1

MOTHER BOARD PARTS

PCB5	PQWP5TD1232C	MOTHER BOARD ASS'Y (RTL)		1
		(COMPONENTS COMBINATIONS)		
RA401	PQRS8B8332J	RESISTOR ARRAY		1
RA402	EXBP88472K	RESISTOR ARRAY	S	1

This replacement parts list is for CANADA version only. Refer to the simplified manual (cover) for other areas.

Ref. No.	Part No.	Value, Part Name & Description	Pcs
		(CONNECTORS)	
CN402	PQJP64A09Z	CONNECTOR, 64P	1
CN403	PQJP50A09Z	CONNECTOR, 50P	1
CN404	PQJP50A09Z	CONNECTOR, 50P	1
CN405	PQJP50A09Z	CONNECTOR, 50P	1
CN406	PQJP60A09Z	CONNECTOR, 60P	1
CN407	PQJP60A09Z	CONNECTOR, 60P	1
CN408	PQJP60A09Z	CONNECTOR, 60P	1
CN409	PQJP50A09Z	CONNECTOR, 50P	1
CN410	PQJP34A09Z	CONNECTOR, 34P	1
CN411	PQJP40A09Z	CONNECTOR, 40P	1
		POWER SUPPLY UNIT PARTS	
		(CHASSIS & ELECTRICAL PARTS)	
90	PQQT4164Z	CAUTION LABEL	1
91	PQMC10053Z	SHIELD COVER ⚠	1
92	PQMC10052Z	SHIELD CASE ⚠	1
93	PQHR447Z	SPACER-A	1
94	PQHR10178Z	SPACER-B	1
95	PQHR10179Z	SPACER-C	1
96	PQJS02R46Z	CONNECTOR, 2P ⚠	1
97	PQJP04R07Z	CONNECTOR, 4P	1
98	PQJP3A3Z	SOCET, AC ⚠	1
99	EST15304T	SWITCH, POWER ⚠	1
100	PQMH10027Z	ANGLE, POWER SW ⚠	1
101	PQJV3Z	HOLDER, FUSE ⚠	1
102	XBA2C25ND1L	FUSE ⚠	1
103	PQQT10469Z	FUSE LABEL ⚠	1
PCB6	PQWP6TD1232C	POWER SUPPLY BOARD ASS'Y (RTL) ⚠	1
		(ICs)	
IC400	PQVISTK73904	IC	1
IC450	PQVISTK732C	IC	1
IC451	PQVIHLD05003	IC	1
IC452	PQVILA6500	IC	1
		(TRANSISTOR)	
Q450	2SC4641	TRANSISTOR(SI)	1
		(DIODES)	
D400	PQVDD5SB40	DIODE (SI) ⚠	1
D401	PQVDERD3805L	DIODE (SI) ⚠	1
D402	PQVDRD13FB	DIODE(SI)	1
D450	PQVDRD6.2FB	DIODE (SI)	1
D451	PQVDC25P30F	DIODE (SI)	1
D452	PQVDC25P30F	DIODE (SI)	1
D453	MA4057M	DIODE(SI) ⚠	1
D454	PQVDD10SC4M	DIODE (SI)	1
D455	PQVDD10SC4M	DIODE (SI)	1
		(RESISTORS)	
R401	ERS1TJ474	470K	1
R402	ERDS1TJ104	100K	1
R403	ERG2SJ223	22K	1
R404	ER016CKF1801	1.8K	1
R405	ERF5TKR22M	0.22	1
R406	ER016CKF4700	470	1
R407	ER016CKF5110	511	1
R408	ERG3SJ101	100	
R409	ERDS1TJ104	100K	1
R450	ERDS2TJ222	2.2K	1
R451	ERDS2TJ122	1.2K	1
R453	ERDS2TJ562	5.6K	1
R454	ERDS2TJ472	4.7K	1
R455	ERG3SJ271	270	1
R456	ERDS2TJ100	10	1
R457	ERF5TLK75M	700K	1
R458	ERDS2TJ272	2.7K	1
R459	ERDS2TJ392	3.9K	1

Ref. No.	Part No.	Value, Part Name & Description	Pcs
R460	PQRF2TLK50M	5	1
R462	ERDS2TJ562	5.6K	
R463	ERDS2TJ472	4.7K	1
R464	ERDS2TJ2R2	2.2	1
R465	ERG2SJ101	100	1
R466	ERDS2TJ390	39	1
R467	ERDS2TJ102	1K	1
R469	ER016CKF2561	256	1
R470	ER016CKF2701	2.7K	1
R471	ER016CKF1522	15.2K	1
		(CAPACITORS)	
C400	ECQU2A684MX	0.68 ⚠	1
C401	ECKDKC472KB	0.0047 ⚠	1
C402	ECKDKC472KB	0.0047 ⚠	1
C403	ECKDKC472KB	0.0047 ⚠	1
C404	ECKDKC332KB	0.0033 ⚠S	1
C405	ECKWRS472ME	0.0047 ⚠	1
C406	ECKWRS472ME	0.0047 ⚠	1
C407	ECKDKC332KB	0.0033 ⚠S	1
C408	EC0S2DB681BA	680P ⚠	1
C409	EC0S2DB681BA	680P ⚠	1
C410	ECKW3A151KB	150P	1
C411	ECQE6224RJ	0.22 ⚠	1
C412	ECQE10472KF	0.0047 ⚠	1
C414	ECQB1H222JF	0.0022	1
C415	ECQB1H392JF	0.0039	1
C416	ECKZ3A101KB	100P	1
C417	ECQE1H683JZ	0.068	1
C450	ECEA1VFG332	3300	1
C452	ECQB1H102JZ	0.001 S	1
C454	ECEA1JFG102	1000	1
C455	ECEA1JFG102	1000	1
C456	ECEA1VFG331	330	1
C457	ECEA1HGE010	1	1
C458	ECEA1JFG102	1000	1
C459	ECQB1H102JZ	0.001 S	1
C460	ECEA1EFG102	1000	1
C461	ECEA1HGA0R1	0.1	1
C462	ECEA1CFG102	0.001	1
C463	ECQV1H104JZ	0.1	1
C464	ECEA1HGE100	10	1
C465	ECQV1H104JZ	0.1	1
C467	ECEA1EGE101	100	1
C468	ECEA1VFG101	100	1
		(VARISTOR)	
SA400	ERZC14DK271U	VARISTOR ⚠	1
		(VARIABLE RESISTORS)	
VR450	EVMF5S00B23	SEMI-FIXED RESISTOR, 2KΩ (B)	1
VR451	EVMF5S00B23	SEMI-FIXED RESISTOR, 2KΩ (B)	1
CN400	PQJP2D98Z	CONNECTOR, 2P	1
CN401	PQJS07R50Z	CONNECTOR, 7P	1
CN402	PQJP4D30Z	CONNECTOR, 4P	1
CN403	PQJP4D46Z	CONNECTOR, 4P	1
		(COMPONENT COMBINATION)	
CR400	PQVDMGC4R3R2	COMPONENT COMBINATION ⚠	1
CR401	PQVDMGC4R3R2	COMPONENT COMBINATION ⚠	1
		(THYRISTOR)	
SCR450	PQVDTCSF5B41	THYRISTOR	1
		(COILS)	
L401	ELF18D450M	COIL ⚠	1
L400	ELF18D480C	COIL ⚠	1
L455	PQLE127	COIL	1
L450	PQLE128	COIL	1
L451	PQLE129	COIL	1

This replacement parts list is for CANADA version only. Refer to the simplified manual (cover) for other areas.

Ref. No.	Part No.	Part Name & Description	Pcs
L452	PQLE72	COIL	1
L453	PQLE94	COIL	1
L454	PQLE94	COIL	1
		(TRANSFORMER)	
T400	ETS42AC111AC	TRANSFORMER ⚠	1
		(PHOTO ELECTRIC TRANSDUCER)	
PC400	PQVIPC817CD	PHOTO COUPLER ⚠	1
		(THERMISTOR)	
TH401	PQRTD0WFL5R0	THERMISTOR ⚠	1
		(FUSE)	
F450	XBA1C40N1001	FUSE ⚠	1
		FIXTURES AND TOOL	
EC1	PQZZ64K2Z	EXTENSION CORD, 64P	1
EC2	PQZZ60K1Z	EXTENSION CORD, 60P	1
EC3	PQZZ50K2Z	EXTENSION CORD, 50P	1
EC4	PQZZ40K1Z	EXTENSION CORD, 40P	1
EC5	PQZZ34K1Z	EXTENSION CORD, 34P	1
		Notes: Extension cords are useful for servicing. (They make servicing easy.)	

T Ⓕ KXTD 1232C
Printed in Japan

ORDER NO. KM49309622A3

Service Manual

and Technical Guide

DIGITAL SUPER HYBRID SYSTEM

KX-TD1232BX

• Please use this manual together with the original Service Manual for KX-TD1232C, Order No. KM49307582C1.
This Service Manual indicates tha main differences between; Original KX-TD1232C and KX-TD1232BX.

■ SPECIFICATIONS (Change of original page 4)

General Description

4. Power Supplies

Primary	120 V AC, 60 Hz	→	Primary	220-240 V AC, 50/60 Hz

Characteristics

5. Primary Power

120V AC, 60 Hz	→	220-240 V AC, 50/60Hz
(Model: KX-TD1232C)		(Model: KX-TD1232BX)

■ INSULATION RESISTANCE TEST (Change of original page 3)

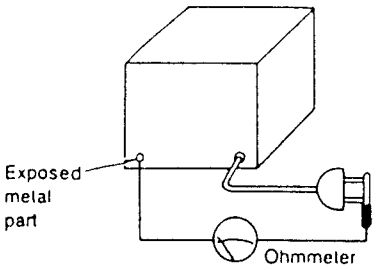

Fig. 2

Resistance=Approx. 5 MΩ ← **Change**
(at DC 500 V)

(KX-TD1232BX)

Panasonic

This replacement parts list is for KX-TD1232BX version only. Refer to the simplified manual (cover) for other areas.

REPLACEMENT PARTS LIST

Model KX-TD1232BX

Notes:

1. The marking (RTL) indicates that the Retention Time is limited for this item. After the discontinuation of this assembly in production, the item will continue to be available for a specific period of time. The retention period of availability is dependant on the type of assembly, and in accordance with the laws governing part and product retention. After the end of this period, the assembly will no longer be available.
2. Important safety notice.
   Components identified by the ⚠ mark special characteristics important for safety.
   When replacing any of these components, use only manufacturer's specified parts.
3. The S mark indicates service standard parts and may differ from production parts.
4. RESISTORS & CAPACITORS
   Unless otherwise specified.
   All resistors are in ohms (Ω) K=1000Ω, M=1000KΩ
   All capacitors are in MICRO FARADS(μF) P= μμF
   *Type &Wattage of Resistor
   Type

ERC: Solid	ERX: Metal Film	PQRD: Carbon
ERD: Carbon	ERG: Metal Oxide	PQRQ: Fuse
PQ4R: Chip	ERO: Metal Film	ERF: Wire Wound

   Wattage

10, 16, 18: 1/8W	14, 25, S2: 1/4W	12, 50, S1: 1/2W	1: 1W	2: 2W	5: 5W

   *Type & Voltage of Capacitor
   Type

ECFD: Semi-Conductor	ECCD, ECKD, PQCBC, PQVP: Ceramic
ECQS: Styrol	ECQM, ECQV, ECQE, ECQU, ECQB: Polyester
PQCBX, ECUV: Chip	ECEA, ECSZ, ECOS: Electrolytic
ECMS: Mica	ECQP: Polypropylene

   Voltage

ECQ Type	ECQG ECQV Type	ECSZ Type	Others	
1H: 50V	05: 50V	OF: 3.15V	OJ: 6.3V	1V: 35V
2A: 100V	1: 100V	1A: 10V	1A: 10V	50, 1H: 50V
2E: 250V	2: 200V	1V: 35V	1C: 16V	1J: 63V
2H: 500V		OJ: 6.3V	1E, 25: 25V	2A: 100V

Ref. No.	Part No.	Part Name & Description	Pcs
		CABINET & ELECTRICAL PARTS	
1	PQKE10002Z1	TOP COVER	1
2	PQHD10011Z	SCREW	2
3	PQUS141Z	COIL SPRING	2
4	PQKV10006Z1	COVER-A, FRONT	1
5	PQKV10005Z1	COVER-B, FRONT	2
6	PQHR10031Z	CLAMPER-A	1
7	PQKF10018Z1	INSIDE CABINET	1
8	PQKK10018Z1	LID, ROM	1
9	PQMH10008Z	ANGLE, FRONT COVER	2
10	PQQT10125Z	CAUTION LABEL-A	1
11	PQHR10028Z	CLAMPER-B	2
12	PQHR10029Z	CLAMPER-C	2
13	XUC3VW	E-RING	1
14	PQMH10009Z	HINGE-A	2
15	PQMC10010Z	ANGLE, FG (TOP COVER)	1
16	PQMC10064Z	SHEET, TOP COVER	1
20	PQKM10021Z1	CABINET BODY	1
21	PQHR10032Z	COVER, FG SPRING	1
22	PQQT10470Z	CAUTION LABEL-B	1
23	PQQT10126X	CAUTION LABEL-C	1
24	PQMH10010Y	HINGE-B	1
25	PQMH10010Z	HINGE-C	1
26	PQMH10007Z	SPRING, FG	1
27	PQMC10009Z	ANGLE, FG (CABINET BODY)	1
28	PQGP10009Z1	PANEL, LED	1
29	PQGG10009Z1	GRILLE, LED	1
30	PQMH10026Z	FRAME, BELL TRANSFORMER	1
31	PQLT1U9M1A	BELL TRANSFORMER	1
32	PQMC10063Z	SHEET, CABINET BODY	1
33	PQGT10510Z	NAME PLATE	1

Ref. No.	Part No.	Value, Part Name & Description		Pcs
		ACCESSORIES AND PACKING MATERIALS		
A1	PQJA223Z	AC CORD		1
A2	PQJP1E1Z	PLUG		2
A3	PQJP1E2Z	PLUG		2
A4	PQHR10113Z1	COVER, TEL CORD		1
A5	PQHE10Z	MOUNTING BRACKET (CURL PLUG)		4
A6	PQHE5008Z	MOUNTING BRACKET (SCREW)		4
A7	PQQX10191Z	USERS GUIDE (FOR SLT)		1
A8	PQQX10190Y	USERS GUIDE		1
A9	PQQX10193Y	TEMPLATE		1
A10	XZB05X08A03	PROTECTION COVER (SCREW etc)		2
A11	XZB23X35A01	PROTECTION COVER (DOCUMENTS)		1
A12	PQQX10189Y	INSTALLATION MANUAL		1
A13	PQQX10496Y	PROGRAMMING TABLE		1
P1	PQPK10438Z	PACKING CASE		1
P2	PQPD10045Z	CUSHION, TOP		1
P3	PQPN10196Z	CUSHION, L/R		2
P4	PQPN10191Z	ACCESSORY BOX		1
		CPU BOARD PARTS		
PCB1	PQWP1TD1232X	CPU BOARD ASS'Y (RTL)		1
		(ICs)		
IC 1	PQVI68301FCG	IC		1
IC 2	PQVI620890F	IC		1
IC 3	PQVIMT8980DE	IC		1
IC 6~8	PQVIMC45503P	IC		3
IC 9	PQVIS7860SG	IC		1
IC10~12 ,14, 27	PQVINJM4558D	IC		5
IC13	PQVIPS520C	IC		1
IC15	PQVIHD75188P	IC	S	1
IC16	PQVIHD75189P	IC	S	1
IC17	PQVISN7H00S	IC	S	1
IC18	PQVISN7L00S	IC		1
IC19	PQWI2TD1232C	IC (ROM)		1
IC20, 21	PQWI1D1232C2	IC (ROM PACK)		1
IC22, 23	PQVITC5183SD	IC	S	2
IC24, 25	PQVIMB84256D	IC	S	2
IC26	PQVIMS6242BS	IC		1
IC29	PQVISN7L368M	IC		1
IC31	PQVISN7L640M	IC		1
IC32	PQVISN7L365S	IC		1
IC33, 34	PQVISN7L368M	IC		2
IC35	PQVISN7L365S	IC		1
		(TRANSISTORS)		
Q 5	PQVTDTA144EK	TRANSISTOR(SI)		1
Q 6	2SC2412K	TRANSISTOR(SI)		1
Q 7	2SC2412K	TRANSISTOR(SI)		1
Q 8	PQVTDTA143E	TRANSISTOR(SI)		1
Q 9	PQVTDTC144E	TRANSISTOR(SI)		1
Q10	2SA933	TRANSISTOR(SI) (or 2SA1317)		1
Q11	2SC2412K	TRANSISTOR(SI)		1
Q12	2SC2878	TRANSISTOR(SI)		1
Q13	2SC2412K	TRANSISTOR(SI)		1
Q14	2SC2878	TRANSISTOR(SI)		1
Q601, 603	PQVTDTA144E	TRANSISTOR(SI)		2
Q602, 604	PQVTDTC144EK	TRANSISTOR(SI)		2
		(DIODES)		
D1	MA4091	DIODE(SI)		1
D3	MA723	DIODE(SI)		1
D4	PQVDAK03	DIODE(SI)		1
D7~10	MA4068	DIODE(SI)		4
D11, 12	RLS71	DIODE(SI)		2
D13, 14	MA4030	DIODE(SI)		2
D15	MA4056	DIODE(SI)		1
D16, 17	RLS71	DIODE(SI)		2
D20, 21	MA723	DIODE(SI)		2

This replacement parts list is for KX-TD1232BX version only. Refer to the simplified manual (cover) for other areas.

Ref. No.	Part No.	Value	Pcs
		(RESISTORS)	
R 4	PQ4R10XJ471	470	1
R 5	PQ4R10XJ472	4.7K	1
R 6	PQ4R10XJ223	22K	1
R 7	PQ4R10XJ103	10K	1
R 8	PQ4R10XJ683	68K	1
R 9	PQ4R10XJ124	120K	1
R12	PQ4R10XJ393	39K	1
R13	PQ4R10XF1782	17.8K	1
R14	PQ4R10XJ104	100K	1
R15	PQ4R10XJ103	10K	1
R16	PQ4R10XJ274	270K	1
R17	PQ4R10XJ183	18K	1
R18	PQ4R10XJ103	10K	1
R19	PQ4R10XJ561	560	1
R20	PQ4R10XJ105	1M	1
R21	PQ4R10XJ563	56K	1
R22	PQ4R10XJ104	100K	1
R23	PQ4R10XJ104	100K	1
R24	PQ4R10XJ124	120K	1
R[illegible]	PQ4R10XJ823	82K	1
R[illegible]	PQ4R10XJ104	100K	1
R27	PQ4R10XJ104	100K	1
R28	PQ4R10XF1211	1.21K	1
R29	PQ4R10XF1211	1.21K	1
R30	PQ4R10XJ224	220K	1
R31	PQ4R10XF1401	1.4K	1
R32	PQ4R10XJ823	82K	1
R33	PQ4R10XJ472	4.7K	1
R34	PQ4R10XJ333	33K	1
R35	PQ4R10XJ104	100K	1
R36	PQ4R10XJ124	120K	1
R37	PQ4R10XJ104	100K	1
R38	PQ4R10XJ104	100K	1
R39	PQ4R10XJ124	120K	1
R40	PQ4R10XJ104	100K	1
R48	PQ4R10XJ333	33K	1
R50	PQ4R10XJ224	220K	1
R51	PQ4R10XJ333	33K	1
R52	PQ4R10XJ472	4.7K	1
R53	PQ4R10XJ104	100K	1
R[illegible]	PQ4R10XJ102	1K	1
R[illegible]	PQ4R10XJ104	100K	1
R61	PQ4R10XJ103	10K	1
R62	PQ4R10XJ223	22K	1
R65	PQ4R10XJ561	560	1
R66	PQ4R10XJ103	10K	1
R67	PQ4R10XJ103	10K	1
R68	PQ4R10XJ103	10K	1
R69	PQ4R10XJ103	10K	1
R70	PQ4R10XJ103	10K	1
R71	PQ4R10XJ103	10K	1
R72	PQ4R10XJ103	10K	1
R73	PQ4R10XJ103	10K	1
R74	PQ4R10XJ103	10K	1
R75	PQ4R10XJ103	10K	1
R76	PQ4R10XJ103	10K	1
R77	PQ4R10XJ103	10K	1
R78	PQ4R10XJ103	10K	1
R79	PQ4R10XJ103	10K	1
R83	ERDS1TJ151	150	1
R84	PQ4R10XJ152	1.5K	1
R85	PQ4R10XJ681	680	1
R87	PQ4R10XJ103	10K	1

Ref. No.	Part No.	Value	Pcs
R91~94	PQ4R10XJ103	10K	6
,96, 97	PQ4R10XJ103	10K	
R110-112	PQ4R10XJ470	47	3
R113	PQ4R10XJ103	10K	1
R114	PQ4R10XJ103	10K	1
R115	PQ4R10XJ222	2.2K	1
R116	PQ4R10XJ472	4.7K	1
R117	PQ4R10XJ103	10K	1
R118	PQ4R10XJ333	33K	1
R119	PQ4R10XJ103	10K	1
R120	PQ4R10XJ334	330K	1
R121	PQ4R10XJ222	2.2K	1
R122	PQ4R10XJ472	4.7K	1
R123	PQ4R10XJ103	10K	1
R124	PQ4R10XJ333	33K	1
R125	PQ4R10XJ103	10K	1
R126	PQ4R10XJ334	330K	1
R127	PQ4R10XJ472	4.7K	1
R128	PQ4R10XJ472	4.7K	1
R129	PQ4R10XJ470	47	1
R130	PQ4R10XJ470	47	1
R131	PQ4R10XJ470	47	1
R132	PQ4R10XJ470	47	1
R133	PQ4R10XJ470	47	1
R134	PQ4R10XJ390	39	1
R135	PQ4R10XJ470	47	1
R136	PQ4R10XJ470	47	1
R137	PQ4R10XJ470	47	1
R138	PQ4R10XJ101	100	1
R139	PQ4R10XJ101	100	1
R140	PQ4R10XJ101	100	1
R141	PQ4R10XJ101	100	1
R142	PQ4R10XJ101	100	1
R143	PQ4R10XJ101	100	1
R144	PQ4R10XJ101	100	1
R145	PQ4R10XJ101	100	1
R146	PQ4R10XJ470	47	1
R147	PQ4R10XJ470	47	1
R148	PQ4R10XJ470	47	1
R149	PQ4R10XJ470	47	1
R150	PQ4R10XJ470	47	1
R151	PQ4R10XJ470	47	1
R152	PQ4R10XJ470	47	1
R153	PQ4R10XJ470	47	1
R154	PQ4R10XJ470	47	1
R155	PQ4R10XJ470	47	1
R156	PQ4R10XJ470	47	1
R157	PQ4R10XJ470	47	1
R158	PQ4R10XJ470	47	1
R159	PQ4R10XJ470	47	1
R160	PQ4R10XJ470	47	1
R161	PQ4R10XJ390	39	1
R162	PQ4R10XJ390	39	1
R163	PQ4R10XJ560	56	1
R164	PQ4R10XJ560	56	1
R165	PQ4R10XJ560	56	1
R166	PQ4R10XJ560	56	1
R167	PQ4R10XJ560	56	1
R168	PQ4R10XJ560	56	1
R169	PQ4R10XJ560	56	1
R170	PQ4R10XJ560	56	1
R171	PQ4R10XJ560	56	1
R172	PQ4R10XJ560	56	1
R173	PQ4R10XJ560	56	1
R174	PQ4R10XJ560	56	1
R175	PQ4R10XJ560	56	1

This replacement parts list is for KX-TD1232BX version only. Refer to the simplified manual (cover) for other areas.

Ref. No.	Part No.	Value	Pcs
R176	PQ4R10XJ560	56	1
R177	PQ4R10XJ560	56	1
R178	PQ4R10XJ560	56	1
R179	PQ4R10XJ560	56	1
R180	PQ4R10XJ560	56	1
R181	PQ4R10XJ560	56	1
R182	PQ4R10XJ560	56	1
R183	PQ4R10XJ560	56	1
R184	PQ4R10XJ560	56	1
R185	PQ4R10XJ560	56	1
R186	PQ4R10XJ560	56	1
R187	PQ4R10XJ560	56	1
R188	PQ4R10XJ560	56	1
R189	PQ4R10XJ560	56	1
R190	PQ4R10XJ560	56	1
R191	PQ4R10XJ560	56	1
R192	PQ4R10XJ560	56	1
R193	PQ4R10XJ560	56	1
R194	PQ4R10XJ560	56	1
R195	PQ4R10XJ560	56	1
R196	PQ4R10XJ560	56	1
R197	PQ4R10XJ560	56	1
R198	PQ4R10XJ560	56	1
R199	PQ4R10XJ560	56	1
R200	PQ4R10XJ560	56	1
R201, 202, 203	PQ4R10XJ102	1K	3
R204	PQ4R10XJ103	10K	1
R205	PQ4R10XJ103	10K	1
R206	PQ4R10XJ103	10K	1
R207	PQ4R10XJ103	10K	1
R208	PQ4R10XJ103	10K	1
R209	PQ4R10XJ103	10K	1
R210	PQ4R10XJ103	10K	1
R211	PQ4R10XJ103	10K	1
R212	PQ4R10XJ103	10K	1
R213	PQ4R10XJ103	10K	1
R214	PQ4R10XJ103	10K	1
R215	PQ4R10XJ103	10K	1
R216	PQ4R10XJ103	10K	1
R217	PQ4R10XJ103	10K	1
R218	PQ4R10XJ103	10K	1
R219	PQ4R10XJ103	10K	1
R220	PQ4R10XJ223	22K	1
R221	PQ4R10XJ222	2.2K	1
R601, 602	PQ4R10XJ104	100K	2
R603	PQ4R10XJ331	330	1
R604	PQ4R10XJ151	150	1
R605	PQ4R10XJ824	820K	1
R606	PQ4R10XJ223	22K	1
R608	PQ4R10XJ124	120K	1
R609, 610, 611	PQ4R10XJ223	22K	3
J1, 3	PQ4R10XJ000	0	2
J 5	ERDS2TJ0T	0	1
J 6, 7	PQ4R10XJ000	0	2
		(CAPACITORS)	
C 1	EECFE5R5474	5.47M	1
C 2	ECEA1EU4R7	4.7	1
C 3	ECEA1HN3R3S	3.3	1
C 8, 9	ECQV1H104JZ	0.1	2
C11	PQCUV1H104ZF	0.1	1
C12	PQCUV1H101JC	100P	1
C13	PQCUV1H682KB	0.0068	1
C16	PQCUV1H101JC	100P	1
C17	PQCUV1H104ZF	0.1	1
C19	PQCUV1H101JC	100P	1

Ref. No.	Part No.	Value, Part Name & Description		Pcs
C20	PQCUV1H332KB	0.0033		1
C21	PQCUV1H104ZF	0.1		1
C22, 23	PQCUV1H101JC	100P		2
C24	PQCUV1H332KB	0.0033		1
C25, 26	PQCUV1H104ZF	0.1		2
C27	PQCUV1H102J	0.001		1
C28	PQCUV1H104ZF	0.1		1
C29	PQCUV1H101JC	100P		1
C30	PQCUV1H104ZF	0.1		1
C31	PQCUV1H102J	0.001		1
C33~38	PQCUV1H223KB	0.022		6
C35	PQCUV1H223KB	0.022		1
C36	PQCUV1H223KB	0.022		1
C37	PQCUV1H223KB	0.022		1
C38	PQCUV1H223KB	0.022		1
C39	PQCUV1H200JC	20P		1
C40	PQCUV1H223KB	0.022		1
C41	PQCUV1H223KB	0.022		1
C42	PQCUV1H223KB	0.022		1
C43	PQCUV1H223KB	0.022		1
C44	PQCUV1H223KB	0.022		1
C45	PQCUV1H223KB	0.022		1
C46	PQCUV1H223KB	0.022		1
C47	PQCUV1H223KB	0.022		1
C50	ECEA1EU331	330		1
C53	PQCUV1H180JC	18P		1
C54	PQCUV1H180JC	18P		1
C55	PQCUV1H223KB	0.022		1
C56	PQCUV1H223KB	0.022		1
C59	ECEA1HU010	1		1
C60	ECEA1HU010	1		1
C61	ECEA1HU010	1		1
C62	ECEA1HU010	1		1
C63	ECEA1HU010	1		1
C64	PQCUV1H223KB	0.022		1
C66	ECEA1AU101	100		1
C67	PQCUV1H223KB	0.022		1
C68	PQCUV1H223KB	0.022		1
C70	PQCUV1H223KB	0.022		1
C71	PQCUV1H223KB	0.022		1
C72	PQCUV1H223KB	0.022		1
C80	PQCUV1H200JC	20P		1
C81	PQCUV1H223KB	0.022		1
C82	PQCUV1H223KB	0.022		1
C83	PQCUV1H223KB	0.022		1
C84	PQCUV1H223KB	0.022		1
C85	PQCUV1H223KB	0.022		1
C86	PQCUV1H104ZF	0.1		1
C87	ECEA1VU330	33	S	1
C88	ECEA1HN2R2S	2.2		1
C89	PQCUV1H104ZF	0.1		1
C90	ECEA1VU330	33	S	1
C91	ECEA1HN2R2S	2.2		1
C92, 93	PQCUV1H101JC	100P		2
C94	PQCUV1H470JC	47P		1
C95	PQCUV1H470JC	47P		1
C96	PQCUV1H470JC	47P		1
C97	PQCUV1H223KB	0.022		1
C98	PQCUV1H223KB	0.022		1
C99	PQCUV1H223KB	0.022		1
C601, 602	ECEA1EU4R7	4.7	S	2
C603	PQCUV1H223KB	0.022		1
C604	PQCUV1H104ZF	0.1		1
		(TRANSFORMERS)		
T1	ETA14Y180AY	TRANSFORMER		1
T2~5	PQLT2D6A	TRANSFORMER	S	4

This replacement parts list is for KX-TD1232BX version only Refer to the simplified manual (cover) for other areas.

Ref. No.	Part No.	Part Name & Description		Pcs
		(COILS)		
L7~14	PQLE106	COIL		8
L21~23	PQVFTU50MT	CERAMIC FILTER		3
L24~27	PQVFCM04RC01	CERAMIC FILTER		4
		(JACKS)		
JAC1, 2	PQJJ1G1Z	JACK, PAGING		2
JAC3, 4	PQJJ1D3Z	JACK, EP		2
		(CONNECTORS)		1
CN1	PQJS64R15Z	CONNECTOR, 64P		1
CN4	PQJP2D70Z	CONNECTOR, 2P		1
CN9	PQJP20A08Z	CONNECTOR, 20P		1
CN12	PQJP6D70Z	CONNECTOR, 6P		1
		(BATTERY)		1
BAT	CR2354-1HF	LITHIUM BATTERY		1
		(SWITCHES)		
SW1	EVQ21409K	SWITCH		1
SW2	PQSS2A24Z	SWITCH		1
SW3	ESD11V120	SWITCH		1
		(CRYSTAL OSCILLATORS)		
X1	PQVCJ8192N8Z	CRYSTAL OSCILLATOR		1
X2	PQVCL3276N6Z	CRYSTAL OSCILLATOR		1
		(COMPONENTS COMBINATIONS)		
Z1, 2, 4~6	PQRSLD8X103J	RESISTOR ARRAY		5
EXTENSION BOARD PARTS				
PCB2	PQWP2TD1232C	EXTENSION BOARD ASS'Y (RTL)		1
		(ICs)		
IC201A~ IC201H	PQVIMC45503W	IC		8
IC202A~ IC202H	PQVINJM4558M	IC		8
IC203A~ IC203H	PQVINJM319V	IC		8
IC211	PQVI603830F	IC		1
IC213	PQVIMT8952BE	IC		1
IC215, 216	PQVICM8870FI	IC	S	2
IC217, 218	PQVIMC4051BF	IC	S	2
IC219	PQVISN7L14S	IC	S	1
IC220	PQVISN7L14S	IC	S	1
IC221	PQVISN7L14S	IC	S	1
IC222	PQVISN7L365S	IC		1
IC223	PQVISN7L86S	IC	S	1
IC224	PQVISN7L640M	IC		1
		(TRANSISTORS)		
Q200A~ Q200D	2SB1218A	TRANSISTOR(SI) (or 2SA1576R)	S	4
Q200E~ Q200H	2SD1819A	TRANSISTOR(SI) (or 2SA4081R)	S	4
Q201A~ Q201D, Q201F~ Q201H	2SB1218A	TRANSISTOR(SI)	S	7
Q201E	2SB1218A	TRANSISTOR(SI) (or 2SA1576R)	S	1
Q203A~ Q203H	2SB1322	TRANSISTOR(SI)		8
Q204A~ Q204H	2SD1994A	TRANSISTOR(SI)		8
Q205A~ Q205H	2SD1819A	TRANSISTOR(SI) (or 2SC4081R)	S	8
Q206A~ Q206H	2SD1819A	TRANSISTOR(SI) (or 2SC4081R)	S	8
Q207A~ Q207H	PQVTDTC143E	TRANSISTOR(SI)		8
Q208A~ Q208H	2SB1218A	TRANSISTOR(SI) (or 2SA1576R)	S	8

Ref. No.	Part No.	Value, Part Name & Description		Pcs
Q210	2SD2137	TRANSISTOR(SI)		1
Q211	UN5113	TRANSISTOR(SI)	S	1
Q213	2SD1819A	TRANSISTOR(SI) (or 2SC4081R)	S	1
Q214	UN5213	TRANSISTOR(SI)	S	1
Q215	2SD2137	TRANSISTOR(SI)		1
Q220A	UN5213	TRANSISTOR(SI)	S	1
Q221	PQVTDTC143E	TRANSISTOR(SI)		1
Q251	2SB1322	TRANSISTOR(SI) (or 2SB1237R)	S	1
Q252	UN5113	TRANSISTOR(SI)	S	1
		(DIODES)		
D203A	RLS71	DIODE(SI)		1
D204A~ D204H	RLS71	DIODE(SI)		8
D205A~ D205H	RLS71	DIODE(SI)		8
D206A~ D206H	RLS71	DIODE(SI)		8
D207A~ D207H	RLS71	DIODE(SI)		8
D210A~ D210H	RLS71	DIODE(SI)		8
D211A~ D211H	MA4039	DIODE(SI)		8
D212A	MA151WK	DIODE(SI) (or 1SS184)	S	8
D212H				
D213A~ D213H	1SS181	DIODE(SI)		8
D214A~ D214H	RLS71	DIODE(SI)		8
D220, 221 ,223, 225	RLS71	DIODE(SI)		4
D251	MA4056	DIODE(SI)		1
D252	RLS71	DIODE(SI)		1
		(RESISTORS)		
R200A~ R200H	PQ4R10XJ330	33		8
R201A~ R201H	PQ4R10XJ222	2.2K		8
R202A~ R202H	PQ4R10XJ222	2.2K		8
R203	PQ4R10XJ101	100		1
R204	PQ4R10XJ105	1M		1
R205A~ R205H	ERDS2TJ220	22		8
R206A~ R206H	ERDS2TJ680	68		8
R207A~ R207H	PQ4R10XJ682	6.8K		8
R208A~ R208H	ERDS2TJ220	22		8
R209A~ R209H	ERDS2TJ680	68		8
R210A R210H	PQ4R10XJ682	6.8K		8
R211A ~ R211H	PQ4R10XF3000	300		8
R212A~ R212H	PQ4R10XF2940	294		8
R213A~ R213H	PQ4R10XF3000	300		8
R214A~ R214H	PQ4R10XF7502	75K		8
R215A~ R215H	PQ4R10XF1003	100K		8
R216A~ R216H	PQ4R10XF4702	47K		8
R217A~ R217H	PQ4R10XF4702	47K		8
R218A~ R218H	PQ4R10XF1003	100K		8

This replacement parts list is for KX-TD1232BX version only. Refer to the simplified manual (cover) for other areas.

Ref. No.	Part No.	Value	Pcs
R219A~ R219H	PQ4R10XF1003	100K	8
R220A~ R220H	PQ4R10XF1003	100K	8
R221A~ R221H	PQ4R10XF1003	100K	8
R222A~ R222H	PQ4R10XF3000	300	8
R223A~ R223H	PQ4R10XF7502	75K	8
R224A~ R224H	PQ4R10XJ153	15K	8
R225A~ R225H	PQ4R10XJ333	33K	8
R226A~ R226H	PQ4R10XJ103	10K	8
R227A~ R227H	PQ4R10XJ473	47K	8
R228A~ R228H	PQ4R10XJ123	12K	8
R229A~ R229H	PQ4R10XJ333	33K	8
R230A~ R230H	PQ4R10XJ103	10K	8
R231A~ R231H	PQ4R10XJ102	1K	8
R232A~ R232H	PQRD2TJ102	1K	8
R233A~ R233H	PQ4R10XJ000	0	8
R234A~ R234H	PQ4R10XJ472	4.7K	8
R235A~ R235H	PQ4R10XJ472	4.7K	8
R236A~ R236H	PQ4R10XJ472	4.7K	8
R237A~ R237H	PQ4R10XJ472	4.7K	8
R238A~ R238H	PQ4R10XJ330	33	8
R239A~ R239H	PQ4R10XJ222	2.2K	8
R240A~ R240H	PQ4R10XJ222	2.2K	8
R241	PQ4R10XJ473	47K	1
R242	PQ4R10XJ682	6.8K	1
R243	PQ4R10XJ223	22K	1
R244	PQ4R10XJ472	4.7K	1
R245	PQ4R10XJ153	15K	1
R246	PQ4R10XJ152	1.5K	1
R247	PQ4R10XJ223	22K	1
R248A~ R248H	PQ4R10XJ471	470	8
R251	PQ4R10XJ103	10K	1
R252	PQ4R10XJ103	10K	1
R253	PQ4R10XJ103	10K	1
R254	PQ4R10XJ103	10K	1
R255	PQ4R10XJ393	39K	1
R256	PQ4R10XJ104	100K	1
R257	PQ4R10XJ334	330K	1
R258	PQ4R10XJ393	39K	1
R259	PQ4R10XJ104	100K	1
R260	PQ4R10XJ334	330K	1
R261	PQRD1TJ820	82 S	1
R262	PQ4R10XJ152	1.5K	1
R263	PQ4R10XJ152	1.5K	1
R264	PQ4R10XJ152	1.5K	1
R265, 266	PQ4R10XJ103	10K	2
R267	PQ4R10XJ101	100	1
R268	PQ4R10XJ101	100	1
R269	PQ4R10XJ101	100	1
R270	ERDS2TJ220	22	1
R270A~ R270H	PQ4R10XJ103	10K	8
R271	PQ4R10XJ682	6.8K	1
R272	PQ4R10XJ101	100	1
R273, 274	Not Used		
R275A~ R275H	PQ4R10XJ563	56K	8
R276A~ R276H	PQ4R10XJ560	56	8
R277A~ R277H	PQ4R10XJ560	56	8
R278A~ R278H	PQ4R10XJ560	56	8
R279A~ R279H	PQ4R10XJ560	56	8
R280	PQ4R10XJ223	22K	1
R285	PQ4R10XJ122	1.2K	1
R286	PQ4R10XJ152	1.5K	1
R290A~ R290H	PQ4R10XJ472	4.7K	8
R291A~ R291H	PQ4R10XJ472	4.7K	8
R292A~ R292H	PQ4R10XJ472	4.7K	8
R293	PQ4R10XF6801	6.8K	1
R294	PQ4R10XF1201	1.2K	1
R295A~ R295H	PQ4R10XJ101	100	8
R296A~ R296H	PQ4R10XJ220	22	8
R297A~ R297H	PQ4R10XJ220	22	8
R299A~ R299H	PQ4R10XJ101	100	8
J201~ J204	PQ4R10XJ000	0	4
J251A ~ J251H	PQ4R10XJ000	0	8
J253A~ J253H	PQ4R10XJ000	0	8
J255A~ J255H	PQ4R10XJ000	0	8
J257A~ J257H	PQ4R10XJ000	0	8
J259A ~ J259H	PQ4R10XJ000	0	8
		(CAPACITORS)	
C200A~ C200H	ECEA1HU2R2	2.2	8
C202A~ C202H	ECEA1HU2R2	2.2	8
C204A~ C204H	ECEA1HU100	10	8
C205A~ C205H	ECEA1EN100S	10	8
C206A~ C206H	ECEA1EN100S	10	8
C207A~ C207H	ECEA1HU3R3	3.3	8
C208A~ C208H	ECUV1H104MD	0.1 S	8
C209A~ C209H	PQCUV1H104ZF	0.1	8
C210A~ C210H	PQCUV1H104ZF	0.1	8

This replacement parts list is for KX-TD1232BX version only. Refer to the simplified manual (cover) for other areas.

Ref. No.	Part No.	Value, Part Name & Description		Pcs
C211A~ C211H	ECEA1HN4R7S	4.7		8
C212A~ C212H	PQCUV1H104ZF	0.1		8
C213A ~ C213H	PQCUV1H104ZF	0.1		8
C214, 215	Not Used			
C216A ~ C216H	ECEA1HU2R2	2.2		8
C217A ~ C217H	PQCUV1H680JC	68P		8
C218A~ C218H	PQCUV1H680JC	68P		8
C219A~ C219H	ECUV1H104MD	0.1	S	8
C220	ECEA1EU101	100		1
C220A~ C220H	ECUV1H393KB	0.039		8
C221	ECEA1EU101	100		1
C222A~ C222H	ECEA1HU100	10		8
C251~ 254	PQCUV1H223KB	0.022		4
C255	ECEA1VU330	33	S	1
C256	PQCUV1H221JC	220P		1
C257~259	PQCUV1H104ZF	0.1		3
C260	ECEA1ESS471U	470		1
C262~264	ECEA1VU330	33	S	3
C265	PQCUV1H104ZF	0.1		1
C270	ECEA1AU101	100		1
C272	PQCUV1H104ZF	0.1		1
C273	PQCUV1H104ZF	0.1		1
C280~285	PQCUV1H104ZF	0.1		6
C287-290	PQCUV1H104ZF	0.1		4
C292	ECEA1EU101	100		1
C295, 296	PQCUV1H104ZF	0.1		2
		(CONNECTORS)		
CN200	PQJS50A04Z	CONNECTOR, 50P		1
CN201	PQJS50R15Z	CONNECTOR, 50P		1
		(CHOKE COILS)		
L200A~ L200H	PQLQZM100K	CHOKE COIL	S	8
L201A ~ L201H	PQLQZM100K	CHOKE COIL	S	8
L202A~D	PQRPAR8R2	CHOKE COIL		4
L202E~H	PQLE106			4
L203A~ L203H	PQLE106	CHOKE COIL		8
		(RELAYS)		
RY200A, RY200B	PQSL44Z	RELAY		2
RY201A, RY202A~ RY202H	PQSL119Z	RELAY		9
		(TRANSFORMERS)		
T201A~	ETE13K79AY	TRANSFORMER		8

Ref. No.	Part No.	Value, Part Name & Description		Pcs
		(VARISTORS)		
ZR202A~ ZR202H	PQVDNV039D03	VARISTOR		8
ZR203A~ ZR203H	PQVDNV039D03	VARISTOR		8
ZR204A~ ZR204H	PQVDNV039D03	VARISTOR		8
ZR205A~ ZR205H	PQVDNV039D03	VARISTOR		8
		(FUSES)		
F200,201	PQBA1N15NMAL	FUSE		2
		(CERAMIC RESONATOR)		
X201	PQVBFC3584A1	CERAMIC RESONATOR		1

CO LINE BOARD PARTS

PCB3	PQWP3TD1232X	CO LINE BOARD ASS'Y (RTL)		1
		(ICs)		
IC101A~ IC101H	PQVINJM4558M	IC		8
IC102A~ IC102H	PQVIMC45503W	IC		8
IC111	PQVI63HB110	IC	S	1
IC112	PQVISN7L138M	IC		1
IC114	PQVISN7L138M	IC		1
IC116	PQVISN7L640M	IC		1
IC117	PQVISN7L08S	IC	S	1
IC120	PQVISN7L04S	IC	S	1
IC121	PQVISN7L14S	IC	S	1
IC122	PQVISN7L273M	IC		1
IC123	PQVISN7L14S	IC	S	1
		(TRANSISTORS)		
Q101A ~ Q101H	2SD1897	TRANSISTOR(SI)		8
Q102A~ Q102H	PQVTDTC143EK	TRANSISTOR(SI)		8
Q111	2SB1322	TRANSISTOR(SI) (or 2SB1238R)	S	1
Q112	UN5113	TRANSISTOR(SI)	S	1
Q120A~ Q120H	2SA1627	TRANSISTOR(SI)		8
		(DIODES)		
D101A~ D101H	PQVDS1YB40F1	DIODE(SI)		8
D102A~ D102H	PQVDHZS2B1	DIODE(SI)		8
D103A~ D103H	PQVDHZS2B1	DIODE(SI)		8
D104A~ D104H	MA3047	DIODE(SI)		8
D105A~ D105H	MA3047	DIODE(SI)		8
D108A~ D108H	RLS71	DIODE(SI)		8
D154	MA4056	DIODE(SI)		1
D155	MA723	DIODE(SI)		1
		(RESISTORS)		
R101A~ R101H	ERQN1VJ223	22K		8
R102A ~ R102H	PQ4R10XJ822	8.2K		8
R103A~ R103H	ERDS2TJ390	39		8
R104A~ R104H	PQ4R10XJ103	10K		8

This replacement parts list is for KX-TD1232BX version only. Refer to the simplified manual (cover) for other areas.

Ref. No.	Part No.	Value, Part Name & Description	Pcs
R105A~ R105H	PQ4R10XJ471	470	8
R107A~ R107H	PQ4R10XF1211	1.21K	8
R108A~ R108H	PQ4R10XJ821	820	8
R110A~ R110H	PQ4R10XF2323	232K	8
R111A~ R111H	PQ4R10XF1003	100K	8
R112A~ R112H	PQ4R10XF1003	100K	8
R113A~ R113H	PQ4R10XF1003	100K	8
R114A~ R114H	PQ4R10XF4702	47K	8
R115A~ R115H	PQ4R10XF1203	120K	8
R116A~ R116H	PQ4R10XF4702	47K	8
R118A~ R118H	ERDS2TJ122	1.2K	8
R119A~ R119H	PQ4R10XF1211	1.21K	8
R122A~ R122H	PQ4R10XJ222	2.2K	8
R125 ~132	PQ4R10XJ101	100	8
R153	PQ4R10XJ152	1.5K	1
R154	PQRD1VJ221	220	1
R155~160	PQ4R10XJ103	10K	6
R161	PQ4R10XJ101	100	1
R161A~ R161H	ERDS2TJ560	56	8
R162A~ R162H	PQ4R10XJ104	100K	8
R163A ~ R163H	PQRQ25VJ5R6	5.6	8
R164A~ R164H	ERDS2TJ272	2.7K	8
R165A~ R165H	PQ4R10XJ471	470	8
J100A	ERDS2TJ0T	0	1
J151~ 154	PQ4R10XJ000	0	4
J155A~ J155H	PQ4R10XJ000	0	8
J156A~ J156H	PQ4R10XJ000	0	8
		(CAPACITORS)	
C101A ~ C101H	ECKDKC222KB	0.0022	8
C102A~ C102H	ECQE2474KF	0.47	8
C103A~ C103H	ECEA1HU100	10	8
C104A~ C104H	ECEA1HU220	22	8
C105A~ C105H	PQCUV1H102J	0.001	8
C106A~ C106H	PQCUV1H563MD	0.056	8
C107A~ C107H	PQCUV1H820JC	82P	8
C108A~ C108H	ECUV1H104MD	0.1	8
C109A~ C109H	PQCUV1H223KB	0.022	8
C110A~ C110H	PQCUV1H223KB	0.022	8

Ref. No.	Part No.	Value, Part Name & Description		Pcs
C111A~ C111H	ECEA1HUR47	0.47		8
C120	PQCUV1H101JC	100P		1
C151	ECEA1HU330	33		1
C152	ECEA1HU330	33		1
C153	ECEA1HU330	33		1
C154	ECEA1HKS010	1		1
C155	ECEA1ESS331	330		1
C156	ECEA1AU222	2200		1
		(CONNECTORS)		
CN101	PQJS50R15Z	CONNECTOR, 50P		1
CN108~11	PQJJ1TB25Y	JACK, TEL		4
		(COILS)		
L101A~ L101H	PQLE106	COIL		8
L102A~ L102H	PQLE106	COIL		8
L103A~ L103H	PQLE106	COIL		8
L104A~ L104H	PQLE106	COIL		8
		(PHOTO ELECTRIC TRANSDUCERS)		
PC101A~ PC101H	ON3181R	PHOTO ELECTRIC TRANSDUCER		8
PC102A~ PC102H	PQVITLP627	PHOTO ELECTRIC TRANSDUCER		8
		(RELAYS)		
RY101A~ RY101H	PQSL41Z	RELAY		8
		(VARISTORS)		
SA101A~ SA101H	PQVDB1A351	VARISTOR (SURGE ABSORBER)		8
SA102A~ SA102H	PQVDB1A351	VARISTOR (SURGE ABSORBER)		8
SA103A~ SA103H	PQVDB1A351	VARISTOR (SURGE ABSORBER)		8
SA104	ERZC10DK681	VARISTOR		1
ZR101A~ ZR101H	ERZC07DK820	VARISTOR	S	8
		(TRANSFORMERS)		
T101A~ T101H	ETA14Y85AY	TRANSFORMER	S	8

SMDR / LED BOARD PARTS

PCB4	PQWP4TD1232C	SMDR / LED BOARD ASS'Y (RTL)		1
		(DIODE)		
LED	LN242RP	DIODE(SI)	S	
		(TRANSISTORS)		
R700~703	ERDS2TJ821	820		4
		(CAPACITORS)		
C700~703	ECKD1H392MD	0.0039	S	4
		(CONNECTORS)		
CN701	PQJS06R49Z	CONNECTOR, 6P		1
CN702	PQJS25P31Z	SOCKET, 25P		1
CN703	PQJS02R48Z	CONNECTOR, 2P		1

This replacement parts list is for KX-TD1232BX version on Refer to the simplified manual (cover) for other areas.

Ref. No.	Part No.	Value, Part Name & Description	Pcs
		MOTHER BOARD PARTS	
PCB5	PQWP5TD1232C	MOTHER BOARD ASS'Y (RTL)	1
		(CONNECTORS)	
CN402	PQJP64A09Z	CONNECTOR, 64P	1
CN403	PQJP50A09Z	CONNECTOR, 50P	1
CN404	PQJP50A09Z	CONNECTOR, 50P	1
CN405	PQJP50A09Z	CONNECTOR, 50P	1
CN406	PQJP60A09Z	CONNECTOR, 60P	1
CN407	PQJP60A09Z	CONNECTOR, 60P	1
CN408	PQJP60A09Z	CONNECTOR, 60P	1
CN409	PQJP50A09Z	CONNECTOR, 50P	1
CN410	PQJP34A09Z	CONNECTOR, 34P	1
CN411	PQJP40A09Z	CONNECTOR, 40P	1
		(COMPONENTS COMBINATIONS)	
RA401	PQRS8B8332J	RESISTOR ARRAY	1
RA402	EXBP88472K	RESISTOR ARRAY S	1
		POWER SUPPLY UNIT PARTS	
PCB6	PQWP6TD1232X	POWER SUPPLY BOARD ASS'Y (RTL) ⚠	1
		(CHASSIS & ELECTRICAL PARTS)	
90	PQQT4164Z	CAUTION LABEL	1
91	PQMC10053Z	SHIELD COVER ⚠	1
92	PQMC10052Z	SHIELD CASE ⚠	1
93	PQHR447Z	SPACER-A	1
94	PQHR10178Z	SPACER-B	1
95	PQHR10179Z	SPACER-C	1
96	PQJS02R46Z	CONNECTOR, 2P ⚠	1
97	PQJP04R07Z	CONNECTOR, 4P	1
98	PQJP3A3Z	SOCET, AC	1
99	EST15304T	SWITCH, POWER ⚠	1
100	PQMH10027Z	ANGLE, POWER SW ⚠	1
101	PQJV3Z	HOLDER, FUSE ⚠	1
102	XBA2C25TB0;	FUSE ⚠	1
103	PQQT10469Y	FUSE LABEL ⚠	1
		(ICs)	
IC400	PQVISTK73908	IC	1
IC450	PQVISTK732C	IC	1
IC451	PQVIHLD05003	IC	1
IC452	PQVILA6500	IC	1
		(TRANSISTOR)	
Q450	2SC4641	TRANSISTOR(SI)	1
		(DIODES)	
D400	PQVDD5SB40	DIODE (SI) ⚠	1
D401	PQVDERD3805L	DIODE (SI) ⚠	1
D402	PQVDRD13FB	DIODE(SI)	1
D450	PQVDRD6.2FB	DIODE (SI)	1
D451	PQVDC25P30F	DIODE (SI)	1
D452	PQVDC25P30F	DIODE (SI)	1
D453	MA4057M	DIODE(SI) ⚠	1
D454	PQVDD10SC4M	DIODE (SI)	1
D455	PQVDD10SC4M	DIODE (SI)	1
		(RESISTORS)	
R401	ERDS1TJ474	470K	1
R402	ERDS1TJ474	100K	1
R403	ERG3SJ683	68K	1
R404	ER016CKF1801	1.8K	1
R405	ERF5TKR22M	0.22	1
R406	ER016CKF4700	470	1
R407	ER016CKF5110	511	1
R408	ERG3SJ101	100	
R409	ERDS1TJ104	100K	1

Ref. No.	Part No.	Value, Part Name & Description	Pcs
R450	ERDS2TJ222	2.2K	1
R451	ERDS2TJ122	1.2K	1
R453	ERDS2TJ562	5.6K	1
R454	ERDS2TJ472	4.7K	1
R455	ERG3SJ271	270	1
R456	ERDS2TJ100	10	1
R457	ERF5TLK75M	700K	1
R458	ERDS2TJ272	2.7K	1
R459	ERDS2TJ392	3.9K	1
R460	PQRF2TLK50M	5	1
R462	ERDS2TJ562	5.6K	
R463	ERDS2TJ472	4.7K	1
R464	ERDS2TJ2R2	2.2	1
R465	ERG2SJ101	100	1
R466	ERDS2TJ390	39	1
R467	ERDS2TJ102	1K	1
R469	ER016CKF2561	256	1
R470	ER016CKF2701	2.7K	1
R471	ER016CKF1522	15.2K	1
		(CAPACITORS)	
C400	ECQU2A684MX	0.68	1
C401, 402, 403	ECKDKC472KB	0.0047 ⚠	3
C404	ECKDKC332KB	0.0033 ⚠ S	1
C405, 406	ECKWRS472ME	0.0047 ⚠	2
C407	ECKDKC332KB	0.0033 ⚠ S	1
C408, 409	EC0S2GB181BA	180P ⚠	2
C410	ECKD3A221KBN	220P	1
C411	ECQE6224RJ	0.22 ⚠	1
C412	ECQE10152RK	0.0047 ⚠	1
C414	ECQB1H222JF	0.0022	1
C415	ECQB1H392JF	0.0039	1
C416	ECKZ3A101KB	100P	1
C417	ECQE1H683JZ	0.068	1
C450	ECEA1VFG332	3300	1
C452	ECQB1H102JZ	0.001 S	1
C454	ECEA1JFG102	1000	1
C455	ECEA1JFG102	1000	1
C456	ECEA1VFG331	330	1
C457	ECEA1HGE010	1	1
C458	ECEA1JFG102	1000	1
C459	ECQB1H102JZ	0.001 S	1
C460	ECEA1EFG102	1000	1
C461	ECEA1HGA0R1	0.1	1
C462	ECEA1CFG102	0.001	1
C463	ECQV1H104JZ	0.1	1
C464	ECEA1HGE100	10	1
C465	ECQV1H104JZ	0.1	1
C467	ECEA1EGE101	100	1
C468	ECEA1VFG101	100	1
		(VARISTOR)	
SA400	ERZC14DK471U	VARISTOR ⚠	1
		(VARIABLE RESISTORS)	
VR450	EVMF5S00B23	SEMI-FIXED RESISTOR, 2KΩ (B)	1
VR451	EVMF5S00B23	SEMI-FIXED RESISTOR, 2KΩ (B)	1
		(CONNECTORS)	
CN400	PQJP2D98Z	CONNECTOR, 2P	1
CN401	PQJS07R50Z	CONNECTOR, 7P	1
CN402	PQJP4D30Z	CONNECTOR, 4P	1
CN403	PQJP4D46Z	CONNECTOR, 7P	1
		(COMPONENT COMBINATIONS)	
CR400, 401	PQVDMGC4R3R2	COMPONENT COMBINATION ⚠	2

This replacement parts list is for KX-TD1232BX version only. Refer to the simplified manual (cover) for other areas.

Ref. No.	Part No.	Part Name & Description	Pcs
		(THYRISTOR)	
SCR450	PQVDTCSF5B41	THYRISTOR	1
		(COILS)	
L401	ELF18D450M	COIL ⚠	1
L400	ELF18D850C	COIL ⚠	1
L455	PQLE127	COIL	1
L450	PQLE128	COIL	1
L451	PQLE129	COIL	1
L452	PQLE72	COIL	1
L453	PQLE94	COIL	1
L454	PQLE94	COIL	1
		(TRANSFORMER)	
T400	ETS42AB128AC	TRANSFORMER ⚠	1
		(PHOTO ELECTRIC TRANSDUCER)	
PC400	PQVIPC817CD	PHOTO COUPLER ⚠	1
		(THERMISTOR)	
TH401	PQRTD0WFL5R0	THERMISTOR ⚠	1
		(FUSE)	
F450	XBA1C40N1001	FUSE ⚠	1
		FIXTURES AND TOOL	
EC1	PQZZ64K2Z	EXTENSION CORD, 64P	1
EC2	PQZZ60K1Z	EXTENSION CORD, 60P	1
EC3	PQZZ50K2Z	EXTENSION CORD, 50P	1
EC4	PQZZ40K1Z	EXTENSION CORD, 40P	1
EC5	PQZZ34K1Z	EXTENSION CORD, 34P	1
		Note: Extension cords are useful for servicing. (They make servicing easy.)	